Age Bias and Precision

Alex J. Benecke May 18, 2017

```
Age <- read.csv("Data/Raw-Data/2016_largemouth-bass_age-estimates_raw.csv") %>%
 select(FID:Difference) %>%
  arrange(FID)
Age$FID <- factor(Age$FID)</pre>
length(Age$FID)
## [1] 132
Age[Age$FID==55,];FID55 <- as.numeric(rownames(Age[Age$FID==55,]))
      FID AgerA AgerB AgerC Difference
## 55 55
              2
Age \leftarrow Age [-c(FID55),] %>%
 filterD(!is.na(FID)) ### Remove outliers
length(Age$FID)
## [1] 131
str(Age)
## 'data.frame':
                    131 obs. of 5 variables:
                : Factor w/ 131 levels "1","2","3","4",..: 1 2 3 4 5 6 7 8 9 10 ...
## $ FID
## $ AgerA
                : int 4 4 4 6 4 NA 1 2 4 8 ...
## $ AgerB
                : int 4 4 4 6 4 NA 1 2 4 8 ...
## $ AgerC
                : int 4 4 4 6 4 NA 4 2 4 8 ...
## $ Difference: Factor w/ 2 levels "NO", "YES": 1 1 1 1 1 NA 2 1 1 1 ...
#write.csv(Age,file="Data/Clean-Data/2016_largemouth-bass_age-estimates_clean.csv")
```

Comparing Age Estimates Between 3 Readers

```
ab.AB <- ageBias(AgerA~AgerB, data=Age, ref.lab = "Ager B", nref.lab = "Ager A")

ab.AC <- ageBias(AgerA~AgerC,data = Age,ref.lab = "Ager C", nref.lab = "Ager A")


ab.BC <- ageBias(AgerB~AgerC,data = Age,ref.lab = "Ager C", nref.lab = "Ager B")
```

Bias

Three readers made indipendant reads of Largemouth Bass otoliths to determine the age of Largemouth Bass in our sample. Now we will look for bias between the 3 readers (readers A, B, C). We will use age bias plots to do this.

Bias Alex (AgerA) vs Jim (AgerB) Age Est.


```
plot(ab.AB,
     col.CIsig = "Black",
     show.range = TRUE,
     main="",
     bty="n",
     lwd = 2,
     lwd.CI = 2,
    lwd.range = 2,
    lwd.agree = 2,
     col.CI = "red",
     col.range = "red",
     cex.n = 1.25,
     cex.axis=1.5,
     yaxt = "n",
    xlab="",ylab="")
## Warning in plot.window(...): "cex.n" is not a graphical parameter
## Warning in plot.xy(xy, type, ...): "cex.n" is not a graphical parameter
## Warning in axis(side = side, at = at, labels = labels, ...): "cex.n" is not
## a graphical parameter
## Warning in axis(side = side, at = at, labels = labels, ...): "cex.n" is not
## a graphical parameter
## Warning in box(...): "cex.n" is not a graphical parameter
## Warning in title(...): "cex.n" is not a graphical parameter
axis(2,at=seq(0,8,1),cex.axis=1.5)
mtext("Ager A", side = 2, cex = 1.5, line = 2.5)
mtext("Ager B", side = 1, cex = 1.5, line = 2.5)
mtext("Age Estimate Ager A vs. B", side = 3, cex = 1.5, line = 2.5)
```

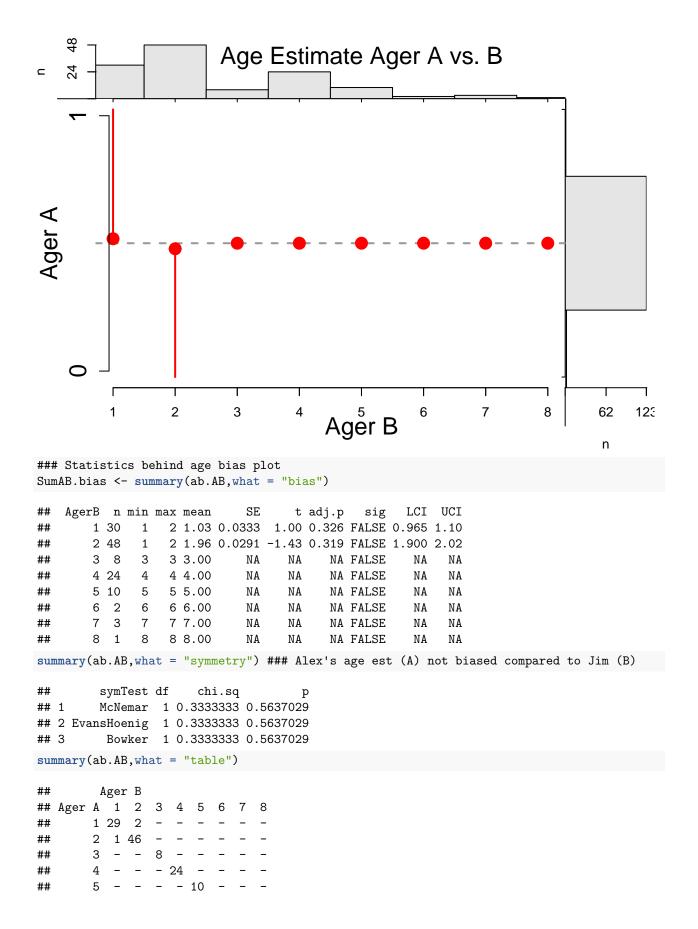

```
## 6 - - - - 2 - -
## 7 - - - - 3 -
## 8 - - - - - 1
```

Bias Alex (AgerA) vs Steve (AgerC) Age Est.


```
plot(ab.AC,
     col.CIsig = "Black",
     show.range = TRUE,
    main="",
    bty="n",
    lwd = 2,
    lwd.CI = 2,
    lwd.range = 2,
    lwd.agree = 2,
    col.CI = "red",
    col.range = "red",
     cex.n = 1.25,
     cex.axis=1.5,
    yaxt = "n",
    xlab="",ylab="")
## Warning in plot.window(...): "cex.n" is not a graphical parameter
## Warning in plot.xy(xy, type, ...): "cex.n" is not a graphical parameter
## Warning in axis(side = side, at = at, labels = labels, ...): "cex.n" is not
## a graphical parameter
## Warning in axis(side = side, at = at, labels = labels, ...): "cex.n" is not
## a graphical parameter
## Warning in box(...): "cex.n" is not a graphical parameter
## Warning in title(...): "cex.n" is not a graphical parameter
axis(2,at=seq(0,8,1),cex.axis=1.5)
mtext("Ager A", side = 2, cex = 1.5, line = 2.5)
mtext("Ager C", side = 1, cex = 1.5, line = 2.5)
mtext("Age Estimate Ager A vs. C", side = 3, cex = 1.5, line = 2.5)
```

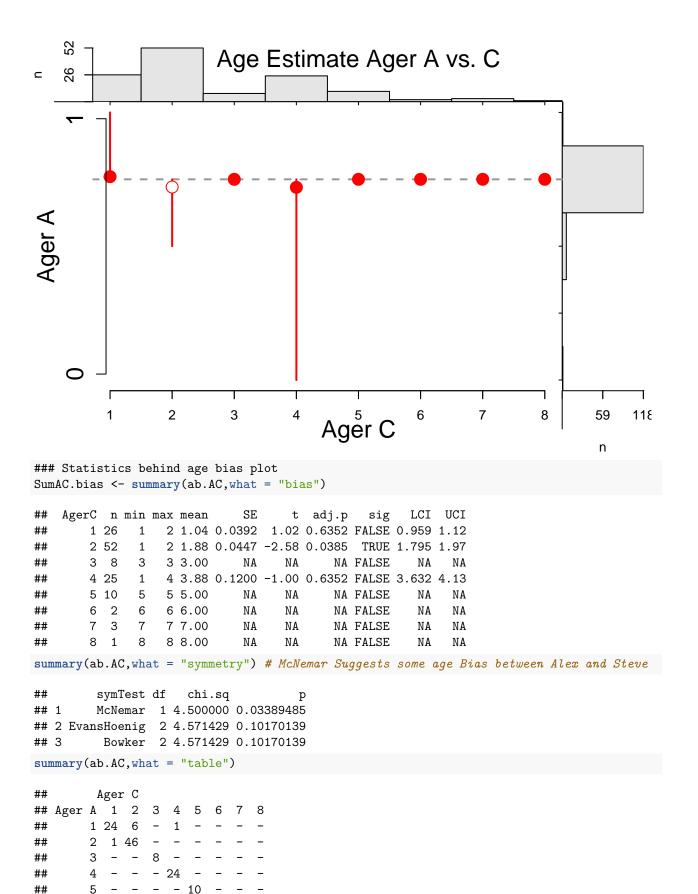

```
## 6 - - - - 2 - - ## 7 - - - - - 3 - ## 8 - - - - - - - 1
```

Bias Steve (AgerC) vs Jim (AgerB) Age Est.

plot(ab.BC,col.CIsig = "Black",show.range = TRUE,main="Age Est. Ager B vs C")

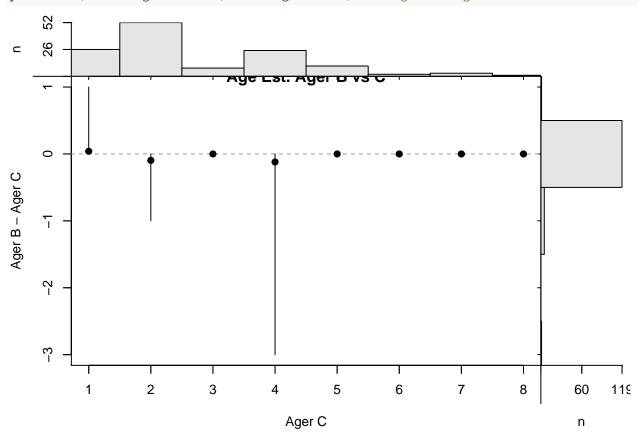

```
### Statistics behind age bias plot
summary(ab.BC,what = "bias")
    AgerC n min max mean
                               SE
                                      t adj.p
                                                       LCI UCI
##
                                                 sig
##
        1 26
                   2 1.04 0.0392 1.02 0.6352 FALSE 0.959 1.12
##
        2 52
                   2 1.90 0.0413 -2.33 0.0715 FALSE 1.821 1.99
               1
##
        3 8
               3
                   3 3.00
                               NA
                                     NA
                                            NA FALSE
                                                        NA
##
        4 25
               1
                   4 3.88 0.1200 -1.00 0.6352 FALSE 3.632 4.13
##
        5 10
               5
                   5 5.00
                              NA
                                     NA
                                            NA FALSE
                   6 6.00
##
        6
           2
               6
                               NA
                                     NA
                                            NA FALSE
                                                              NA
                                                        NA
##
        7
           3
               7
                   7 7.00
                              NA
                                     NA
                                            NA FALSE
                                                        NA
                                                              NA
##
        8
          1
               8
                   8 8.00
                              NA
                                     NA
                                            NA FALSE
                                                        NA
                                                              NA
summary(ab.BC, what = "symmetry") # close but no age bias between jim and steve
##
         symTest df
                      chi.sq
## 1
         McNemar 1 3.571429 0.05878172
## 2 EvansHoenig 2 3.666667 0.15987975
          Bowker 2 3.666667 0.15987975
summary(ab.BC, what = "table")
##
         Ager C
              2
## Ager B
          1
                 3
                    4
                       5
        1 24
##
             5
##
           1 47
##
        3
                 8
##
        4
        5
##
##
        6
##
##
```

Precision

We will assess precision of age estimates using average coeficcient of variance but will also look at some other metrics.

```
ap.ABC <- agePrecision(~AgerA+AgerB+AgerC, data=Age)</pre>
summary(ap.ABC, what = "difference")
##
                                       -1
## AgerA - AgerB 0.0000
                          0.0000
                                  1.5873 97.6190
                                                  0.7937
                          0.0000 4.7619 93.6508 0.7937
## AgerA - AgerC
                  0.7937
## AgerB - AgerC 0.7937 0.0000 3.9683 94.4444 0.7937
SumABC.Prec <- summary(ap.ABC, what = "precision")</pre>
      n validn R
                   ACV
                         APE PercAgree
           126 3 3.162 2.434
                                 92.86
##
  131
```

FID	AgerA (Alex)	AgerB (Jim)	AgerC (Steve)
7	1	1	4
27	1	1	2
29	1	1	2
34	1	1	2
35	1	2	2
63	1	2	2
71	2	2	1
90	2	1	2
122	1	1	2

There is some dissagreement about the age of some fish (FIDs 7,27,29,34,35,63,71,90,122) and some have not been aged at all (FIDs 6,28,79,81,124). I may remove these fish when fitting the growth model.

Age estimates were similar between all three readers (AgerA, AgerB, and AgerC). AgerA was found to underestimate the ages of 2 year old fish when compared to AgerC (t =-2.58, p = 0.038) but not when compared to AgerB (t = -1.43, p = 0.319). We found no other significant bias in the age estimations made by the three readers. Fish with inconsistent age estimates (n = 9) were removed from later analysis to eliminate this bias [(or) will be assigned ages based on the majority agreement between 2 readers]. Overall, there was a high level of precision between age estimates provided by our three readers (n = 126, 92.86 % Agreement, ACV = 3.16).