Made With Gsap

005
Word by word

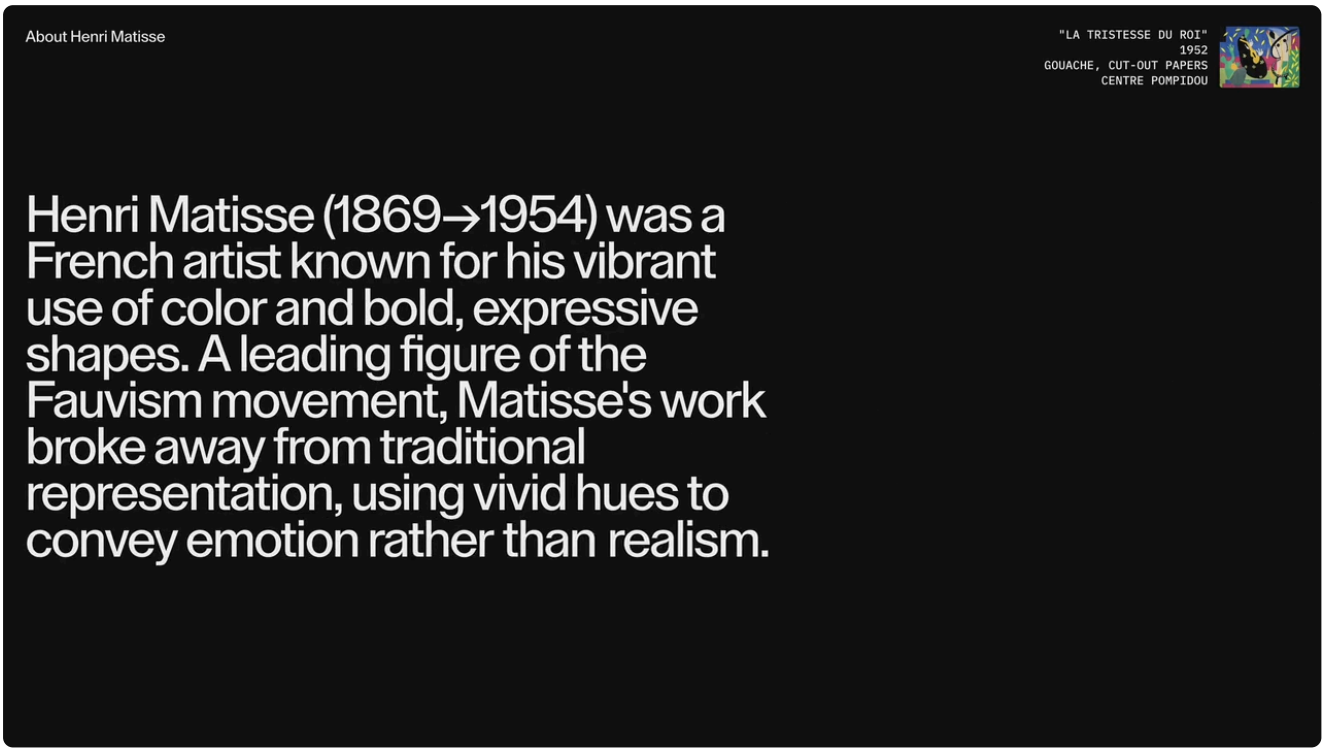

For this effect, I wanted to make the words of a paragraph appear from the right edge of the screen, moving into their final position. I also staggered the start of each word's movement for a more elegant result.

HTML Structure

To keep the effect easy to implement, you can write a text inside an element without worrying about wrapping each word in a `span`. This element will be the child of a division that we'll later pin to the user's scroll.

```
<div class="pin">
    <div class="container">
        <p class="paragraph">Henri Matisse (1869→1954) was a French artist</p>
    </div>
</div>
```

BATCH 001 — 050 EFFECTS

COPY/PASTE TO WEBFLOW AVAILABLE SEE HOW EASY IT IS

is function takes the DOM is its parameter.

```
function wrapWordsInSpan(element) {
    const text = element.textContent
    element.innerHTML = text
        .split(' ')
        .map(word => `<span class="word">${word}</span>`)
        .join(' ');
}
```

Some CSS

To begin, we can set in CSS the height for which our `container` will remain pinned. The shorter this height, the faster the words will appear as the user scrolls.

```
.mwg_effect005 .pin-height {
    height: 500vh;
}
```

Word movement

First step: move the words off-screen. To do this, we simply shift them 100% of the viewport width to the right. We also specify that each word should be `display: inline-block` , otherwise the transform won't work.

```
.mwg_effect005 .word {
    display: inline-block;
    transform: translate(100vw, 0);
}
```

Now, we just need to evenly distribute the appearance of each word over the scrolling distance. To achieve this, I use the `gsap.to()` method combined with the `scrollTrigger` object. This object allows us to specify when the animation should be triggered.

BATCH 001 — 050 EFFECTS

COPY/PASTE TO WEBFLOW AVAILABLE SEE HOW EASY IT IS

```
; .pin-height")
Selector( .mwg_effect005 .container")
ctorAll(".mwg_effect005 .word")

gsap.to(words, {
    x: 0, // Animate the 'x' property to 0
    stagger: 0.02, // Stagger the animation of each element by 0.02 seconds
    ease: 'power4.inOut', // Use a power4 easing function for smooth start and end
    scrollTrigger: {
        trigger: pinHeight, // We listen to pinHeight position
        start: 'top top', // Start the animation when the top of the trigger hits the t
        end: 'bottom bottom', // End the animation when the bottom of the trigger hits
        scrub: true, // Smoothly scrub the animation based on scroll position
        pin: container, // Let's pin our container while all the words animate
    }
})
```

To prevent all the words from animating at the same time, I specify `stagger: 0.2`. But why 0.2? The key thing to understand here is that the default duration value for each tween is 0.5 seconds (I didn't set a duration, so it uses the default). Therefore, if each element animates for 0.5 seconds and I stagger their start times by 0.5 seconds, that means they'd be perfectly sequenced. When we set `scrub: true` on a ScrollTriggered animation, it just squishes/stretches it to fit perfectly between the start and end scroll positions.

So, if we set `stagger` to 0.5, a word will appear exactly when the previous one has finished its movement. Lowering this value allows multiple words to overlap in animation at the same time.

The `gsap.to()` method will return each word to its initial position. The first word will begin to appear when the `pinHeight` section reaches the top of the viewport, and the last word will finish animating when the bottom of the `pinHeight` section reaches the bottom of the viewport. It's important to note the `pin` attribute here, which allows the animation to remain on screen instead of disappearing along with the initial scrolling flow.

Go further

You can experiment with different `ease` values to tweak the motion. For example, using `expo.out` makes the words arrive quickly at their final positions and then slow down gently.

BATCH 001 — 050 EFFECTS

COPY/PASTE TO WEBFLOW AVAILABLE SEE HOW EASY IT IS

ihance the fluidity and sliding

Made With Gsap

is well, visit our Go Further page to learn how to easily add it.

Final code

HTML CSS JAVASCRIPT

```
<section class="mwg_effect005">
    <p class="scroll">Scroll</p>

    <div class="pin-height">
        <div class="container">
            <div class="header">
                <p class="left">About Henri Matisse</p>
                <div class="right">
                    <p>"La Tristesse du roi" <br/>1952 </br>gouache, cut-out papers <br
                    <img src="assets/medias/painting.jpg" alt="">
                </div>
            </div>
            <p class="paragraph">Henri Matisse (1869→1954) was a French artist known f
        </div>
    </div>
</section>
```

Wanna learn something else?

BACK TO THE COLLECTION

BATCH 001 — 050 EFFECTS

COPY/PASTE TO WEBFLOW AVAILABLE SEE HOW EASY IT IS

Made With Gsap

Never miss what's next

Your email SUBMIT

By submitting your email, you'll be the first to know about upcoming updates for Made With Gsap. You can unsubscribe at any time.

SOCIAL

X(TWITTER)
INSTAGRAM
BLUESKY
LINKEDIN

PAGES

HOME
COLLECTION
FAQ
PRICING

CONTACT

REACH US
SUPPORT

Made With Gsap

2025© PERMISSIONS & TERMS PRIVACY POLICY