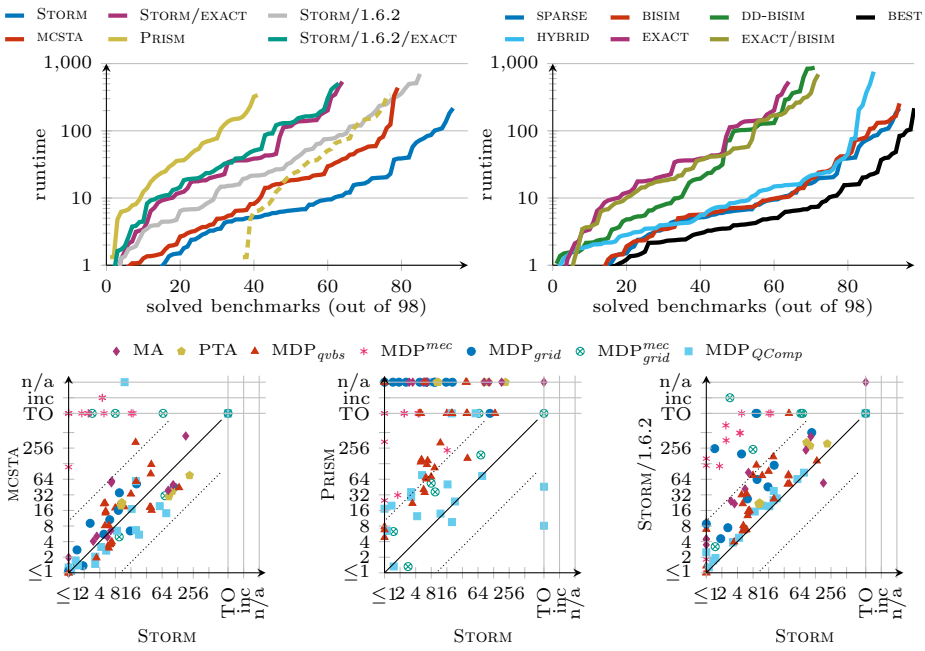



**Fig. 6.** MDP model checking performance comparison between STORM, MCSTA, PRISM, and other configurations of STORM. Top: quantile plots indicating how many instances ($x$-axis) are solved within a given time ($y$-axis) for each tool (left) and STORM configuration (right). Bottom: scatter plots for direct runtime comparison. n/a means not supported.

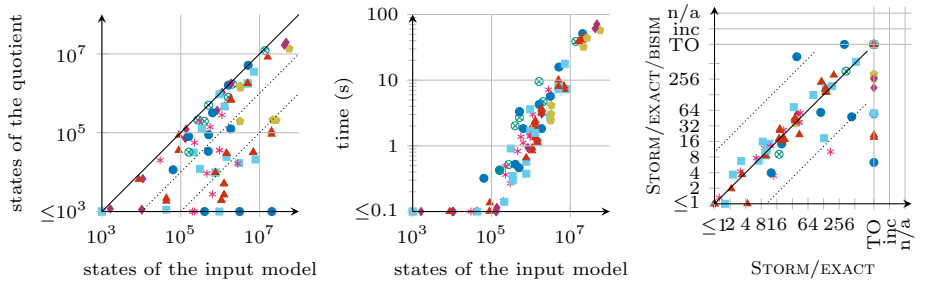



**Fig. 7.** Bisimulation minimisation in STORM. Left: number of states of the input model ($x$-axis) and of its bisimulation quotient ($y$-axis). Middle: time to compute the quotient ($y$-axis) depending on the number of states of the input model ($x$-axis). Right: scatter plot for direct runtime comparison of STORM/EXACT with and without bisimulation.

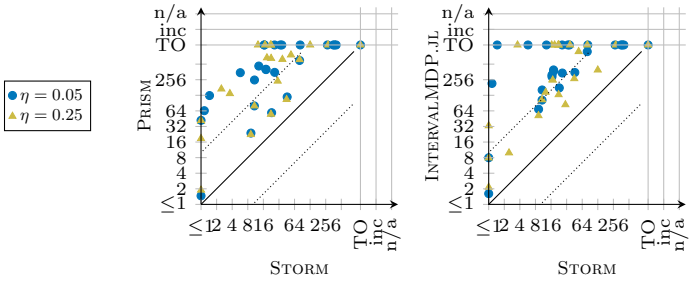



**Fig. 8.** STORM, PRISM, and INTERVALMDP.JL on interval MDPs with interval width $\eta$.

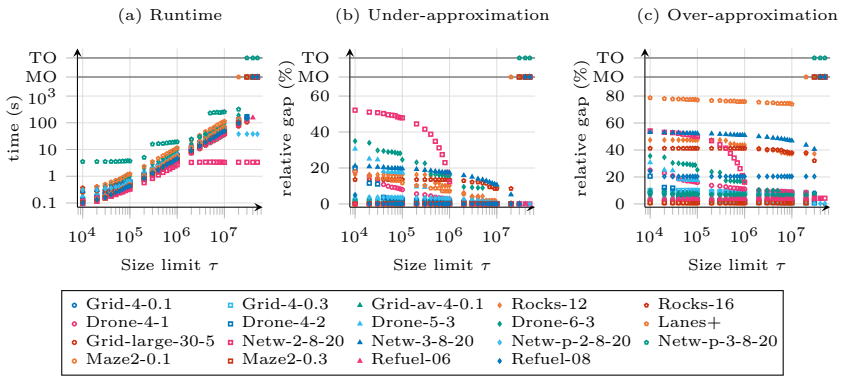



**Fig. 9.** Belief exploration for 19 POMDPs in STORM with different limits on the number of explored beliefs (size limit $\tau$). Left: runtime. Centre: relative gap between computed bound value and the best computed under-approximation. Right: relative gap between computed bound value and the best computed over-approximation (using belief interpolation). TO and MO indicate timeouts and memory exhaustion.