


To request an update to this runbook please click [here](#) (OC1 link)

NA LVV Service: Portal Tutorial


Tools Required	Username and password created by the DCO engineer

First time logging into the portal


- Once a [user account has been created](#), the LVV site lead will receive an automated email for verifying the account
 - Use the tenancy name `lvv-dcbt-dco`
 - The initial one-time password for the account can be obtained from the DCO engineer
 - The unique vendor name will be there in the automated email
- Verify and reset the password using the link in the email
- From a browser, go to the [lvv-portal](#)
- In the initial `Sign In` page for tenancy write: `lvv-dcbt-dco` and click Continue

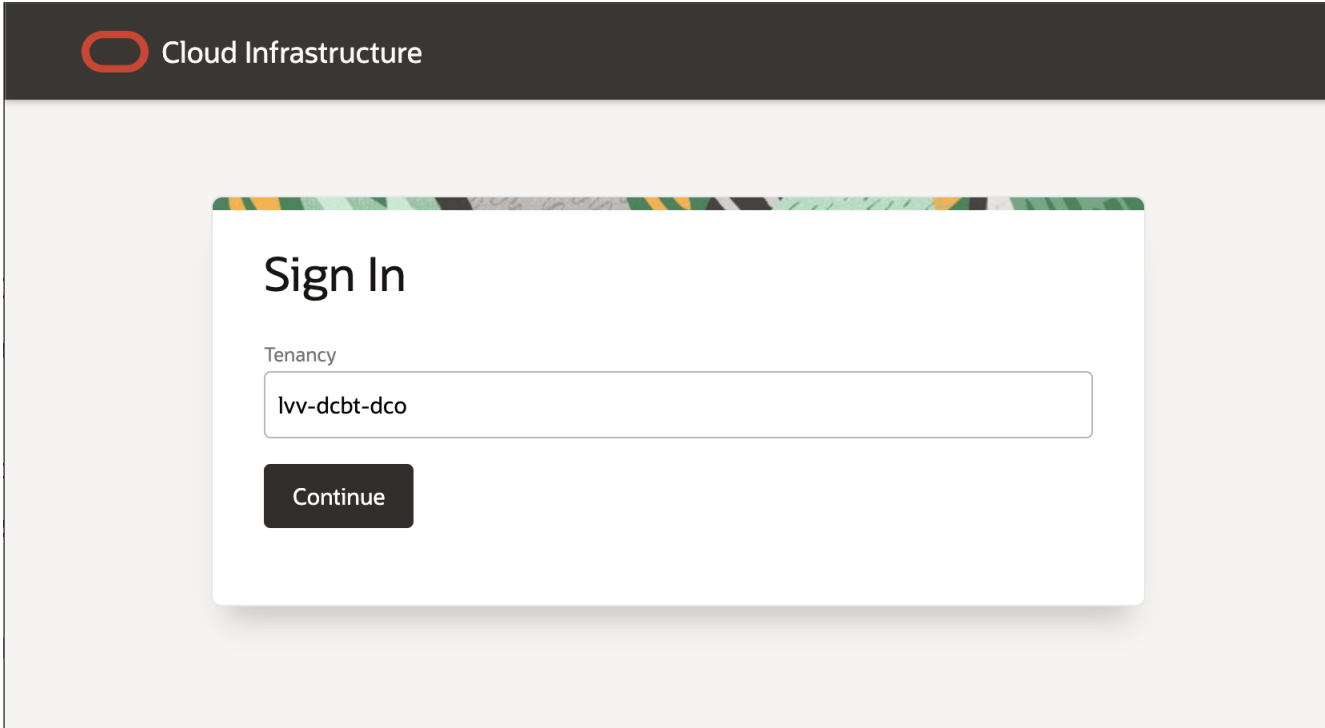

- The next page will ask for the vendor name and the password. Provide your unique vendor name and the password [here](#)

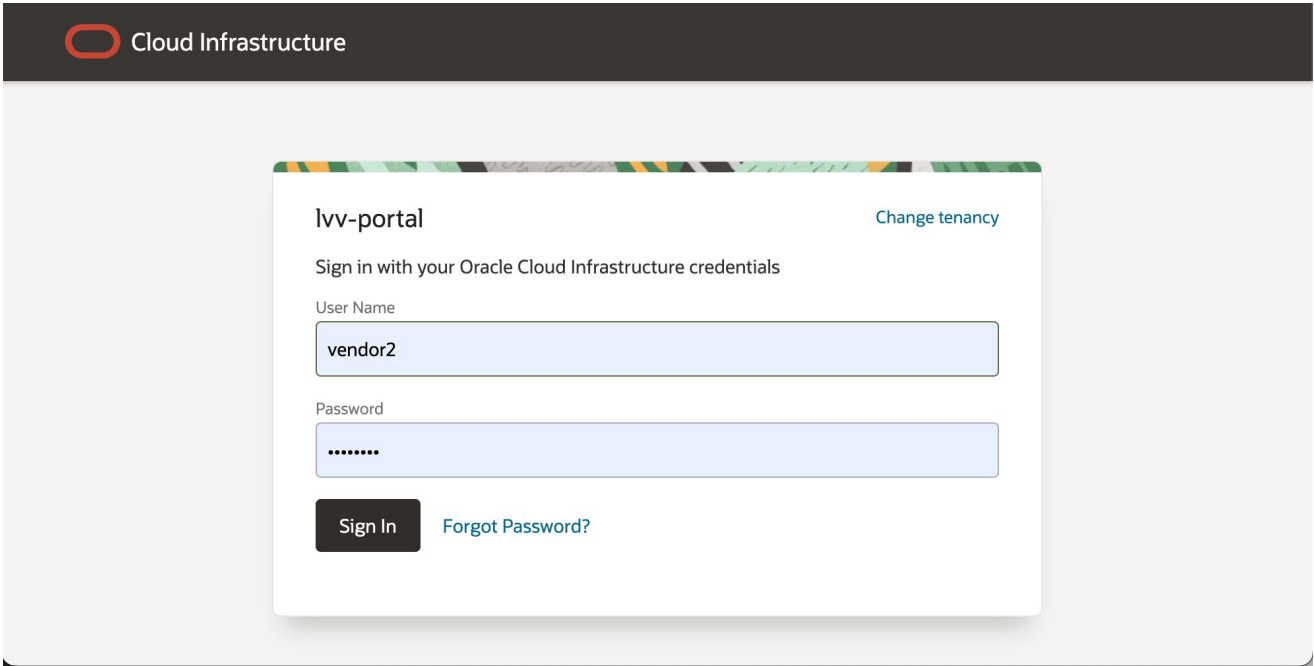


The initial page will display the assigned projects to the vendor based on the building and block

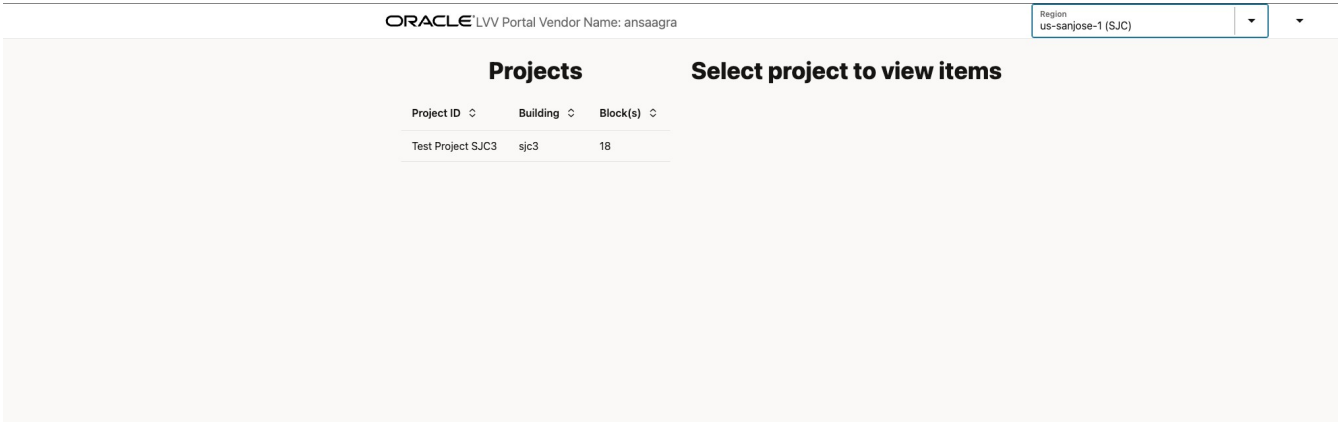

Looking at project detail

Click on the project in the Projects table to get the list of racks with cabling issues

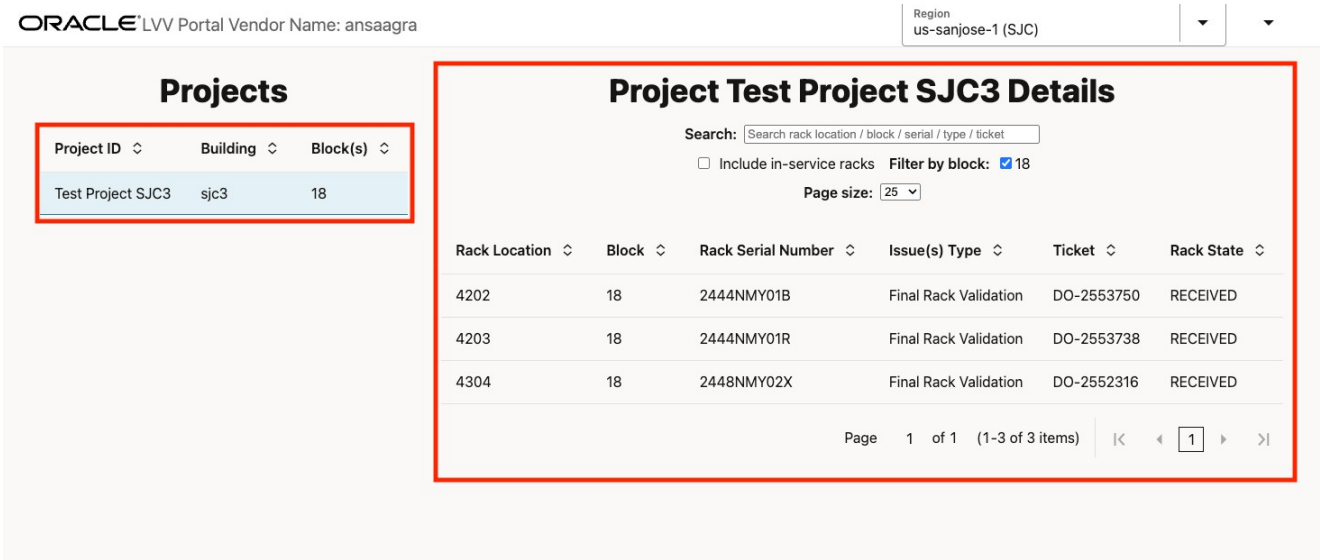

- You can check the `Include in-service racks` checkbox to see the in-service racks

ORACLE[®] LVV Portal Vendor Name: ansaagra

Region
us-sanjose-1 (SJC)

Projects

Project ID

Building

Block(s)

Test Project SJC3

sjc3

18

Project Test Project SJC3 Details

Search:

☒ Include in-service racks

Filter by block: ☒ 18

Page size:

Rack Location	Block	Rack Serial Number	Issue(s) Type	Ticket	Rack State
3701	18	2435XL8036			AVAILABLE
3702	18	2436XL8043			AVAILABLE
3703	18	2437XL80DB			AVAILABLE
3704	18	2436XL8040			AVAILABLE
3705	18	2436XL804P			AVAILABLE
3706	18	2435XL801R			AVAILABLE
3707	18	2437XL80F6			AVAILABLE
3802	18	2438XL80HF			AVAILABLE
3803	18	2438XL80J7			AVAILABLE
3804	18	2438XL80M1			AVAILABLE
3805	18	2438XL80BY			AVAILABLE
3806	18	2438XL80RV			AVAILABLE
3807	18	2438XL80NB			AVAILABLE

- You can filter the results by rack location/block/rack serial/ticket type/ticket ID using the search bar

ORACLE[®] LVV Portal Vendor Name: ansaagra

Region
us-sanjose-1 (SJC)

Projects

Project ID

Building

Block(s)

Test Project SJC3

sjc3

18

Project Test Project SJC3 Details

Search:

☒ Include in-service racks

Filter by block: ☒ 18

Page size:

Rack Location	Block	Rack Serial Number	Issue(s) Type	Ticket	Rack State
3701	18	2435XL8036			AVAILABLE
3702	18	2436XL8043			AVAILABLE
3703	18	2437XL80DB			AVAILABLE
3704	18	2436XL8040			AVAILABLE
3705	18	2436XL804P			AVAILABLE
3706	18	2435XL801R			AVAILABLE
3707	18	2437XL80F6			AVAILABLE

Page 1 of 1 (1-7 of 7 items)

- Click on the desired rack in the Project Details table to validate or see the errors for that rack

ORACLE[®] LVV Portal Vendor Name: ansaagra

Region
us-sanjose-1 (SJC)

Projects

Project ID	Building	Block(s)
Test Project SJC3	sjc3	18

Project Test Project SJC3 Details

Search:

☐ Include in-service racks **Filter by block:** ☒ 18

Page size:

Rack Location	Block	Rack Serial Number	Issue(s) Type	Ticket	Rack State
4202	18	2444NMY01B	Final Rack Validation	DO-2553750	RECEIVED
4203	18	2444NMY01R	Final Rack Validation	DO-2553738	RECEIVED
4304	18	2448NMY02X	Final Rack Validation	DO-2552316	RECEIVED

Page 1 of 1 (1-3 of 3 items)

Validating the rack

- Once you select a rack, you will land on the rack validation page
 - Here you will see the list of devices in the rack which can be validated along with their elevation and status. The various statuses are:
 - Not Triggered -> There hasn't been a validation triggered for this device yet
 - In Progress -> The device validation is in progress
 - Completed -> The device validation is completed. You can see the number of link errors in the errors column
 - Device Unreachable -> The device is unreachable and therefore cannot be validated
 - You can also see the elevation and error count for each device
 - You can select the devices you want to validate or can select the above checkbox to select all devices to validate. If you don't select any device, it by default validates all the devices

ORACLE[®] LVV Portal Vendor Name: aygangwa

Region
us-phoenix-1 (PHX)

 Building: **phx13** Block: **2** Rack: **0921** Serial: **2603XV805L**

 Validation Summary

Validate

Resolve

Download CSV

☒ Hide Unsupported LLDP errors

+

-

Validation has not been triggered for this rack.

Please select the devices and hit the Validate button above to run validation.

☐	Device	Elevation	Errors	PSU Status	Status
> ☐	phx13-c1-b2-t0-r134	35	0	-	Not Triggered
> ☐	phx13-c1-b2-t0-r133	34	0	-	Not Triggered

Confidential - Oracle Restricted \Employees Only

- You can then hit the validate button to run the validations

ORACLE[®]LVV Portal Vendor Name: aygangwa

Region
us-phoenix-1 (PHX)

Building: **phx13** Block: **2** Rack: **0921** Serial: **2603XV805L**

Validation Summary

Validate

Resolve

Download CSV

☒ Hide Unsupported LLDP errors

+

-

Validation has not been triggered for this rack.
Please select the devices and hit the Validate button above to run validation.

☐ Device	Elevation	Errors	PSU Status	Status
> ☐ phx13-c1-b2-t0-r134	35	0	-	Not Triggered
> ☐ phx13-c1-b2-t0-r133	34	0	-	Not Triggered

- This will trigger the rack validation, which would take a few minutes

ORACLE[®]LVV Portal Vendor Name: aygangwa

Region
us-phoenix-1 (PHX)

Building: **phx13** Block: **2** Rack: **0921** Serial: **2603XV805L**

Validation in progress...

Validation Summary

Validate

Resolve

Download CSV

☒ Hide Unsupported LLDP errors

+

-

☒ Device

Elevation

Errors

PSU Status

Status

> ☒ phx13-c1-b2-t0-r134

35

0

-

In Progress

> ☒ phx13-c1-b2-t0-r133

34

0

-

In Progress

> ☐ 2603XV805L

-

0

-

Not Triggered

- Once the validation is completed, you would be able to see a high level summary of the validation failures

ORACLE[®] LVV Portal

Vendor Name: aygangwa

Region
us-phoenix-1 (PHX)

 Building: **phx13** Block: **2** Rack: **0921** Serial: **2603XV805L**

 Validation Summary

Validate

Resolve

Download CSV

☒ Hide Unsupported LLDP errors

+

-

4 link-level validation failure(s)
0 device(s) are unreachable
1 device(s) have PSU failure(s)

☐ Device	Elevation	Errors	PSU Status	Status
> ☐ phx13-c1-b2-t0-r134	35	0	✓ UP	Completed
> ☐ phx13-c1-b2-t0-r133	34	LLDP:3 OPT:1	✗ DOWN	Completed

- You can expand on each device to view the results for that device OR use the `Expand All / Collapse All` button to expand/collapse all device results at once

 Validation Summary

Validate

Resolve

Download CSV

☐ Hide Unsupported LLDP errors

+

-

4 link-level validation failure(s)
0 device(s) are unreachable
1 device(s) have PSU failure(s)

☐ Device	Elevation	Errors	PSU Status	Status
> ☐ phx13-c1-b2-t0-r134	35	0	✓ UP	Completed
☒ ☐ phx13-c1-b2-t0-r133	34	LLDP:3 OPT:1	✗ DOWN	Completed

LLDP Errors

3

Device A Name	Device A Port	Current Device B Rack	Current Device B Name	Current Device B Port	Expected Device B Rack	Expected Device B Name	Expected Device B Port	Link Status
phx13-c1-b2-t0-r133	Ethernet10/1	0225:20	phx22-q1-b2-t1-r2	Ethernet39/1	0225:35	phx22-q1-b2-t1-r4	Ethernet47/1	MISMATCH
phx13-c1-b2-t0-r133	Ethernet12/1	Unknown	Unknown	Unknown	0225:32	phx22-q1-b2-t1-r6	Ethernet47/1	DOWN
phx13-c1-b2-t0-r133	Ethernet58/1	0225:12	phx22-j1-crypto	Ethernet39/1	0225:30	phx22-q1-b2-t1-r14	Ethernet47/1	UNSUPPORTED

Optic Errors

1

Device Name	Device Port	Tx Power	Rx Power
phx13-c1-b2-t0-r133	Ethernet12/1	1.46	-30.0

Resolving an issue

- Once the cabling issue mentioned in the details page is fixed click on the Resolve button to start the revalidation
 - The revalidation process takes some time to complete
 - If the issue is not fixed the DCO engineer will inform the site lead again

Confidential - Oracle Restricted \Employees Only

ORACLE[®]LVV Portal Vendor Name: vendor2

Building: phx10, Block: 1, Rack: 1214, Serial: 2509NMY03L

Validate

Resolve

Download CSV

☒ Hide "UNSUPPORTED" LLDP Status errors

* When Action Items are completed, Click the Resolve button at the top of the page to resolve the corresponding Jira ticket.

[About Oracle](#)

[Contact Us](#)

[Legal Notices](#)

[Terms Of Use](#)

[Your Privacy Rights](#)

Copyright © 2014, 2024 Oracle and/or its affiliates All rights reserved.

If there are no more pending tasks the initial page will not have any data in the Project Details table

OCI LVV Portal

lvv.us-phoenix-1.oci.oraclecloud.com

OCI Usefull Links

Services

Oncall

https://permission...

NA KTLO - Networ...

Index of libs-relea...

LVV

NACAPS

ORACLE[®]LVV Portal Vendor Name: vendor2

rakshit.viswanatham@or

Projects

Project

Building

Block

DO115

phx1

7

Project DO115 Details

Rack Location

Rack Serial Number

Issue(s) Type

Ticket

No data to display.

Building: phx1

Block: 7

Project ID: DO115

[About Oracle](#)

[Contact Us](#)

[Legal Notices](#)

[Terms Of Use](#)

[Your Privacy Rights](#)

Copyright © 2014, 2024 Oracle and/or its affiliates All rights reserved.

Unsupported LLDP Errors

- Some of the link failures that you would see on the portal are unsupported by the Portal at the moment. We can hide them using this checkbox

Building: **phx13** Block: **2** Rack: **0921** Serial: **2603XV805L**

Validation Summary

Validate

Resolve

Download CSV

☒ Hide Unsupported LLDP errors

+

-

3 link-level validation failure(s)

0 device(s) are unreachable

1 device(s) have PSU failure(s)

☐	Device	Elevation	Errors	PSU Status	Status
>	☐ phx13-c1-b2-t0-r134	35	0	✓ UP	Completed
▼	☐ phx13-c1-b2-t0-r133	34	LLDP:2 OPT:1	✗ DOWN	Completed

▼ LLDP Errors

2

Device A Name	Device A Port	Current Device B Rack	Current Device B Name	Current Device B Port	Expected Device B Rack	Expected Device B Name	Expected Device B Port	Link Status
phx13-c1-b2-t0-r133	Ethernet10/1	0225:20	phx22-q1-b2-t1-r2	Ethernet39/1	0225:35	phx22-q1-b2-t1-r4	Ethernet47/1	MISMATCH
phx13-c1-b2-t0-r133	Ethernet12/1	Unknown	Unknown	Unknown	0225:32	phx22-q1-b2-t1-r6	Ethernet47/1	DOWN

> Optic Errors

1

- These errors are hidden by default, but if you'd like to see them, you can uncheck it.

 Building: **phx13** Block: **2** Rack: **0921** Serial: **2603XV805L**

 Validation Summary

Validate

Resolve

Download CSV

☐ Hide Unsupported LLDP errors

+

-

4 link-level validation failure(s)
0 device(s) are unreachable
1 device(s) have PSU failure(s)

☐ Device	Elevation	Errors	PSU Status	Status
> ☐ phx13-c1-b2-t0-r134	35	0	✓ UP	Completed
✓ ☐ phx13-c1-b2-t0-r133	34	LLDP:3 OPT:1	✗ DOWN	Completed

LLDP Errors

3

Device A Name	Device A Port	Current Device B Rack	Current Device B Name	Current Device B Port	Expected Device B Rack	Expected Device B Name	Expected Device B Port	Link Status
phx13-c1-b2-t0-r133	Ethernet10/1	0225:20	phx22-q1-b2-t1-r2	Ethernet39/1	0225:35	phx22-q1-b2-t1-r4	Ethernet47/1	MISMATCH
phx13-c1-b2-t0-r133	Ethernet12/1	Unknown	Unknown	Unknown	0225:32	phx22-q1-b2-t1-r6	Ethernet47/1	DOWN
phx13-c1-b2-t0-r133	Ethernet58/1	0225:12	phx22-j1-crypto	Ethernet39/1	0225:30	phx22-q1-b2-t1-r14	Ethernet47/1	UNSUPPORTED