

Lab - Parsing JSON with a Python Application

Objectives

- Obtain a MapQuest API Key.
- Import necessary modules.
- Create API request variables and construct a URL.
- Add user input functionality.
- Add a quit feature so that the user can end the application.
- Display trip information for time, distance, and fuel usage.
- Iterate through the JSON data to extract and output the directions.
- Display error messages for invalid user input.

Background / Scenario

In this lab, you will create an application that retrieves JSON data from the MapQuest Directions API, parses the data, and formats it for output to the user. You will use the GET Route request from the MapQuest Directions API. Review the GET Route Directions API documentation here:

<https://developer.mapquest.com/documentation/directions-api/route/get/>

Note: If the above link no longer works, search for “MapQuest API Documentation”.

Required Resources

- Computer with Python installed according to the **Lab - PC Setup for Workshop**.
- Access to the internet.

Instructions

Step 1: Demonstrate the MapQuest Directions API application.

Your instructor may demonstrate the application and show you the script used to create it. In addition, your instructor may allow you to have the solution script, **08_parse-json_sol.py**. However, you will create this script step-by-step in this lab.

The application asks for a starting location and a destination. It then requests JSON data from the MapQuest Directions API, parses it, and displays useful information.

```
>>>
Starting Location: Washington
Destination: Baltimore
URL:
https://www.mapquestapi.com/directions/v2/route?key=your_api_key&from=Washington&to=Baltimore
API Status: 0 = A successful route call.

Directions from Washington to Baltimore
```

```
Trip Duration:    00:49:19
Kilometers:      61.32
Fuel Used (Ltr): 6.24
=====
Start out going north on 6th St/US-50 E/US-1 N toward Pennsylvania Ave/US-1 Alt N.
(1.28 km)
Turn right onto New York Ave/US-50 E. Continue to follow US-50 E (Crossing into
Maryland). (7.51 km)
Take the Balt-Wash Parkway exit on the left toward Baltimore. (0.88 km)
Merge onto MD-295 N. (50.38 km)
Turn right onto W Pratt St. (0.86 km)
Turn left onto S Calvert St/MD-2. (0.43 km)
Welcome to BALTIMORE, MD. (0.00 km)
=====

Starting Location: quit
>>>
```

Note: To see the JSON for the above output, you will need to replace **your_api_key** with the MapQuest API key you obtained in Step 3.

Step 2: Authenticating a RESTful request.

Before building the application, you will need to obtain a key from MapQuest developer site, which you will do in the next step. Previously, you used no authentication to access the ISS Pass Predictions API. However, many APIs require some form of authentication.

Authenticating a RESTful request is done in one of four ways. Describe each method below:

- **None:** _____

- **Basic HTTP:** _____

- **Token:** _____

- **Open Authorization (OAuth):** _____

For the MapQuest API, you will use token authentication.

Step 3: Get a MapQuest API key.

Complete the following steps to get a MapQuest API key:

- a. Go to: <https://developer.mapquest.com/>.
- b. Click **Sign Up** at the top of the page.
- c. Fill out the form to create a new account. For **Company**, enter **Cisco Networking Academy Student**.
- d. After clicking **Sign Me Up**, you are redirected to the **Manage Keys** page.
- e. Click **Approve All Keys** and expand **My Application**.
- f. Copy your **Consumer Key** to Notepad for future use. This will be the key you use for the rest of this lab.

Note: MapQuest may change the process for obtaining a key. If the steps above are no longer valid, search for “steps to generate mapquest api key”.

Step 4: Importing modules for the application.

To begin your script for parsing JSON data, you will need to import two modules from the Python library: **requests** and **urllib.parse**. The **request** module provides functions for retrieving JSON data from a URL. The **urllib.parse** module provides a variety of functions that will enable you to parse and manipulate the JSON data you receive from a request to a URL.

- a. Open a blank script file and save it **08_parse-json1.py**.
- b. Import the **urllib.parse** and **requests** modules.

```
import urllib.parse
import requests
```

Step 5: Create variables for API request.

The first step in creating your API request is to construct the URL that your application will use to make the call. Initially, the URL will be the combination of the following variables:

- **main_api** – This is the main URL that you are accessing.
 - **orig** – This is the parameter to specify your point of origin.
 - **dest** – This is the parameter to specify your destination.
 - **key** – This is the MapQuest API key you retrieved from the developer website.
- a. Create variables to build the URL that will be sent in the request. Copy your MapQuest key to the key variable.
 - b. Combine the four variables **main_api**, **orig**, **dest**, and **key** to format the requested URL. Use the **urlencode** method to properly format the address value. This function builds the parameters part of the URL and converts possible special characters in the address value (e.g. space into “+” and a comma into “%2C”).

```
main_api = "https://www.mapquestapi.com/directions/v2/route?"
orig = "Washington"
dest = "Baltimore"
key = "your_api_key"
```

- c. Create a variable to hold the reply of the requested URL and print the returned JSON data. The **json_data** variable holds a Python's Dictionary representation that is the **json** reply of the **get** method of the **requests** module. The **print** statement is used to check the returned data.

```
json_data = requests.get(url).json()
print(json_data)
```

Step 6: Test the URL request.


- a. Run your **08_json-parse1.py** script and verify that it works. Troubleshoot your code, if necessary. Although your output might be slightly different, you should get a JSON response similar to the following:

```
{'route': {'distance': 38.089, 'hasHighway': True, 'hasUnpaved': False,
'hasAccessRestriction': False, 'options': {'mustAvoidLinkIds': []},
'maxWalkingDistance': -1, 'manmaps': 'true', 'urbanAvoidFactor': -1,
'stateBoundaryDisplay': True, 'cyclingRoadFactor': 1, 'routeType': 'FASTEST',
'countryBoundaryDisplay': True, 'drivingStyle': 2, 'highwayEfficiency': 22,
'narrativeType': 'text', 'routeNumber': 0, 'tryAvoidLinkIds': [], 'generalize': -1,
'returnLinkDirections': False, 'doReverseGeocode': True, 'avoidTripIds': []},
```

Lab - Parsing JSON with a Python Application

```
'timeType': 0, 'sideOfStreetDisplay': True, 'filterZoneFactor': -1, 'walkingSpeed': -1, 'useTraffic': False, 'unit': 'M', 'tr
[output omitted]
>>>
```

- b. Change the **orig** and **dest** variables. Rerun the script to get different results.

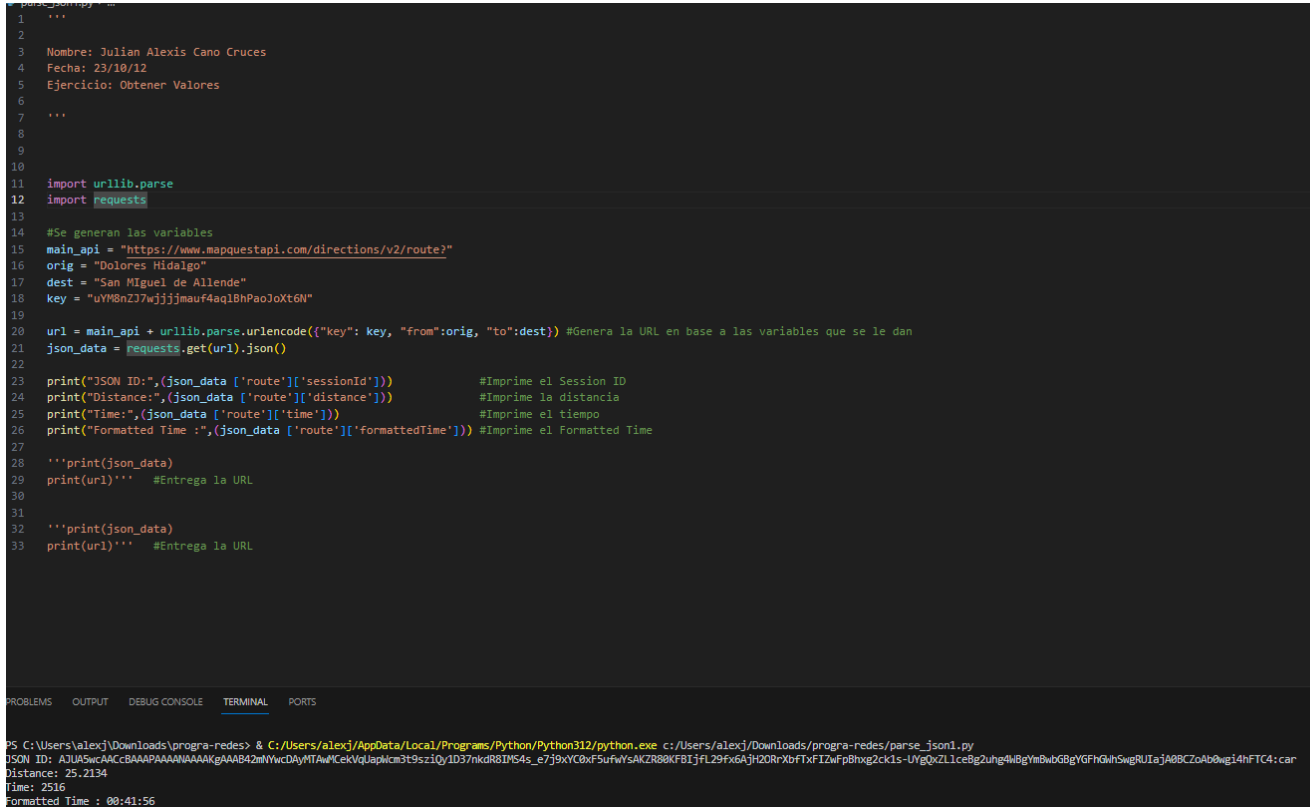

The screenshot shows a Python script named `parse_json1.py` in an IDE. The script imports `urllib.parse` and `requests`, then defines API variables and makes a GET request to the MapQuest API. It prints the session ID, distance, time, and formatted time from the JSON response. The terminal output at the bottom shows the script's execution, including the URL, session ID, distance (25.2134), time (2516), and formatted time (00:41:56).

```
1 '''
2
3 Nombre: Julian Alexis Cano Cruces
4 Fecha: 23/10/12
5 Ejercicio: Obtener Valores
6
7 '''
8
9
10
11 import urllib.parse
12 import requests
13
14 #Se generan las variables
15 main_api = "https://www.mapquestapi.com/directions/v2/route?"
16 orig = "Dolores Hidalgo"
17 dest = "San Miguel de Allende"
18 key = "uYWMnZj7wjjjmauf4aq18hPaoJoxT6N"
19
20 url = main_api + urllib.parse.urlencode({"key": key, "from":orig, "to":dest}) #Genera la URL en base a las variables que se le dan
21 json_data = requests.get(url).json()
22
23 print("JSON ID:",(json_data ['route'] ['sessionId'])) #Imprime el Session ID
24 print("Distance:",(json_data ['route'] ['distance'])) #Imprime la distancia
25 print("Time:",(json_data ['route'] ['time'])) #Imprime el tiempo
26 print("Formatted Time :", (json_data ['route'] ['formattedTime'])) #Imprime el Formatted Time
27
28 '''print(json_data)
29 print(url)''' #Entrega la URL
30
31
32 '''print(json_data)
33 print(url)''' #Entrega la URL
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

PS C:\Users\alexj\Downloads\progra-redes> C:\Users\alexj\AppData\Local\Programs\Python\Python312\python.exe c:\Users\alexj\Downloads\progra-redes\parse_json1.py
JSON ID: A3UASwCAACcBAAAPAAAAAAGAAAB42mYwcDAyMTAwKckVqJapMcm3t9sziQyID37nkdR8IM54s_e7j9xYC8f5uFwYsAKZB88KFBIjfl29FxBjH20RfXbFTxIZwFp8hxg2ck1s-UvgQxZL1ceBg2uhg4wBgYmbw6BgYGFhGhSwgRUIaJAOBCZoAbdwgi4hFTC4:car
Distance: 25.2134
Time: 2516
Formatted Time : 00:41:56

Step 7: Print the URL and check the status of the JSON request.

Now that you know the JSON request is working, you can add some more functionality to the application.

- Save your script as **08_json-parse2.py**.
- Delete the **print(json_data)** statement because you no longer need to test that the request is properly formatted.
- Add the statements below, which will do the following:
 - Print the constructed URL so that the user can see the exact request made by the application.
 - Parse the JSON data to obtain the **statuscode** value.
 - Start an **if** loop that checks for a successful call, which has a value of 0. Add a print statement to display the **statuscode** value and its meaning. The **\n** adds a blank line below the output.

```
print("URL: " + (url))
```

```
json_data = requests.get(url).json()
json_status = json_data["info"]["statuscode"]
```

```
if json_status == 0:
    print("API Status: " + str(json_status) + " = A successful route call.\n")
```


Later in this lab, you will add **elif** and **else** statements for different **statuscode** values.

Step 8: Test status and URL print commands.

Run your **08_json-parse2.py** script and verify that it works. Troubleshoot your code, if necessary. You should get output similar to the following:

```
URL:
https://www.mapquestapi.com/directions/v2/route?key=your_api_key&to=Baltimore&from=Washington
API Status: 0 = A successful route call.
```

```
>>>
```

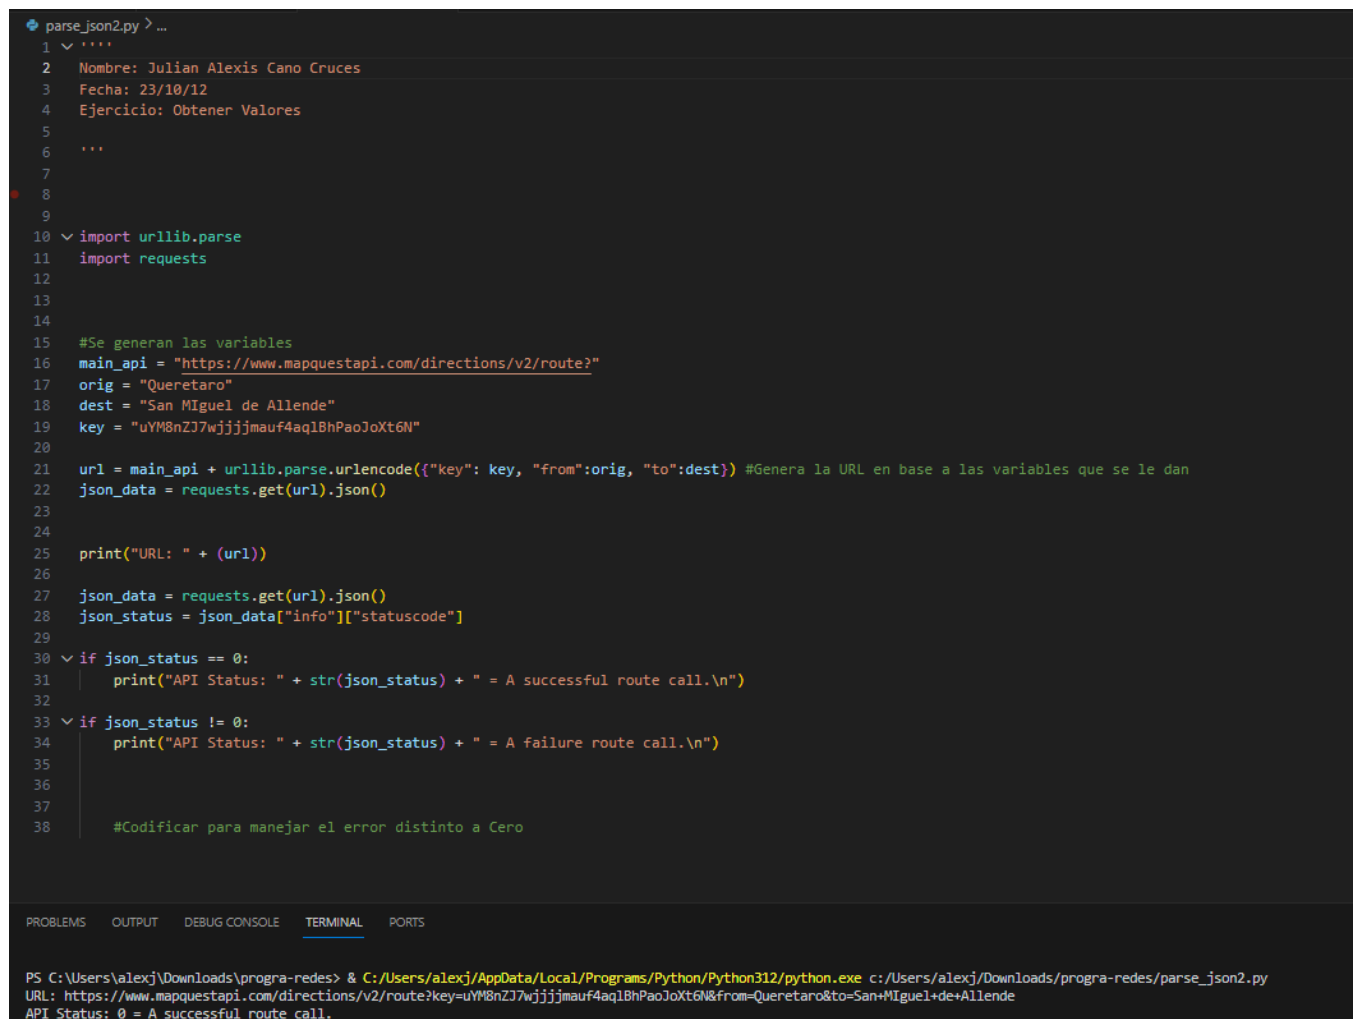

```
1  """
2  Nombre: Julian Alexis Cano Cruces
3  Fecha: 23/10/12
4  Ejercicio: Obtener Valores
5
6  """
7
8
9
10 import urllib.parse
11 import requests
12
13
14
15 #Se generan las variables
16 main_api = "https://www.mapquestapi.com/directions/v2/route?"
17 orig = "Queretaro"
18 dest = "San Miguel de Allende"
19 key = "uYM8nZJ7wjjjmauf4aq1BhPaoJoxT6N"
20
21 url = main_api + urllib.parse.urlencode({"key": key, "from":orig, "to":dest}) #Genera la URL en base a las variables que se le dan
22 json_data = requests.get(url).json()
23
24
25 print("URL: " + (url))
26
27 json_data = requests.get(url).json()
28 json_status = json_data["info"]["statuscode"]
29
30 if json_status == 0:
31     print("API Status: " + str(json_status) + " = A successful route call.\n")
32
33 if json_status != 0:
34     print("API Status: " + str(json_status) + " = A failure route call.\n")
35
36
37
38 #Codificar para manejar el error distinto a Cero
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
PS C:\Users\alexj\Downloads\progra-redes> & C:/Users/alexj/AppData/Local/Programs/Python/Python312/python.exe c:/Users/alexj/Downloads/progra-redes/parse_json2.py
URL: https://www.mapquestapi.com/directions/v2/route?key=uYM8nZJ7wjjjmauf4aq1BhPaoJoxT6N&from=Queretaro&to=San+Miguel+de+Allende
API Status: 0 = A successful route call.
```

Step 9: Add user input for starting location and destination.

Up to this point, you have used Washington and Baltimore as the static values for the location variables. However, the application requires that the user input these. Complete the following steps to update your application:

- Save your script as **08_json-parse3.py**.
- Delete the current **orig** and **dest** variables.

- c. Rewrite the **orig** and **dest** to be within a **while** loop in which it requests user input for the starting location and destination. The **while** loop allows the user to continue to make requests for different directions.
- d. Be sure all the remaining code is indented within the **while** loop.

```
while True:
    orig = input("Starting Location: ")
    dest = input("Destination: ")
    url = main_api + urllib.parse.urlencode({"key": key, "from":orig, "to":dest})
    print("URL: " + (url))

    json_data = requests.get(url).json()
    json_status = json_data["info"]["statuscode"]

    if json_status == 0:
        print("API Status: " + str(json_status) + " = A successful route call.\n")
```

Step 10: Test user input functionality.

Run your **08_json-parse3.py** script and verify that it works. Troubleshoot your code, if necessary. You should get output similar to what is shown below. You will add quit functionality in the next step. For now, enter **Ctrl+C** to quit the application.

```
Starting Location: Washington
Destination: Baltimore
URL:
https://www.mapquestapi.com/directions/v2/route?key=your_api_key&from=Washington&to=Baltimore
API Status: 0 = A successful route call.

Starting Location: <Ctrl+C>
```

```
'''
Nombre: Julian Alexis Cano Cruces
Fecha: 23/10/12
Ejercicio: Obtener Valores
'''

import urllib.parse
import requests

while True:
    orig = input("Origen: ")

    dest = input("Destino: ")

    #Condicion para Dest

    #Se generan las variables
    main_api = "https://www.mapquestapi.com/directions/v2/route?"
    key = "uYM8nZJ7wjjjmauf4aq18hPaoJoXt6N"

    url = main_api + urllib.parse.urlencode({"key": key, "from":orig, "to":dest}) #Genera la URL en base a las variables que se le dan
    json_data = requests.get(url).json()

    print("URL: " + (url))

    json_data = requests.get(url).json()
    json_status = json_data["info"]["statuscode"]

    if json_status == 0:
        print("API Status: " + str(json_status) + " = A successful route call.\n")

    if json_status != 0:
        print("API Status: " + str(json_status) + " = A failure route call.\n")

    #Codificar para manejar el error distinto a Cero

Origen: & C:/Users/alexj/AppData/Local/Programs/Python/Python312/python.exe c:/Users/alexj/Downloads/progra-redes/parse_json3.py
Destino: Dolores Hidalgo
URL: https://www.mapquestapi.com/directions/v2/route?key=uYM8nZJ7wjjjmauf4aq18hPaoJoXt6N&from=Dolores+Hidalgo&to=Queretaro
API Status: 402 = A failure route call.
Origen: Dolores Hidalgo
Destino: Queretaro
URL: https://www.mapquestapi.com/directions/v2/route?key=uYM8nZJ7wjjjmauf4aq18hPaoJoXt6N&from=Dolores+Hidalgo&to=Queretaro
API Status: 0 = A successful route call.
Origen: |
```

Step 11: Add the quit functionality to the application.

Instead of entering **Ctrl+C** to quit the application, you will add the ability for the user to enter **q** or **quit** as keywords to quit the application. Complete the following steps to update your application:

- Save your script as **08_json-parse4.py**.
- Add an **if** statement after each location variable to check if the user enters **q** or **quit**, as shown below:

```
while True:
    orig = input("Starting Location: ")
    if orig == "quit" or orig == "q":
        break
    dest = input("Destination: ")
    if dest == "quit" or dest == "q":
        break
```

Step 12: Test the quit functionality.

Run your **08_json-parse4.py** script four times to test each location variable. Verify that both **quit** and **q** will end the application. Troubleshoot your code, if necessary. You should get output similar to the following:

```
Starting Location: q
>>>
Starting Location: quit
>>>
Starting Location: Washington
Destination: q
>>>
Starting Location: Washington
Destination: quit
>>>
```

```
'''
Nombre: Julian Alexis Cano Cruces
Fecha: 23/10/12
Ejercicio: Obtener Valores
'''

import urllib.parse
import requests

while True:
    orig = input("Origen: ")
    if orig == "quit" or orig == "q": #Condicion para orig
        print("Hasta Luego")
        break

    dest = input("Destino: ")
    if orig == "quit" or orig == "q": #Condicion para orig
        print("Hasta Luego")
        break

    #Condicion para Dest

    #Se generan las variables
    main_api = "https://www.mapquestapi.com/directions/v2/route?"
    key = "uYM8nZJ7wjjjmauf4aq1BhPaoJoXt6N"

    url = main_api + urllib.parse.urlencode({"key": key, "from":orig, "to":dest}) #Genera la URL en base a las variables que se le dan
    json_data = requests.get(url).json()

    print("URL: " + (url))

    json_data = requests.get(url).json()
    json_status = json_data["info"]["statuscode"]

    if json_status == 0:
        print("API Status: " + str(json_status) + " = A successful route call.\n")

    if json_status != 0:
        print("API Status: " + str(json_status) + " = A failure route call.\n")

    #Codificar para manejar el error distinto a Ceros
```



```
Origen: Dolores Hidalgo
Destino: JSJSJSJ
URL: https://www.mapquestapi.com/directions/v2/route?key=uYM8nZJ7wjjjjmauf4aql8hPaoJoXt6N&from=Dolores+Hidalgo&to=JSJSJSJ
API Status: 402 = A failure route call.

Origen: Dolores Hidalgo
Destino: San Miguel de Allende
URL: https://www.mapquestapi.com/directions/v2/route?key=uYM8nZJ7wjjjjmauf4aql8hPaoJoXt6N&from=Dolores+Hidalgo&to=San+Miguel+de+Allende
API Status: 0 = A successful route call.

Origen: q
Hasta Luego
PS C:\Users\alexj\Downloads\progra-redes>
```

Step 13: Parse and display some data about the trip.

- Copy your URL into your web browser. If you collapse all the JSON data, you will see that there are two root dictionaries: **route** and **info**.
- Expand the **route** dictionary and investigate the rich data. There are values to indicate whether the route has toll roads, bridges, tunnels, highways, closures, or crosses into other countries. You should also see values for distance, the total time the trip will take, and fuel usage, as highlighted below. To parse and display this, specify the **route** dictionary and select key/value pair you want to print.



```
{
  - route: {
    hasTollRoad: false,
    hasBridge: true,
    + boundingBox: {...},
    distance: 38.089,
    hasTimedRestriction: false,
    hasTunnel: false,
    hasHighway: true,
    computedWaypoints: [ ],
    + routeError: {...},
    formattedTime: 00:49:19,
    sessionId: "5bc20e76-03aa-6750-02b4-1daf-0a1a4c2d1adc",
    hasAccessRestriction: false,
    realTime: 3309,
    hasSeasonalClosure: false,
    hasCountryCross: false,
    fuelUsed: 1.65,
    - legs: [
```

- Save your script as **08_json-parse5.py**.
- Below the API status print command, add print statements that display the from and to locations, as well as the **formattedTime**, **distance**, and **fuelUsed** keys.
- Add a print statement that will display a double line before the next request for a starting location as shown below.

```
if json_status == 0:
    print("API Status: " + str(json_status) + " = A successful route call.\n")
    print("=====")
    print("Directions from " + (orig) + " to " + (dest))
```

```
print("Trip Duration: " + (json_data["route"]["formattedTime"]))
print("Miles: " + str(json_data["route"]["distance"]))
print("Fuel Used (Gal): " + str(json_data["route"]["fuelUsed"]))
print("=====")
```

- f. Run **08_json-parse5.py** to see the following output:

```
Starting Location: Washington
Destination: Baltimore
URL:
https://www.mapquestapi.com/directions/v2/route?to=Baltimore&key=Your_api_key&from=Washington
API Status: 0 = A successful route call.

=====
Directions from Washington to Baltimore
Trip Duration: 00:49:19
Miles: 38.089
Fuel Used (Gal): 1.65
=====

Starting Location: q
>>>
```

- g. MapQuest uses the imperial system and there is not a request parameter to change data to the metric system. Therefore, you should probably convert your application to display metric values, as shown below.

```
print("Kilometers: " + str((json_data["route"]["distance"])*1.61))
print("Fuel Used (Ltr): " + str((json_data["route"]["fuelUsed"])*3.78))
```

- h. Run the modified **08_json-parse5.py** script to see the following output:

```
Starting Location: Washington
Destination: Baltimore
URL:
https://www.mapquestapi.com/directions/v2/route?key=Your_api_key&to=Baltimore&from=Washington
API Status: 0 = A successful route call.

=====
Directions from Washington to Baltimore
Trip Duration: 00:49:19
Kilometers: 61.32329
Fuel Used (Ltr): 6.2369999999999999
=====

Starting Location: q
>>>
```

- i. Use the **"{: .2f} ".format** argument to format the float values to 2 decimal places before converting them to string values, as shown below. Each statement should be on one line.

```
print("Kilometers: " +
str("{: .2f} ".format((json_data["route"]["distance"])*1.61)))
print("Fuel Used (Ltr): " +
str("{: .2f} ".format((json_data["route"]["fuelUsed"])*3.78)))
```

Step 14: Test the parsing and formatting functionality.

Run your **08_json-parse5.py** script to verify that it works. Troubleshoot your code, if necessary. Make sure you have all the proper opening and closing parentheses. You should get output similar to the following:

```
Starting Location: Washington
Destination: Baltimore
URL:
https://www.mapquestapi.com/directions/v2/route?key=Your_api_key&to=Baltimore&from=Was
hington
API Status: 0 = A successful route call.

=====
Directions from Washington to Baltimore
Trip Duration:    00:49:19
Kilometers:      61.32
Fuel Used (Ltr): 6.24
=====
Starting Location: q
>>>
```

```
Nombre: Julian Alexis Cano Cruces
Fecha: 23/10/12
Ejercicio: Obtener Valores

'''

import urllib.parse
import requests

while True:
    orig = input("Origen: ")
    if orig == "quit" or orig == "q": #Condicion para orig
        print("Hasta Luego")
        break

    dest = input("Destino: ")
    if orig == "quit" or orig == "q": #Condicion para orig
        print("Hasta Luego")
        break

    #Condicion para Dest

    #Se generan las variables
    main_api = "https://www.mapquestapi.com/directions/v2/route?"
    key = "uYM8nZJ7wjmauf4aql8hPaoJoXt6N"

    url = main_api + urllib.parse.urlencode({"key": key, "from":orig, "to":dest}) #Genera la URL en base a las variables que se le dan
    json_data = requests.get(url).json()

    print("URL: " + (url))

    json_data = requests.get(url).json()
    json_status = json_data["info"]["statuscode"]

    if json_status == 0:
        print("API Status: " + str(json_status) + " = A successful route call.\n")

    if json_status != 0:
        print("API Status: " + str(json_status) + " = A failure route call.\n")

    #Codificar para manejar el error distinto a Cero

    if json_status == 0:
        print("API Status: " + str(json_status) + " = A successful route call.\n")
        print("=====")
        print("Directions from " + (orig) + " to " + (dest))
        print("Trip Duration: " + (json_data["route"]["formattedTime"]))
        print("Miles: " + str(json_data["route"]["distance"]))
        #print("Fuel Used (Gal): " + str(json_data["route"]["fuelUsed"]))
        print("Route Type: " + str(json_data["route"]["options"]["routeType"]))
        print("Latitud: " + str(json_data["route"]["boundingBox"]["ul"]["lat"]))
        print("Longitud: " + str(json_data["route"]["boundingBox"]["ul"]["lng"]))
        print("Kilometers: " + str((json_data["route"]["distance"])*1.61))
```


```
PS C:\Users\alexj\Downloads\progra-redes> & C:/Users/alexj/AppData/Local/Programs/Python/Python312/python.exe c:/Users/alexj/Downloads/progra-redes/parse_json5.py
Origen: Dolores Hidalgo
Destino: Queretaro
URL: https://www.mapquestapi.com/directions/v2/route?key=uYM8nZJ7wjjjmauf4aq1BhPaoJcXt6N&from=Dolores+Hidalgo&to=Queretaro
API Status: 0 = A successful route call.

API Status: 0 = A successful route call.

=====
Directions from Dolores Hidalgo to Queretaro
Trip Duration: 01:34:36
Miles: 65.8579
Route Type: FASTEST
Latitud: 21.171149999999976
Longitud: -100.933626
Kilometers: 106.03121900000001
Origen: q
Hasta Luego
```

Step 15: Inspect the maneuvers JSON data.

- a. Now you are ready to display the step-by-step directions from the starting location to the destination. Locate the **legs** list inside the route dictionary. The **legs** list includes one big dictionary with most of the JSON data.
- b. Find the **maneuvers** list and collapse each of the seven dictionaries inside, as shown below.

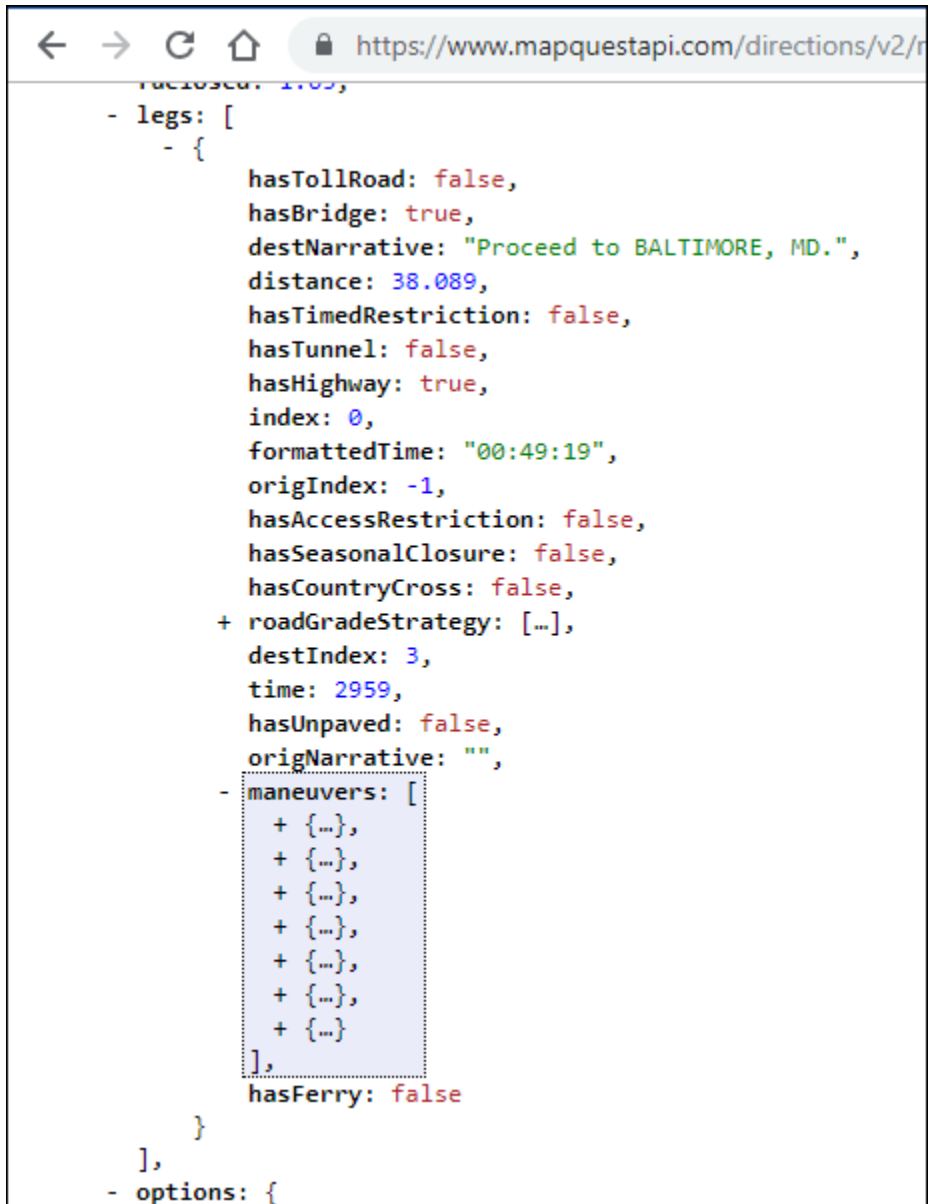

```
← → ↻ 🏠 https://www.mapquestapi.com/directions/v2/r
    "distance": 1.05,
    - legs: [
      - {
        hasTollRoad: false,
        hasBridge: true,
        destNarrative: "Proceed to BALTIMORE, MD.",
        distance: 38.089,
        hasTimedRestriction: false,
        hasTunnel: false,
        hasHighway: true,
        index: 0,
        formattedTime: "00:49:19",
        origIndex: -1,
        hasAccessRestriction: false,
        hasSeasonalClosure: false,
        hasCountryCross: false,
        + roadGradeStrategy: [...],
        destIndex: 3,
        time: 2959,
        hasUnpaved: false,
        origNarrative: "",
        - maneuvers: [
          + {...},
          + {...},
          + {...},
          + {...},
          + {...},
          + {...},
          + {...}
        ],
        hasFerry: false
      }
    ],
    - options: {
```

- c. Expand the first dictionary in the **maneuvers** list. Each dictionary contains a **narrative** key with a value, such as "Start out going north...", as shown below. You need to parse the JSON data to extract the value for the **narrative** key to display inside your application.



```

time: 2959,
hasUnpaved: false,
origNarrative: "",
- maneuvers: [
  - {
    distance: 0.792,
    - streets: [
      "6th St",
      "US-50 E",
      "US-1 N"
    ],
    narrative: "Start out going north on 6th St",
    turnType: 0,
    - startPoint: {
      lng: -77.019913,
      lat: 38.892063
    },
    index: 0,
    formattedTime: "00:02:05",
    directionName: "North",
    maneuverNotes: [ ],
    linkIds: [ ],
    - signs: [
      - {

```

Step 16: Add a for loop to iterate through the maneuvers JSON data.

Complete the following steps to update your application:

- Save your script as **08_json-parse6.py**.
- Add a **for** loop below the second double line print statement. The **for** loop iterates through each **maneuvers** list and does the following:
 - Prints the **narrative** value.
 - Converts miles to kilometers with ***1.61**.
 - Formats the kilometer value to print only two decimal places with the **"{: .2f}".format** function.
- Add a print statement that will display a double line before the next request for a starting location, as shown below.

Note: The second double line print statement is not indented within the **for** loop. Therefore, it is part of the previous **if** statement that checks the **statuscode** parameter.

```

print("Fuel Used (Ltr): " + str("{: .2f}".format((json_data["route"]["fuelUsed"])*3.78)))
print("=====")
for each in json_data["route"]["legs"][0]["maneuvers"]:
    print((each["narrative"]) + " (" + str("{: .2f}".format((each["distance"])*1.61) + " km)"))
print("=====\\n")

```

Step 17: Activity - Test the JSON iteration.

Run your **08_json-parse6.py** script and verify that it works. Troubleshoot your code, if necessary. You should get an output similar to the following:

```
Starting Location: Washington
Destination: Baltimore
URL:
https://www.mapquestapi.com/directions/v2/route?key=Your_api_key&to=Baltimore&from=Washington
API Status: 0 = A successful route call.

Directions from Washington to Baltimore
Trip Duration:    00:49:19
Kilometers:      61.32
Fuel Used (Ltr): 6.24
=====
Start out going north on 6th St/US-50 E/US-1 N toward Pennsylvania Ave/US-1 Alt N.
(1.28 km)
Turn right onto New York Ave/US-50 E. Continue to follow US-50 E (Crossing into
Maryland). (7.51 km)
Take the Balt-Wash Parkway exit on the left toward Baltimore. (0.88 km)
Merge onto MD-295 N. (50.38 km)
Turn right onto W Pratt St. (0.86 km)
Turn left onto S Calvert St/MD-2. (0.43 km)
Welcome to BALTIMORE, MD. (0.00 km)
=====

Starting Location: q
>>>
```



```
'''
Nombre: Julian Alexis Cano Cruces
Fecha: 23/10/12
Ejercicio: Obtener Valores
'''

import urllib.parse
import requests

while True:
    orig = input("Origen: ")
    if orig == "quit" or orig == "q": #Condicion para orig
        print("Hasta Luego")
        break

    dest = input("Destino: ")
    if dest == "quit" or dest == "q": #Condicion para dest
        print("Hasta Luego")
        break

    #Condicion para Dest

    #Se generan las variables
    main_api = "https://www.mapquestapi.com/directions/v2/route?"
    key = "uYM8nZ37wjjjmauf4aq18hPaoJoXt6N"

    url = main_api + urllib.parse.urlencode({"key": key, "from":orig, "to":dest}) #Genera la URL en base a las variables que se le dan
    json_data = requests.get(url).json()

    print("URL: " + (url))

    json_data = requests.get(url).json()
    json_status = json_data["info"]["statuscode"]

    if json_status == 0:
        print("API Status: " + str(json_status) + " = A successful route call.\n")

    elif json_status != 0:
        print("API Status: " + str(json_status) + " = A failure route call.\n")

    #Codificar para manejar el error distinto a Cero

    if json_status == 0:
        print("API Status: " + str(json_status) + " = A successful route call.\n")
        print("-----")
        print("Directions from " + (orig) + " to " + (dest))
        print("Trip Duration: " + (json_data["route"]["formattedTime"]))
        print("Miles: " + str(json_data["route"]["distance"]))
        #print("Fuel Used (Gal): " + str(json_data["route"]["fuelUsed"]))
        print("Route Type: " + str(json_data["route"]["options"]["routeType"]))
        print("Latitude: " + str(json_data["route"]["boundingBox"]["ul"]["lat"]))
        print("Longitude: " + str(json_data["route"]["boundingBox"]["ul"]["lng"]))
        print("Kilometers: " + str("%.2f".format((json_data["route"]["distance"])*1.61)))

        print("-----")
        for each in json_data["route"]["legs"][0]["maneuvers"]:
            print((each["narrative"]) + " (" + str("%.2f".format((each["distance"])*1.61)) + " km)")
        print("-----\n")
```

```
PS C:\Users\alexj\Downloads\progra-redes> & c:/Users/alexj/AppData/Local/Programs/Python/Python312/python.exe c:/Users/alexj/Downloads/progra-redes/parse_json6.py
Origin: Dolores Hidalgo
Destino: Queretaro
URL: https://www.mapquestapi.com/directions/v2/route?key=uW8nZ37wjjjauf4aql8hPaoJotXt6M&from=Dolores+Hidalgo&to=Queretaro
API Status: 0 = A successful route call.

API Status: 0 = A successful route call.

=====
Directions from Dolores Hidalgo to Queretaro
Trip Duration: 01:34:36
Miles: 65.8579
Route Type: FASTEST
Latitud: 21.171149999999976
Longitud: -100.933626
Kilometers: 106.03
=====
Head toward Calle México on Calle Querétaro. Go for 0.2 mi. (0.32 km)
Turn right onto Avenida Norte. Go for 0.3 mi. (0.40 km)
Continue on Calzada Mariano Ballera toward Antigua Estacion FFCC. Go for 0.5 mi. (0.84 km)
Continue on Calzada de los Héroes. Go for 1.5 mi. (2.39 km)
Continue on Carretera Dolores Hidalgo-S Miguel de Allende toward San Luis de La Paz/San Miguel de Allende. Go for 1.2 mi. (1.97 km)
Keep right onto Carretera Dolores Hidalgo-S Miguel de Allende toward MEX-51/San Miguel de Allende/Guanajuato/MEX-110. Go for 19.2 mi. (30.92 km)
Continue toward Querétaro/MEX-57. Go for 108 ft. (0.03 km)
Take the 1st exit from roundabout onto Calle Libramiento José Manuel Zavala (MEX-51) toward Querétaro/MEX-57. Go for 2.8 mi. (4.51 km)
Keep left toward Calle Libramiento José Manuel Zavala. Go for 0.4 mi. (0.63 km)
Continue on Calle Libramiento José Manuel Zavala. Go for 2.0 mi. (3.24 km)
Take the 1st exit from roundabout onto Boulevard de la Conspiración toward Querétaro. Go for 0.9 mi. (1.40 km)
Take the 2nd exit from roundabout onto Carretera San Miguel de Allende-Buenavista toward Querétaro. Go for 19.3 mi. (31.01 km)
Take ramp onto Carretera San Luis Potosí-Querétaro toward Mexico Libre/Querétaro/MEX-57. Go for 14.2 mi. (22.80 km)
Keep left onto Avenida 5 de Febrero (MEX-57) toward Mexico. Go for 1.3 mi. (2.06 km)
Keep right onto Avenida 5 de Febrero toward Av Universidad. Go for 0.3 mi. (0.51 km)
Keep right onto Avenida 5 de Febrero toward Av Universidad. Go for 0.2 mi. (0.29 km)
Turn left onto Avenida Carretera al Campo Militar. Go for 427 ft. (0.13 km)
Turn slightly right onto Avenida Carretera al Campo Militar. Go for 0.1 mi. (0.16 km)
Continue on Avenida Universidad. Go for 0.9 mi. (1.43 km)
Turn right onto Calle Ezequiel Montes. Go for 0.3 mi. (0.47 km)
Turn left onto Avenida Miguel Hidalgo. Go for 0.2 mi. (0.29 km)
Turn right onto Calle Vicente Guerrero. Go for 512 ft. (0.16 km)
Turn right onto Calle Andrés Balmvera. Go for 210 ft. (0.06 km)
Arrive at Calle Andrés Balmvera. (0.00 km)
=====
Origin: |
```

Step 18: Check for invalid user input.

Now you are ready to add one final feature to your application to report an error when the user enters invalid data. Recall that you started an **if** loop to make sure the returned **statuscode** equals 0 before parsing the JSON data:

```
json_status = json_data["info"]["statuscode"]

if json_status == 0:
    print("API Status: " + str(json_status) + " = A successful route call.\n")
```

- But what happens if the **statuscode** is not equal to 0? For example, the user might enter an invalid location or might not enter one or more locations. If so, then the application displays the URL and asks for a new starting location. The user has no idea what happened. Try the following values in your application. You should see results similar to the following:

Starting Location: **Washington**

Destination: **Beijing**

URL:

`https://www.mapquestapi.com/directions/v2/route?to=Beijing&key=your_api_key&from=Washington`

Starting Location: **Washington**

Destination: **Balt**

URL:

`https://www.mapquestapi.com/directions/v2/route?to=Balt&key=your_api_key&from=Washington`

Starting Location: **Washington**

Destination:

URL:

`https://www.mapquestapi.com/directions/v2/route?to=&key=your_api_key&from=Washington`

Starting Location: **q**

- b. Save your script as **08_jsont-parse7.py**.
- c. To provide error information when this happens, add **elif** and **else** statements to your **if** loop. After the last double line print statement under the **if json_status == 0**, add the following **elif** and **else** statements:

```
for each in json_data["route"]["legs"][0]["maneuvers"]:
    print((each["narrative"]) + " (" +
str(" {:.2f}".format((each["distance"])*1.61) + " km"))
    print("=====\n")
elif json_status == 402:
    print("*****")
    print("Status Code: " + str(json_status) + "; Invalid user inputs for one or both
locations.")
    print("*****\n")
else:
    print("*****")
    print("For Status Code: " + str(json_status) + "; Refer to:")
    print("https://developer.mapquest.com/documentation/directions-api/status-codes")
    print("*****\n")
```

The **elif** statement prints if the **statuscode** value is 402 for an invalid location. The **else** statement prints for all other **statuscode** values, such as no entry for one or more locations. The **else** statement ends the **if/else** loop and returns the application to the **while** loop.

Step 19: Activity - Test full application functionality.

Run your **08_json-parse7.py** script and verify that it works. Troubleshoot your code, if necessary. Test all the features of the application. You should get output similar to the following:

```
Starting Location: Washington
Destination: Baltimore
URL:
https://www.mapquestapi.com/directions/v2/route?key=your_api_key&from=Washington&to=Ba
ltimore
API Status: 0 = A successful route call.

Directions from Washington to Baltimore
Trip Duration:    00:49:19
Kilometers:      61.32
Fuel Used (Ltr): 6.24
=====
Start out going north on 6th St/US-50 E/US-1 N toward Pennsylvania Ave/US-1 Alt N.
(1.28 km)
Turn right onto New York Ave/US-50 E. Continue to follow US-50 E (Crossing into
Maryland). (7.51 km)
Take the Balt-Wash Parkway exit on the left toward Baltimore. (0.88 km)
Merge onto MD-295 N. (50.38 km)
Turn right onto W Pratt St. (0.86 km)
Turn left onto S Calvert St/MD-2. (0.43 km)
Welcome to BALTIMORE, MD. (0.00 km)
=====

Starting Location: Moscow
```

```
Destination: Beijing
URL:
https://www.mapquestapi.com/directions/v2/route?key=your_api_key&from=Moscow&to=Beijing
API Status: 0 = A successful route call.
```

```
Directions from Moscow to Beijing
Trip Duration: 84:31:10
Kilometers: 7826.83
Fuel Used (Ltr): 793.20
=====
Start out going west on Кремлёвская набережная/Kremlin Embankment. (0.37 km)
Turn slight right onto ramp. (0.15 km)
Turn slight right onto Боровицкая площадь. (0.23 km)
[output omitted]
Turn left onto 广场东侧路/E. Guangchang Rd. (0.82 km)
广场东侧路/E. Guangchang Rd becomes 东长安街/E. Chang'an Str. (0.19 km)
Welcome to BEIJING. (0.00 km)
=====
```

```
Starting Location: Washington
Destination: Beijing
URL:
https://www.mapquestapi.com/directions/v2/route?key=your_api_key&from=WashingtonTurn+right+onto+%E5%89%8D%E9%97%A8%E8%A5%BF%E5%A4%A7%E8%A1%97%2FQianmen+West+Street.+%281.01+km%29&to=Beijing
```

```
*****
Status Code: 402; Invalid user inputs for one or both locations.
*****
```

```
Starting Location: Washington
Destination: Balt
URL:
https://www.mapquestapi.com/directions/v2/route?key=your_api_key&from=Washington&to=Balt
```

```
*****
Status Code: 602; Refer to:
https://developer.mapquest.com/documentation/directions-api/status-codes
*****
```

```
Starting Location: Washington
Destination:
URL:
https://www.mapquestapi.com/directions/v2/route?key=your_api_key&from=Washington&to=

*****
Status Code: 611; Refer to:
https://developer.mapquest.com/documentation/directions-api/status-codes
```

Lab - Parsing JSON with a Python Application

Starting Location: q

>>>

```
'''
Nombre: Julian Alexis Cano Cruces
Fecha: 23/10/12
Ejercicio: Obtener Valores
'''

import urllib.parse
import requests

while True:
    orig = input("Origen: ")
    if orig == "quit" or orig == "q": #Condicion para orig
        print("Hasta Luego")
        break

    dest = input("Destino: ")
    if dest == "quit" or dest == "q": #Condicion para dest
        print("Hasta Luego")
        break

    #Condicion para Dest

    #Se generan las variables
    main_api = "https://www.mapquestapi.com/directions/v2/route?"
    key = "uYMBnZ37wjjjmauf4aql8HPaoJ0xt6N"

    url = main_api + urllib.parse.urlencode({"key": key, "from":orig, "to":dest}) #Genera la URL en base a las variables que se le dan
    json_data = requests.get(url).json()

    print("URL: " + (url))

    json_data = requests.get(url).json()
    json_status = json_data["info"]["statuscode"]

    if json_status == 0:
        print("API Status: " + str(json_status) + " - A successful route call.\n")

    '''elif json_status != 0:
        print("API Status: " + str(json_status) + " - A failure route call.\n")'''

    if json_status == 402:
        print("*****")
        print("Status Code: " + str(json_status) + "; Invalid user inputs for one or both locations.")
        print("*****\n")
    else:
        print("*****")
        print("For Status Code: " + str(json_status) + "; Refer to:")
        print("https://developer.mapquest.com/documentation/directions-api/status-codes")
        print("*****\n")

    #Codificar para manejar el error distinto a Cero

    if json_status == 0:
        print("API Status: " + str(json_status) + " - A successful route call.\n")
        print("-----")
        print("Directions from " + (orig) + " to " + (dest))
        print("Trip Duration: " + (json_data["route"]["formattedTime"]))
        print("Miles: " + str(json_data["route"]["distance"]))
        #print("Fuel Used (Gal): " + str(json_data["route"]["fuelUsed"]))
        print("Route Type: " + str(json_data["route"]["options"]["routeType"]))
        print("Latitud: " + str(json_data["route"]["boundingBox"]["ul"]["lat"]))
        print("Longitud: " + str(json_data["route"]["boundingBox"]["ul"]["lng"]))
        print("Kilometers: " + str("%.2f".format((json_data["route"]["distance"])*1.61)))

        print("-----")
        for each in json_data["route"]["legs"][0]["maneuvers"]:
            print((each["narrative"]) + " (" + str("%.2f".format((each["distance"])*1.61) + " km)"))
        print("-----\n")
```

```
PS C:\Users\alexj\Downloads\progra-redes> & C:\Users\alexj\AppData\Local\Programs\Python\Python312\python.exe c:\Users\alexj\Downloads\progra-redes\parse_json7.py
Origin: Dolores Hidalgo
Destino: Queretaro
URL: https://www.mapquestapi.com/directions/v2/route?key=uY8nZ77wjfjjauf4aq1BhPao3oXt6M&from=Dolores+Hidalgo&to=Queretaro
API Status: 0 = A successful route call.

*****
For Status Code: 0; Refer to:
https://developer.mapquest.com/documentation/directions-api/status-codes
*****

API Status: 0 = A successful route call.

-----
Directions from Dolores Hidalgo to Queretaro
Trip Duration: 01:34:36
Miles: 65.8579
Route Type: FASTEST
Latitud: 21.171149999999976
Longitud: -100.933626
Kilometers: 106.03
-----
Head toward Calle México on Calle Querétaro. Go for 0.2 mi. (0.32 km)
Turn right onto Avenida Norte. Go for 0.3 mi. (0.48 km)
Continue on Calzada Mariano Balleza toward Antigua Estación FFCC. Go for 0.5 mi. (0.84 km)
Continue on Calzada de los Héroes. Go for 1.5 mi. (2.39 km)
Continue on Carretera Dolores Hidalgo-S Miguel de Allende toward San Luis de La Paz/San Miguel de Allende. Go for 1.2 mi. (1.97 km)
Keep right onto Carretera Dolores Hidalgo-S Miguel de Allende toward MEX-51/San Miguel de Allende/Guanajuato/MEX-110. Go for 19.2 mi. (30.92 km)
Continue toward Querétaro/MEX-57. Go for 108 ft. (0.03 km)
Take the 1st exit from roundabout onto Calle Libramiento José Manuel Zavala (MEX-51) toward Querétaro/MEX-57. Go for 2.8 mi. (4.51 km)
Keep left toward Calle Libramiento José Manuel Zavala. Go for 0.4 mi. (0.63 km)
Continue on Calle Libramiento José Manuel Zavala. Go for 2.0 mi. (3.24 km)
Take the 1st exit from roundabout onto Boulevard de la Conspiración toward Querétaro. Go for 0.9 mi. (1.40 km)
Take the 2nd exit from roundabout onto Carretera San Miguel de Allende-Buenavista toward Querétaro. Go for 19.3 mi. (31.01 km)
Take ramp onto Carretera San Luis Potosí-Querétaro toward Mexico Libre/Querétaro/MEX-57. Go for 14.2 mi. (22.80 km)
Keep left onto Avenida 5 de Febrero (MEX-57) toward Mexico. Go for 1.3 mi. (2.06 km)
Keep right onto Avenida 5 de Febrero toward Av Universidad. Go for 0.3 mi. (0.51 km)
Keep right onto Avenida 5 de Febrero toward Av Universidad. Go for 0.2 mi. (0.29 km)
Turn left onto Avenida Carretera al Campo Militar. Go for 427 ft. (0.13 km)
Turn slightly right onto Avenida Carretera al Campo Militar. Go for 0.1 mi. (0.16 km)
Continue on Avenida Universidad. Go for 0.9 mi. (1.43 km)
Turn right onto Calle Ezequiel Montes. Go for 0.3 mi. (0.47 km)
Turn left onto Avenida Miguel Hidalgo. Go for 0.2 mi. (0.29 km)
Turn right onto Calle Vicente Guerrero. Go for 512 ft. (0.16 km)
Turn right onto Calle Andrés Balvanera. Go for 210 ft. (0.06 km)
Arrive at Calle Andrés Balvanera. (0.00 km)
-----
```

Julián Alexis Cano Cruces