

QuantConnect Documentation - Local Platform

Created on 05/31/2023


Copyright QuantConnect 2023

Table of Content

- [1 Key Concepts](#)
- [1.1 Getting Started](#)
- [1.2 Features](#)
- [1.3 Deployment Targets](#)
- [2 Installation](#)
- [3 Development Environment](#)
- [3.1 Authentication](#)
- [3.2 Organization Workspaces](#)
- [3.3 Configuration](#)
- [3.4 Autocomplete](#)
- [3.5 Collaboration](#)
- [3.6 LEAN Engine Versions](#)
- [3.7 Synchronization](#)
- [3.8 Source Control](#)
- [3.9 Resource Management](#)
- [3.10 Packages and Libraries](#)
- [3.11 Working With VS Code](#)
- [4 Projects](#)
- [4.1 Getting Started](#)
- [4.2 Files](#)
- [4.3 Shared Libraries](#)
- [5 Backtesting](#)
- [5.1 Getting Started](#)
- [5.2 Deployment](#)
- [5.3 Debugging](#)

1 Key Concepts


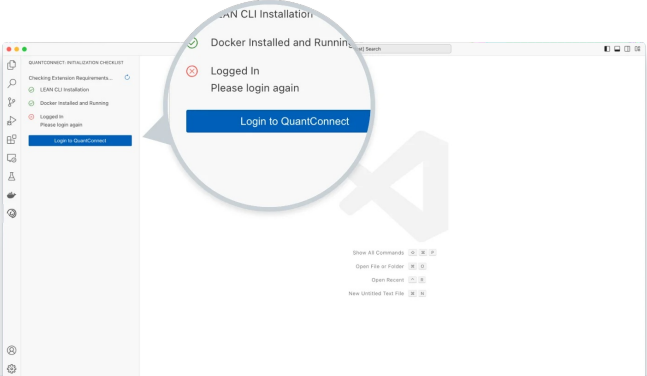
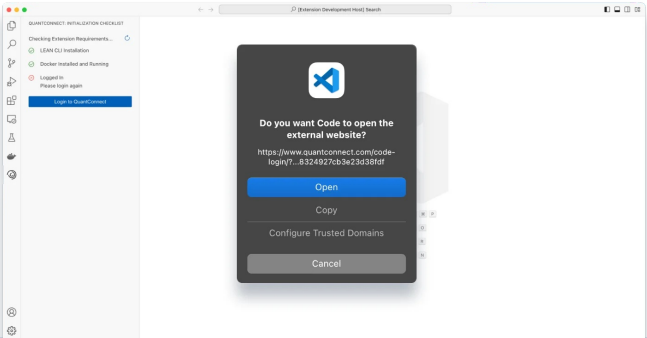
1.1 Getting Started

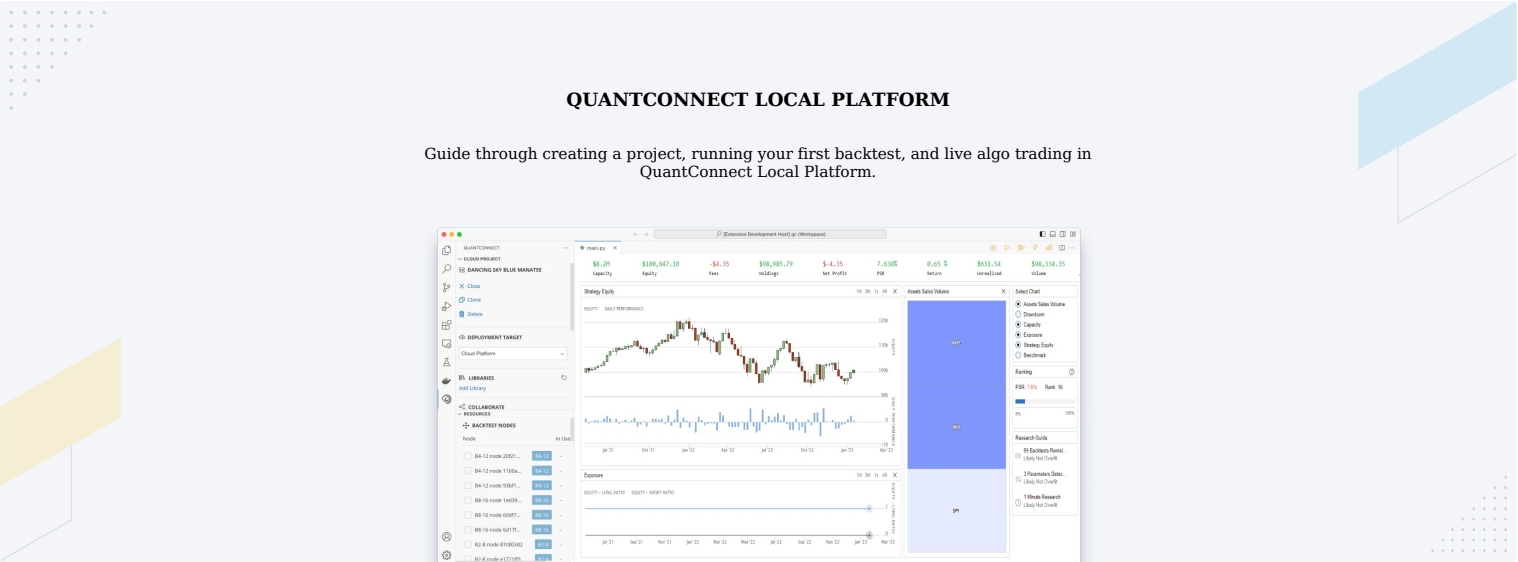


The Local Platform enables you to seamlessly develop quant strategies on-premise and in QuantConnect Cloud, getting the best of both environments. With Local Platform, you can harness your local version control, autocomplete, and coding tools with the full power of a scalable cloud at your finger tips. We intend to keep complete feature parity with our cloud environment, allowing you to harness cloud or local datasets to power on-premise quantitative research.


We encourage a hybrid “cloud + local” workflow, so you can use right tool for each stage of your development process. With the Local Platform, you can create, debug, and run projects on premise while using your own on-site tools. With the Cloud Platform you can deploy backtests at scale and harness our massive data library at low cost.

Follow these steps to create a new trading algorithm and backtest it in QuantConnect Cloud:

1. [Install Local Platform](#).
2. Open  Visual Studio Code .
3. In the Initialization Checklist panel, click Login to QuantConnect .
- 
4. In the Visual Studio Code window, click Open .
- 
5. On the Code Extension Login page, click Grant Access .
6. In VS Code, in the Select Workspace panel, click Pull Organization Workspace .

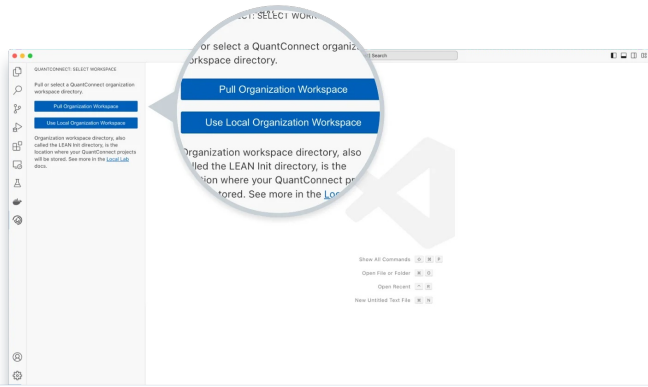


7. In the Pull QuantConnect Organization Workspace window, click the cloud workspace ([organization](#)) that you want to pull.

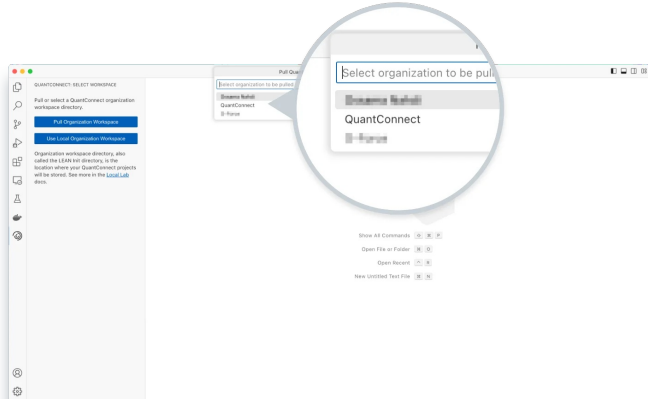


8. In the Pull QuantConnect Organization Workspace window, create a directory to serve as the organization workspace and then click Select .

If you are running Docker on Windows using the legacy Hyper-V backend instead of the new WSL 2 backend, you need to enable file sharing for your temporary directories and for your organization workspace. To do so, open your Docker settings, go to Resources > File Sharing and add C: / Users / / AppData / Local / Temp and your organization workspace path to the list. Click Apply & Restart after making the required changes.

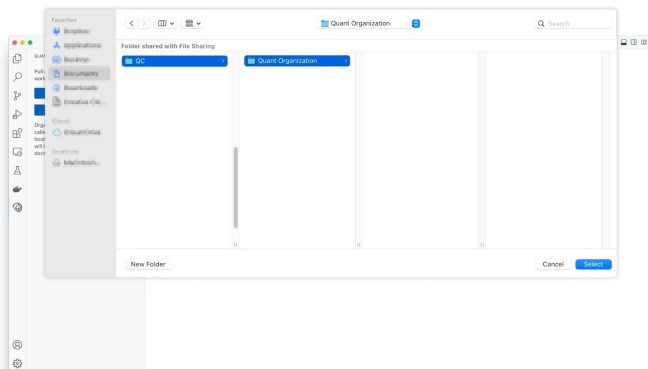


9. In the Open Project panel, click Create Project .

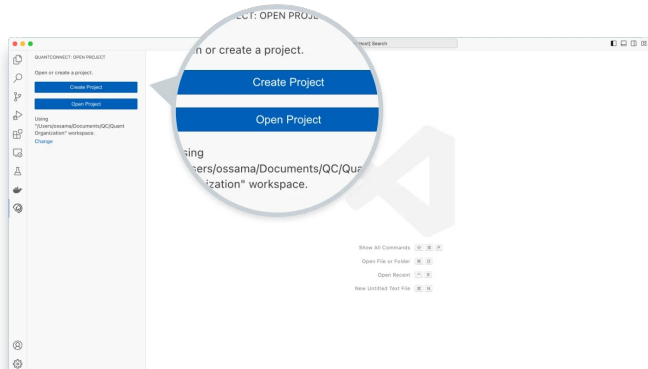


10. Enter the project name and then press Enter .

Congratulations! You just created your first local project.

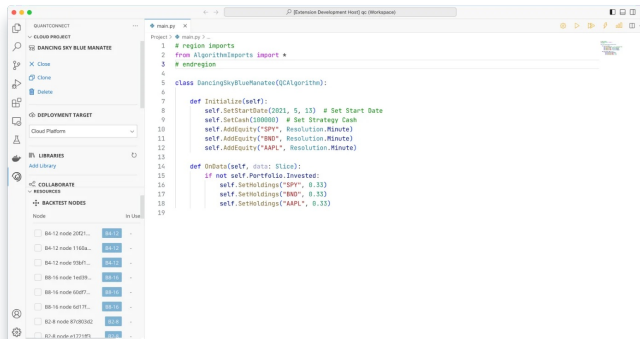

11. In the top-right corner of VS Code, click  Build and then click  Backtest .

The backtest results page displays your algorithm’s performance over the backtest period.

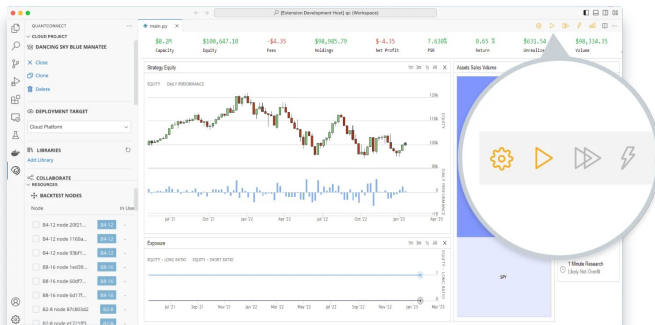

1.2 Features

Introduction

There are 5 tiers of organizations and each tier has its own set of features on Local Platform. To accommodate the growth of your trading skills and business, you can [adjust the tier of your organization](#) at any time.

Hybrid Workflow

The Local Platform lets you run backtests, deploy research notebooks, and deploy live algorithms on your local machine and in QuantConnect Cloud. This gives you the best of both works where you can utilize your local hardware or our scalable cloud compute systems.

Version Control

The Local Platform syncs your local and cloud project files. If you pull your cloud projects to your local machine, you can use your own version control systems to track project changes.

Self-Sovereign Security

The Local Platform offers you the ability to take ownership of your project security. On the Institution tier, you can create local projects without pushing them to QuantConnect Cloud.

Custom LEAN Images

The latest master branch on the LEAN GitHub repository is the default engine branch that runs backtests, research notebooks, and live trading algorithms. The latest version of LEAN is generally the safest as it includes all bug fixes. Trading Firm or Institution tier users concerned for stability can elect to use older or custom versions of LEAN.

On-Premise Compute

The Local Platform enables you to run backtests, deploy research notebooks, and deploy live algorithms on your local hardware.

Offline Access

Trading Firm and Institution organizations can run backtests and research notebooks on Local Platform without an internet connection for up to 24 hours.

Coding

The following table shows the coding features of each organization tier:

Feature	Organization Tier		
	Quant Researcher	Team	Institution
Offline Access			
Edit projects without an internet connection for up to 24 hours		✓	✓
Anonymous Projects			
Create and edit local projects without syncing to QuantConnect Cloud			✓

Backtesting

The following table shows the backtesting features of each organization tier:

Feature	Organization Tier		
	Quant Researcher	Team	Institution
Concurrent Cloud Backtests Quota			
The maximum number of backtests your organization can run at the same time in QuantConnect Cloud	2	10	Unlimited
Offline Access			
Backtest algorithms without an internet connection for up to 24 hours			✓

Optimization

The following table shows the parameter optimization features of each organization tier:

Feature	Organization Tier		
	Quant Researcher	Team	Institution
Concurrent Cloud Optimizations Quota			
The maximum number of optimizations your organization can run at the same time in QuantConnect Cloud	2	10	Unlimited
Offline Access			
Optimize parameters without an internet connection for up to 24 hours			✓

Live Trading

The following table shows the parameter optimization features of each organization tier:

Feature	Organization Tier		
	Quant Researcher	Team	Institution
Concurrent Cloud Algorithms Quota			
The maximum number of live algorithms your organization can run at the same time in QuantConnect Cloud	2	10	Unlimited

1.3 Deployment Targets

Introduction





The deployment target setting allows you to switch modes from local to cloud platforms, choosing where you run your algorithm. Local Platform targets are denoted with blue icons and Cloud Platform targets are denoted with gold icons.

Local

The Local Platform deployment target is your local machine. Follow these steps to set the deployment target of a project to Local Platform:

1. [Create a project](#) or [open an exisiting one](#).
2. In the Project panel, click the Deployment Target field and then click Local Platform from the drop-down menu.

After you set the deployment target to Local Platform, the following icons are blue:

Icon	Name
	Build
	Backtest
	Debug
	Backtest Results






Cloud

The Cloud Platform deployment target is a collection of servers that the QuantConnect team manages. It's the same deployment target you use if you create projects, spin up research nodes, and deploy algorithms on the QuantConnect website. For more information about QuantConnect Cloud, including our infrastructure and usage quotas, see [Cloud Platform](#).

Follow these steps to set the deployment target Cloud Platform:

1. [Create a project](#) or [open an exisiting one](#).
2. In the Project panel, click the Deployment Target field and then click Cloud from the drop-down menu.

After you set the deployment target to Cloud Platform, the following icons are gold:

Icon	Name
	Build
	Backtest
	Optimize
	Live Trading
	Backtest Results

2 Installation

Introduction

It takes 10 minutes to install Local Platform and about 1 hour to download the latest LEAN image. The Local Platform requires Docker and the LEAN CLI. When you launch Local Platform, we scan for these projects and prompt you to install them to continue. We run all algorithms in a Docker container to avoid installing any dependencies on your computer. The LEAN CLI is required to simplify the interactions with the cloud.

Requirements

The following sections explain the minimum requirements to run Local Platform:

Windows System Requirements

Windows systems must meet the following minimum requirements:

- A 64-bit processor
- 4GB RAM or more
- Windows 10, version 1903 or higher (released May 2019)
- Hardware virtualization enabled in the BIOS

When you download Docker Desktop, you need to select the Enable WSL 2 Features check box. After you install Docker and restart your computer, if Docker prompts you that the WSL 2 installation is incomplete, follow the instructions in the dialog shown by Docker to finish the WSL 2 installation.

Mac System Requirements

Mac systems must meet the following minimum requirements:

- Mac hardware from 2010 or newer with an Intel processor
- macOS 10.14 or newer (Mojave, Catalina, or Big Sur)
- 4GB RAM or more

Internet Requirements

You need an internet connection for things like downloading updates, collaborating with team members, and syncing your projects with QuantConnect Cloud. Trading Firm and Institution organizations can run local backtests and research notebooks without an internet connection for up to 24 hours.

Install Docker

If you run the LEAN engine locally with QuantConnect Local Platform, LEAN executes in a Docker container. These Docker containers contain a minimal Linux-based operating system, the LEAN engine, and all the packages available to you on QuantConnect.com. It is therefore required to install Docker if you plan on using QuantConnect Local Platform to run the LEAN engine locally.

Install on Windows

To install Docker, see [Install Docker Desktop on Windows](#) in the Docker documentation. As you install docker, enable WSL 2 features. After you install Docker and restart your computer, if Docker prompts you that the WSL 2 installation is incomplete, follow the instructions in the dialog shown by Docker to finish the WSL 2 installation.

By default, Docker doesn't automatically start when your computer starts. So, when you run the LEAN engine with QuantConnect Local Platform for the first time after starting your computer, you must manually start Docker. To automatically start Docker, open the Docker Desktop application, click Settings > General , and then enable the Start Docker Desktop when you log in check box.

Install on macOS

To install Docker, see [Install Docker Desktop on Mac](#) in the Docker documentation.

If your Mac has an M1 chip, follow these additional steps:

1. Open a terminal and run the following commands to pull the AMD46 version of LEAN and Research:

```
$ docker pull --platform linux/amd64 quantconnect/lean
$ docker pull --platform linux/amd64 quantconnect/research
```

The first command enables you to run the AMD64 LEAN image by taking advantages of the [qemu](#) emulator.

2. To achieve the best performance and stability, use [colima](#), which uses the latest stable qemu version.

```
$ brew install colima
$ colima start --cpu 4 --memory 8
```

Without colima, in some cases, the container hangs.

3. To verify it's working correctly, run:

```
$ qemu-img --version
qemu-img version 7.1.0 (or higher)
$ docker context ls
    should show colima as selected
$ docker inspect quantconnect/lean
    should show amd64 arch
$ docker run -it --entrypoint bash quantconnect/lean
$ uname -a
    should show x86_x64/amd64 or similar
```

4. If docker context ls does not show colima, run colima start --edit and make sure docker is the selected context.

Install on Linux

To install, see [Install Docker Desktop on Linux](#) in the Docker documentation.

Install Local Platform

Follow these steps to install Local Platform:

1. [Install Docker](#).
2. Open a terminal and download the latest LEAN image.

```
$ docker pull quantconnect/lean
```


If you're using a Mac that has an M1 chip, download the AMD64 version of LEAN and Research.

```
$ docker pull --platform linux/amd64 quantconnect/lean
$ docker pull --platform linux/amd64 quantconnect/research
```

It takes about an hour to download the image. While it's downloading, continue to the next step. When you use Local Platform, it automatically pulls the latest LEAN image if your current version is more than a week old.

3. [Install Visual Studio Code](#).
4. [Install Local Platform](#).

If you open Visual Studio Code and it asks you to log in to QuantConnect, you successfully installed Local Platform.

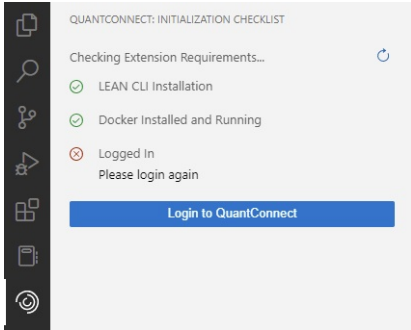

Next Steps

Log in to your [account](#) and then set up your first [organization workspace](#).

Troubleshooting

The following sections explain how to solve some issues you may encounter while installing Local Platform.

Docker with M1/M2/Colima

If your Mac has an M1 chip, follow these additional steps:

1. Open a terminal and run the following commands to pull the AMD64 version of LEAN and Research:

```
$ docker pull --platform linux/amd64 quantconnect/lean
$ docker pull --platform linux/amd64 quantconnect/research
```

The first command enables you to run the AMD64 LEAN image by taking advantages of the [qemu](#) emulator.

2. To achieve the best performance and stability, use [colima](#), which uses the latest stable qemu version.

```
$ brew install colima
$ colima start --cpu 4 --memory 8
```

Without colima, in some cases, the container hangs.

3. To verify it's working correctly, run:

```
$ qemu-img --version
qemu-img version 7.1.0 (or higher)
$ docker context ls
    should show colima as selected
$ docker inspect quantconnect/lean
    should show amd64 arch
$ docker run -it --entrypoint bash quantconnect/lean
    $ uname -a
    should show x86_x64/amd64 or similar
```

4. If `docker context ls` does not show colima, run `colima start --edit` and make sure docker is the selected context.

Docker with WSL 2 Features

When you download Docker Desktop, you need to select the Enable WSL 2 Features check box. After you install Docker and restart your computer, if Docker prompts you that the WSL 2 installation is incomplete, follow the instructions in the dialog shown by Docker to finish the WSL 2 installation.

Docker Not Found

If you have Docker installed but the Local Platform can't detect it, update your [Executable Path: Docker setting](#) to be the path to your Docker executable.

LEAN CLI Account Synchronization

Local Platform and the LEAN CLI share your login credentials. If you log in to your account on Local Platform or the LEAN CLI, you log into that account for both Local Platform and the LEAN CLI.

Further Support

For further support with installing Local Platform, [contact us](#).

3 Development Environment


3.1 Authentication


Introduction

To use Local Platform, you need to grant it access to your QuantConnect account.


Log In

Follow these steps to log in to Local Platform:

1. Log in to the Algorithm Lab.
2. Start [Docker Desktop](#).
3. Open Visual Studio Code.
4. In the left navigation menu, click the  QuantConnect icon.
5. The Project panel checks the following requirements on your local machine. If any of the checks fail, see the related documentation.
 - [LEAN CLI is installed](#).
 - [Docker is installed and running](#).
 - You are logged in to QuantConnect.
6. In the Initialization Checklist panel, click Login to QuantConnect .

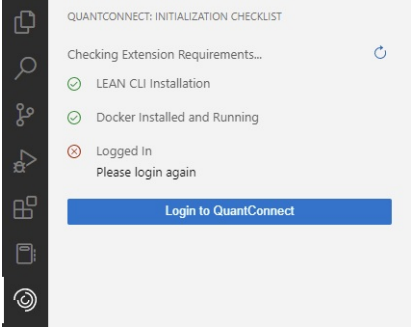

7. In the Visual Studio Code window, click Open .




8. On the Code Extension Login page, click Grant Access .

Log Out

Follow these steps to log out of Local Platform:

1. Open Visual Studio Code.
2. Press F1 .
3. Enter QuantConnect: Logout of QuantConnect and then press Enter .



Troubleshooting

Local Platform and the LEAN CLI share your login credentials. If you log in to your account on Local Platform or the LEAN CLI, you log into that account for both Local Platform and the LEAN CLI.

3.2 Organization Workspaces

Introduction

An organization workspace is a directory that contains a data directory, a Lean configuration file, and all your project files from one of your organizations. You can have a separate organization workspace directory for each organization you're a member of on QuantConnect. These directories need a data directory and a Lean configuration file in order to run the LEAN engine on your local machine.

Pull Cloud Organization Workspaces

Follow these steps to pull one of your [cloud organization workspaces](#) and set it as your local organization workspace:

1. [Log in to Local Platform](#).

QuantConnect icon.

3. In the Select Workspace panel, click Pull Organization Workspace .

QUANTCONNECT: SELECT WORKSPACE

Pull or select a QuantConnect organization workspace directory

Pull Organization Workspace

Use Existing Organization Workspace

4. In the Pull QuantConnect Organization Workspace window, click the cloud workspace ([organization](#).) that you want to pull.

Pull QuantConnect Organization Workspace

Select organization to be pulled

Quant Organization

5. In the Pull QuantConnect Organization Workspace window, create a directory to serve as the organization workspace and then click Select .

Pull QuantConnect Organization Workspace

Search workspaces

Quant Organization

Select

Cancel

It takes a few minutes to create a new organization workspace directory and populate it with the [the initial file structure](#) . After the organization workspace is populated with the initial file structure, it pulls [your cloud project files](#) .

If you are running Docker on Windows using the legacy Hyper-V backend instead of the new WSL 2 backend, you need to enable file sharing for your temporary directories and for your organization workspace. To do so, open your Docker settings, go to Resources > File Sharing and add C: / Users / <username> / AppData / Local / Temp and your organization workspace path to the list. Click Apply & Restart after making the required changes.

Change Organization Workspaces

Follow these steps to change organization workspaces:

1. [Log in to Local Platform](#).

QuantConnect icon.

3. If a project is already open, [close it](#).

QUANTCONNECT: OPEN PROJECT

Open or create a project.

Create Project

Open Project

Using "d:\qc\workspaces\Quant Organization" workspace.

Change

5. [Pull a cloud workspace](#).
- Directory Structure
- The organization workspace directory initially has following structure:
- ```
.
├── data/
├── alternative/
├── crypto/
├── equity/
├── market-hours/
├── option/
├── symbol-properties/
├── README.md
└── lean.json
```
- These files contain the following content:
- | File/Directory | Description                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| data /         | This directory contains the local data that LEAN uses to run locally. This directory is comes with <a href="#">sample data from the QuantConnect/Lean repository</a> . As you <a href="#">download additional data</a> from the dataset market, it's stored in this directory. Each organization workspace has its own data directory because each organization has its own data licenses.                                             |
| lean.json      | This file contains the Lean configuration that is used when running the LEAN engine locally. The configuration is stored as JSON with support for both single-line and multiline comments. The Lean configuration file is based on the <a href="#">Launcher/config.json</a> file from the Lean repository. When you create a new organization workspace, the latest version of this file is downloaded and stored on your local drive. |
- As you add [projects](#) , the project files are added to your organization workspace directory. If you create and use [shared libraries](#) in your projects, the library files are added to a Library directory in your organization workspace.

3.3 Configuration

Introduction

The Local Platform is configured by extension settings in VS Code and by the LEAN Engine settings. Change these settings at any time to suit your needs.

Extension Settings

Follow these steps to view the settings of the Local Platform extension:

- 1. Open VS Code.
- 2. In the top navigation bar, click File > Preferences > Settings .
- 3. On the Settings page, in the left navigation menu, click Extensions > QuantConnect .

The following table describes each setting:

| Name                           | Description                                                                                                      |
|--------------------------------|------------------------------------------------------------------------------------------------------------------|
| Executable Path: Docker        | A path to the Docker installation you want to use.                                                               |
| Executable Path: Lean          | A path to the LEAN CLI executable you want to use.                                                               |
| Lean: Init                     | A path to the current organization workspace.                                                                    |
| Sync: Local And Cloud Projects | Yes to synchronize cloud and local projects. Otherwise, No . No is only available for Institution organizations. |
| User: Preferred Language       | The programming language to use when creating new projects. Py for Python or C# for C#.                          |

LEAN Settings

The Lean configuration contains settings for locally running the LEAN engine. This configuration is created in the lean.json file when you pull or create an [organization workspace](#) . The configuration is stored as JSON, with support for both single-line and multiline comments.

The Lean configuration file is based on the [Launcher / config.json](#) file from the Lean GitHub repository. When you pull or create an organization workspace, the latest version of this file is downloaded and stored in your organization workspace. Before the file is stored, some properties are automatically removed because the Local Platform automatically sets them.

The Local Platform can update most of the values of the lean.json file. The following table shows the configuration settings that you need to manually adjust in the lean.json file if you want to change their values:

| Name                                  | Description                                                                                                                                                                 | Default |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| show-missing-data-logs                | Log missing data files. This is useful for debugging.                                                                                                                       | true    |
| maximum-warmup-history-days-look-back | The maximum number of days of data the history provider will provide during <a href="#">warm-up</a> in live trading. The history provider expects older data to be on disk. | 5       |
| maximum-data-points-per-chart-series  | The maximum number of data points you can add to a chart series in backtests.                                                                                               | 4000    |

### 3.4 Autocomplete

#### Introduction

Intellisense is a GUI tool in your code files that shows auto-completion options and presents the members that are accessible from the current object. The tool works by searching for the statement that you're typing, given the context. You can use Intellisense to auto-complete method names and object attributes. When you use it, a pop-up displays in the IDE with the following information:

- Member type
- Member description
- The parameters that the method accepts (if the member is a method)

Use Intellisense to speed up your algorithm development. It works with all of the default class members in Lean, but it doesn't currently support class names or user-defined objects.

#### Install Python Stubs

Before you use autocomplete, you may need to run the following command in a terminal to get the latest Python stubs:

```
$ pip install --upgrade quantconnect-stubs
```

#### Use Autocomplete

Follow these steps to use autocomplete:

1. [Open a project](#).
2. Type the first few characters of a variable, function, class, or class member that you want to autocomplete (for example, `self.Set` or `SimpleMovingAverage.Upda` ).
3. Press CTRL+Space .

If there are class members that match the characters you provided, a list of class members displays.

10 11 12 13 14 15 16 17 18 19 20 21 22 --

self.Set

SetAccountCurre... def SetAccountCurrency(accountCurre...

SetAlgorithmId

SetAlpha

SetApi

SetAvailableDataTypes

SetBenchmark

SetBrokerageMessageHandler

SetBrokerageModel

SetCash

SetCurrentSlice

SetDateTime

SetEndDate

61 62 63 64 65 66 67 68 69 70 71 72 73 74

Set

SetAccountCurrency

SetAlgorithmId

SetAlpha

SetApi

SetAvailableDataTypes

SetBenchmark

SetBrokerageMessageHandler

SetBrokerageModel

SetCash

SetCurrentSlice

SetDateTime

SetEndDate

4. Select the class member that you want to autocomplete.

The rest of the class member name is automatically written in the code file.


3.5 Collaboration

Introduction

Project collaboration is a real-time coding experience with other members of your team. Collaborating can speed up your development time. By working with other members in an organization, members within the organization can specialize in different parts of the project. On Local Platform, you can collaborate with your remote team members.

Video Demo

When there are multiple people working on the same project, the cursor of each member is visible in the IDE and all file changes occur in real-time for everyone. The following video demonstrates the collaboration feature:

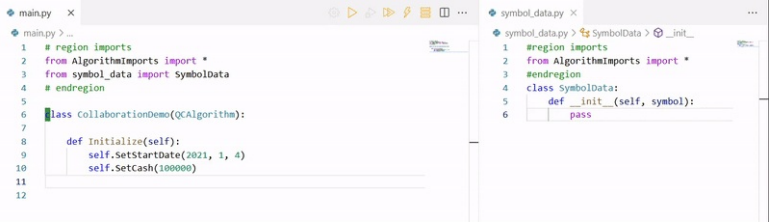

Add Team Members

You need to own the project to add team members to it.

Follow these steps to add team members to a project:

- 1. [Open the project](#).
- 2. In the left navigation menu, click the  QuantConnect icon.
- 3. In the Collaborate section of the Project panel, click Add Collaborator .
- 4. Click the Select User... field and then click a member from the drop-down menu.
- 5. If you want to give the member live control of the project, select the Live Control check box.
- 6. Click Add User .

The member you add receives an email with a link to the project.

If the project has a [shared library](#), the collaborator can access the project, but not the library. To grant them access to the library, add them as a collaborator to the library project.

Collaborator Quotas

The number of members you can add to a project depends on your [organization's tier](#). The following table shows the number of collaborators each tier can have per project:

| Tier             | Collaborators per Project |
|------------------|---------------------------|
| Free             | Unsupported               |
| Quant Researcher | Unsupported               |
| Team             | 10                        |
| Trading Firm     | Unlimited                 |
| Institution      | Unlimited                 |

Toggle Live Control

You need to have added a member to the project to toggle their live control of the project.

Follow these steps to enable and disable live control for a team member:

- 1. [Open the project](#).
- 2. In the left navigation menu, click the  QuantConnect icon.
- 3. In the Collaborate section of the Project panel, click the profile image of the team member.
- 4. Click the Live Control check box.
- 5. Click Save Changes .

Remove Team Members

Follow these steps to remove a team member from a project you own:

- 1. [Open the project](#).
- 2. In the left navigation menu, click the  QuantConnect icon.
- 3. In the Collaborate section of the Project panel, click the profile image of the team member.
- 4. Click Remove User .

To remove yourself as a collaborator from a project you don't own, [delete the project](#).

## 3.6 LEAN Engine Versions

### Introduction

The latest master branch on the LEAN GitHub repository is the default engine branch that runs backtests, research notebooks, and live trading algorithms. The latest version of LEAN is generally the safest as it includes all bug fixes. Trading Firm or Institution tier users concerned for stability can elect to use older or custom versions of LEAN.

### Change Branches

Follow these steps to change the LEAN engine branch that runs your backtests and live trading algorithms:

1. [Open a project](#).
2. In the left navigation menu, click the  QuantConnect icon.
3. In the Project panel, click the LEAN Engine field and then click a branch from the drop-down menu.
4. (Optional) Click About Version to display the branch description.
5. If you want to always use the master branch, select the Always use Master Branch check box.
6. Click Select .

Changing the Lean engine branch only affects the current project. If you [create a new project](#), the new project will use the master branch by default.

### Custom Branches

To create and use custom versions of LEAN, see [Custom Docker Images](#).

## 3.7 Synchronization

### Introduction

Unless you are working on an anonymous project, Local Platform automatically syncs your local project files with QuantConnect Cloud. Every time you save a file, Local Platform saves the changes in your local project and in the cloud version of the project.

### Anonymous Projects

Anonymous projects are projects that are on your local machine and not synced with QuantConnect Cloud. These types of projects are only available for members in Institution organizations. Anonymous projects provide organizations the opportunity to take ownership of their projects security.

### Supported File Types

When you save your local projects and push them to QuantConnect Cloud, it only pushes the Python, C#, and notebook files in your project. Projects can contain many other file types like json , csv , and html , but Local Platform only pushes your py , cs , and ipynb files.



**3.8 Source Control**

**Introduction**


### 3.9 Resource Management

#### Introduction

The Resources panel shows all of the backtest, research, and live trading nodes that Local Platform can use or is already using.

▼ RESOURCES

⚙ BACKTEST NODES

| Node        | In Use By |                                                                                                 |
|-------------|-----------|-------------------------------------------------------------------------------------------------|
| backtest 1  | Local     |  Derek Melchin |
| backtest 2  | Local     | -                                                                                               |
| backtest 3  | Local     | -                                                                                               |
| backtest 4  | Local     | -                                                                                               |
| backtest 5  | Local     | -                                                                                               |
| backtest 6  | Local     | -                                                                                               |
| backtest 7  | Local     | -                                                                                               |
| backtest 8  | Local     | -                                                                                               |
| backtest 9  | Local     | -                                                                                               |
| backtest 10 | Local     | -                                                                                               |

The In Use By column displays the owner and name of the project using the node.

#### View Resources

To view the Resources panel, [open a project](#) and then, in the left navigation menu, click the  QuantConnect icon. The Resources panel is at the bottom of the Project panel.

#### Stop Nodes

To stop a node, open the Resources panel and then click the stop button next to the node.

3.10 Packages and Libraries


Introduction

Libraries (or packages) are third-party software that you can use in your projects. You can use many of the available open-source libraries to complement the classes and methods that you create. Libraries reduce your development time because it's faster to use a pre-built, open-source library than to write the functionality. Libraries can be used in backtesting, research, and live trading. The environments support various libraries for machine learning, plotting, and data processing. As members often request new libraries, we frequently add new libraries to the underlying docker image that runs the Lean engine.

This feature is primarily for Python algorithms as not all Python libraries are compatible with each other. We've bundled together different sets of libraries into distinct environments. To use the libraries of an environment, set the environment in your project and add the relevant `using import` statement of a library at the top of your file.

Set Environment

Follow these steps to set the library environment:

- 1. [Open a project](#).
- 2. In the left navigation menu, click the  QuantConnect icon.
- 3. In the Project panel, click the Python Foundation field and then select an environment from the drop-down menu.

Default Environment

The default environment supports the following libraries:

| #                          | Name | Version   |
|----------------------------|------|-----------|
| absl.py                    |      | 1.4.0     |
| adagio                     |      | 0.2.4     |
| aesara                     |      | 2.8.12    |
| aiodns                     |      | 3.0.0     |
| aiohttp                    |      | 3.8.4     |
| aiohttp-cors               |      | 0.7.0     |
| aiohttp                    |      | 1.3.1     |
| alabaster                  |      | 0.7.13    |
| ale.py                     |      | 0.7.4     |
| alembic                    |      | 1.10.3    |
| alpaca-trade-api           |      | 0.26      |
| alphalens-reloaded         |      | 0.4.3     |
| altair                     |      | 4.2.2     |
| ansi2html                  |      | 1.8.0     |
| antlr4-python3-runtime     |      | 4.11.1    |
| anyio                      |      | 3.6.2     |
| appdirs                    |      | 1.4.4     |
| arch                       |      | 5.3.1     |
| argon2-cffi                |      | 21.3.0    |
| argon2-cffi-bindings       |      | 21.2.0    |
| arviz                      |      | 0.15.1    |
| astropy                    |      | 5.2.1     |
| asttokens                  |      | 2.2.1     |
| astunparse                 |      | 1.6.3     |
| async-timeout              |      | 4.0.2     |
| asyncio-nats-client        |      | 0.11.5    |
| attrs                      |      | 23.1.0    |
| autograd                   |      | 1.5       |
| autokeras                  |      | 1.1.0     |
| autoray                    |      | 0.6.3     |
| AutoROM                    |      | 0.4.2     |
| AutoROM.accept-rom-license |      | 0.6.1     |
| ax-platform                |      | 0.3.0     |
| Babel                      |      | 2.12.1    |
| backcall                   |      | 0.2.0     |
| bayesian-optimization      |      | 1.4.2     |
| beautifulsoup4             |      | 4.11.2    |
| bleach                     |      | 6.0.0     |
| blessed                    |      | 1.20.0    |
| blis                       |      | 0.7.9     |
| blosc2                     |      | 2.0.0     |
| bokeh                      |      | 2.4.3     |
| boltons                    |      | 23.0.0    |
| botorch                    |      | 0.8.2     |
| Bottleneck                 |      | 1.3.7     |
| brotlipy                   |      | 0.7.0     |
| cachetools                 |      | 5.3.0     |
| captum                     |      | 0.6.0     |
| catalogue                  |      | 2.0.8     |
| catboost                   |      | 1.1.1     |
| category-encoders          |      | 2.6.0     |
| ccxt                       |      | 3.0.72    |
| certifi                    |      | 2022.12.7 |
| cffi                       |      | 1.15.1    |
| chardet                    |      | 5.1.0     |
| charset-normalizer         |      | 2.0.4     |
| check_shapes               |      | 1.0.0     |
| click                      |      | 7.1.2     |
| clikit                     |      | 0.6.2     |
| cloudpickle                |      | 2.2.1     |
| cmaes                      |      | 0.9.1     |
| cmdstanpy                  |      | 1.1.0     |
| colorama                   |      | 0.4.6     |
| colorcet                   |      | 3.0.1     |
| colorful                   |      | 0.5.5     |
| colorlog                   |      | 6.7.0     |
| colorlover                 |      | 0.3.0     |
| colour                     |      | 0.1.5     |
| comm                       |      | 0.1.3     |
| commonmark                 |      | 0.9.1     |
| conda                      |      | 23.3.1    |
| conda-content-trust        |      | 0.1.3     |
| conda-package-handling     |      | 2.0.2     |
| conda_package_streaming    |      | 0.7.0     |
| confection                 |      | 0.0.4     |
| cons                       |      | 0.4.5     |
| contourpy                  |      | 1.0.7     |
| convertdate                |      | 2.4.0     |
| copulae                    |      | 0.7.7     |
| copulas                    |      | 0.8.0     |
| cramjam                    |      | 2.6.2     |
| crashtest                  |      | 0.3.1     |
| creme                      |      | 0.6.1     |
| cryptography               |      | 38.0.4    |
| cufflinks                  |      | 0.17.3    |
| cvxopt                     |      | 1.3.0     |
| cvxpy                      |      | 1.3.0     |
| cycler                     |      | 0.11.0    |
| cymem                      |      | 2.0.7     |
| Cython                     |      | 0.29.33   |
| darts                      |      | 0.23.1    |
| dash                       |      | 2.9.3     |
| dash-core-components       |      | 2.0.0     |
| dash-cytoscape             |      | 0.3.0     |
| dash-html-components       |      | 2.0.0     |
| dash-table                 |      | 5.0.0     |
| dask                       |      | 2023.4.0  |
| deap                       |      | 1.3.3     |
| debugpy                    |      | 1.5.1     |
| decorator                  |      | 5.1.1     |
| defusedxml                 |      | 0.7.1     |
| Deprecated                 |      | 1.2.13    |

|                          |                |
|--------------------------|----------------|
| dgl                      | 1.0.1          |
| dill                     | 0.3.6          |
| dimod                    | 0.12.3         |
| diskcache                | 5.6.1          |
| distlib                  | 0.3.6          |
| distributed              | 2021.4.1       |
| dm-tree                  | 0.1.8          |
| docutils                 | 0.19           |
| DoubleML                 | 0.5.2          |
| dtreeviz                 | 2.2.1          |
| dtw-python               | 1.3.0          |
| dwave-cloud-client       | 0.10.3         |
| dwave-drivers            | 0.4.4          |
| dwave-greedy             | 0.3.0          |
| dwave-hybrid             | 0.6.9          |
| dwave-inspector          | 0.3.0          |
| dwave-inspectorapp       | 0.3.0          |
| dwave-neal               | 0.6.0          |
| dwave-networkx           | 0.8.12         |
| dwave-ocean-sdk          | 6.1.1          |
| dwave-preprocessing      | 0.5.3          |
| dwave-samplers           | 1.0.0          |
| dwave-system             | 1.18.0         |
| dwave-tabu               | 0.5.0          |
| dwavebinarycsp           | 0.2.0          |
| dx                       | 0.1.22         |
| ecos                     | 2.0.12         |
| EMD-signal               | 1.4.0          |
| empyrial                 | 0.5.5          |
| empyrial-reloaded        | 0.5.9          |
| en-core-web-md           | 3.5.0          |
| en-core-web-sm           | 3.5.0          |
| entrypoints              | 0.4            |
| ephem                    | 4.1.4          |
| et-xmlfile               | 1.1.0          |
| etuples                  | 0.3.8          |
| exceptiongroup           | 1.1.1          |
| exchange-calendars       | 4.2.6          |
| executing                | 1.2.0          |
| ezyrb                    | 1.3.0.post2304 |
| fastai                   | 2.7.11         |
| fastai2                  | 0.0.30         |
| fastcore                 | 1.5.29         |
| fastdownload             | 0.0.7          |
| fasteners                | 0.18           |
| fastjsonschema           | 2.16.3         |
| fastparquet              | 2023.2.0       |
| fastprogress             | 1.0.3          |
| fasttext                 | 0.9.2          |
| featuretools             | 0.23.1         |
| filelock                 | 3.12.0         |
| findiff                  | 0.9.2          |
| finrl                    | 0.3.1          |
| FixedEffectModel         | 0.0.5          |
| Flask                    | 2.0.3          |
| flatbuffers              | 23.3.3         |
| fonttools                | 4.39.3         |
| fracdiff                 | 0.9.0          |
| frozendict               | 2.3.7          |
| frozenlist               | 1.3.3          |
| fs                       | 2.4.16         |
| fsspec                   | 2023.4.0       |
| fst-pso                  | 1.8.1          |
| fugue                    | 0.8.3          |
| fugue-sql-antlr          | 0.1.6          |
| future                   | 0.18.3         |
| fuzzy-c-means            | 1.6.3          |
| FuzzyTM                  | 2.0.5          |
| gast                     | 0.4.0          |
| gensim                   | 4.3.0          |
| gevent                   | 22.10.2        |
| gluonts                  | 0.12.3         |
| google-api-core          | 2.11.0         |
| google-auth              | 2.17.3         |
| google-auth-oauthlib     | 0.4.6          |
| google-pasta             | 0.2.0          |
| googleapis-common-protos | 1.59.0         |
| gpflow                   | 2.7.0          |
| gplearn                  | 0.4.2          |
| gpustat                  | 1.1            |
| GPUTil                   | 1.4.0          |
| gpytorch                 | 1.9.1          |
| graphviz                 | 0.20.1         |
| greenlet                 | 2.0.2          |
| grpcio                   | 1.54.0         |
| gym                      | 0.21.0         |
| Gymnasium                | 0.26.3         |
| gymnasium-notices        | 0.0.1          |
| h2o                      | 3.40.0.1       |
| h5netcdf                 | 1.1.0          |
| h5py                     | 3.8.0          |
| hijri-converter          | 2.2.4          |
| hmmlearn                 | 0.2.8          |
| holidays                 | 0.23           |
| holoviews                | 1.15.4         |
| homebase                 | 1.0.1          |
| hopcroftkarp             | 1.2.5          |
| html5lib                 | 1.1            |
| httpstan                 | 4.9.1          |
| hurst                    | 0.0.5          |
| hvplot                   | 0.8.2          |
| hyperopt                 | 0.2.7          |
| idna                     | 3.4            |
| iisignature              | 0.24           |
| ijson                    | 3.2.0.post0    |
| imageio                  | 2.27.0         |
| imageio-ffmpeg           | 1.4.1          |
| imbalanced-learn         | 0.10.1         |
| importlib-metadata       | 4.13.0         |
| importlib-resources      | 5.12.0         |
| iniconfig                | 2.0.0          |
| injector                 | 0.20.1         |
| interpret                | 0.3.0          |
| interpret-core           | 0.3.2          |
| ipykernel                | 6.22.0         |
| ipython                  | 8.12.0         |
| ipython-genutils         | 0.2.0          |
| ipywidgets               | 8.0.4          |
| itsdangerous             | 2.1.2          |
| jax                      | 0.4.4          |
| jaxlib                   | 0.4.4          |
| jedi                     | 0.18.2         |
| Jinja2                   | 3.1.2          |
| joblib                   | 1.2.0          |
| jqdatasdk                | 1.8.11         |
| json5                    | 0.9.11         |
| jsonpatch                | 1.32           |
| jsonpointer              | 2.0            |
| jsonschema               | 4.17.3         |
| jupyter                  | 1.0.0          |
| jupyter-bokeh            | 3.0.5          |
| jupyter-console          | 6.6.3          |
| jupyter-dash             | 0.4.2          |
| jupyter-resource-usage   | 0.7.2          |

|                         |             |
|-------------------------|-------------|
| jupyter-server          | 1.24.0      |
| jupyter_client          | 8.2.0       |
| jupyter_core            | 5.3.0       |
| jupyterlab              | 3.4.4       |
| jupyterlab-pygments     | 0.2.2       |
| jupyterlab-widgets      | 3.0.7       |
| jupyterlab_server       | 2.22.1      |
| keract                  | 4.5.1       |
| keras                   | 2.11.0      |
| keras-nlp               | 0.4.1       |
| keras-rl                | 0.4.2       |
| keras-tuner             | 1.3.5       |
| kiwisolver              | 1.4.4       |
| kmapper                 | 2.0.1       |
| korean-lunar-calendar   | 0.3.1       |
| kt-legacy               | 1.0.5       |
| langcodes               | 3.3.0       |
| lark                    | 1.1.5       |
| lazy_loader             | 0.2         |
| lazypredict             | 0.2.12      |
| libclang                | 16.0.0      |
| lightgbm                | 3.3.5       |
| lime                    | 0.2.0.1     |
| line-profiler           | 4.0.2       |
| linear-operator         | 0.3.0       |
| littlutils              | 0.2.2       |
| livelossplot            | 0.5.5       |
| llvmlite                | 0.39.1      |
| locket                  | 1.0.0       |
| logical-unification     | 0.4.5       |
| LunarCalendar           | 0.0.9       |
| lxml                    | 4.9.2       |
| lz4                     | 4.3.2       |
| Mako                    | 1.2.4       |
| Markdown                | 3.4.3       |
| MarkupSafe              | 2.1.2       |
| marshmallow             | 3.19.0      |
| matplotlib              | 3.7.0       |
| matplotlib-inline       | 0.1.6       |
| miniful                 | 0.0.6       |
| miniKanren              | 1.0.3       |
| minorminer              | 0.2.9       |
| mistune                 | 2.0.5       |
| mljar-supervised        | 0.11.5      |
| mlxtend                 | 0.21.0      |
| mmh3                    | 2.5.1       |
| modin                   | 0.18.1      |
| mpi4py                  | 3.1.4       |
| mplfinance              | 0.12.9b7    |
| mpmath                  | 1.2.1       |
| msgpack                 | 1.0.4       |
| mthree                  | 2.4.0       |
| multidict               | 6.0.4       |
| multiplatformdispatch   | 0.6.0       |
| multiprocess            | 0.70.14     |
| multitasking            | 0.0.11      |
| murmurhash              | 1.0.9       |
| nbclassic               | 0.5.5       |
| nbclient                | 0.7.3       |
| nbconvert               | 7.3.1       |
| nbeats-keras            | 1.8.0       |
| nbeats-pytorch          | 1.8.0       |
| nbformat                | 5.8.0       |
| nest-asyncio            | 1.5.6       |
| networkx                | 2.8.8       |
| neural-tangents         | 0.6.2       |
| neuralprophet           | 0.5.0       |
| nfoursid                | 1.0.1       |
| nltk                    | 3.8.1       |
| nose                    | 1.3.7       |
| notebook                | 6.5.4       |
| notebook_shim           | 0.2.2       |
| ntlm-auth               | 1.5.0       |
| numba                   | 0.56.4      |
| numerapi                | 2.13.2      |
| numexpr                 | 2.8.4       |
| numpy                   | 1.23.5      |
| numpydoc                | 1.5.0       |
| nvdiacublas-cu11        | 11.10.3.66  |
| nvdiacudartc-cu11       | 11.7.99     |
| nvdiacudartime-cu11     | 11.7.99     |
| nvdiacudnn-cu11         | 8.5.0.96    |
| nvdiacml-py             | 11.525.112  |
| oauthlib                | 3.2.2       |
| openai                  | 0.26.5      |
| opencensus              | 0.11.2      |
| opencensus-context      | 0.1.3       |
| opencv-python           | 4.7.0.72    |
| openpyxl                | 3.1.1       |
| opt-einsum              | 3.3.0       |
| optuna                  | 3.1.0       |
| orjson                  | 3.8.10      |
| ortools                 | 9.4.1874    |
| osqp                    | 0.6.2.post9 |
| outdated                | 0.2.2       |
| packaging               | 23.1        |
| pandas                  | 1.5.3       |
| pandas-datareader       | 0.10.0      |
| pandas-flavor           | 0.5.0       |
| pandas-market-calendars | 4.1.4       |
| pandas-ta               | 0.3.14b0    |
| pandocfilters           | 1.5.0       |
| panel                   | 0.14.3      |
| param                   | 1.13.0      |
| parso                   | 0.8.3       |
| partd                   | 1.4.0       |
| pastel                  | 0.2.1       |
| pathos                  | 0.3.0       |
| pathy                   | 0.10.1      |
| patsy                   | 0.5.3       |
| pbr                     | 5.11.1      |
| penaltymodel            | 1.0.2       |
| PennyLane               | 0.29.0      |
| PennyLane-Lightning     | 0.29.0      |
| PennyLane-qiskit        | 0.29.0      |
| persim                  | 0.3.1       |
| pexpect                 | 4.8.0       |
| pickleshare             | 0.7.5       |
| Pillow                  | 9.5.0       |
| pingouin                | 0.5.3       |
| pip                     | 22.3.1      |
| pkgutil_resolve_name    | 1.3.10      |
| platformdirs            | 3.2.0       |
| plotly                  | 5.13.1      |
| plotly-resampler        | 0.8.3.2     |
| plucky                  | 0.4.3       |
| pluggy                  | 1.0.0       |
| ply                     | 3.11        |
| pmdarima                | 2.0.2       |
| polars                  | 0.16.9      |
| pox                     | 0.3.2       |
| ppft                    | 1.7.6.6     |
| pprofile                | 2.1.0       |
| ppscore                 | 1.2.0       |

|                      |                |
|----------------------|----------------|
| preshed              | 3.0.8          |
| prometheus-client    | 0.16.0         |
| prompt-toolkit       | 3.0.38         |
| property-cached      | 1.6.4          |
| prophet              | 1.1.2          |
| protobuf             | 3.19.6         |
| psutil               | 5.9.5          |
| psycpg2-binary       | 2.9.6          |
| ptvsd                | 4.3.2          |
| ptyprocess           | 0.7.0          |
| PuLP                 | 2.7.0          |
| pure-eval            | 0.2.2          |
| py-cpuinfo           | 9.0.0          |
| py-heat              | 0.0.6          |
| py-heat-magic        | 0.0.2          |
| py-lets-be-rational  | 1.0.1          |
| py-spy               | 0.3.14         |
| py-volib             | 1.0.1          |
| py4j                 | 0.10.9.7       |
| pyaml                | 21.10.1        |
| pyarrow              | 11.0.0         |
| pyasn1               | 0.4.8          |
| pyasn1-modules       | 0.2.8          |
| pybind11             | 2.10.4         |
| pycares              | 4.3.0          |
| pycosat              | 0.6.4          |
| pycparser            | 2.21           |
| pyct                 | 0.5.0          |
| pydantic             | 1.10.7         |
| pyDeprecate          | 0.3.2          |
| pydevd-pycharm       | 201.8538.36    |
| pydmd                | 0.4.0.post2301 |
| pyerfa               | 2.0.0.3        |
| pyfolio              | 0.9.2          |
| pyfolio-reloaded     | 0.9.5          |
| pyFUME               | 0.2.25         |
| Pygments             | 2.15.1         |
| pykalman             | 0.9.5          |
| pylev                | 1.4.0          |
| pyluach              | 2.2.0          |
| pymannkendall        | 1.4.3          |
| pymc                 | 5.0.2          |
| pymdptoolbox         | 4.0b3          |
| PyMeeus              | 0.5.12         |
| PyMySQL              | 1.0.3          |
| pymndescent          | 0.5.9          |
| pyod                 | 1.0.9          |
| Pyomo                | 6.5.0          |
| pyOpenSSL            | 22.0.0         |
| pyarsing             | 3.0.9          |
| pyportfolioopt       | 1.5.4          |
| pyqubo               | 1.3.1          |
| pyrb                 | 1.0.1          |
| pyro-api             | 0.1.2          |
| pyro-ppl             | 1.8.4          |
| pyrsistent           | 0.19.3         |
| pysimdjson           | 5.0.2          |
| PySocks              | 1.7.1          |
| pystan               | 3.6.0          |
| pytensor             | 2.9.1          |
| pytest               | 7.3.1          |
| python-dateutil      | 2.8.2          |
| python-statemachine  | 1.0.3          |
| pytorch-ignite       | 0.4.11         |
| pytorch-lightning    | 1.7.4          |
| pytz                 | 2023.3         |
| pyvinecopulib        | 0.6.2          |
| pyviz-comms          | 2.2.1          |
| PyWavelets           | 1.4.1          |
| PyYAML               | 6.0            |
| pyzmq                | 25.0.2         |
| qdl                  | 0.1.7          |
| qiskit               | 0.41.1         |
| qiskit-aer           | 0.11.2         |
| qiskit-ibmq-provider | 0.20.1         |
| qiskit-terra         | 0.23.2         |
| qpd                  | 0.4.1          |
| qtconsole            | 5.4.2          |
| QtPy                 | 2.3.1          |
| quadprog             | 0.1.11         |
| quantecon            | 0.6.0          |
| QuantLib             | 1.29           |
| QuantStats           | 0.0.59         |
| rauth                | 0.7.3          |
| ray                  | 2.3.0          |
| rectangle-packer     | 2.0.1          |
| regex                | 2023.3.23      |
| requests             | 2.28.1         |
| requests-ntlm        | 1.1.0          |
| requests-oauthlib    | 1.3.1          |
| retrying             | 1.3.4          |
| retworkx             | 0.12.1         |
| rich                 | 12.4.4         |
| ripser               | 0.6.4          |
| Riskfolio-Lib        | 4.0.3          |
| riskparityportfolio  | 0.4            |
| river                | 0.14.0         |
| rsa                  | 4.9            |
| ruamel.yaml          | 0.17.21        |
| ruamel.yaml.clib     | 0.2.6          |
| ruptures             | 1.1.7          |
| rustworkx            | 0.12.1         |
| SALib                | 1.4.7          |
| scikeras             | 0.10.0         |
| scikit-image         | 0.19.3         |
| scikit-learn         | 1.2.1          |
| scikit-learn-extra   | 0.2.0          |
| scikit-multiflow     | 0.5.3          |
| scikit-optimize      | 0.9.0          |
| scikit-plot          | 0.3.7          |
| scikit-tda           | 1.0.0          |
| scipy                | 1.10.1         |
| scs                  | 3.2.3          |
| sdeint               | 0.3.0          |
| seaborn              | 0.12.2         |
| semantic-version     | 2.10.0         |
| Send2Trash           | 1.8.0          |
| setuptools           | 64.0.2         |
| setuptools-scm       | 7.1.0          |
| shap                 | 0.41.0         |
| simpful              | 2.10.0         |
| simplejson           | 3.19.1         |
| simpy                | 4.0.1          |
| six                  | 1.16.0         |
| sklearn-json         | 0.1.0          |
| skope-rules          | 1.0.1          |
| sktime               | 0.16.1         |
| slice                | 0.0.7          |
| smart-open           | 6.3.0          |
| sniffio              | 1.3.0          |
| snowballstemmer      | 2.2.0          |
| sortedcontainers     | 2.4.0          |
| soupsieve            | 2.4.1          |
| spacy                | 3.5.0          |

|                               |           |
|-------------------------------|-----------|
| spacy-legacy                  | 3.0.12    |
| spacy-loggers                 | 1.0.4     |
| Sphinx                        | 6.1.3     |
| sphinxcontrib-applehelp       | 1.0.4     |
| sphinxcontrib-devhelp         | 1.0.2     |
| sphinxcontrib-htmlhelp        | 2.0.1     |
| sphinxcontrib-jsmath          | 1.0.1     |
| sphinxcontrib-qthelp          | 1.0.3     |
| sphinxcontrib-serializinghtml | 1.1.5     |
| SQLAlchemy                    | 1.4.47    |
| sqlglot                       | 11.5.5    |
| srsly                         | 2.4.6     |
| ssm                           | 0.0.1     |
| stable-baselines3             | 1.7.0     |
| stack-data                    | 0.6.2     |
| statsforecast                 | 1.5.0     |
| statsmodels                   | 0.13.5    |
| stellargraph                  | 1.2.1     |
| stevedore                     | 5.0.0     |
| stochastic                    | 0.7.0     |
| stockstats                    | 0.5.2     |
| stumpy                        | 1.11.1    |
| symengine                     | 0.10.0    |
| sympy                         | 1.11.1    |
| ta                            | 0.10.2    |
| TA-Lib                        | 0.4.18    |
| tables                        | 3.8.0     |
| tabulate                      | 0.8.10    |
| tadatasets                    | 0.0.4     |
| tbats                         | 1.1.3     |
| tblib                         | 1.7.0     |
| tenacity                      | 8.2.2     |
| tensorboard                   | 2.11.2    |
| tensorboard-data-server       | 0.6.1     |
| tensorboard-plugin-wit        | 1.8.1     |
| tensorboardX                  | 2.6       |
| tensorflow                    | 2.11.0    |
| tensorflow-addons             | 0.19.0    |
| tensorflow-decision-forests   | 1.2.0     |
| tensorflow-estimator          | 2.11.0    |
| tensorflow-hub                | 0.13.0    |
| tensorflow-io-gcs-filesystem  | 0.32.0    |
| tensorflow-probability        | 0.19.0    |
| tensorflow-text               | 2.11.0    |
| tensorly                      | 0.8.0     |
| tenstrade                     | 1.0.3     |
| termcolor                     | 2.2.0     |
| terminado                     | 0.17.1    |
| tf2jax                        | 0.3.3     |
| thinc                         | 8.1.9     |
| threadpoolctl                 | 3.1.0     |
| thriftpy2                     | 0.4.16    |
| thundergbm                    | 0.3.17    |
| tick                          | 0.7.0.1   |
| tiff file                     | 2023.4.12 |
| tinycss2                      | 1.2.1     |
| toml                          | 0.10.2    |
| tomli                         | 2.0.1     |
| toolz                         | 0.12.0    |
| torch                         | 1.13.1    |
| torch-cluster                 | 1.6.0     |
| torch-geometric               | 2.2.0     |
| torch-scatter                 | 2.1.0     |
| torch-sparse                  | 0.6.16    |
| torch-spline-conv             | 1.2.1     |
| torchmetrics                  | 0.9.3     |
| torchvision                   | 0.14.1    |
| tornado                       | 6.3       |
| tqdm                          | 4.64.1    |
| trace-updater                 | 0.0.9.1   |
| trading-calendars             | 2.1.1     |
| traitlets                     | 5.9.0     |
| treeinterpreter               | 0.2.3     |
| triad                         | 0.8.6     |
| tsfresh                       | 0.20.0    |
| tslearn                       | 0.5.3.2   |
| tweepy                        | 4.10.0    |
| typeguard                     | 3.0.2     |
| typer                         | 0.3.2     |
| typing_extensions             | 4.5.0     |
| umap-learn                    | 0.5.3     |
| urllib3                       | 1.26.14   |
| virtualenv                    | 20.21.0   |
| wasabi                        | 1.1.1     |
| wcwidth                       | 0.2.6     |
| webargs                       | 8.2.0     |
| webencodings                  | 0.5.1     |
| websocket-client              | 1.5.1     |
| websockets                    | 10.4      |
| Werkzeug                      | 2.2.3     |
| wheel                         | 0.37.1    |
| widgetsnbextension            | 4.0.7     |
| wordcloud                     | 1.8.2.2   |
| wrapt                         | 1.14.1    |
| wrds                          | 3.1.6     |
| wurlitzer                     | 3.0.3     |
| xarray                        | 2023.1.0  |
| xarray-einstats               | 0.5.1     |
| xgboost                       | 1.7.4     |
| xlrd                          | 2.0.1     |
| XlsxWriter                    | 3.1.0     |
| yaml                          | 1.8.2     |
| yellowbrick                   | 1.5       |
| yfinance                      | 0.2.18    |
| zict                          | 3.0.0     |
| zipp                          | 3.15.0    |
| zope.event                    | 4.6       |
| zope.interface                | 6.0       |
| zstandard                     | 0.18.0    |

| #                                    | Name | Version |
|--------------------------------------|------|---------|
| Accord                               |      | 3.6.0   |
| Accord.Fuzzy                         |      | 3.6.0   |
| Accord.MachineLearning               |      | 3.6.0   |
| Accord.Math                          |      | 3.6.0   |
| Accord.Statistics                    |      | 3.6.0   |
| CloneExtensions                      |      | 1.3.0   |
| Common.Logging                       |      | 3.4.1   |
| Common.Logging.Core                  |      | 3.4.1   |
| CsvHelper                            |      | 19.0.0  |
| Deedle                               |      | 2.1.0   |
| DotNetZip                            |      | 1.16.0  |
| DynamicInterop                       |      | 0.9.1   |
| fasterflect                          |      | 3.0.0   |
| FSharp.Core                          |      | 4.5.2   |
| MathNet.Numerics                     |      | 4.15.0  |
| McMaster.Extensions.CommandLineUtils |      | 2.6.0   |
| Microsoft.IO.RecyclableMemoryStream  |      | 2.3.1   |
| Microsoft.NET.Test.Sdk               |      | 16.9.4  |
| Microsoft.TestPlatform.ObjectModel   |      | 16.9.4  |
| Moq                                  |      | 4.16.1  |
| NetMQ                                |      | 4.0.1.6 |
| Newtonsoft.Json                      |      | 13.0.2  |
| NodaTime                             |      | 3.0.5   |

|                                   |          |
|-----------------------------------|----------|
| NUnit                             | 3.13.3   |
| NUnit3TestAdapter                 | 4.2.1    |
| protobuf-net                      | 3.1.33   |
| QLNet                             | 1.12.0   |
| QuantConnect.pythonnet            | 2.0.18   |
| RestSharp                         | 106.12.0 |
| SharpZipLib                       | 1.3.3    |
| System.ComponentModel.Composition | 6.0.0    |

Pomegranate Environment

The Pomegranate environment supports the following libraries:

| # | Name                       | Version   |
|---|----------------------------|-----------|
|   | absl-py                    | 1.4.0     |
|   | adagio                     | 0.2.4     |
|   | aesara                     | 2.8.12    |
|   | aiodns                     | 3.0.0     |
|   | aiohttp                    | 3.8.4     |
|   | aiohttp-cors               | 0.7.0     |
|   | aiosignal                  | 1.3.1     |
|   | alabaster                  | 0.7.13    |
|   | ale-py                     | 0.7.4     |
|   | alembic                    | 1.10.3    |
|   | alpaca-trade-api           | 0.26      |
|   | alphalens-reloaded         | 0.4.3     |
|   | altair                     | 4.2.2     |
|   | ansi2html                  | 1.8.0     |
|   | antlr4-python3-runtime     | 4.11.1    |
|   | anyio                      | 3.6.2     |
|   | appdirs                    | 1.4.4     |
|   | arch                       | 5.3.1     |
|   | argon2-cffi                | 21.3.0    |
|   | argon2-cffi-bindings       | 21.2.0    |
|   | arviz                      | 0.15.1    |
|   | astropy                    | 5.2.1     |
|   | asttokens                  | 2.2.1     |
|   | astunparse                 | 1.6.3     |
|   | async-timeout              | 4.0.2     |
|   | asyncio-nats-client        | 0.11.5    |
|   | attrs                      | 23.1.0    |
|   | autograd                   | 1.5       |
|   | autokeras                  | 1.1.0     |
|   | autoray                    | 0.6.3     |
|   | AutoROM                    | 0.4.2     |
|   | AutoROM.accept-rom-license | 0.6.1     |
|   | ax-platform                | 0.3.0     |
|   | Babel                      | 2.12.1    |
|   | backcall                   | 0.2.0     |
|   | bayesian-optimization      | 1.4.2     |
|   | beautifulsoup4             | 4.11.2    |
|   | bleach                     | 6.0.0     |
|   | blessed                    | 1.20.0    |
|   | blis                       | 0.7.9     |
|   | blosc2                     | 2.0.0     |
|   | bokeh                      | 2.4.3     |
|   | boltons                    | 23.0.0    |
|   | botorch                    | 0.8.2     |
|   | Bottleneck                 | 1.3.7     |
|   | brotlipy                   | 0.7.0     |
|   | cachetools                 | 5.3.0     |
|   | captum                     | 0.6.0     |
|   | catalogue                  | 2.0.8     |
|   | catboost                   | 1.1.1     |
|   | category-encoders          | 2.6.0     |
|   | ccxt                       | 3.0.72    |
|   | certifi                    | 2022.12.7 |
|   | cffi                       | 1.15.1    |
|   | chardet                    | 5.1.0     |
|   | charset-normalizer         | 2.0.4     |
|   | check-shapes               | 1.0.0     |
|   | click                      | 7.1.2     |
|   | clikit                     | 0.6.2     |
|   | cloudpickle                | 2.2.1     |
|   | cmaes                      | 0.9.1     |
|   | cmdstanpy                  | 1.1.0     |
|   | colorama                   | 0.4.6     |
|   | colorcet                   | 3.0.1     |
|   | colorful                   | 0.5.5     |
|   | colorlog                   | 6.7.0     |
|   | colorlover                 | 0.3.0     |
|   | colour                     | 0.1.5     |
|   | comm                       | 0.1.3     |
|   | commonmark                 | 0.9.1     |
|   | conda                      | 23.3.1    |
|   | conda-content-trust        | 0.1.3     |
|   | conda-package-handling     | 2.0.2     |
|   | conda_package_streaming    | 0.7.0     |
|   | confection                 | 0.0.4     |
|   | cons                       | 0.4.5     |
|   | contourpy                  | 1.0.7     |
|   | convertdate                | 2.4.0     |
|   | copulae                    | 0.7.7     |
|   | copulas                    | 0.8.0     |
|   | cramjam                    | 2.6.2     |
|   | crashtest                  | 0.3.1     |
|   | creme                      | 0.6.1     |
|   | cryptography               | 38.0.4    |
|   | cufflinks                  | 0.17.3    |
|   | cvxopt                     | 1.3.0     |
|   | cvxpy                      | 1.3.0     |
|   | cycler                     | 0.11.0    |
|   | cymem                      | 2.0.7     |
|   | Cython                     | 0.29.33   |
|   | darts                      | 0.23.1    |
|   | dash                       | 2.9.3     |
|   | dash-core-components       | 2.0.0     |
|   | dash-cytoscape             | 0.3.0     |
|   | dash-html-components       | 2.0.0     |
|   | dash-table                 | 5.0.0     |
|   | dask                       | 2023.4.0  |
|   | deap                       | 1.3.3     |
|   | debugpy                    | 1.5.1     |
|   | decorator                  | 5.1.1     |
|   | defusedxml                 | 0.7.1     |
|   | Deprecated                 | 1.2.13    |
|   | dgl                        | 1.0.1     |
|   | dill                       | 0.3.6     |
|   | dimod                      | 0.12.3    |
|   | diskcache                  | 5.6.1     |
|   | distlib                    | 0.3.6     |
|   | distributed                | 2021.4.1  |
|   | dm-tree                    | 0.1.8     |
|   | docutils                   | 0.19      |
|   | DoubleML                   | 0.5.2     |
|   | dtreeviz                   | 2.2.1     |
|   | dtw-python                 | 1.3.0     |
|   | dwave-cloud-client         | 0.10.3    |
|   | dwave-drivers              | 0.4.4     |
|   | dwave-greedy               | 0.3.0     |
|   | dwave-hybrid               | 0.6.9     |
|   | dwave-inspector            | 0.3.0     |
|   | dwave-inspectorapp         | 0.3.0     |



|                          |                |
|--------------------------|----------------|
| dwave-neal               | 0.6.0          |
| dwave-networkx           | 0.8.12         |
| dwave-ocean-sdk          | 6.1.1          |
| dwave-preprocessing      | 0.5.3          |
| dwave-samplers           | 1.0.0          |
| dwave-system             | 1.18.0         |
| dwave-tabu               | 0.5.0          |
| dwavebinarycsp           | 0.2.0          |
| dx                       | 0.1.22         |
| ecos                     | 2.0.12         |
| EMD-signal               | 1.4.0          |
| empyrcal                 | 0.5.5          |
| empyrcal-reloaded        | 0.5.9          |
| en-core-web-md           | 3.5.0          |
| en-core-web-sm           | 3.5.0          |
| entrypoints              | 0.4            |
| ephem                    | 4.1.4          |
| et-xmlfile               | 1.1.0          |
| etuples                  | 0.3.8          |
| exceptiongroup           | 1.1.1          |
| exchange-calendars       | 4.2.6          |
| executing                | 1.2.0          |
| ezyrb                    | 1.3.0.post2304 |
| fastai                   | 2.7.11         |
| fastai2                  | 0.0.30         |
| fastcore                 | 1.5.29         |
| fastdownload             | 0.0.7          |
| fasteners                | 0.18           |
| fastjsonschema           | 2.16.3         |
| fastparquet              | 2023.2.0       |
| fastprogress             | 1.0.3          |
| fasttext                 | 0.9.2          |
| featuretools             | 0.23.1         |
| filelock                 | 3.12.0         |
| findiff                  | 0.9.2          |
| finrl                    | 0.3.1          |
| FixedEffectModel         | 0.0.5          |
| Flask                    | 2.0.3          |
| flatbuffers              | 23.3.3         |
| fonttools                | 4.39.3         |
| fracdiff                 | 0.9.0          |
| frozendict               | 2.3.7          |
| frozenlist               | 1.3.3          |
| fs                       | 2.4.16         |
| fspec                    | 2023.4.0       |
| fst-pso                  | 1.0.1          |
| fugue                    | 0.0.3          |
| fugue-sql-antlr          | 0.1.6          |
| future                   | 0.18.3         |
| fuzzy-c-means            | 1.6.3          |
| FuzzyTM                  | 2.0.5          |
| gast                     | 0.4.0          |
| gensim                   | 4.3.0          |
| gevent                   | 22.10.2        |
| gluonts                  | 0.12.3         |
| google-api-core          | 2.11.0         |
| google-auth              | 2.17.3         |
| google-auth-oauthlib     | 0.4.6          |
| google-pasta             | 0.2.0          |
| googleapis-common-protos | 1.59.0         |
| gpflow                   | 2.7.0          |
| gplearn                  | 0.4.2          |
| gpustat                  | 1.1            |
| GPUtil                   | 1.4.0          |
| gpytorch                 | 1.9.1          |
| graphviz                 | 0.8.4          |
| greenlet                 | 2.0.2          |
| grpcio                   | 1.54.0         |
| gym                      | 0.21.0         |
| Gymnasium                | 0.26.3         |
| gymnasium-notices        | 0.0.1          |
| h2o                      | 3.40.0.1       |
| h5netcdf                 | 1.1.0          |
| h5py                     | 3.8.0          |
| hijri-converter          | 2.2.4          |
| hmmlearn                 | 0.2.8          |
| holidays                 | 0.23           |
| holoviews                | 1.15.4         |
| homebase                 | 1.0.1          |
| hopcroftkarp             | 1.2.5          |
| html5lib                 | 1.1            |
| httpstan                 | 4.9.1          |
| hurst                    | 0.0.5          |
| hvplot                   | 0.8.2          |
| hyperopt                 | 0.2.7          |
| idna                     | 3.4            |
| iisignature              | 0.24           |
| ijson                    | 3.2.0.post0    |
| imageio                  | 2.27.0         |
| imagesize                | 1.4.1          |
| imbalanced-learn         | 0.10.1         |
| importlib-metadata       | 4.13.0         |
| importlib-resources      | 5.12.0         |
| iniconfig                | 2.0.0          |
| injector                 | 0.20.1         |
| interpret                | 0.3.0          |
| interpret-core           | 0.3.2          |
| ipykernel                | 6.22.0         |
| ipython                  | 8.12.0         |
| ipython-genutils         | 0.2.0          |
| ipywidgets               | 8.0.4          |
| itsdangerous             | 2.1.2          |
| jax                      | 0.4.4          |
| jaxlib                   | 0.4.4          |
| jedi                     | 0.18.2         |
| Jinja2                   | 3.1.2          |
| joblib                   | 1.2.0          |
| jqdatasdk                | 1.8.11         |
| json5                    | 0.9.11         |
| jsonpatch                | 1.32           |
| jsonpointer              | 2.0            |
| jsonschema               | 4.17.3         |
| jupyter                  | 1.0.0          |
| jupyter-bokeh            | 3.0.5          |
| jupyter-console          | 6.6.3          |
| jupyter-dash             | 0.4.2          |
| jupyter-resource-usage   | 0.7.2          |
| jupyter-server           | 1.24.0         |
| jupyter_client           | 8.2.0          |
| jupyter_core             | 5.3.0          |
| jupyterlab               | 3.4.4          |
| jupyterlab-pygments      | 0.2.2          |
| jupyterlab-widgets       | 3.0.7          |
| jupyterlab_server        | 2.22.1         |
| keract                   | 4.5.1          |
| keras                    | 2.11.0         |
| keras-nlp                | 0.4.1          |
| keras-rl                 | 0.4.2          |
| keras-tuner              | 1.3.5          |
| kiwisolver               | 1.4.4          |
| kmapper                  | 2.0.1          |
| korean-lunar-calendar    | 0.3.1          |
| kt-legacy                | 1.0.5          |
| langcodes                | 3.3.0          |

|                          |             |
|--------------------------|-------------|
| lark                     | 1.1.5       |
| lazy_loader              | 0.2         |
| lazypredict              | 0.2.12      |
| libclang                 | 16.0.0      |
| lightgbm                 | 3.3.5       |
| lime                     | 0.2.0.1     |
| line-profiler            | 4.0.2       |
| linear-operator          | 0.3.0       |
| littleutils              | 0.2.2       |
| livelossplot             | 0.5.5       |
| llvmlite                 | 0.38.1      |
| locket                   | 1.0.0       |
| logical-unification      | 0.4.5       |
| LunarCalendar            | 0.0.9       |
| lxml                     | 4.9.2       |
| lz4                      | 4.3.2       |
| Mako                     | 1.2.4       |
| Markdown                 | 3.4.3       |
| MarkupSafe               | 2.1.2       |
| marshmallow              | 3.19.0      |
| matplotlib               | 3.7.0       |
| matplotlib-inline        | 0.1.6       |
| miniful                  | 0.0.6       |
| miniKanren               | 1.0.3       |
| minorminer               | 0.2.9       |
| mistune                  | 2.0.5       |
| mljar-supervised         | 0.11.5      |
| mlxtend                  | 0.21.0      |
| mmh3                     | 2.5.1       |
| modin                    | 0.18.1      |
| mpi4py                   | 3.1.4       |
| mplfinance               | 0.12.9b7    |
| mpmath                   | 1.2.1       |
| msgpack                  | 1.0.4       |
| mthree                   | 2.4.0       |
| multidict                | 6.0.4       |
| multipledispatch         | 0.6.0       |
| multiprocess             | 0.70.14     |
| multitasking             | 0.0.11      |
| murmurhash               | 1.0.9       |
| mxnet                    | 1.9.1       |
| nbclassic                | 0.5.5       |
| nbclient                 | 0.7.3       |
| nbconvert                | 7.3.1       |
| nbeats-keras             | 1.8.0       |
| nbeats-pytorch           | 1.8.0       |
| nbformat                 | 5.0.0       |
| nest-asyncio             | 1.5.6       |
| networkx                 | 2.8.8       |
| neural-tangents          | 0.6.2       |
| neuralprophet            | 0.5.0       |
| nfoursid                 | 1.0.1       |
| nltk                     | 3.8.1       |
| nose                     | 1.3.7       |
| notebook                 | 6.5.4       |
| notebook_shim            | 0.2.2       |
| ntlm-auth                | 1.5.0       |
| numba                    | 0.55.1      |
| numerapi                 | 2.13.2      |
| numexpr                  | 2.8.4       |
| numpy                    | 1.21.5      |
| numpydoc                 | 1.5.0       |
| nvdiia-cublas-cu11       | 11.10.3.66  |
| nvdiia-cuda-nvrtc-cu11   | 11.7.99     |
| nvdiia-cuda-runtime-cu11 | 11.7.99     |
| nvdiia-cudnn-cu11        | 8.5.0.96    |
| nvdiia-ml-py             | 11.525.112  |
| oauthlib                 | 3.2.2       |
| openai                   | 0.26.5      |
| opencensus               | 0.11.2      |
| opencensus-context       | 0.1.3       |
| opencv-python            | 4.7.0.72    |
| openpyxl                 | 3.1.1       |
| opt-einsum               | 3.3.0       |
| optuna                   | 3.1.0       |
| orjson                   | 3.8.10      |
| ortools                  | 9.4.1874    |
| osqp                     | 0.6.2.post9 |
| outdated                 | 0.2.2       |
| packaging                | 23.1        |
| pandas                   | 1.5.3       |
| pandas-datareader        | 0.10.0      |
| pandas-flavor            | 0.5.0       |
| pandas-market-calendars  | 4.1.4       |
| pandas-ta                | 0.3.14b0    |
| pandocfilters            | 1.5.0       |
| panel                    | 0.14.3      |
| param                    | 1.13.0      |
| parso                    | 0.8.3       |
| partd                    | 1.4.0       |
| pastel                   | 0.2.1       |
| pathos                   | 0.3.0       |
| pathy                    | 0.10.1      |
| patsy                    | 0.5.3       |
| pbr                      | 5.11.1      |
| penaltymodel             | 1.0.2       |
| PennyLane                | 0.29.0      |
| PennyLane-Lightning      | 0.29.0      |
| PennyLane-qiskit         | 0.29.0      |
| persim                   | 0.3.1       |
| pexpect                  | 4.8.0       |
| pickleshare              | 0.7.5       |
| Pillow                   | 9.5.0       |
| pingouin                 | 0.5.3       |
| pip                      | 22.0.4      |
| pkgutil_resolve_name     | 1.3.10      |
| platformdirs             | 3.2.0       |
| plotly                   | 5.13.1      |
| plotly-resampler         | 0.8.3.2     |
| plucky                   | 0.4.3       |
| pluggy                   | 1.0.0       |
| ply                      | 3.11        |
| pmdarima                 | 2.0.2       |
| polars                   | 0.16.9      |
| pomegranate              | 0.14.8      |
| pox                      | 0.3.2       |
| ppft                     | 1.7.6.6     |
| pprofile                 | 2.1.0       |
| ppscore                  | 1.2.0       |
| preshed                  | 3.0.8       |
| prometheus-client        | 0.16.0      |
| prompt-toolkit           | 3.0.38      |
| property-cached          | 1.6.4       |
| prophet                  | 1.1.2       |
| protobuf                 | 3.19.6      |
| psutil                   | 5.9.5       |
| psycpg2-binary           | 2.9.6       |
| ptvsd                    | 4.3.2       |
| ptyprocess               | 0.7.0       |
| PuLP                     | 2.7.0       |
| pure-eval                | 0.2.2       |
| py-cpuinfo               | 9.0.0       |
| py-heat                  | 0.0.6       |
| py-heat-magic            | 0.0.2       |

|                               |                |
|-------------------------------|----------------|
| py-lets-be-rational           | 1.0.1          |
| py-spy                        | 0.3.14         |
| py-vollib                     | 1.0.1          |
| py4j                          | 0.10.9.7       |
| pyaml                         | 21.10.1        |
| pyarrow                       | 11.0.0         |
| pyasn1                        | 0.4.8          |
| pyasn1-modules                | 0.2.8          |
| pybind11                      | 2.10.4         |
| pycares                       | 4.3.0          |
| pycosat                       | 0.6.4          |
| pycparser                     | 2.21           |
| pyct                          | 0.5.0          |
| pydantic                      | 1.10.7         |
| pyDeprecate                   | 0.3.2          |
| pydevd-pycharm                | 201.8538.36    |
| pydmd                         | 0.4.0.post2301 |
| pyerfa                        | 2.0.0.3        |
| pyfolio                       | 0.9.2          |
| pyfolio-reloaded              | 0.9.5          |
| pyFUME                        | 0.2.25         |
| Pygments                      | 2.15.1         |
| pykalman                      | 0.9.5          |
| pylev                         | 1.4.0          |
| pyluach                       | 2.2.0          |
| pymannkendall                 | 1.4.3          |
| pymc                          | 5.0.2          |
| pymdptoolbox                  | 4.0b3          |
| PyMeeus                       | 0.5.12         |
| PyMySQL                       | 1.0.3          |
| pynndescent                   | 0.5.9          |
| pyod                          | 1.0.9          |
| Pyomo                         | 6.5.0          |
| pyOpenSSL                     | 22.0.0         |
| pyparsing                     | 3.0.9          |
| pyportfolioopt                | 1.5.4          |
| pyqubo                        | 1.3.1          |
| pyrb                          | 1.0.1          |
| pyro-api                      | 0.1.2          |
| pyro-ppl                      | 1.8.4          |
| pyrsistent                    | 0.19.3         |
| pysimdjson                    | 5.0.2          |
| PySocks                       | 1.7.1          |
| pystan                        | 3.6.0          |
| pytensor                      | 2.9.1          |
| pytest                        | 7.3.1          |
| python-dateutil               | 2.8.2          |
| python-statemachine           | 1.0.3          |
| pytorch-ignite                | 0.4.11         |
| pytorch-lightning             | 1.7.4          |
| pytz                          | 2023.3         |
| pyvinecopulib                 | 0.6.2          |
| pyviz-comms                   | 2.2.1          |
| PyWavelets                    | 1.4.1          |
| PyYAML                        | 6.0            |
| pyzmq                         | 25.0.2         |
| qdldl                         | 0.1.7          |
| qiskit                        | 0.41.1         |
| qiskit-aer                    | 0.11.2         |
| qiskit-ibmq-provider          | 0.20.1         |
| qiskit-terra                  | 0.23.2         |
| qpd                           | 0.4.1          |
| qtconsole                     | 5.4.2          |
| QtPy                          | 2.3.1          |
| quadprog                      | 0.1.11         |
| quantecon                     | 0.6.0          |
| QuantLib                      | 1.29           |
| QuantStats                    | 0.0.59         |
| rauth                         | 0.7.3          |
| ray                           | 2.3.0          |
| rectangle-packer              | 2.0.1          |
| regex                         | 2023.3.23      |
| requests                      | 2.28.1         |
| requests-ntlm                 | 1.1.0          |
| requests-oauthlib             | 1.3.1          |
| retrying                      | 1.3.4          |
| retworkx                      | 0.12.1         |
| rich                          | 12.4.4         |
| ripser                        | 0.6.4          |
| Riskfolio-Lib                 | 4.0.3          |
| riskparityportfolio           | 0.4            |
| river                         | 0.14.0         |
| rsa                           | 4.9            |
| ruamel.yaml                   | 0.17.21        |
| ruamel.yaml.clib              | 0.2.6          |
| ruptures                      | 1.1.7          |
| rustworkx                     | 0.12.1         |
| SALib                         | 1.4.7          |
| scikeras                      | 0.10.0         |
| scikit-image                  | 0.19.3         |
| scikit-learn                  | 1.2.1          |
| scikit-learn-extra            | 0.2.0          |
| scikit-multiflow              | 0.5.3          |
| scikit-optimize               | 0.9.0          |
| scikit-plot                   | 0.3.7          |
| scikit-tda                    | 1.0.0          |
| scipy                         | 1.8.0          |
| scs                           | 3.2.3          |
| sdeint                        | 0.3.0          |
| seaborn                       | 0.12.2         |
| semantic-version              | 2.10.0         |
| Send2Trash                    | 1.8.0          |
| setuptools                    | 56.0.0         |
| setuptools-scm                | 7.1.0          |
| shap                          | 0.41.0         |
| simplful                      | 2.10.0         |
| simplejson                    | 3.19.1         |
| simpy                         | 4.0.1          |
| six                           | 1.16.0         |
| sklearn-json                  | 0.1.0          |
| skope-rules                   | 1.0.1          |
| sktime                        | 0.16.1         |
| slice                         | 0.0.7          |
| smart-open                    | 6.3.0          |
| sniffio                       | 1.3.0          |
| snowballstemmer               | 2.2.0          |
| sortedcontainers              | 2.4.0          |
| soupsieve                     | 2.4.1          |
| spacy                         | 3.5.0          |
| spacy-legacy                  | 3.0.12         |
| spacy-loggers                 | 1.0.4          |
| Sphinx                        | 6.1.3          |
| sphinxcontrib-applehelp       | 1.0.4          |
| sphinxcontrib-devhelp         | 1.0.2          |
| sphinxcontrib-htmlhelp        | 2.0.1          |
| sphinxcontrib-jsmath          | 1.0.1          |
| sphinxcontrib-qthelp          | 1.0.3          |
| sphinxcontrib-serializinghtml | 1.1.5          |
| SQLAlchemy                    | 1.4.47         |
| sqlglot                       | 11.5.5         |
| srsly                         | 2.4.6          |
| ssm                           | 0.0.1          |
| stable-baselines3             | 1.7.0          |
| stack-data                    | 0.6.2          |

|                              |           |
|------------------------------|-----------|
| statsforecast                | 1.5.0     |
| statsmodels                  | 0.13.5    |
| stellargraph                 | 1.2.1     |
| stevedore                    | 5.0.0     |
| stochastic                   | 0.7.0     |
| stockstats                   | 0.5.2     |
| stumpy                       | 1.11.1    |
| symengine                    | 0.10.0    |
| sympy                        | 1.11.1    |
| ta                           | 0.10.2    |
| TA-Lib                       | 0.4.18    |
| tables                       | 3.8.0     |
| tabulate                     | 0.8.10    |
| tadasets                     | 0.0.4     |
| tbats                        | 1.1.3     |
| tblib                        | 1.7.0     |
| tenacity                     | 8.2.2     |
| tensorboard                  | 2.11.2    |
| tensorboard-data-server      | 0.6.1     |
| tensorboard-plugin-wit       | 1.8.1     |
| tensorboardX                 | 2.6       |
| tensorflow                   | 2.11.0    |
| tensorflow-addons            | 0.19.0    |
| tensorflow-decision-forests  | 1.2.0     |
| tensorflow-estimator         | 2.11.0    |
| tensorflow-hub               | 0.13.0    |
| tensorflow-io-gcs-filesystem | 0.32.0    |
| tensorflow-probability       | 0.19.0    |
| tensorflow-text              | 2.11.0    |
| tensorly                     | 0.8.0     |
| tensortrade                  | 1.0.3     |
| termcolor                    | 2.2.0     |
| terminado                    | 0.17.1    |
| tf2jax                       | 0.3.3     |
| thinc                        | 8.1.9     |
| threadpoolctl                | 3.1.0     |
| thriftpy2                    | 0.4.16    |
| thundergbm                   | 0.3.17    |
| tick                         | 0.7.0.1   |
| tiFFfile                     | 2023.4.12 |
| tigramite                    | 5.1.0.3   |
| tinycss2                     | 1.2.1     |
| toml                         | 0.10.2    |
| tomli                        | 2.0.1     |
| toolz                        | 0.12.0    |
| torch                        | 1.13.1    |
| torch-cluster                | 1.6.0     |
| torch-geometric              | 2.2.0     |
| torch-scatter                | 2.1.0     |
| torch-sparse                 | 0.6.16    |
| torch-spline-conv            | 1.2.1     |
| torchmetrics                 | 0.9.3     |
| torchvision                  | 0.14.1    |
| tornado                      | 6.3       |
| tqdm                         | 4.64.1    |
| trace-updater                | 0.0.9.1   |
| trading-calendars            | 2.1.1     |
| traitlets                    | 5.9.0     |
| treeinterpreter              | 0.2.3     |
| triad                        | 0.8.6     |
| tsfresh                      | 0.20.0    |
| tslearn                      | 0.5.3.2   |
| tweepy                       | 4.10.0    |
| typeguard                    | 3.0.2     |
| typer                        | 0.3.2     |
| typing_extensions            | 4.5.0     |
| umap-learn                   | 0.5.3     |
| urllib3                      | 1.26.14   |
| virtualenv                   | 20.21.0   |
| wasabi                       | 1.1.1     |
| wcwidth                      | 0.2.6     |
| webargs                      | 8.2.0     |
| webencodings                 | 0.5.1     |
| websocket-client             | 1.5.1     |
| websockets                   | 10.4      |
| Werkzeug                     | 2.2.3     |
| wheel                        | 0.37.1    |
| widgetsnbextension           | 4.0.7     |
| wordcloud                    | 1.8.2.2   |
| wrapt                        | 1.14.1    |
| wrds                         | 3.1.6     |
| wurlitzer                    | 3.0.3     |
| xarray                       | 2023.1.0  |
| xarray-einstats              | 0.5.1     |
| xgboost                      | 1.7.4     |
| xlrd                         | 2.0.1     |
| XlsxWriter                   | 3.1.0     |
| yaml                         | 1.8.2     |
| yellowbrick                  | 1.5       |
| yfinance                     | 0.2.18    |
| zict                         | 3.0.0     |
| zipp                         | 3.15.0    |
| zope.event                   | 4.6       |
| zope.interface               | 6.0       |
| zstandard                    | 0.18.0    |

Request New Libraries

To request a new library, [contact us](#) . We will add the library to the queue for review and deployment. Since the libraries run on our servers, we need to ensure they are secure and won't cause harm. The process of adding new libraries takes 2-4 weeks to complete. View the list of libraries currently under review on the [Issues list of the Lean GitHub repository](#) .

3.11 Working With VS Code

Introduction

The VS Code Integrated Development Environment (IDE) lets you work on research notebooks and develop algorithms for backtesting and live trading. When you [open a project](#), the IDE automatically displays. You can access your trading algorithms from anywhere in the world with just an internet connection and a browser.

Supported Languages

The Lean engine supports C# and Python. Python is less verbose, has more third-party libraries, and is more popular among the QuantConnect community than C#. C# is faster than Python and it's easier to contribute to Lean if you have features written in C# modules. Python is also the native language for the research notebooks, so it's easier to use in the Research Environment.

The programming language that you have set on your account determines how autocomplete and IntelliSense are verified and determines the types of files that are included in your new projects. If you have Python set as your programming language, new projects will have .py files. If you have C# set as your programming language, new projects will have .cs files.

Change Languages

To change the default programming language for your new projects, adjust the User: Preferred Language [extension setting](#).

Terminal

The terminal panel at the bottom of the IDE shows API messages, errors, and the logs from your algorithms.

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

QuantConnect

[4:21:49] Building project 'Swimming Fluorescent Orange Hippopotamus' in Local, with Signature '5f0ac5'  
[4:21:51] Built project 'Swimming Fluorescent Orange Hippopotamus' in Local for Lean Engine 2.5.0.0.15471, with Id 'bf8055-5f0ac5'  
[4:21:53] Received backtest 'Casual Red Sardine' request  
[4:22:17] Initializing algorithm...  
[4:22:17] Launching analysis for 1202151492 with LEAN Engine v2.5.0.0  
[4:22:17] Hello World!  
[4:22:17] Algorithm '1202151492' completed  
[4:22:17] Algorithm Id:(1202151492) completed in 2.05 seconds at 16k data points per second. Processing total of 32,894 data points.  
[4:22:17] Backtest deployed in 23.374 seconds

The Problems tab of the panel highlights the coding errors in your algorithms.

PROBLEMS 2 OUTPUT DEBUG CONSOLE TERMINAL

Filter (e.g. text, \*\*/\*.ts, !\*\*/\*)

main.py 2  
Expected expression Pylance [Ln 12, Col 12]  
Expected ":" Pylance [Ln 12, Col 17]

PROBLEMS 5 OUTPUT DEBUG CONSOLE TERMINAL

Filter (e.g. text, \*\*/\*.ts, !\*\*/\*)

Main.cs 5  
Syntax error, '(' expected [Upgraded Tan Frog] csharp(CS1003) [Ln 59, Col 16]  
The name 'no' does not exist in the current context [Upgraded Tan Frog] csharp(CS0103) [Ln 59, Col 16]  
) expected [Upgraded Tan Frog] csharp(CS1026) [Ln 59, Col 18]  
Invalid expression term ']' [Upgraded Tan Frog] csharp(CS1525) [Ln 59, Col 18]  
; expected [Upgraded Tan Frog] csharp(CS1002) [Ln 59, Col 18]

Navigate the File Outline

The Outline section in the Explorer panel is an easy way to navigate your files. The section shows the name of classes, members, and functions defined throughout the file. Click one of the names to jump your cursor to the respective definition in the file. To view the Outline , [open a project](#) and then, in the left navigation menu, click the Explorer icon.


OPEN EDITORS  
CRAWLING ASPARAGUS BULL  
OUTLINE  
CrawlingAsparagusBull  
Initialize  
symbol  
OnData  
data

main.py > ...  
1 from AlgorithmImports import \*  
2  
3 class CrawlingAsparagusBull(QCAlgorithm):  
4 def Initialize(self):  
5 self.SetStartDate(2013, 10, 7)  
6 self.SetCash(1000000)  
7 self.symbol = self.AddEquity("SPY", Resolution.Minute).Symbol  
8  
9 def OnData(self, data):  
10 if not self.Portfolio.Invested:  
11 self.SetHoldings("SPY", 1)  
12 self.Debug("Purchased Stock")  
13

Split the Editor

The editor can split horizontally and vertically to display multiple files at once. Follow these steps to split the editor:

1. [Open a project](#).
2. In the left navigation bar, click the Explorer icon.
3. In the QC (Workspace) section, drag and drop the files you want to open.

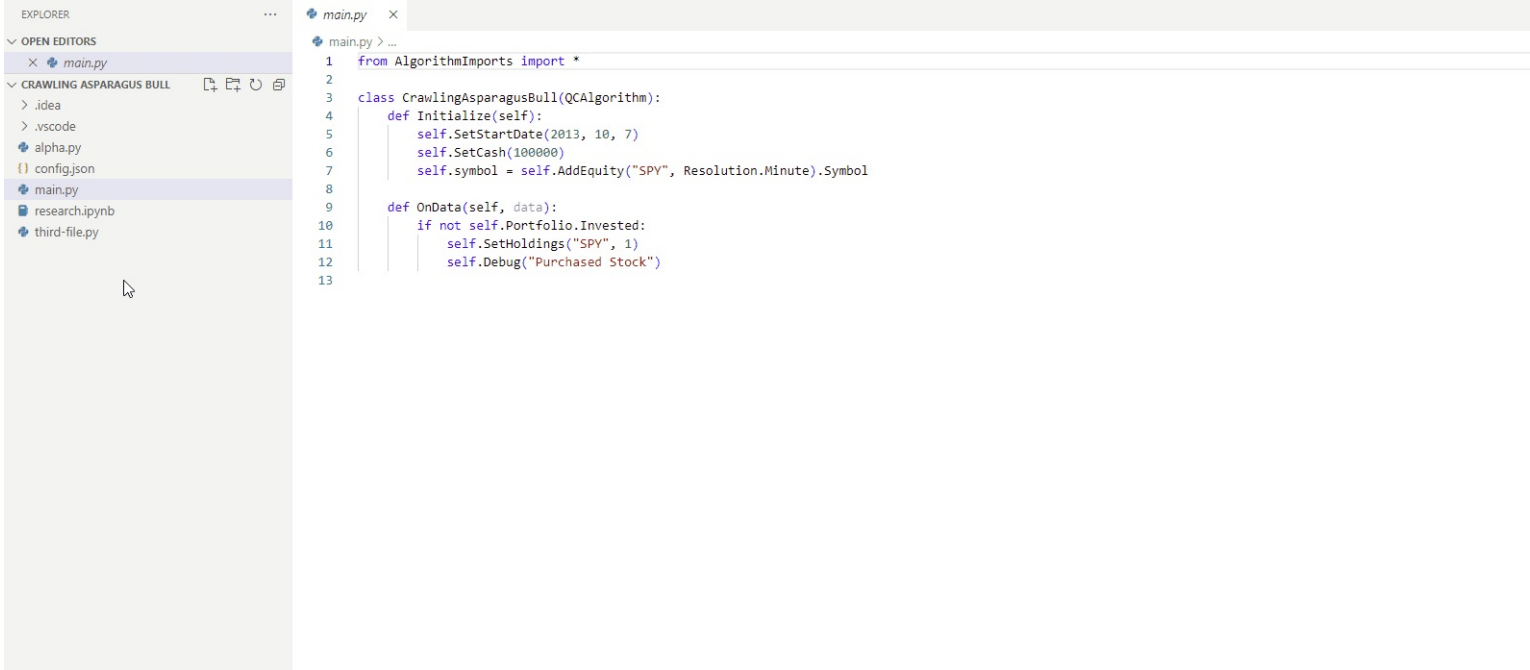

### Show and Hide Code Blocks

The editor can hide and show code blocks to make navigating files easier. To hide and show code blocks, [open a project](#) and then click the arrow icon next to a line number.

```
1 class MyAlgorithm(QCAlgorithm):
2 def Initialize(self):
3 self.SetStartDate(2021, 1, 1)
4 self.SetCash(100000)
5 self.AddEquity("SPY")
6
```

### Keyboard Shortcuts

Keyboard shortcuts are combinations of keys that you can issue to manipulate the IDE. They can speed up your workflow because they remove the need for you to reach for your mouse.

Follow these steps to view the keyboard shortcuts of your account:

1. [Open a project](#) .
2. Press F1 .
3. Enter "Preferences: Open Keyboard Shortcuts".
4. Click Preferences: Open Keyboard Shortcuts .

To set a key binding for a command, click the pencil icon in the left column of the keyboard shortcuts table, enter the key combination, and then press Enter .

4 Projects

4.1 Getting Started

Introduction


Projects contain files to run backtests, launch research notebooks, perform parameter optimizations, and deploy live trading strategies. You need to create projects in order to create strategies and share your work with other members. Projects enable you to generate institutional-grade reports on the performance of your backtests. You can create your projects from scratch or you can utilize pre-built libraries and third-party packages to expedite your development process.


View All Projects

To view all your projects, open the [organization workspace](#) directory on your local machine.


Create Projects

Follow these steps to create a project on Local Platform:

- 1. [Log in to Local Platform](#).
- 2. In the left navigation menu, click the  QuantConnect icon.
- 3. If a project is already open, [close it](#).
- 4. In the Open Project panel, click Create Project .




- 5. Enter the project name and then press Enter .




The new project directory is added to your [organization workspace](#) directory and the project opens.


Open Projects

Follow these steps to open a project on Local Platform:

- 1. [Log in to Local Platform](#).
- 2. In the left navigation menu, click the  QuantConnect icon.
- 3. If a project is already open, [close it](#).
- 4. In the Project panel, click Open Project .





- 5. In the Open QuantConnect Project window, click a project in your organization workspace and then click Select .

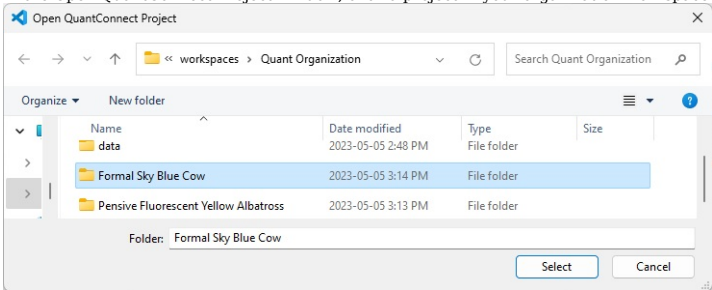

Close Projects

Follow these steps to close a project:


- 1. In the left navigation menu, click the  QuantConnect icon.
- 2. In the Project panel, click Close .



Clone Projects

Clone a project to create a new copy of the project and save it within the same organization. When you clone a project, the project files are duplicated but the backtest results are not retained. Cloning enables you to test small changes in your projects before merging the changes back into the original project.

Follow these steps to clone a project:


- 1. [Open the project](#).
- 2. In the left navigation menu, click the  QuantConnect icon.
- 3. In the Project panel, click Clone .



The cloned version of the project opens in a new VS Code window.

Rename Projects

Follow these steps to rename a project:

- 1. [Open the project](#).
- 2. In the left navigation menu, click the  QuantConnect icon.
- 3. In the Project panel, hover over the project name and then click the pencil icon that appears.



- 4. In the Name field, enter the new project name and then click Save Changes .

The project name must only contain - , \_ , letters, numbers, and spaces. The project name can't start with a space or be any of the following reserved names: CON, PRN, AUX, NUL, COM1, COM2, COM3, COM4, COM5, COM6, COM7, COM8, COM9, LPT1, LPT2, LPT3, LPT4, LPT5, LPT6, LPT7, LPT8, or LPT9.

Create Project Directories

Set the name of a project to directoryName / projectName to create a project directory.

Set Descriptions

You can give a project a description to provide a high-level overview of the project and its functionality. Descriptions make it easier to return to old projects and understand what is going on at a high level without having to look at the code. The project description is also displayed at the top of backtest reports, which you can create after your backtest completes.

Follow these steps to set the project description:

- 1. [Open the project](#).
- 2. In the Project panel, hover over the project name and then click the pencil icon that appears.




- 3. In the Description field, enter the new project description and then click Save Changes .

Edit Parameters

Algorithm parameters are hard-coded values for variables in your project that are set outside of the code files. Add parameters to your projects to remove hard-coded values from your code files and to perform parameter optimizations. You can add parameters, set default parameter values, and remove parameters from your projects.

Add Parameters

Follow these steps to add an algorithm parameter to a project:

- 1. [Open the project](#).
- 2. In the left navigation menu, click the  QuantConnect icon.
- 3. In the Project panel, click Add New Parameter .
- 4. Enter the parameter name.

The parameter name must be unique in the project.


- 5. Enter the default value.
- 6. Click Create Parameter .

To get the parameter values into your algorithm, see [Get Parameters](#).

Set Default Parameter Values

Follow these steps to set the default value of an algorithm parameter in a project:

- 1. [Open the project](#).
- 2. In the left navigation menu, click the  QuantConnect icon.
- 3. In the Project panel, hover over the algorithm parameter and then click the pencil icon that appears.

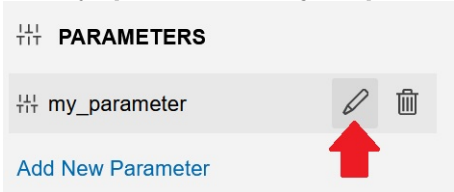


- 4. Enter a default value for the parameter and then click Save .

The Project panel displays the default parameter value next to the parameter name.

Delete Parameters

Follow these steps to delete an algorithm parameter in a project:


- 1. [Open the project](#).
- 2. In the left navigation menu, click the  QuantConnect icon.
- 3. In the Project panel, hover over the algorithm parameter and then click the trash can icon that appears.

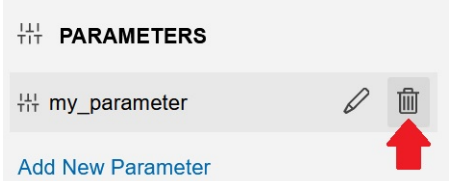


- 4. Remove the GetParameter calls that were associated with the parameter from your code files.

Delete Projects

Follow these steps to delete a project:

- 1. [Open the project](#).
- 2. In the left navigation menu, click the  QuantConnect icon.
- 3. In the Project panel, click Delete .



 RETROSPECTIVE MAGENTA CORMOR...

 Close

 Clone

 Delete

4.2 Files

Introduction

The files in your projects enable you to implement trading algorithms, perform research, and store important information. Python projects start with a `main.py` and a `research.ipynb` file. C# projects start with a `Main.cs` and a `Research.ipynb` file. Use the `main.py` or `Main.cs` file to implement trading algorithms and use the `ipynb` file to access the Research Environment.

Supported File Types

Local Platform supports `.py` , `.cs` , and `.ipynb` files in your projects.

Code Files

The `.py` / `.cs` files are code files. These are the files where you implement your trading algorithm. When you backtest the project or deploy the project to live trading, the LEAN engine executes the algorithm you define in these code files.

Notebook Files

The `.ipynb` files are notebook files. These are the files you open when you want to access the [Research Environment](#) to perform quantitative research. When you save notebook files, it saves the input cells but not the output cells.


Configuration Files

Projects also contain configuration files, which are `.json` files, but they aren't displayed in the Explorer panel. These files contain information like the project description, parameters, and shared libraries. For more information about project configuration files, see [Configuration](#).


Result Files

When you run a backtest, optimize some parameters, or deploy a strategy to live trading on your local machine, the results are saved as physical files in the project directory. Local Platform doesn't push these result files to QuantConnect Cloud.

View Files



To view the files in a project, [open the project](#) and then, in the left navigation bar, click the  Explorer icon.


The QC (Workspace) section of the Explorer panel shows the files in the project.

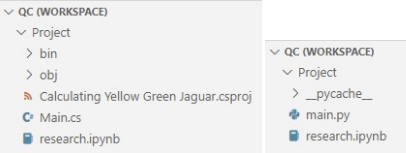

Add Files

Follow these steps to add a file to a project:



1. [Open the project](#).
2. In the left navigation menu, click the  Explorer icon.
3. In the Explorer panel, expand the QC (Workspace) section.
4. Click the  New File icon.
5. Enter a file name and extension.
6. Press Enter .




Add Directories

You can organize the code and notebook files in your project into directories to make navigating them easier. For example, if you have multiple [Alpha models](#) in your strategy, you can create an `alphas` directory in your project to hold a file for each Alpha model.


Follow these steps to add a directory to a project:

1. [Open the project](#).
2. In the left navigation menu, click the  Explorer icon.
3. In the Explorer panel, expand the QC (Workspace) section.
4. Click the  New Directory icon.
5. Enter a directory name and then press Enter .



Open Files

Follow these steps to open a file in a project:

1. [Open the project](#).
2. In the left navigation menu, click the  Explorer icon.
3. In the Explorer panel, click the file you want to open.

Close Files

To close a file, at the top of VS Code, click the x button on the file tab you want to close.

To close all of the files in a project, at the top of VS Code, right-click one of the file tabs and then click Close All .

Rename Files and Directories

Follow these steps to rename a file or directory in a project:


1. [Open the project](#).
2. In the left navigation menu, click the  Explorer icon.
3. In the Explorer panel, right-click the file or directory you want to rename and then click Rename .

4. Enter the new name and then press Enter .



## Delete Files and Directories

Follow these steps to delete a file or directory in a project:

1. [Open the project](#) .
2. In the left navigation menu, click the  Explorer icon.
3. In the Explorer panel, right-click the file or directory you want to delete and then click Delete Permanently .
4. Click Delete .

4.3 Shared Libraries

Introduction

Project libraries are QuantConnect projects you can merge into your project to avoid duplicating code files. If you have tools that you use across several projects, create a library.

Create Libraries

Follow these steps to create a library:

- 1. [Open a project](#).
- 2. In the left navigation menu, click the  QuantConnect icon.
- 3. In the Project panel, click Add Library .
- 4. Click Create New .
- 5. In the Input Library Name field, enter a name for the library.
- 6. Click Create Library .


The template library files are added to a new project in the Library directory in your [organization workspace](#).

- 7. In the left navigation menu, click the  Explorer icon.
- 8. In Explorer panel, open the Library.py Library.cs file and implement your library.

Add Libraries

Follow these steps to add a library to your project:

- 1. [Open the project](#).
- 2. In the left navigation menu, click the  QuantConnect icon.
- 3. In the Project panel, click Add Library .
- 4. Click the Choose a library... field and then click a library from the drop-down menu.
- 5. Click Add Library (e.g. Calculators ).

The library files are added to your project. To view the files, in the right navigation menu, click the  Explorer icon.

- 6. Import the library into your project to use the library.

```
using Calculators;
namespace QuantConnect.Algorithm.CSharp
{
 public class AddLibraryAlgorithm : QCAgorithm
 {
 private TaxesCalculator _taxesCalculator = new();
 }
}


from Calculators.TaxesCalculator import TaxesCalculator
class AddLibraryAlgorithm(QCAgorithm):
 taxes_calculator = TaxesCalculator()
```


Rename Libraries

To rename a library, [open the library project file](#) and then [rename the project](#).

Remove Libraries

Follow these steps to remove a library from your project:

- 1. [Open the project](#) that contains the library you want to remove.
- 2. In the left navigation menu, click the  QuantConnect icon.
- 3. In the Project panel, hover over the library name and then click the trash can icon that appears.

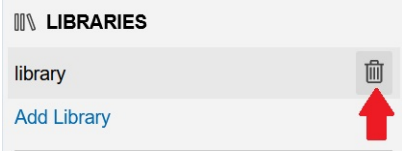

The library files are removed from your project.

Delete Libraries

To delete a library, [delete the library project file](#).


5 Backtesting

5.1 Getting Started

Introduction


Backtesting is the process of simulating a trading algorithm on historical data. By running a backtest, you can measure how the algorithm would have performed in the past. Although past performance doesn't guarantee future results, an algorithm that has a proven track record can provide investors with more confidence when deploying to live trading than an algorithm that hasn't performed favorably in the past. If you run local backtests, you can leverage your local data and hardware.

Run Backtests

To run a backtest, [open a project](#) and then click the  Backtest icon. If the project successfully builds, "Received backtest backtestName request" displays. If the backtest successfully launches, the IDE displays the [backtest results page](#) in a new tab. If the backtest fails to launch due to coding errors, the new tab displays the error. As the backtest executes, you can close Local Platform and Docker Desktop without interfering with the backtest. Just don't quit Docker Desktop.

View All Backtests

Follow these steps to view all of the backtests of a project:

- 1. [Open the project](#) that contains the backtests you want to view.
- 2. In the top-right corner of the IDE, click the  Backtest Results icon.

A table containing all of the backtest results for the project is displayed. If there is a play icon to the left of the name, it's a [backtest result](#) . If there is a fast-forward icon next to the name, it's an [optimization result](#) .

Results

ShowAll

| Name                                  |             | Platform | PSR ↓  | Sharp... | Trades | Requested           |
|---------------------------------------|-------------|----------|--------|----------|--------|---------------------|
| ▶ Calculated Brown Bear               | ✓ Completed | Cloud    | 11.568 | 0.292    | 3      | 2023-04-24 21:41:47 |
| ▶ Logical Brown Bee                   | ✓ Completed | Local    | 0.078  | 0.2212   | 0      | 2023-04-24 20:37:15 |
| ▶ Creative Orange Seahorse            | ✓ Completed | Local    | 0.078  | 0.2212   | 0      | 2023-04-24 20:39:42 |
| ▶ Logical Orange Monkey               | ✓ Completed | Local    | 0.078  | 0.2212   | 0      | 2023-04-24 20:39:50 |
| ▶ Alert Fluorescent Orange Chinchilla | ✓ Completed | Local    | 0.078  | 0.2212   | 0      | 2023-04-24 21:20:58 |

1 to 5 of 5<< < Page 1 of 1 > >>


☐ Hide Runtime Errors

- 3. (Optional) In the top-right corner, select the Show field and then select one of the options from the drop-down menu to filter the table by backtest or optimization results.
- 4. (Optional) In the bottom-right corner, click the Hide Error check box to remove backtest and optimization results from the table that had a runtime error.
- 5. (Optional) Use the pagination tools at the bottom to change the page.
- 6. (Optional) Click a column name to sort the table by that column.
- 7. Click a row in the table to open the results page of that backtest or optimization.

Rename Backtests

We give an arbitrary name (for example, "Smooth Apricot Chicken") to your backtest result files, but you can follow these steps to rename them:

- 1. Open the [backtest history](#) of the project.
- 2. Hover over the backtest you want to rename and then click the pencil icon that appears.

|   |                             |                                                                                     |                                                                                     |                                                                                     |        |       |   |                     |
|---|-----------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|-------|---|---------------------|
| ▶ | Swimming Light Brown Salmon |  |  |  | 21.489 | 0.581 | 1 | 2022-03-08 22:00:20 |
|---|-----------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|-------|---|---------------------|

- 3. Enter the new backtest name and then click OK .

## 5.2 Deployment

### Introduction

Deploy a backtest to simulate the historical performance of your trading algorithm. Since the same Lean engine is used to run backtests and live trading algorithms, it's easy to transition from backtesting to live trading once you are satisfied with the historical performance of your algorithm. If you find any issues with Lean or our historical data, we'll resolve the issue.



### Nodes

If you deploy a local backtest, the algorithm runs on your hardware.



### Concurrent Backtesting

Concurrent backtesting is the process of running multiple backtests at the same time. Concurrent backtesting speeds up your strategy development because you don't have to wait while a single backtest finishes executing. You can run as many concurrent backtests as your CPU and RAM will handle.

### Build Projects

If the compiler finds errors during the build process, the IDE highlights the lines of code that caused the errors in red. Your projects will automatically build after each keystroke. To manually build a project, [open the project](#) and then click the  /  Build icon.

### Run Backtests

To run a backtest, [open a project](#) and then click the  /  Backtest icon. If the project successfully builds, "Received backtest backtestName request" displays. If the backtest successfully launches, the IDE displays the [backtest results page](#) in a new tab. If the backtest fails to launch due to coding errors, the new tab displays the error. As the backtest executes, you can close Local Platform and Docker Desktop without interfering with the backtest. Just don't quit Docker Desktop.

### Stop Backtests

To stop a running backtest, [stop the backtesting node](#) .

### 5.3 Debugging

## Introduction

The debugger is a built-in tool to help you debug coding errors while backtesting. The debugger enables you to slow down the code execution, step through the program line-by-line, and inspect the variables to understand the internal state of the program.

## Requirements

You need to install v2023.4.0 of [Microsoft's Python VS Code extension](#) to run the debugger.

You need to install [.NET](#) and [Microsoft's C# VS Code extension](#) to run the debugger.

## Breakpoints

Breakpoints are lines in your algorithm where execution pauses. You need at least one breakpoint in your code files to start the debugger. [Open a project](#) to start adjusting its breakpoints.

## Add Breakpoints

Click to the left of a line number to add a breakpoint on that line.

```

5 class MyAlgorithm(QCAlgorithm):
6 def Initialize(self):
7 self.SetStartDate(2022, 1, 1)
8 self.SetCash(100000)
9 self.AddEquity("SPV", Resolution.Minute)
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
```

### Edit Breakpoint Conditions

Follow these steps to customize what happens when a breakpoint is hit:

1. Right-click the breakpoint and then click **Edit Breakpoint...**
2. Click one of the options in the following table:



| Option     | Additional Steps                           | Description                                                                               |
|------------|--------------------------------------------|-------------------------------------------------------------------------------------------|
| Expression | Enter an expression and then press Enter . | The breakpoint only pauses the algorithm when the expression is true.                     |
| Hit Count  | Enter an integer and then press Enter .    | The breakpoint doesn't pause the algorithm until its hit the number of times you specify. |

## Enable and Disable Breakpoints

To enable a breakpoint, right-click it and then click **Enable Breakpoint**.

To disable a breakpoint, right-click it and then click **Disable Breakpoint**.



Follow these steps to enable and disable all breakpoints:

1. In the left navigation menu, click the  Run and Debug icon.
2. In the Run and Debug panel, hover over the Breakpoints section and then click the  Toggle Active Breakpoints icon.

## Remove Breakpoints


To remove a breakpoint, right-click it and then click Remove Breakpoint .

Follow these steps to remove all breakpoints:

1. In the left navigation menu, click the  Run and Debug icon.
2. In the Run and Debug panel, hover over the Breakpoints section and then click the  Remove All Breakpoints icon.

## Launch Debugger






Follow these steps to launch the debugger:

1. [Open the project](#) you want to debug.
2. In your project's code files, add at least one breakpoint.
3. Click the  Debug icon.

If the Run and Debug panel is not open, it opens when the first breakpoint is hit.

## Control Debugger

After you launch the debugger, you can use the following buttons to control it:

| Button                                                                            | Name       | Default Keyboard Shortcut | Description                                                       |
|-----------------------------------------------------------------------------------|------------|---------------------------|-------------------------------------------------------------------|
|  | Continue   |                           | Continue execution until the next breakpoint                      |
|  | Step Over  | Alt+F10                   | Step to the next line of code in the current or parent scope      |
|  | Step Into  | Alt+F11                   | Step into the definition of the function call on the current line |
|  | Restart    | Shift+F11                 | Restart the debugger                                              |
|  | Disconnect | Shift+F5                  | Exit the debugger                                                 |


## Inspect Variables

After you launch the debugger, you can inspect the state of your algorithm as it executes each line of code. You can inspect local variables or custom expressions. The values of variables in your algorithm are formatted in the IDE to improve readability. For example, if you inspect a variable that references a `DataFrame`, the debugger represents the variable value as the following:

| symbol     | time        | close      | high ...   | open       | volume                    |
|------------|-------------|------------|------------|------------|---------------------------|
| SPY        | R735QD8XC9Q | 2021-05-11 | 415.246836 | 420.005970 | ... 419.827130 74068713.0 |
| 2021-05-12 | 414.500871  | 412.594042 | ...        | 414.507896 | 108355811.0               |
| 2021-05-13 | 402.797379  | 409.921376 | ...        | 404.138097 | 121823945.0               |
| 2021-05-14 | 407.636197  | 409.692755 | ...        | 404.397204 | 100076654.0               |
| 2021-05-15 | 413.895600  | 414.799736 | ...        | 410.567187 | 72148360.0                |
| 2021-05-18 | 412.842431  | 413.696889 | ...        | 413.712368 | 604311782.0               |
| 2021-05-19 | 409.285500  | 413.378951 | ...        | 413.110691 | 54287859.0                |
| 2021-05-20 | 408.212459  | 409.285500 | ...        | 403.307784 | 90389837.0                |
| 2021-05-21 | 412.669177  | 413.940310 | ...        | 409.116595 | 72172531.0                |
| 2021-05-22 | 412.203168  | 415.051261 | ...        | 414.138099 | 69119554.0                |

## Local Variables

The Variables section of the Run and Debug panel shows the local variables at the current breakpoint. If a variable in the panel is an object, click it to see its members. The panel updates as the algorithm runs.

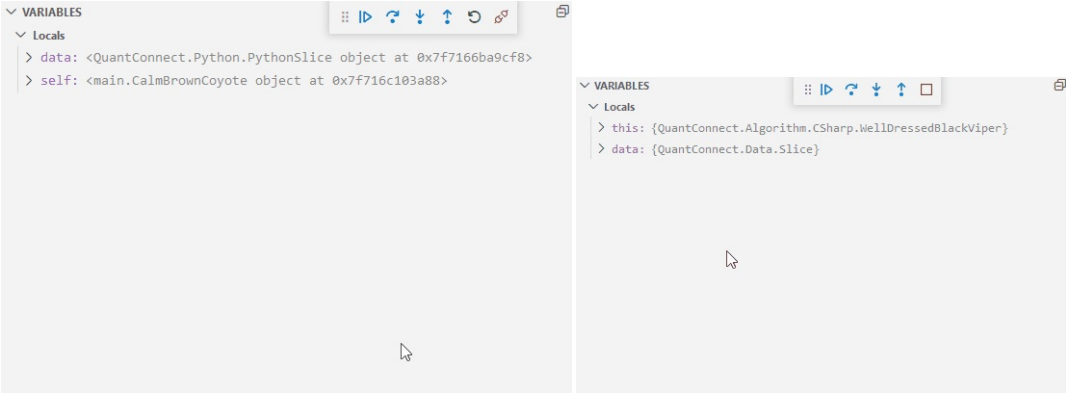

Follow these steps to update the value of a variable:

1. In the Run and Debug panel, right-click a variable and then click Set Value .
2. Enter the new value and then press Enter .

**Custom Expressions**

The Watch section of the Run and Debug panel shows any custom expressions you add. For example, you can add an expression to show the current date in the backtest.



Follow these steps to add a custom expression:

1. Hover over the Watch section and then click the plus icon that appears.
2. Enter an expression and then press Enter .



