

Document title
XXX
Date
2022-02-01
Author
Doument author
Contact
xx@yy.xx

Document type SD
Version X.Y.Z
Status
RELEASE
Page 1 (12)

XXX Service Description

Abstract

This is the template for Service Description (SD document) according to the Eclipse Arrowhead documentation structure.



Document title XXX
Date 2022-02-01

Version X.Y.Z Status RELEASE Page 2 (12)

Contents

1	Overview	3
	1.1 Signi	icant Prior Art
	1.2 How	This Service Is Meant to Be Used
	1.3 Impo	tant Delimitations
2	Service In	
	2.1 functi	on AA
		on BB
		on <mark>CC</mark>
	2.4 funct	on Echo
3	Information	n Model 6
	3.1 struc	ServiceRegistryRequest
	3.2 struc	ServiceRegistryUnregisterRequest
	3.3 struc	ServiceQueryForm
		ives
	0.1 111111	
4	Revision	listory 12
	4.1 Amer	dments
		v Assurance



Document title XXX Date 2022-02-01

Version X.Y.Z Status RELEASE Page 3 (12)

1 Overview

This document describes the [XX] service, which is enables [brief description of service capabilities].

The rest of this document is organized as follows. In Section 2, we describe the abstract message functions provided by the service. In Section 3, we end the document by presenting the data types used by the mentioned functions.



Document title XXX Date 2022-02-01

Version X.Y.Z Status RELEASE Page 4 (12)

1.1 Significant Prior Art

Describe significant prior art which provides the foundation for the service - May be omitted for simple services

1.2 How This Service Is Meant to Be Used

Describe intended usage of the service

1.3 Important Delimitations

Provide delimitations of the provided service



Version
X.Y.Z
Status
RELEASE
Page
5 (12)

2 Service Interface

This section describes the interfaces to the [XX] service. In particular, each subsection names an abstract operation, an input type and an output type, in that order. The input type is named inside parentheses, while the output type is preceded by a colon. Input and output types are only denoted when accepted or returned, respectively, by the interface in question.

All abstract data types named in this section are defined in Section 3.

«SD» ServiceDiscovery operations Register(ServiceRegistryRequest) Unregister(ServiceRegistryRequest) : StatusCodeKind Echo() : StatusCodeKind Query(ServiceQueryForm) : ServiceQueryList

Figure 1: EXAMPLE: SysML block description diagram of the ServiceDiscovery and its interface

The following interface operations are available.

2.1 operation AA (aa): response

The AA operation is used to The services will contain various metadata as well as a physical endpoint. The various parameters are representing the necessary service input information.

2.2 operation BB (bb): response

The BB operation is used to

2.3 operation CC (cc): Response

The CC operation enable

2.4 operation Echo (): StatusCodeKind

The Echo operation provides an is alive response from the XX service.



Document title XXX
Date 2022-02-01

Version X.Y.Z Status RELEASE Page 6 (12)

3 Information Model

Here, all data objects that can be part something the XX Service provides to the hosting System are listed in alphabetic order. Note that each subsection, which describes one type of object, begins with the *struct* keyword, which is used to denote a collection of named fields, each with its own data type. As a complement to the explicitly defined types in this section, there is also a list of implicit primitive types in Section 3.4, which are used to represent things like hashes and identifiers.

An overview of the data object types is illustrated in Figure 2.

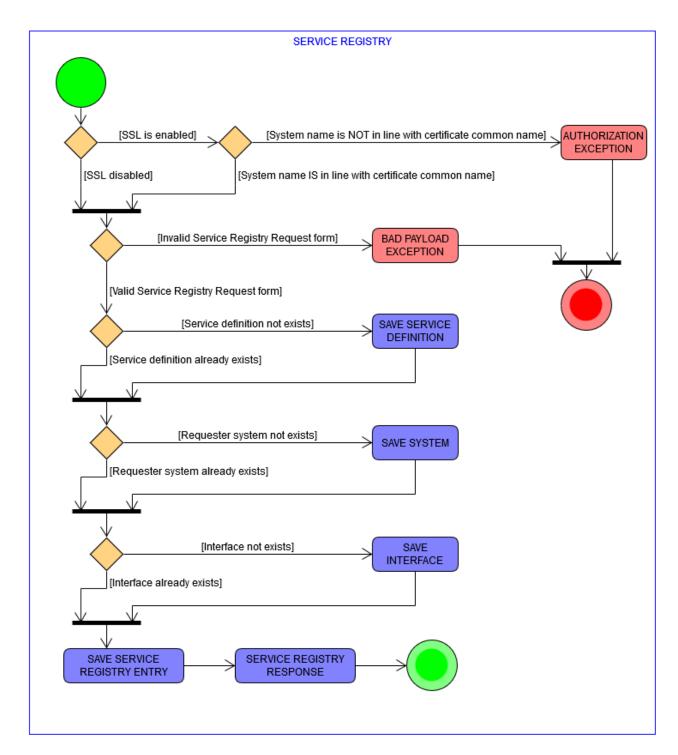


Figure 2: EXAMPLE: Information model as a UML activity diagram. Describes the process of service registration.

3.1 struct ServiceRegistryRequest

EXAMPLE: This structure is used to register a service offering into the Service Registry.



Version X.Y.Z Status RELEASE Page 8 (12)

Field	Туре	Description
endofValidity	DateTime	Service is available until this UTC timestamp.
interfaces	Array <interface></interface>	List of interfaces the service supports.
metadata	Metadata	Metadata
providerSystem	Name	Name of the provider system.
secure	SecureType	Type of security the service uses.
serviceDefinition	Name	Service Definition.
serviceUri	URI	URI of the service.
version	Version	Version of the service.

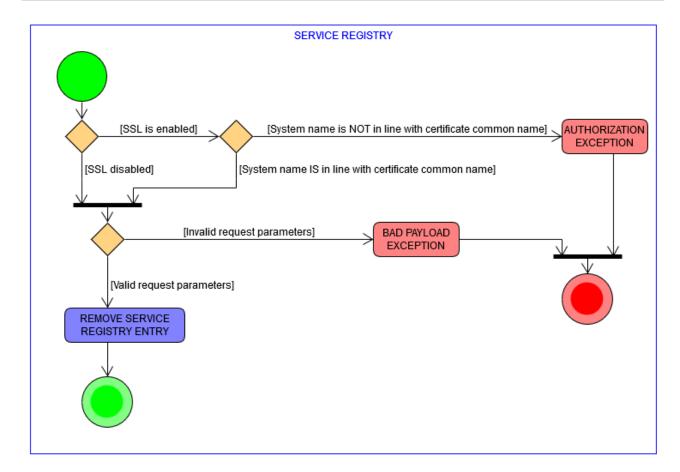


Figure 3: EXAMPLE: Information model as a UML activity diagram. Describes the process of service unregistration.

3.2 struct ServiceRegistryUnregisterRequest

EXAMPLE: This structure is used to register a service offering into the Service Registry. Please also refer to the activity diagram in Figure 3





Version X.Y.Z Status RELEASE Page 9 (12)

Field	Туре	Description
address	Address	Address of the provider systems.
port	PortNumber	Port of the provider system.
system_name	Name	System name of the provider system
service_definition	Name	Service Definition of the unregistered service.

3.3 struct ServiceQueryForm

EXAMPLE: This structure is used to query service offering registered in the Service Registry. Please also refer to the activity diagram in Figure 4

Object Field	Value Type	Description
"interfaceRequirements"	Array <interface></interface>	List of the required interfaces.
"maxVersionRequirement"	Version	Maximum version.
"minVersionRequirement"	Version	Minimum version.
"metadataRequirements"	Metadata	Metadata.
"pingProviders".	Boolean	Checks the availability of the providers if true
"securityRequirements"	Name	Type of security.
"serviceDefinitionRequirement"	Name	Service Definition.
"versionRequirement"	Version	Version of the service.



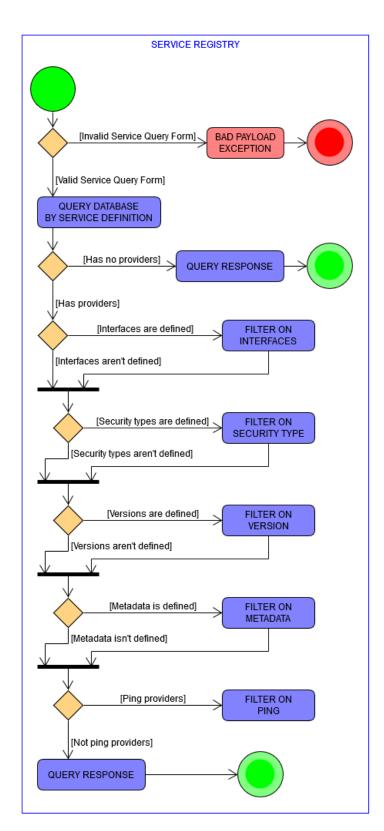


Figure 4: EXAMPLE: Information model as a UML activity diagram. Describes the process of service querying.



Document title XXX
Date 2022-02-01

Version X.Y.Z Status RELEASE Page 11 (12)

3.4 Primitives

Types and structures mentioned throughout this document that are assumed to be available to implementations of this service. The concrete interpretations of each of these types and structures must be provided by any IDD document claiming to implement this service.

Туре	Description	
Address A string representation of the address		
Boolean One out of true or false.		
Interface	Any suitable type chosen by the implementor of the service.	
DateTime	Pinpoints a specific moment in time.	
List <a>	An array of a known number of items, each having type A.	
Name	A string identifier that is intended to be both human and machine-readable.	
PortNumber	Decimal number in the range of 0-65535	
Version	Specifies a service version.	



Version X.Y.Z Status RELEASE Page 12 (12)

4 Revision History

4.1 Amendments

No.	Date	Version	Subject of Amendments	Author
1	2020-12-05	X.Y.Z		Tanyi Szvetlin
2	2021-07-14	X.Y.Z	Minor updates	Jerker Delsing
3	2022-01-10	X.Y.Z	Minor updates	Jerker Delsing

4.2 Quality Assurance

No.	Date	Version	Approved by
1	2022-01-10	X.Y.Z	