

UNIVERSIDAD AUTÓNOMA DE CHIAPAS.

FACULTAD DE CONTADURÍA Y ADMINISTRACIÓN, CAMPUS I.

LICENCIATURA EN INGENIERÍA EN DESARROLLO Y
TECNOLOGÍAS DE SOFTWARE.


SEXTO SEMESTRE, GRUPO: "M"

MATERIA: TALLER DE DESARROLLO

ULISES ALEJANDRO CONSTANTINO SANTIZO.

MATRICULA: A210093

INDEX

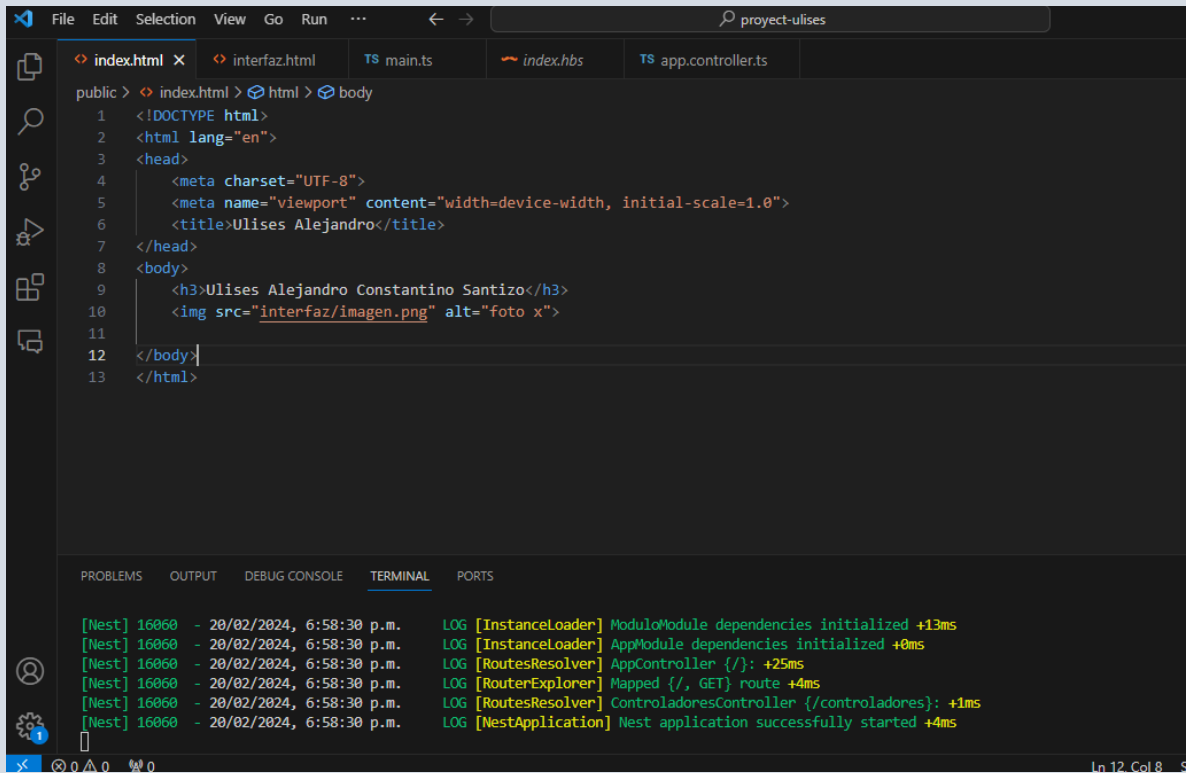


The screenshot shows the VS Code editor with the `index.html` file open. The file content is as follows:

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6   <title>Ulises Alejandro</title>
7 </head>
8 <body>
9   <h3>Ulises Alejandro Constantino Santizo</h3>
10  
11
12 </body>
13 </html>
```

The terminal output shows the following logs:

```
[Nest] 16060 - 20/02/2024, 6:58:30 p.m. LOG [InstanceLoader] ModuloModule dependencies initialized +13ms
[Nest] 16060 - 20/02/2024, 6:58:30 p.m. LOG [InstanceLoader] AppModule dependencies initialized +0ms
[Nest] 16060 - 20/02/2024, 6:58:30 p.m. LOG [RoutesResolver] AppController {}: +25ms
[Nest] 16060 - 20/02/2024, 6:58:30 p.m. LOG [RouterExplorer] Mapped {/, GET} route +4ms
[Nest] 16060 - 20/02/2024, 6:58:30 p.m. LOG [RoutesResolver] ControladoresController {/controladores}: +1ms
[Nest] 16060 - 20/02/2024, 6:58:30 p.m. LOG [NestApplication] Nest application successfully started +4ms
```


MAIN

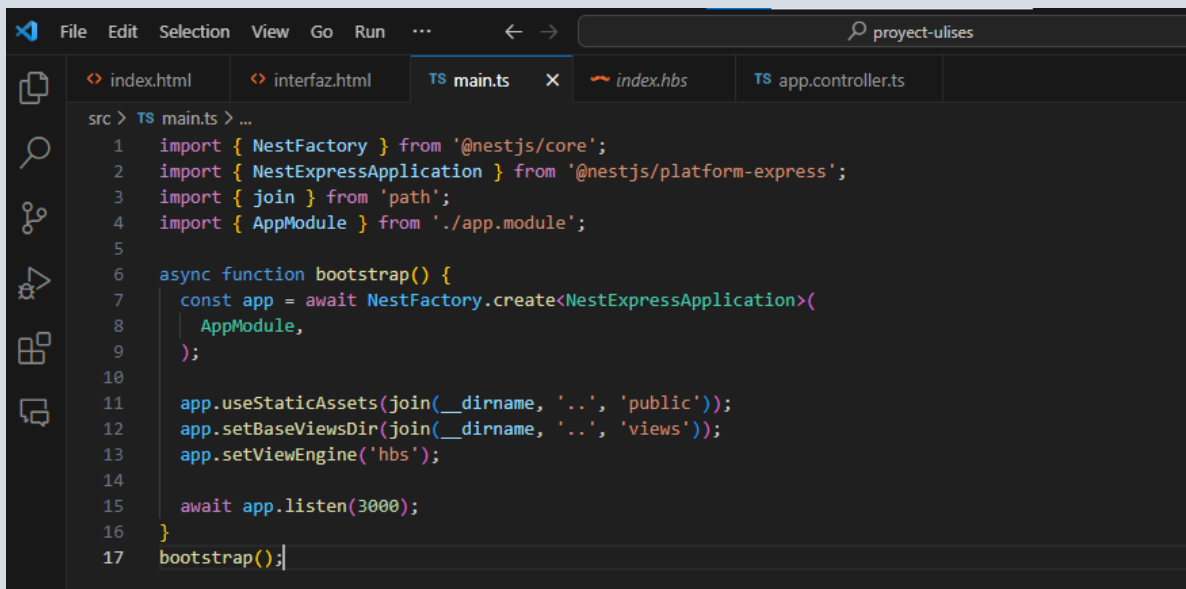

The screenshot shows the VS Code editor with the `main.ts` file open. The file content is as follows:

```
1 import { NestFactory } from '@nestjs/core';
2 import { NestExpressApplication } from '@nestjs/platform-express';
3 import { join } from 'path';
4 import { AppModule } from './app.module';
5
6 async function bootstrap() {
7   const app = await NestFactory.create<NestExpressApplication>(
8     AppModule,
9   );
10
11   app.useStaticAssets(join(__dirname, '..', 'public'));
12   app.setBaseViewsDir(join(__dirname, '..', 'views'));
13   app.setViewEngine('hbs');
14
15   await app.listen(3000);
16 }
17 bootstrap();
```

APP CONTROLER

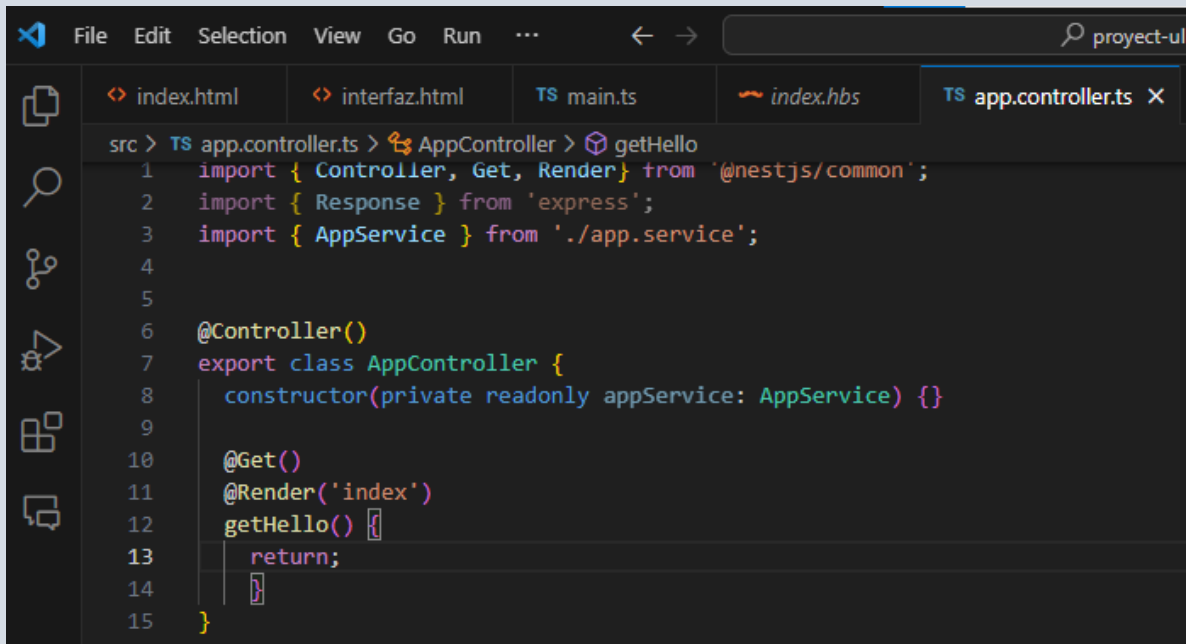

The image shows a code editor window with a dark theme. The top menu bar includes 'File', 'Edit', 'Selection', 'View', 'Go', 'Run', and a search bar. The file explorer on the left shows a project structure with files like 'index.html', 'interfaz.html', 'main.ts', 'index.hbs', and 'app.controller.ts'. The main editor area displays the code for 'app.controller.ts'. The code defines an 'AppController' class decorated with '@Controller()'. It has a constructor that takes an 'AppService' as a dependency. The class has two decorators, '@Get()' and '@Render('index')', applied to the 'getHello()' method. The method body is empty, with a 'return;' statement at the end.

```
src > TS app.controller.ts > AppController > getHello
1  import { Controller, Get, Render } from '@nestjs/common';
2  import { Response } from 'express';
3  import { AppService } from './app.service';
4
5
6  @Controller()
7  export class AppController {
8      constructor(private readonly appService: AppService) {}
9
10     @Get()
11     @Render('index')
12     getHello() {}
13     return;
14 }
15
```