C Programming

Instructor Info:
Tutul
Facebook
Github
Linkedin(Ask Your Problem)

About Course:
Full Playlist
Presentation
W3School
Programiz
Online Compiler

Introduction
Git & GitHub Playlist
GitHub Repository
Presentation

History
Wikipedia

Environment Setup
Codeblocks

VS Code

MingW

Online Compiler

Hello World!

```c
#include <stdio.h>
int main() {
    printf("Hello, World!");
    return 0;
}
```
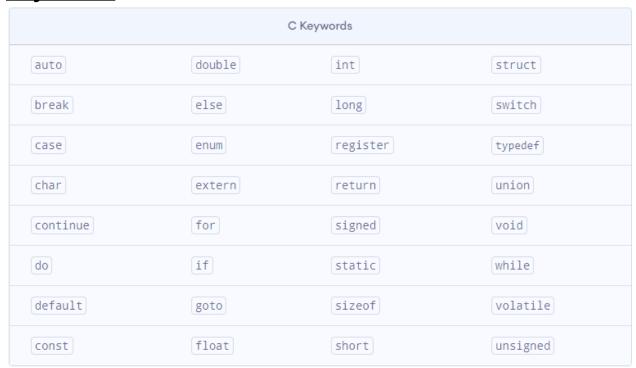
Syntax

Structure of C Program

	1	#include <stdio.h>	Header
	2	int main(void)	Main
BODY	3	{	
	4	printf("Hello World");	Statement
	5	return 0;	Return
	6	}	

Keywords and Identifiers

Keywords: Reserved words.

C Keywords			
auto	double	int	struct
break	else	long	switch
case	enum	register	typedef
char	extern	return	union
continue	for	signed	void
do	if	static	while
default	goto	sizeof	volatile
const	float	short	unsigned

Identifier:
Name of Variable, Function.

C Variables, Constants

Variables: a variable is a container (storage area) to hold data.
Constants: whose value cannot be changed

<u>Data Types</u>

Basic types

Here's a table containing commonly used types in C programming for quick access.

Type	Size (bytes)	Format Specifier
`int`	at least 2, usually 4	`%d`, `%i`
`char`	1	`%c`
`float`	4	`%f`
`double`	8	`%lf`
`short int`	2 usually	`%hd`
`unsigned int`	at least 2, usually 4	`%u`
`long int`	at least 4, usually 8	`%ld`, `%li`
`long long int`	at least 8	`%lld`, `%lli`
`unsigned long int`	at least 4	`%lu`
`unsigned long long int`	at least 8	`%llu`
`signed char`	1	`%c`
`unsigned char`	1	`%c`

Input Output (I/O)

Format Specifiers for I/O

As you can see from the above examples, we use

- `%d` for `int`

- `%f` for `float`

- `%lf` for `double`

- `%c` for `char`

ASCII TABLE

Decimal	Hexadecimal	Binary	Octal	Char
0	0	0	0	[NULL]
1	1	1	1	[START OF HEADING]
2	2	10	2	[START OF TEXT]
3	3	11	3	[END OF TEXT]
4	4	100	4	[END OF TRANSMISSION]
5	5	101	5	[ENQUIRY]
6	6	110	6	[ACKNOWLEDGE]
7	7	111	7	[BELL]
8	8	1000	10	[BACKSPACE]
9	9	1001	11	[HORIZONTAL TAB]
10	A	1010	12	[LINE FEED]
11	B	1011	13	[VERTICAL TAB]
12	C	1100	14	[FORM FEED]
13	D	1101	15	[CARRIAGE RETURN]
14	E	1110	16	[SHIFT OUT]
15	F	1111	17	[SHIFT IN]
16	10	10000	20	[DATA LINK ESCAPE]
17	11	10001	21	[DEVICE CONTROL 1]
18	12	10010	22	[DEVICE CONTROL 2]
19	13	10011	23	[DEVICE CONTROL 3]
20	14	10100	24	[DEVICE CONTROL 4]
21	15	10101	25	[NEGATIVE ACKNOWLEDGE]
22	16	10110	26	[SYNCHRONOUS IDLE]
23	17	10111	27	[END OF TRANS. BLOCK]
24	18	11000	30	[CANCEL]
25	19	11001	31	[END OF MEDIUM]
26	1A	11010	32	[SUBSTITUTE]
27	1B	11011	33	[ESCAPE]
28	1C	11100	34	[FILE SEPARATOR]
29	1D	11101	35	[GROUP SEPARATOR]
30	1E	11110	36	[RECORD SEPARATOR]
31	1F	11111	37	[UNIT SEPARATOR]
32	20	100000	40	[SPACE]
33	21	100001	41	!
34	22	100010	42	"
35	23	100011	43	#
36	24	100100	44	$
37	25	100101	45	%
38	26	100110	46	&
39	27	100111	47	'
40	28	101000	50	(
41	29	101001	51	)
42	2A	101010	52	*
43	2B	101011	53	+
44	2C	101100	54	,
45	2D	101101	55	-
46	2E	101110	56	.
47	2F	101111	57	/
48	30	110000	60	0
49	31	110001	61	1
50	32	110010	62	2
51	33	110011	63	3
52	34	110100	64	4
53	35	110101	65	5
54	36	110110	66	6
55	37	110111	67	7
56	38	111000	70	8
57	39	111001	71	9
58	3A	111010	72	:
59	3B	111011	73	;
60	3C	111100	74	<
61	3D	111101	75	=
62	3E	111110	76	>
63	3F	111111	77	?
64	40	1000000	100	@
65	41	1000001	101	A
66	42	1000010	102	B
67	43	1000011	103	C
68	44	1000100	104	D
69	45	1000101	105	E
70	46	1000110	106	F
71	47	1000111	107	G
72	48	1001000	110	H
73	49	1001001	111	I
74	4A	1001010	112	J
75	4B	1001011	113	K
76	4C	1001100	114	L
77	4D	1001101	115	M
78	4E	1001110	116	N
79	4F	1001111	117	O
80	50	1010000	120	P
81	51	1010001	121	Q
82	52	1010010	122	R
83	53	1010011	123	S
84	54	1010100	124	T
85	55	1010101	125	U
86	56	1010110	126	V
87	57	1010111	127	W
88	58	1011000	130	X
89	59	1011001	131	Y
90	5A	1011010	132	Z
91	5B	1011011	133	[
92	5C	1011100	134	\
93	5D	1011101	135	]
94	5E	1011110	136	^
95	5F	1011111	137	_
96	60	1100000	140	`
97	61	1100001	141	a
98	62	1100010	142	b
99	63	1100011	143	c
100	64	1100100	144	d
101	65	1100101	145	e
102	66	1100110	146	f
103	67	1100111	147	g
104	68	1101000	150	h
105	69	1101001	151	i
106	6A	1101010	152	j
107	6B	1101011	153	k
108	6C	1101100	154	l
109	6D	1101101	155	m
110	6E	1101110	156	n
111	6F	1101111	157	o
112	70	1110000	160	p
113	71	1110001	161	q
114	72	1110010	162	r
115	73	1110011	163	s
116	74	1110100	164	t
117	75	1110101	165	u
118	76	1110110	166	v
119	77	1110111	167	w
120	78	1111000	170	x
121	79	1111001	171	y
122	7A	1111010	172	z
123	7B	1111011	173	{
124	7C	1111100	174		
125	7D	1111101	175	}
126	7E	1111110	176	~
127	7F	1111111	177	[DEL]

Comments

Single-line comments: //

Multi-line Comments: /* — */

Operators

C Arithmetic Operators

An arithmetic operator performs mathematical operations such as addition, subtraction, multiplication, division etc on numerical values (constants and variables).

Operator	Meaning of Operator
+	addition or unary plus
-	subtraction or unary minus
*	multiplication
/	division
%	remainder after division (modulo division)

C Assignment Operators

An assignment operator is used for assigning a value to a variable. The most common assignment operator is `=`

Operator	Example	Same as
=	a = b	a = b
+=	a += b	a = a+b
-=	a -= b	a = a-b
*=	a *= b	a = a*b
/=	a /= b	a = a/b
%=	a %= b	a = a%b

C Relational Operators

A relational operator checks the relationship between two operands. If the relation is true, it returns 1; if the relation is false, it returns value 0.

Relational operators are used in decision making and loops.

Operator	Meaning of Operator	Example
==	Equal to	`5 == 3` is evaluated to 0
>	Greater than	`5 > 3` is evaluated to 1
<	Less than	`5 < 3` is evaluated to 0
!=	Not equal to	`5 != 3` is evaluated to 1
>=	Greater than or equal to	`5 >= 3` is evaluated to 1
<=	Less than or equal to	`5 <= 3` is evaluated to 0

C Logical Operators

An expression containing logical operator returns either 0 or 1 depending upon whether expression results true or false. Logical operators are commonly used in decision making in C programming.

Operator	Meaning	Example
&&	Logical AND. True only if all operands are true	If c = 5 and d = 2 then, expression `((c==5) && (d>5))` equals to 0.
||	Logical OR. True only if either one operand is true	If c = 5 and d = 2 then, expression `((c==5) || (d>5))` equals to 1.
!	Logical NOT. True only if the operand is 0	If c = 5 then, expression `!(c==5)` equals to 0.

Size of Variables:

`sizeof(variable)`

we use either `%lu` or `%zu` format specifier.

Introduction Example:

01. **C program to print an integer, float, double & character value entered by the user**
02. **C program to find ASCII value of a character entered by the user**
03. **C program to find the size of int, float, double and char**