


`gnuplotio::FileHandleWrapper`

- + wrapped\_fh
- + should\_use\_pclose
- + FileHandleWrapper()
- + fh\_close()
- + fh\_fileno()

`boost::iostreams::stream< boost::iostreams::file_descriptor_sink >`

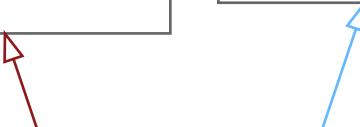

`gnuplotio::Gnuplot`

- + arr\_or\_rec
- + tmp\_files
- + debug\_messages
- + Gnuplot()
- + Gnuplot()
- + ~Gnuplot()
- + clearTmpfiles()
- + send()
- + sendBinary()
- + binfmt()
- + file()
- + binaryFile()
- + GNUPLOT\_DEPRECATED()
- + GNUPLOT\_DEPRECATED()
- Gnuplot()
- operator=(=)
- do\_flush()
- make\_tmpfile()
- get\_default\_cmd()
- open\_cmdline()