

Quantum Simulation of Random Unitaries from Clebsch–Gordan Transforms

Dmitry Grinko[1, 2, 3, *] and Satoshi Yoshida[4, *]

[1] *QuSoft, Amsterdam, The Netherlands*
[2] *Institute for Logic, Language and Computation, University of Amsterdam, The Netherlands*
[3] *Korteweg-de Vries Institute for Mathematics, University of Amsterdam, The Netherlands*
[4] *Department of Physics, Graduate School of Science, The University of Tokyo, Japan*

(Dated: September 2025)

We present a general method for simulating an action of t copies of a Haar random unitary for arbitrary compact groups. This construction can be viewed as a representation-theoretic generalization of Zhandry's compressed function oracle technique. It is conceptually simple, exact and utilizes Clebsch–Gordan transforms as main building blocks. In particular, for the unitary group, our method is efficient in space and time. Finally, our general oracle for forward queries can be easily modified into oracles for conjugate, transpose, and inverse queries, thus unifying all four query types.

arXiv:2509.26623v1 [quant-ph] 30 Sep 2025

Random unitary operation offers a universal primitive for various quantum information processing including shadow tomography [1–8], random sampling [9–14], randomized benchmarking [15–19] and quantum random oracle model in cryptography [20–26]. It also offers a fundamental understanding of physical systems, including black holes and chaotic systems [27–37]. Random distribution of d-dimensional unitary operation is modeled by the Haar measure. Tthere are three common ways to simulate the Haar-random unitary in the quantum circuit model: *unitary t-design*, *pseudorandom unitary (PRU)*, and *compressed oracle*.

Unitary t-design is given by a probability distribution $\{p_i\}_i$ on a finite set of unitary operators $\{U_i\}_i$ (we shortly write it as $\{p_i, U_i\}_i$) and it can simulate a quantum circuit having t queries to a Haar-random unitary operation U, its complex conjugate $\bar{U}$, its transpose U^T, and its inverse $U^\dagger$ [17, 38, 39] [see Fig. 1 (a) and (b)]. *Pseudorandom unitary (PRU)* is a probability distribution $\{p_i, U_i\}_i$ on n-qubit unitaries such that any polynomial-time quantum circuit cannot distinguish it from the Haar measure [40], where the distinguisher is allowed to query only U_i, or U_i and $U_i^\dagger$, or $U_i, U_i^\dagger, \bar{U}_i$, and U_i^T depending on the setting. *Compressed oracle* is another way to simulate an action of random unitaries by using quantum memory to purify the classical randomness associated with the underlying measure. It is defined as unitary operations $\mathrm{fO}, \mathrm{cO}, \mathrm{tO}, \mathrm{iO}$ called the forward, conjugate, transposed, and inverse oracles, respectively, acting on a system and auxiliary memory system. By tracing out the memory system in the end, it simulates the forward query U, the conjugate query U^*, the transposed query U^T, and the inverse query $U^\dagger$ of the Haar-random unitary U, respectively [see Fig. 1 (c)]. This is a natural generalization of the same problem for random functions [22], and it

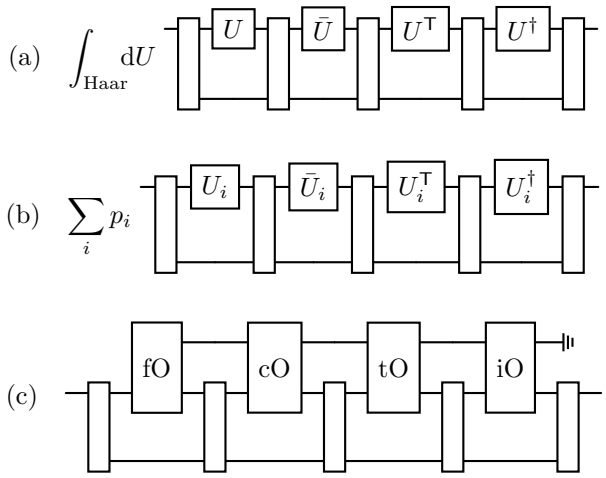


FIG. 1. (a) A quantum circuit involving t queries to a unitary operations $U, \bar{U}, U^\mathsf{T}$ and $U^\dagger$, where U is drawn from the Haar measure. The boxes other than U represent arbitrary quantum channels.
(b) Unitary t-design $\{p_i, U_i\}_i$ can simulate the quantum circuit (a) by using U_i with probability p_i.
(c) Our construction simulates the quantum circuit (a) exactly by using the compressed oracles $\mathrm{fO}, \mathrm{cO}, \mathrm{tO}, \mathrm{iO}$ and tracing out the auxiliary register.

was recently used in the adaptive security proof of a certain PRU construction [41], and can be used to construct cryptographic protocols such as quantum money [42, 43]. These notions are extended to several subgroups of the unitary groups, e.g., orthogonal t-design is defined for the orthogonal group [44], and pseudorandom permutation [45] and the compressed permutation oracle [46, 47] are defined for the permutation group.

Approximate unitary t-design can be implemented efficiently [48–68] with the state-of-the-art circuit complexity $\tilde{O}(nt)$ given in Refs. [67, 68] matching with the lower bound $\tilde{\Omega}(nt)$ shown in Ref. [34]. Known implementation of exact t-design is highly inefficient [69] except for $t \leqslant 3$ [17, 70, 71]. The recent breakthrough in the con-

* All authors contributed equally to this work.
Dmitry Grinko: grinko.dimitry@gmail.com
Satoshi Yoshida: satoshiyoshida.phys@gmail.com