


i) Sender Events:  
Send data octets 1-1000  
Send data octets 1001-2000  
Receive ack for 1000  
Receive ack for 2000

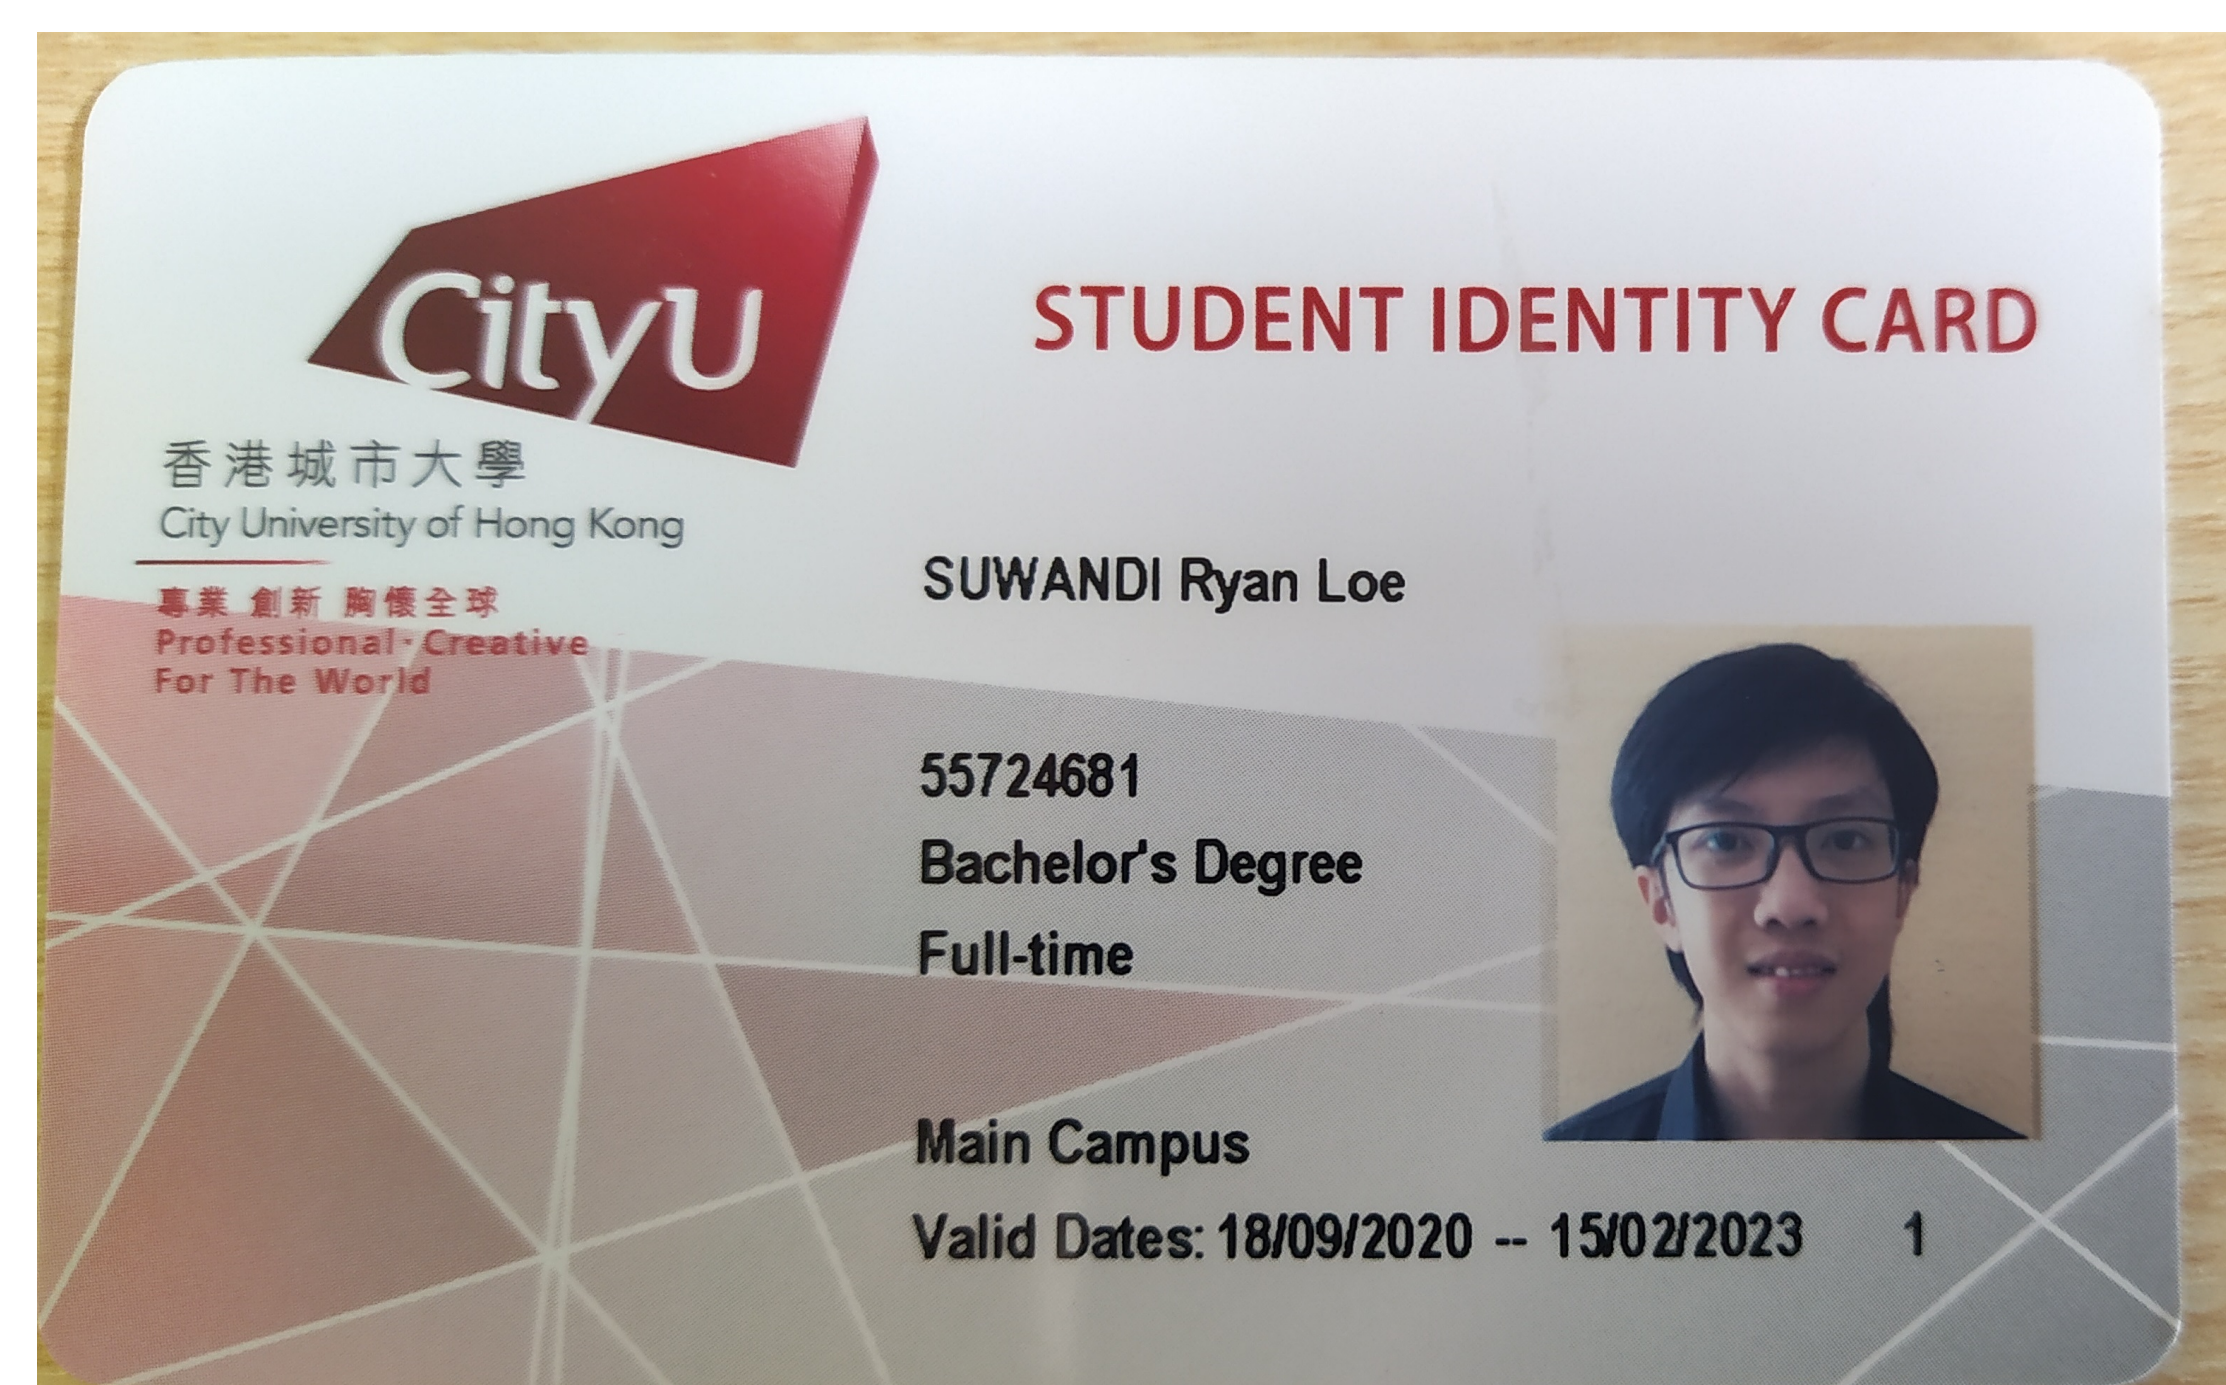

Receiver Events:  
advertise window = 2300  
ack up to 1000, window = 1000  
ack up to 2000, window = 0

i') Sender Events:

Send data octets 2501, 3500  
Send data octets 3501, 4500  
Receive ack for 3500  
Receiver ack for 4500  
Receiver ack for 4500

Receiver Events:

Application reads 1000 octets  
ack up to 2500, window = 2500  
ack up to 3500, window = 1500  
ack up to 4500, window = 500  
Application reads 1000 octets  
ack up to 4500, window = 1500