

Nmap Reconnaissance Report

Target: scanme.nmap.org (45.33.32.156)

Scan Date: October 7, 2025

Tool Used: Nmap 7.95

Scan Type: ACK Scan with OS and Service Detection

Analyst: Alex

Location: Ngecha Tigoni Ward, Kiambu County, Kenya

Scan Summary

Attribute | Details

Host Status | Online and responsive

Firewall Behavior | ACK scans indicate all ports are unfiltered; no stateful firewall detected

Port Status | All 1000 scanned TCP ports returned RST responses (closed or filtered)

OS Detection | Inconclusive due to multiple matching fingerprints

Latency | ~0.28 seconds

Network Distance | Approximately 18 hops

Scan Duration | Extended due to script execution and OS detection retries

Interpretation

- The host is reachable, but not exposing any open TCP ports within the default scan range.
- The absence of filtered ports in the ACK scan suggests no stateful firewall is actively blocking unsolicited ACK packets.
- The consistent RST responses imply that the system may be configured to reset connections transparently, rather than silently dropping them.
- OS fingerprinting was inconclusive, likely due to defensive configurations or uncommon system traits.

Recommendations for Further Testing

To expand the reconnaissance and gain deeper insights into the target's infrastructure:

- Full Port Scan: Use -p- to scan all 65,535 TCP ports.
- UDP Scan: Use -sU to detect services running over UDP.
- Service Detection: Add -sV to identify service versions.
- OS Fingerprinting: Use -O --osscan-guess for improved OS detection.
- NSE Scripts: Run --script=default or --script=intrusive for deeper analysis.
- Traceroute: Use --traceroute to identify filtering points along the path.

Conclusion


This scan provides a foundational understanding of the target's exposure and firewall behavior. The host is online, responsive, and not actively filtering ACK traffic, but no open ports were identified. These findings serve as a baseline for further enumeration and vulnerability assessment in a controlled lab environment.

ap out firewall rulesets. In particular, it helps understand whether firewall rules are stateful or not. The downside is that it cannot distinguish open from closed ports

```
kali@kali: ~  
File Actions Edit View Help  
(kali@kali)-[~]  
$ nmap  
Starting Nmap 7.95 ( https://nmap.org ) at 2025-10-07 02:34 EDT  
WARNING: No targets were specified, so 0 hosts scanned.  
Nmap done: 0 IP addresses (0 hosts up) scanned in 0.20 seconds  
  
(kali@kali)-[~]  
$ nmap scanme.nmap.org  
Starting Nmap 7.95 ( https://nmap.org ) at 2025-10-07 02:34 EDT  
Nmap scan report for scanme.nmap.org (50.116.1.184)  
Host is up (0.27s latency).  
Other addresses for scanme.nmap.org (not scanned): 2600:3c01:e000:3e6::6d4e:7061  
rDNS record for 50.116.1.184: ack.nmap.org  
Not shown: 992 filtered tcp ports (no-response)  
PORT      STATE SERVICE  
22/tcp    open  ssh  
25/tcp    open  smtp  
53/tcp    open  domain  
70/tcp    closed gopher  
80/tcp    open  http  
113/tcp   closed ident  
443/tcp   open  https  
31337/tcp closed Elite  
  
Nmap done: 1 IP address (1 host up) scanned in 16.83 seconds
```

NB: This is Strictly for Educational purposes

```
kali@kali: ~  
File Actions Edit View Help  
Completed Service scan at 02:37, 16.18s elapsed (5 services scanned on 1 host)  
Initiating OS detection (try #1) against scanme.nmap.org (45.33.32.156)  
NSE: Script scanning 45.33.32.156.  
Initiating NSE at 02:37  
Completed NSE at 02:37, 1.22s elapsed  
Initiating NSE at 02:37  
Completed NSE at 02:37, 1.13s elapsed  
Nmap scan report for scanme.nmap.org (45.33.32.156)  
Host is up (0.25s latency).  
Other addresses for scanme.nmap.org (not scanned): 2600:3c01::f03c:91ff:fe18:bb2f  
Not shown: 995 closed tcp ports (conn-refused)  
PORT      STATE SERVICE      VERSION  
22/tcp    open  ssh          OpenSSH 6.6.1p1 Ubuntu 2ubuntu2.13 (Ubuntu Linux; protocol 2.0)  
53/tcp    open  domain       (generic dns response: NOTIMP)  
80/tcp    open  http         Apache httpd 2.4.7 ((Ubuntu))  
9929/tcp  open  nping-echo   Nping echo  
31337/tcp open  tcpwrapped  
1 service unrecognized despite returning data. If you know the service/version, please  
e following fingerprint at https://nmap.org/cgi-bin/submit.cgi?new-service :  
SF-Port53-TCP:V=7.95%I=7%D=10/7%Time=68E4B536%P=x86_64-pc-linux-gnu%r(DNSV  
SF:ersionBindReqTCP,E,"\\0\\x0c\\0\\x06\\x81\\x84\\0\\0\\0\\0\\0\\0\\0\\0");  
Device type: general purpose  
Running: Linux 5.X  
OS CPE: cpe:/o:linux:linux_kernel:5  
OS details: Linux 5.0 - 5.14  
Uptime guess: 29.587 days (since Sun Sep  7 12:33:03 2025)  
Network Distance: 18 hops  
TCP Sequence Prediction: Difficulty=253 (Good luck!)  
IP ID Sequence Generation: All zeros  
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel  
  
Read data files from: /usr/share/nmap  
OS and Service detection performed. Please report any incorrect results at https://  
it/ .  
Nmap done: 1 IP address (1 host up) scanned in 32.83 seconds  
Raw packets sent: 30 (2.170KB) | Rcvd: 15 (1.290KB)
```

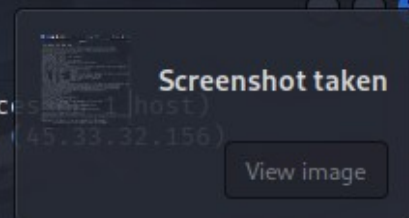

NB: This is Strictly for Educational purposes

NB: This is Strictly for Educational purposes