### Part I: Child calls who and parent waits for child to be done executing.

# $Part \ II: \ {\tt DateServer} \ and \ {\tt DateClient} \ code \ output.$

#### Server output:


```
Command Prompt-java DateServer

Microsoft Windows [Version 10.0.16299.192]
(c) 2017 Microsoft Corporation. All rights reserved.


C:\Users\Almania>cd C:\Users\Almania\Documents\wou\CS365\week_3\lab2

C:\Users\Almania\Documents\wou\CS365\week_3\lab2>java DateServer
```


#### Client output:

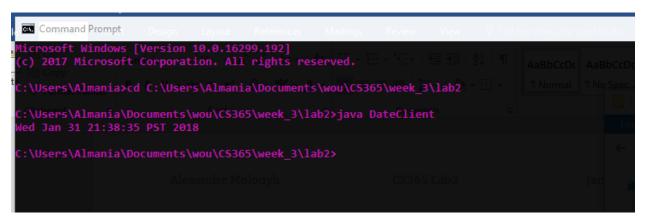

# Part III: A fortune teller client server program.

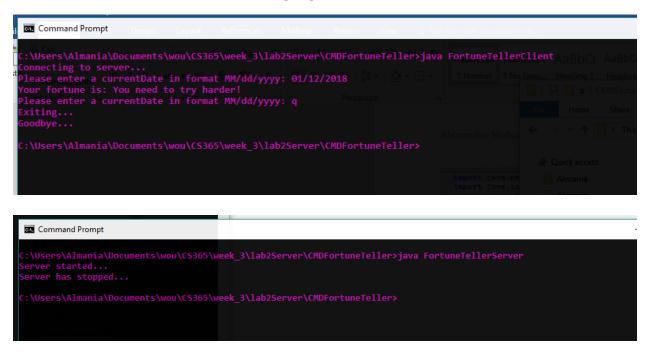

### Part IV: A fortune teller GUI client server program.

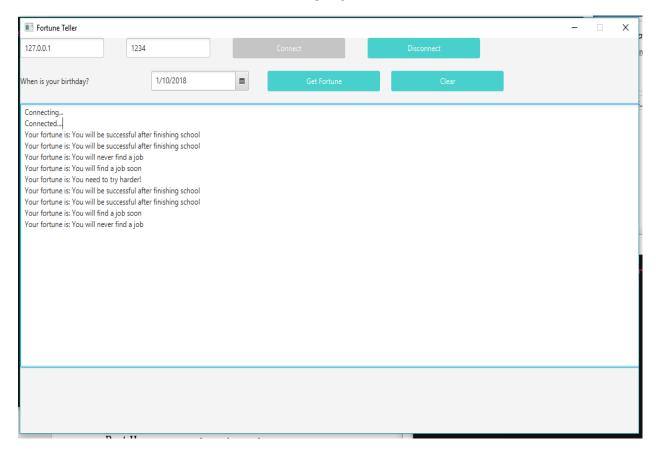

Command Prompt - java FortuneTellerServer

C:\Users\Almania\Documents\wou\CS365\week\_3\lab2Server\GUIFortuneTeller>java FortuneTellerServer