


Evidencia de Examen I Parcial

Cristian Alexis Ortiz Munguía

20181032375

ING Harold Coello

Repositorio: <https://github.com/AlexOrtiz359/ExamenLenguajes.git>

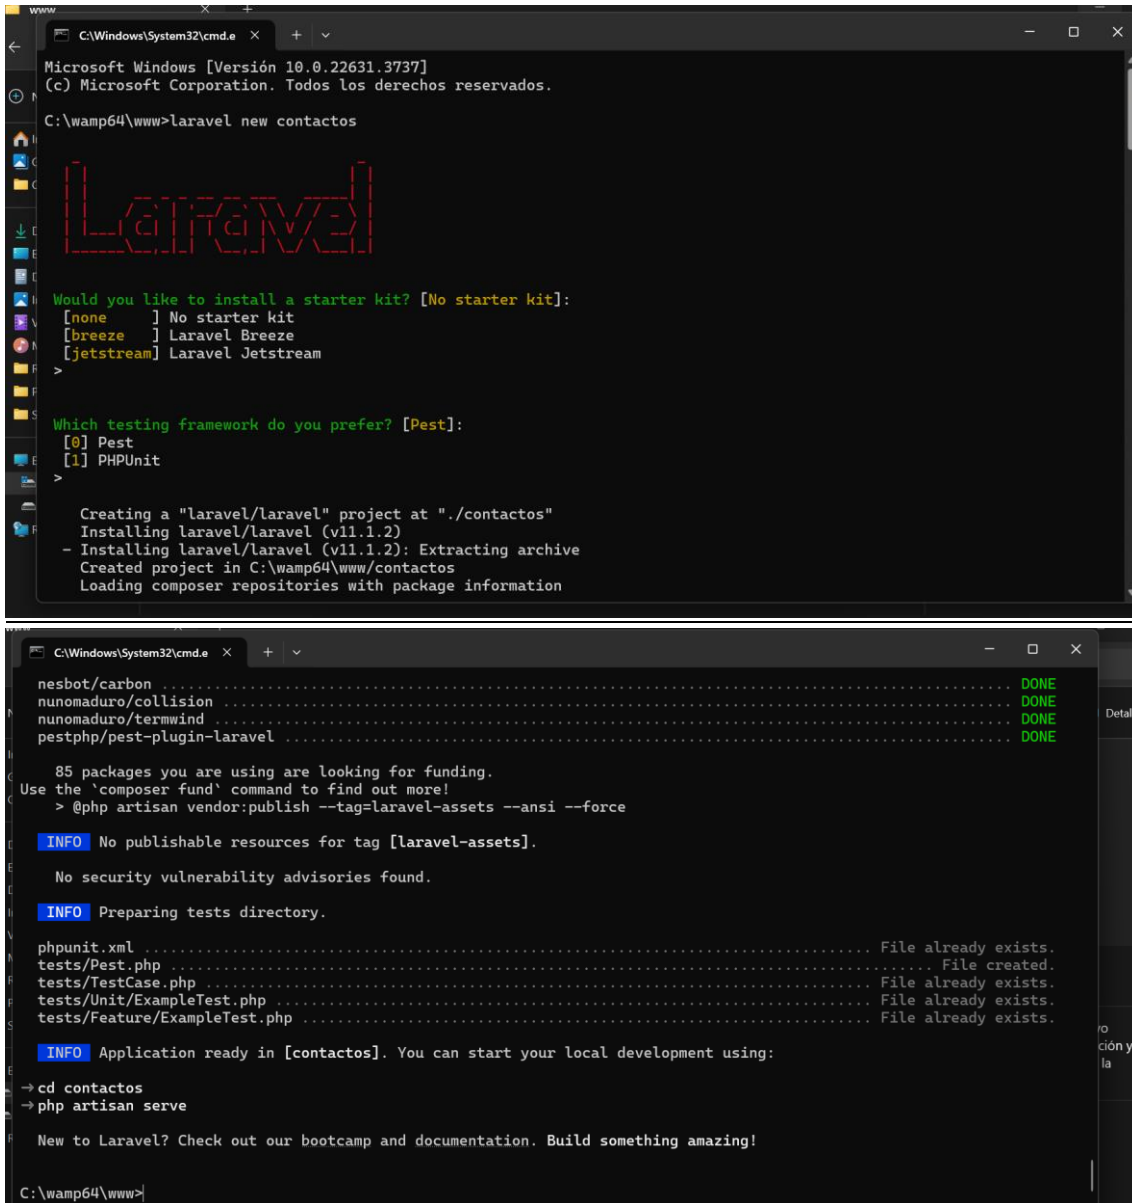

```
C:\Windows\System32\cmd.exe
Microsoft Windows [Versión 10.0.22631.3737]
(c) Microsoft Corporation. Todos los derechos reservados.

C:\wamp64\www>laravel new contactos

  Laravel

Would you like to install a starter kit? [No starter kit]:
[none]    ] No starter kit
[breeze]  ] Laravel Breeze
[jetstream] Laravel Jetstream
>

Which testing framework do you prefer? [Pest]:
[0] Pest
[1] PHPUnit
>

Creating a "laravel/laravel" project at "./contactos"
Installing laravel/laravel (v11.1.2)
- Installing laravel/laravel (v11.1.2): Extracting archive
Created project in C:\wamp64\www\contactos
Loading composer repositories with package information

nesbot/carbon ..... DONE
nunomaduro/collision ..... DONE
nunomaduro/termwind ..... DONE
pestphp/pest-plugin-laravel ..... DONE

85 packages you are using are looking for funding.
Use the 'composer fund' command to find out more!
> @php artisan vendor:publish --tag=laravel-assets --ansi --force

INFO No publishable resources for tag [laravel-assets].

No security vulnerability advisories found.

INFO Preparing tests directory.


phpunit.xml ..... File already exists.
tests/Pest.php ..... File created.
tests/TestCase.php ..... File already exists.
tests/Unit/ExampleTest.php ..... File already exists.
tests/Feature/ExampleTest.php ..... File already exists.

INFO Application ready in [contactos]. You can start your local development using:

→ cd contactos
→ php artisan serve


New to Laravel? Check out our bootcamp and documentation. Build something amazing!

C:\wamp64\www>
```

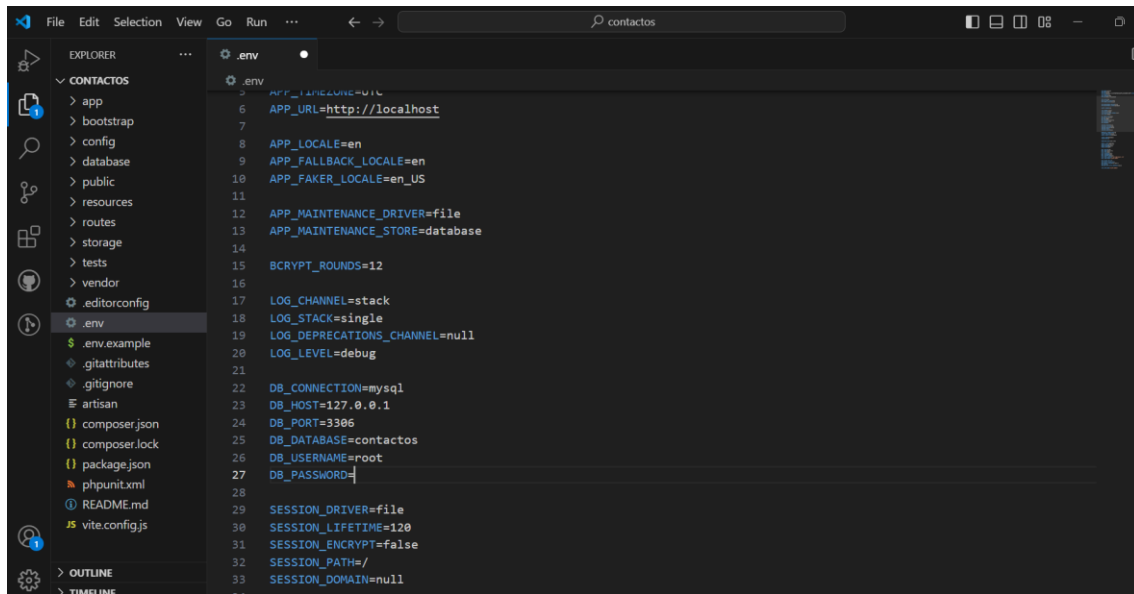

This screenshot shows the Visual Studio Code editor with the `.env` file open. The Explorer sidebar on the left shows the project structure for `CONTACTOS`, with `.env` selected under the `config` directory. The main editor displays the following configuration:



```
APP_TIMEZONE=UTC
APP_URL=http://localhost
APP_LOCALE=en
APP_FALLBACK_LOCALE=en
APP_FAKER_LOCALE=en_US
APP_MAINTENANCE_DRIVER=file
APP_MAINTENANCE_STORE=database
BCRYPT_ROUNDS=12
LOG_CHANNEL=stack
LOG_STACK=single
LOG_DEPRECATIONS_CHANNEL=null
LOG_LEVEL=debug
DB_CONNECTION=mysql
DB_HOST=127.0.0.1
DB_PORT=3306
DB_DATABASE=contactos
DB_USERNAME=root
DB_PASSWORD=
SESSION_DRIVER=file
SESSION_LIFETIME=120
SESSION_ENCRYPT=false
SESSION_PATH=/
SESSION_DOMAIN=null
```


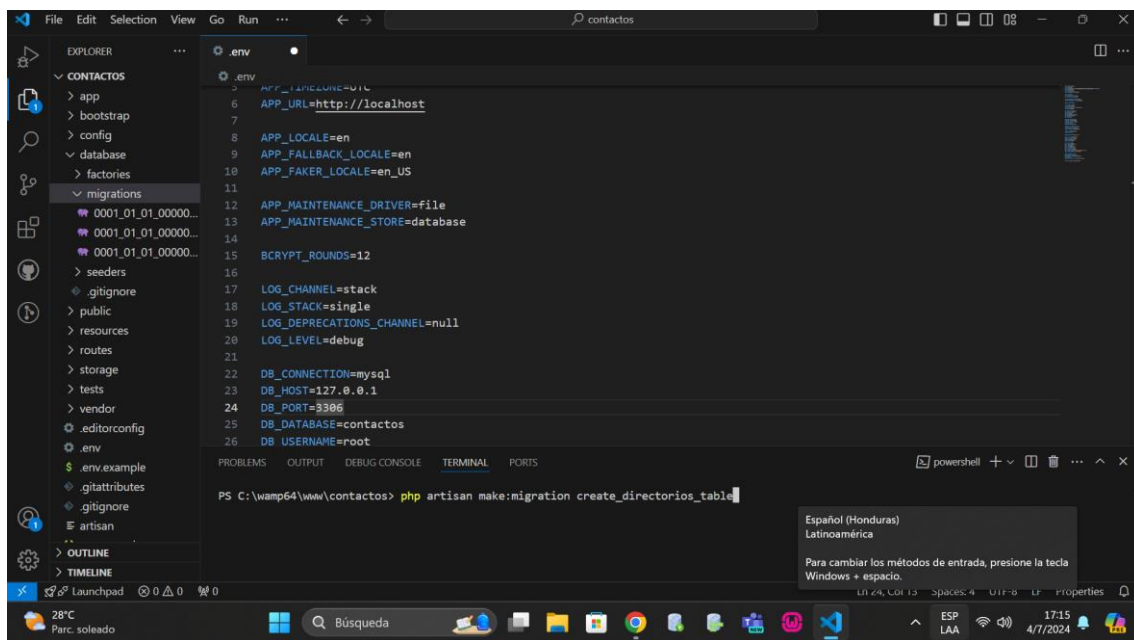




This screenshot shows the same VS Code editor with the `migrations` directory selected in the Explorer sidebar. The `Terminal` panel at the bottom shows the command being executed in a PowerShell window:



```
PS C:\wamp64\www\contactos> php artisan make:migration create_directorios_table
```


A language selection popup is visible in the bottom right corner, showing options for `Español (Honduras)` and `Latinoamérica`. The Windows taskbar at the bottom shows the system clock as 17:15 on 4/1/2024.


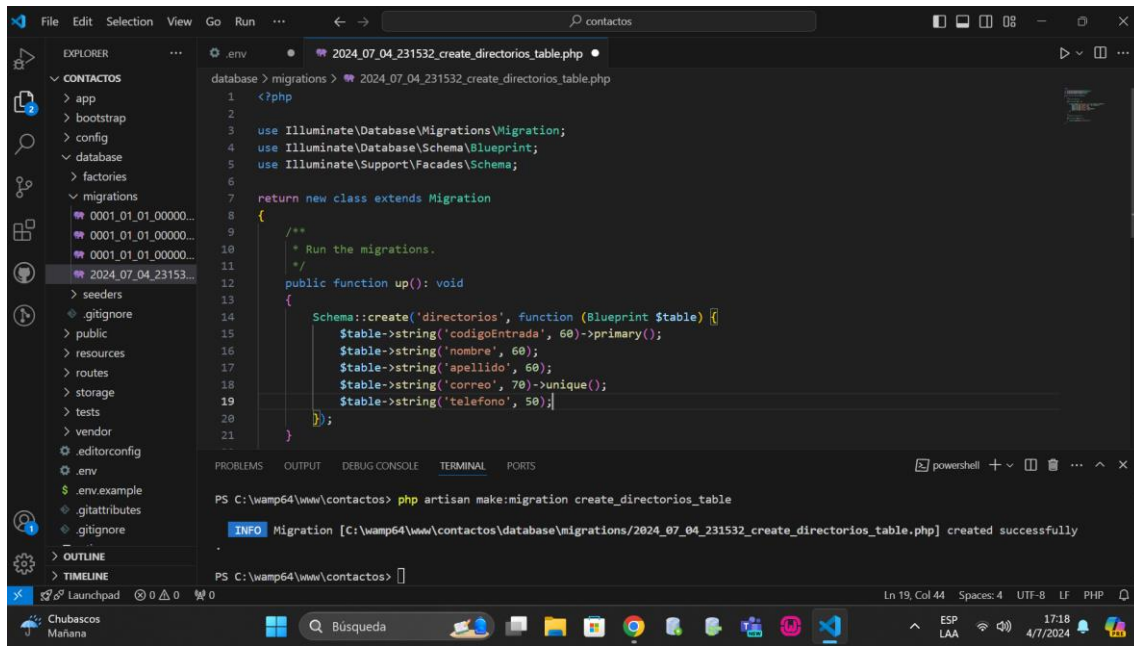
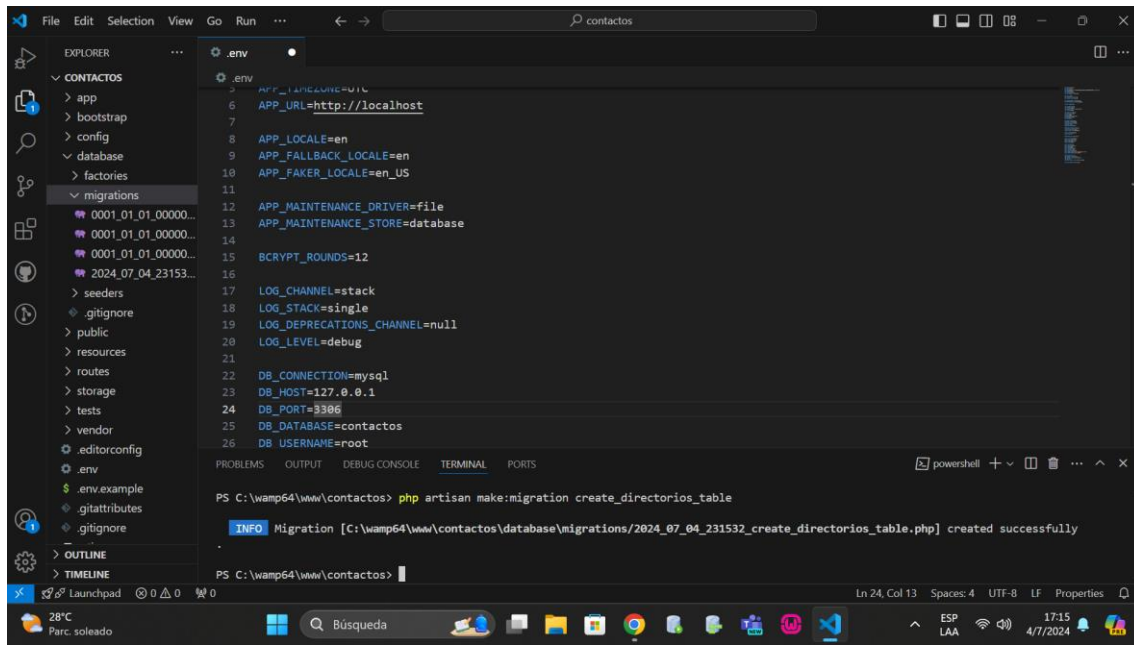


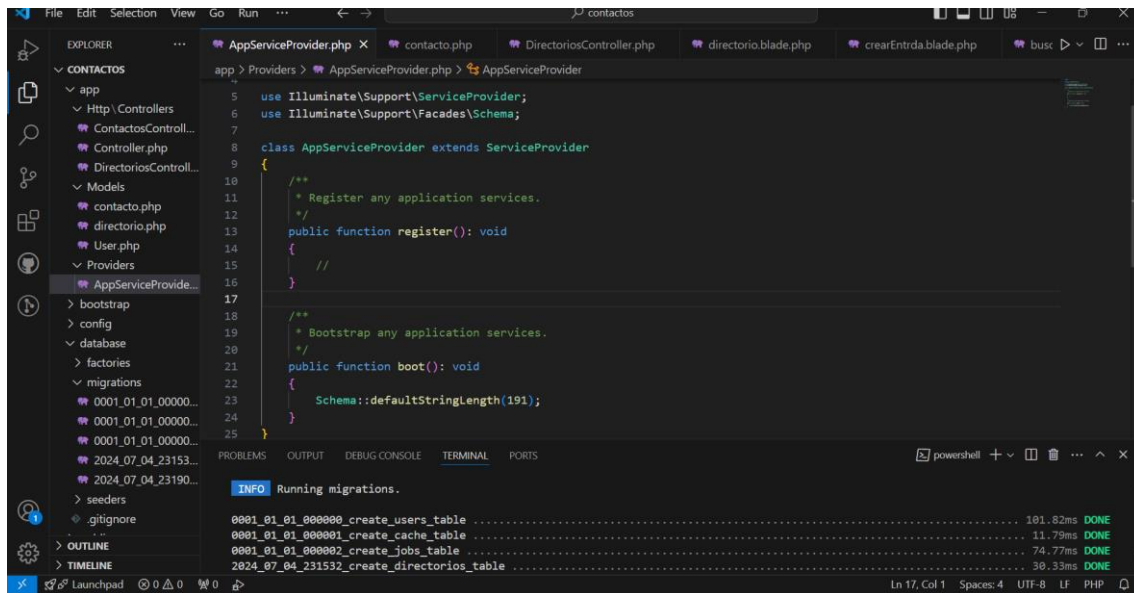
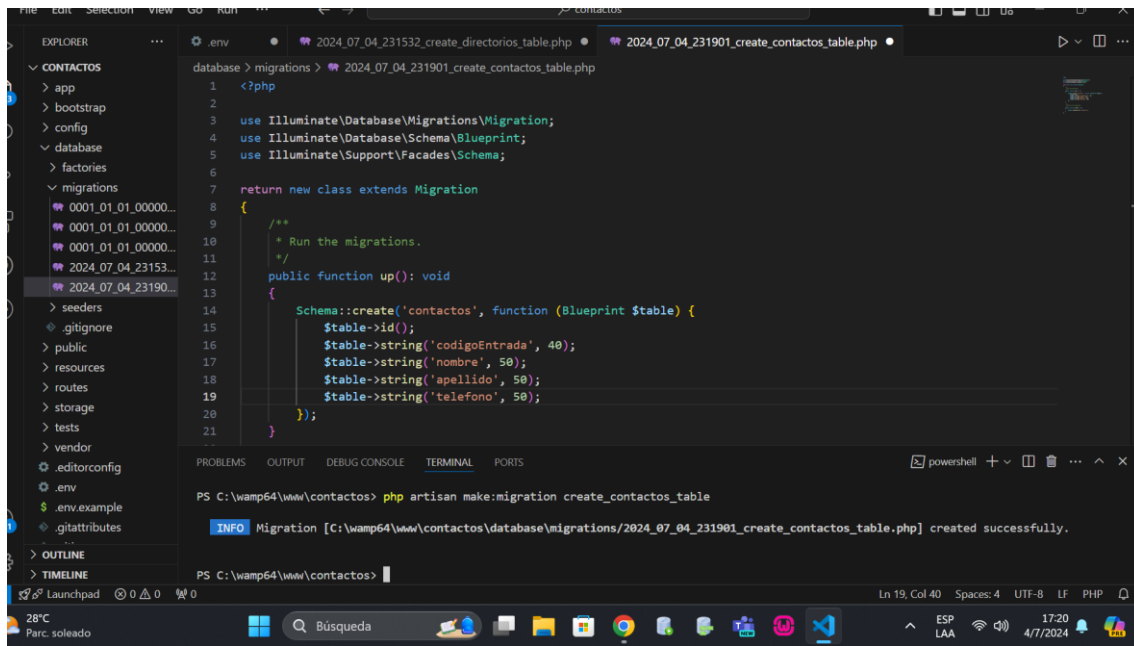


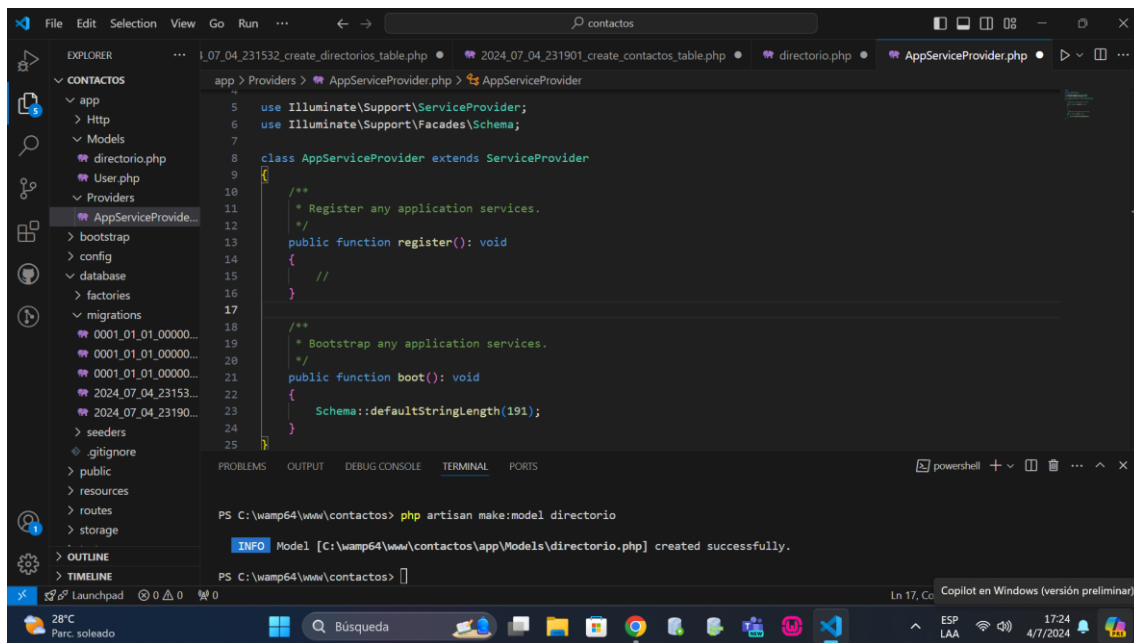
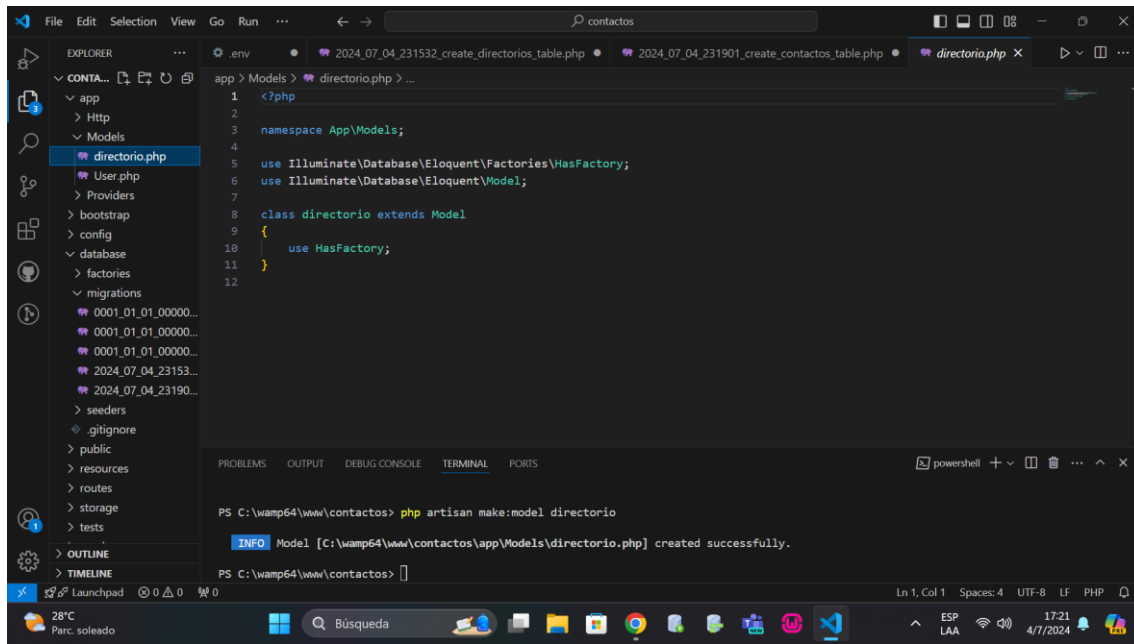


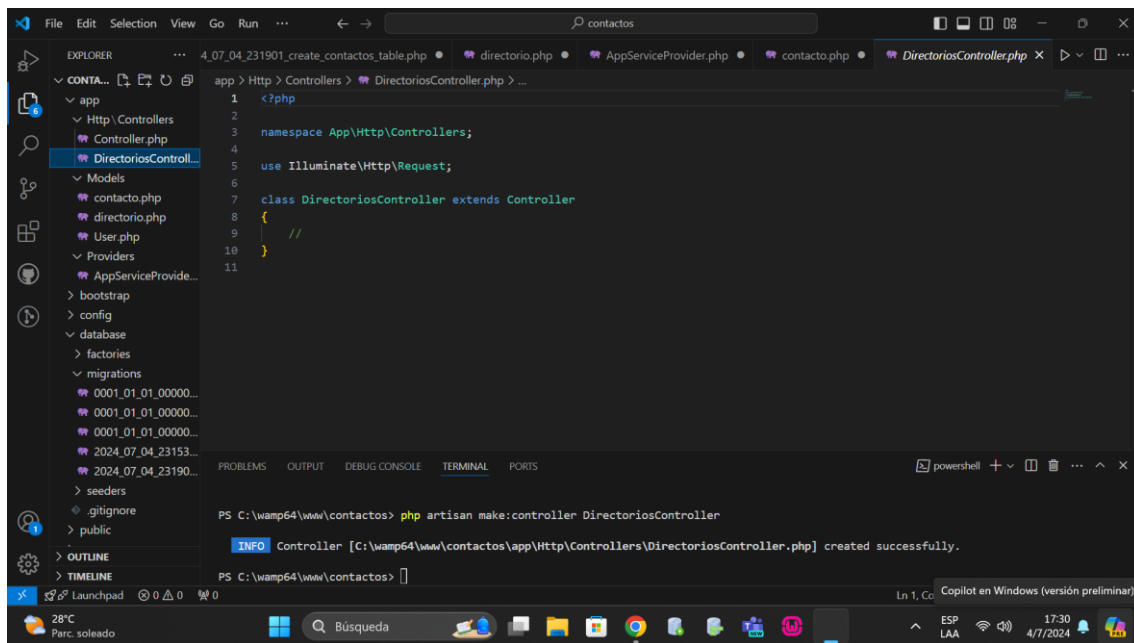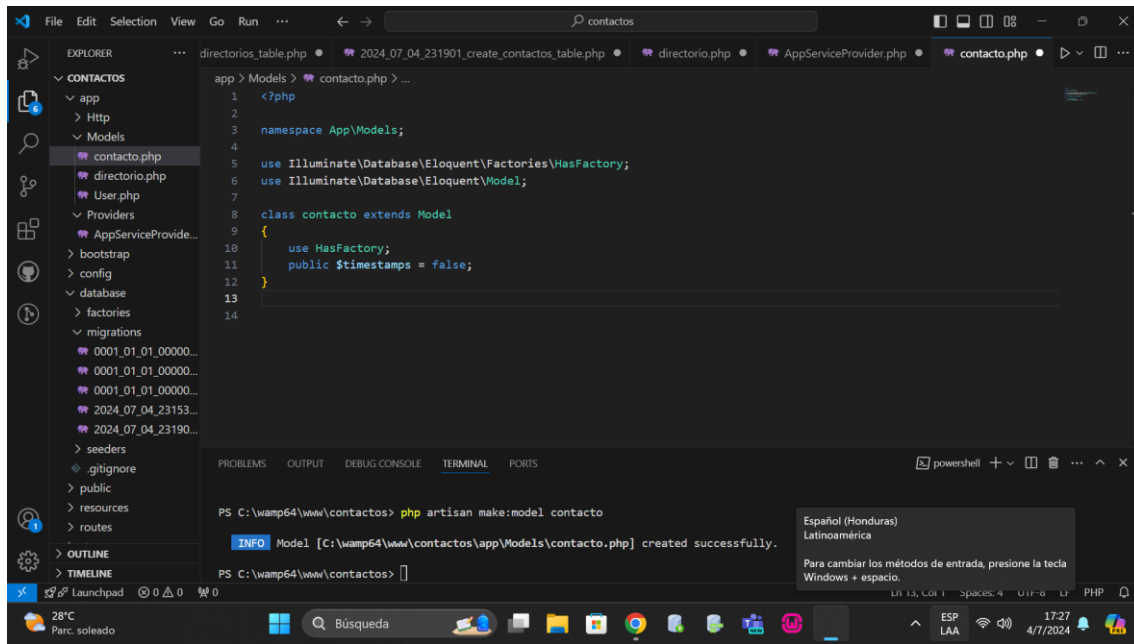


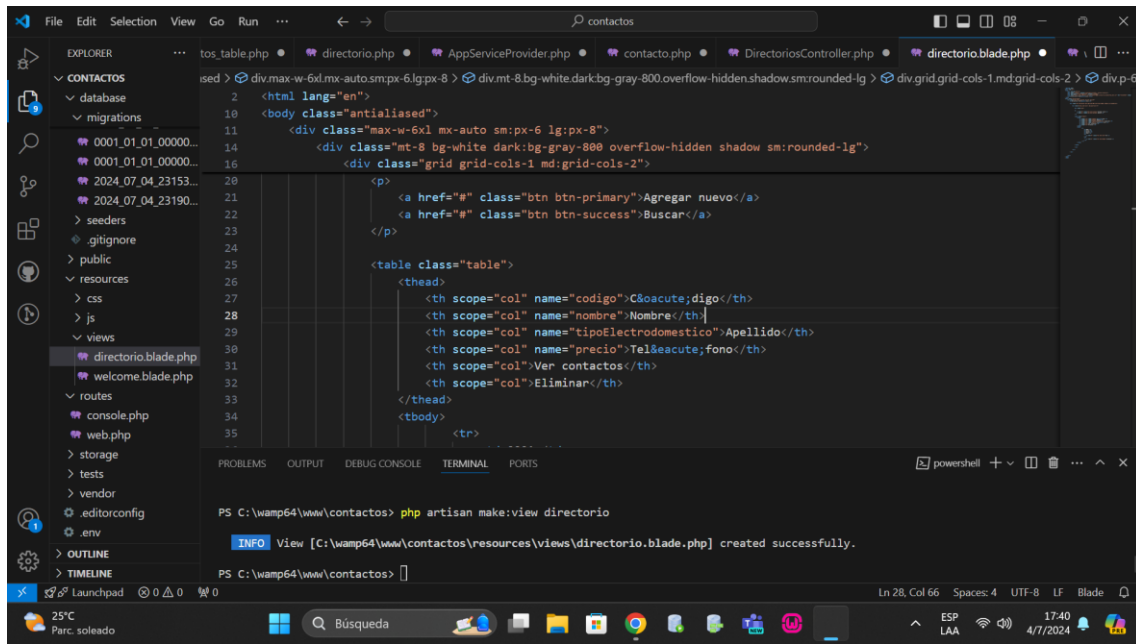

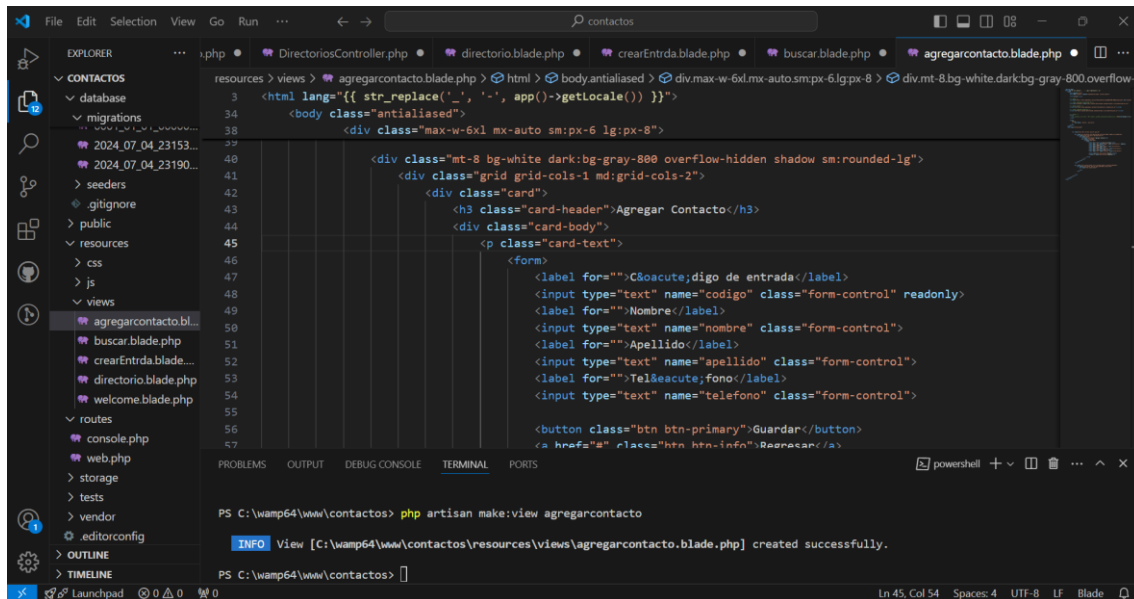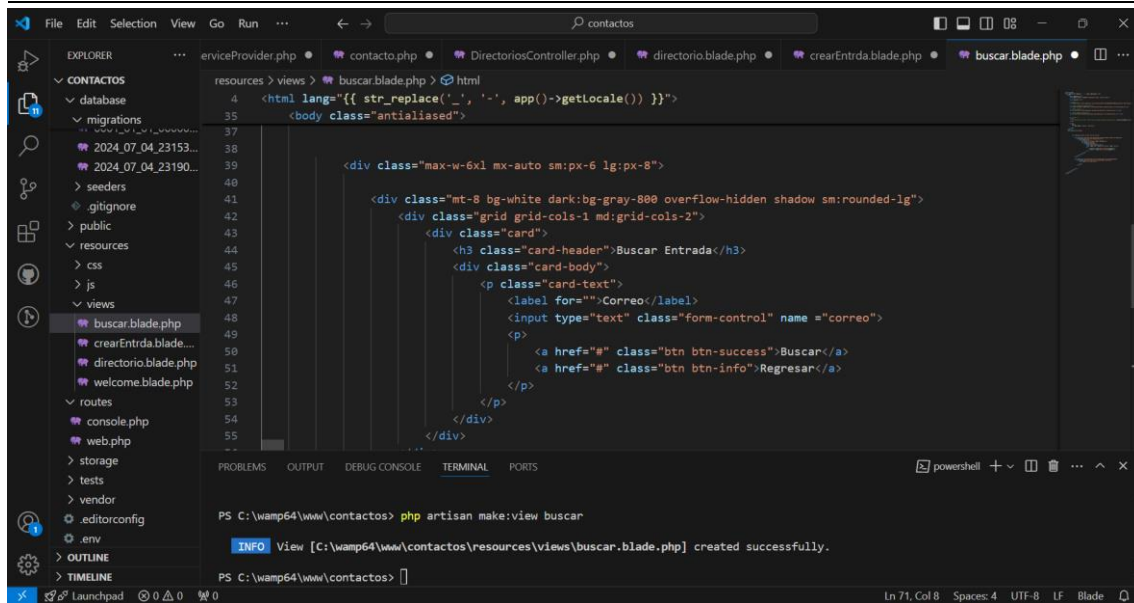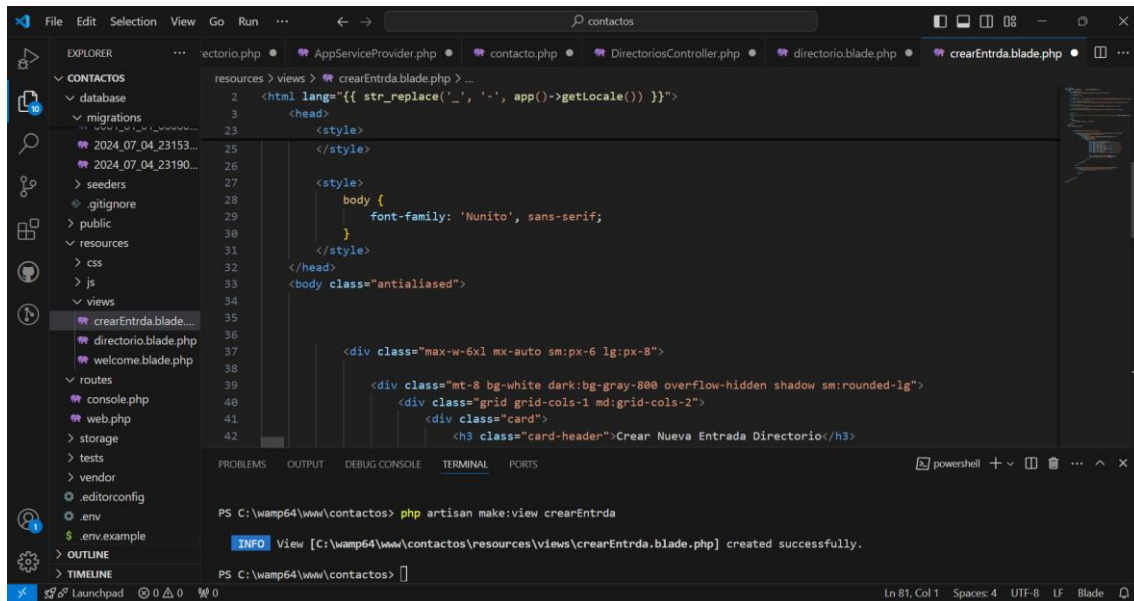

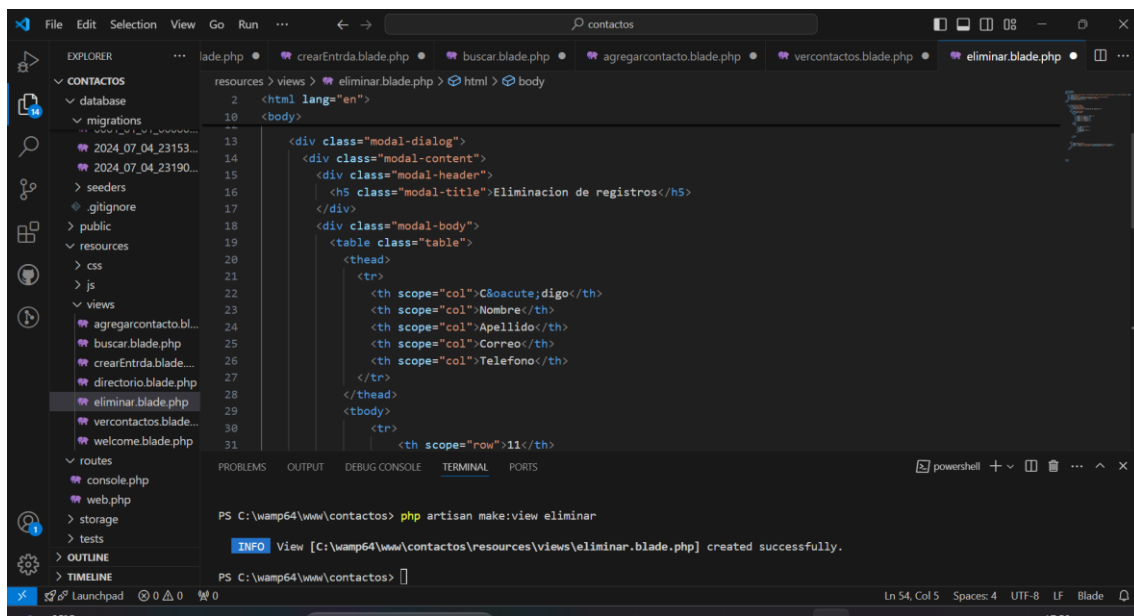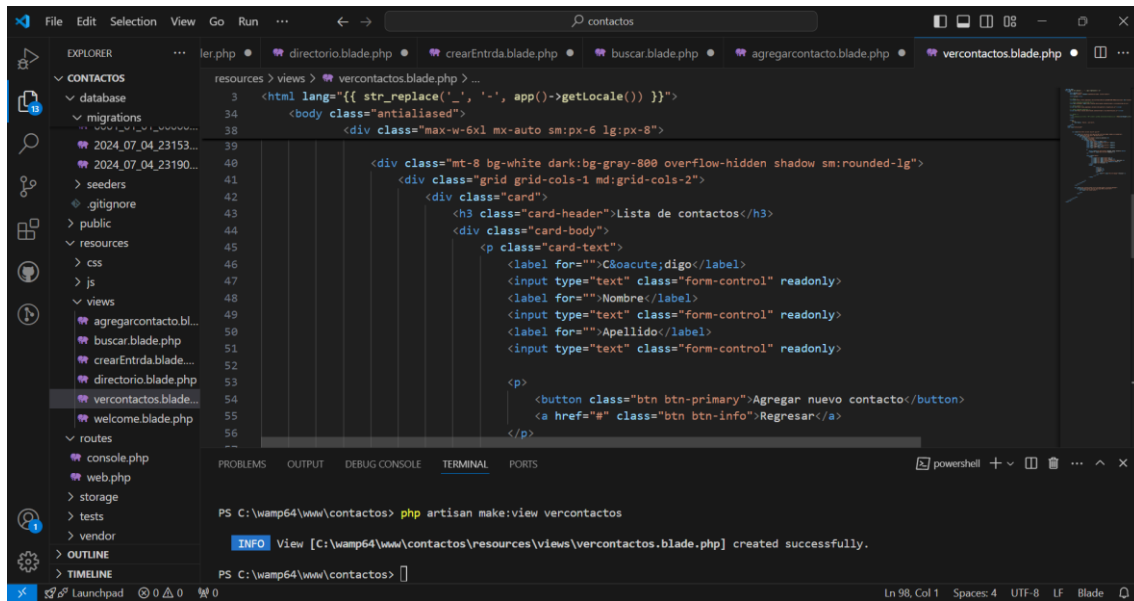

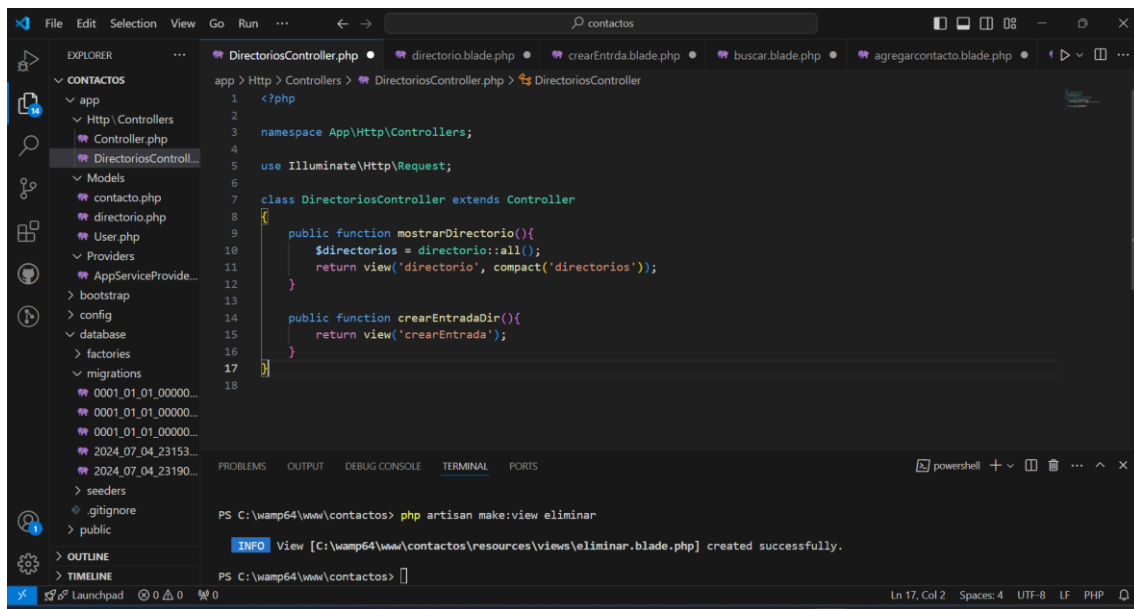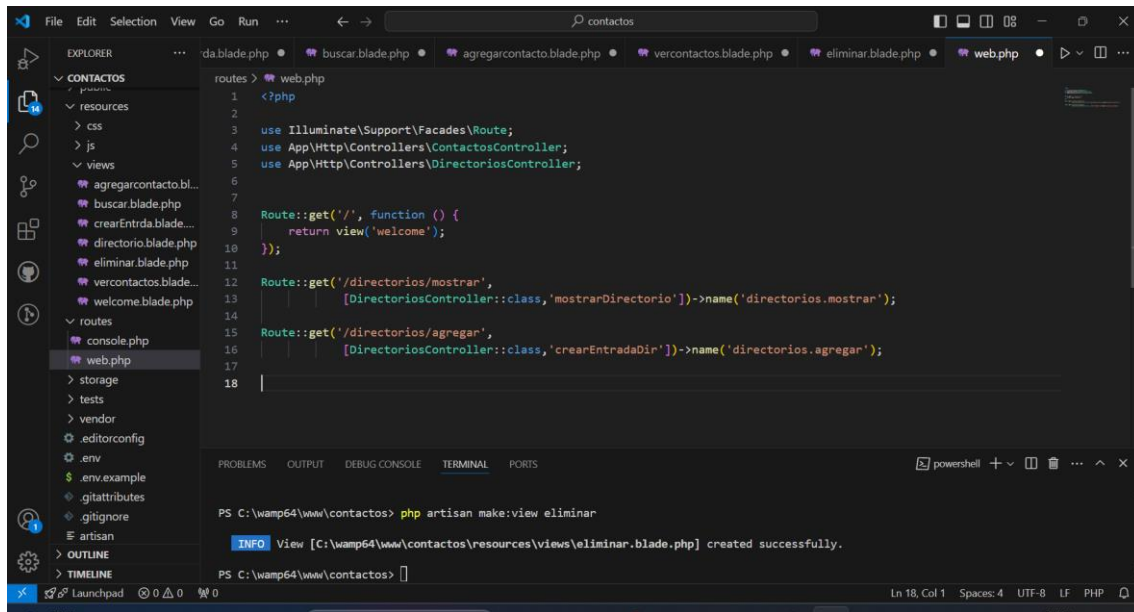

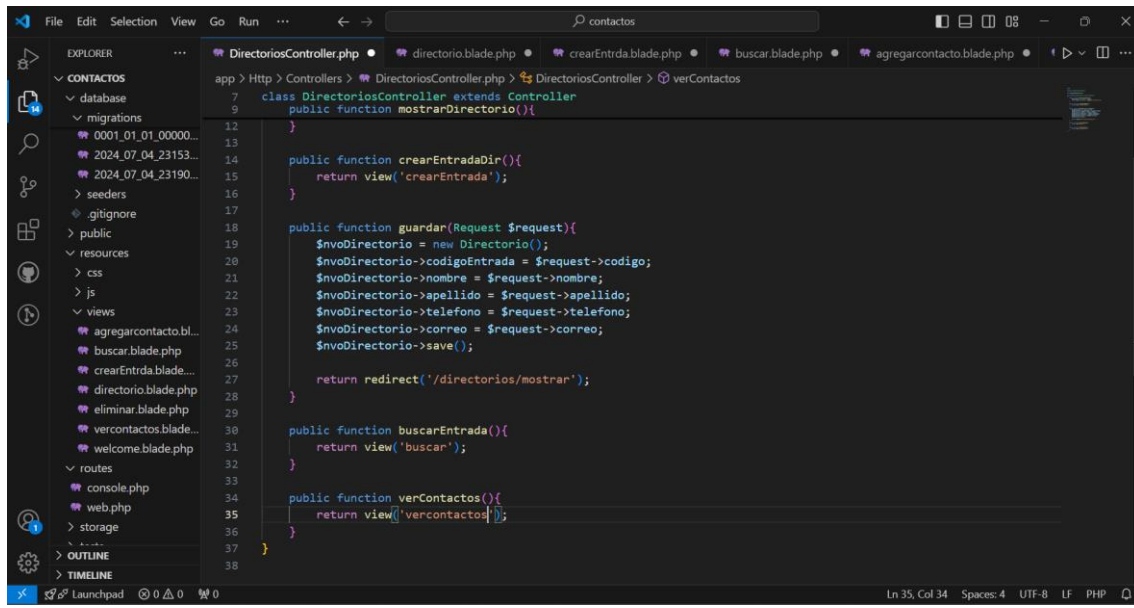

```
app > Http > Controllers > DirectoriosController.php > DirectoriosController > verContactos
class DirectoriosController extends Controller
{
    public function mostrarDirectorio(){}


    public function crearEntradaDir(){}
        return view('crearEntrada');
    }

    public function guardar(Request $request){
        $nvoDirectorio = new Directorio();
        $nvoDirectorio->codigoEntrada = $request->codigo;
        $nvoDirectorio->nombre = $request->nombre;
        $nvoDirectorio->apellido = $request->apellido;
        $nvoDirectorio->telefono = $request->telefono;
        $nvoDirectorio->correo = $request->correo;
        $nvoDirectorio->save();

        return redirect('/directorios/mostrar');
    }

    public function buscarEntrada(){}
        return view('buscar');
    }

    public function verContactos(){}
        return view('verContactos');
    }
}
```

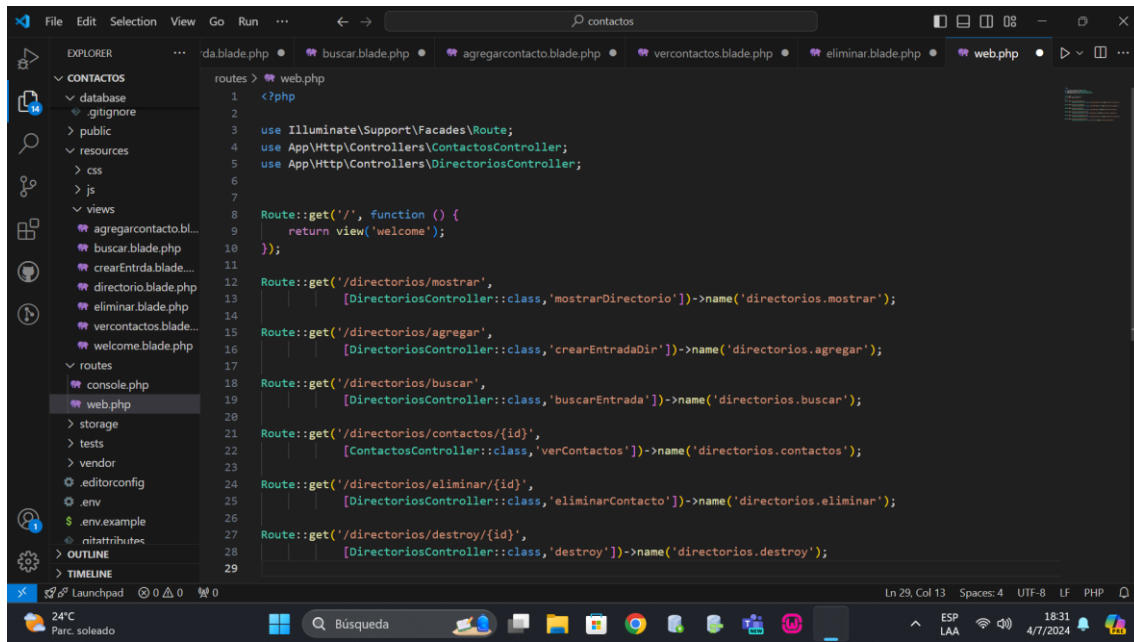

```
routes > web.php
1 <?php
2
3 use Illuminate\Support\Facades\Route;
4 use App\Http\Controllers>ContactosController;
5 use App\Http\Controllers\DirectoriosController;
6
7
8 Route::get('/', function () {
9     return view('welcome');
10 });
11
12 Route::get('/directorios/mostrar',
13     [DirectoriosController::class, 'mostrarDirectorio'])->name('directorios.mostrar');
14
15 Route::get('/directorios/agregar',
16     [DirectoriosController::class, 'crearEntradaDir'])->name('directorios.agregar');
17
18 Route::get('/directorios/buscar',
19     [DirectoriosController::class, 'buscarEntrada'])->name('directorios.buscar');
20
21 Route::get('/directorios/contactos/{id}',
22     [ContactosController::class, 'verContactos'])->name('directorios.contactos');
23
24 Route::get('/directorios/eliminar/{id}',
25     [DirectoriosController::class, 'eliminarContacto'])->name('directorios.eliminar');
26
27 Route::get('/directorios/destroy/{id}',
28     [DirectoriosController::class, 'destroy'])->name('directorios.destroy');
29
```

File Edit Selection View Go Run ... < -> contactos

EXPLORER

- CONTAC...
- app
 - Http Controllers
 - DirectoriosControll...
 - Models
 - contacto.php
 - directorio.php
 - User.php
 - Providers
 - AppServiceProvide...
 - bootstrap
 - config
 - database
 - factories
 - migrations
 - 0001_01_01_00000...
 - 0001_01_01_00000...
 - 0001_01_01_00000...
 - 2024_07_04_23153...
 - 2024_07_04_23190...
 - seeders
 - .gitignore
 - public
- OUTLINE
- TIMELINE

DirectoriosController.php

```
app > Http > Controllers > DirectoriosController > DirectoriosController
7 class DirectoriosController extends Controller
18 public function guardar(Request $request){
25     $nvoDirectorio->save();
26
27     return redirect('/directorios/mostrar');
28 }
29
30 public function buscarEntrada(){
31     return view('buscar');
32 }
33
34 public function verContactos(){
35     return view('vercontactos');
36 }
37
38 public function eliminarContacto($id){
39     $directorio = Directorio::find($id);
40     return view('eliminar',compact('directorio'));
41 }
42
43 public function destroy($id){
44     Contacto::where('codigoEntrada',$id)->delete();
45     $directorio = Directorio::find($id);
46     $directorio->delete();
47     return redirect('/directorios/mostrar');
48 }
49 }
```

Ln 42, Col 1 Spaces: 4 UTF-8 LF PHP

File Edit Selection View Go Run ... < -> contactos

EXPLORER

- CONTACTOS
- database
- .gitignore
- public
- resources
- css
- js
- views
 - agregarcontacto.bl...
 - buscar.blade.php
 - crearEntrda.blade....
 - directorio.blade.php
 - eliminar.blade.php
 - vercontactos.blade...
 - welcome.blade.php
- routes
- console.php
- web.php
- storage
- tests
- vendor
- .editorconfig
- .env
- .env.example
- OUTLINE
- TIMELINE

crearEntrda.blade.php

```
> <div mt-8 bg-white dark:bg-gray-800 overflow-hidden shadow-sm rounded-lg>
2 <html lang="{{ str_replace('_', '-', app()->getLocale()) }}">
33 <body class="antialiased">
37 <div class="max-w-6xl mx-auto sm:px-6 lg:px-8">
39 <div class="mt-8 bg-white dark:bg-gray-800 overflow-hidden shadow-sm rounded-lg">
40 <div class="grid grid-cols-1 md:grid-cols-2">
42 <h3 class="card-header">Crear Nueva Entrada Directorio</h3>
43 <div class="card-body">
44 <p class="card-text">
45 <form action="{{route('directorios.guardar')}}" method="POST">
46 @csrf
47 <label for="">Codigo</label>
48 <input type="text" name="codigo" class="form-control">
49 <label for="">Nombre</label>
50 <input type="text" name="nombre" class="form-control">
51 <label for="">Apellido</label>
52 <input type="text" name="apellido" class="form-control">
53 <label for="">Teléfono</label>
54 <input type="text" name="telefono" class="form-control">
55 <label for="">Correo</label>
56 <input type="text" name="correo" class="form-control">
57 <button type="submit" class="btn btn-primary">Guardar</button>
58 <a href="{{route('directorios.mostrar')}}" class="btn btn-info">Regresar</a>
59 </form>
60 </p>
61 </div>
62 </div>
63 </div>
64 </div>
65 </div>
```

Ln 56, Col 95 Spaces: 4 UTF-8 LF Blade

```
1 <html lang="{{ str_replace('_', '-', app()->getLocale()) }}">
2 <body class="antialiased">
3
4     <div class="max-w-6xl mx-auto sm:px-6 lg:px-8">
5
6         <div class="mt-8 bg-white dark:bg-gray-800 overflow-hidden shadow sm:rounded-lg">
7             <div class="grid grid-cols-1 md:grid-cols-2">
8                 <div class="card">
9                     <h3 class="card-header">Buscar Entrada</h3>
10                     <div class="card-body">
11                         <p class="card-text">
12                             <form action="{{ route('directorios.buscar.dir') }}" method="GET">
13                                 <label for="">Correo</label>
14                                 <input type="text" class="form-control" name="correo">
15                                 <button type="submit">Buscar</button>
16                             </form>
17                         </p>
18                         <a href="{{ route('directorios.mostrar') }}" class="btn btn-info">Regresar</a>
19                     </div>
20                 </div>
21             </div>
22         </div>
23     </div>
24
25     <div class="flex justify-center mt-4 sm:items-center sm:justify-between">
26         <div class="text-center text-sm text-gray-500 sm:text-left">
27             <div class="flex items-center">
```

```
1 <html lang="{{ str_replace('_', '-', app()->getLocale()) }}">
2 <body class="antialiased">
3
4     <div class="max-w-6xl mx-auto sm:px-6 lg:px-8">
5
6         <div class="mt-8 bg-white dark:bg-gray-800 overflow-hidden shadow sm:rounded-lg">
7             <div class="grid grid-cols-1 md:grid-cols-2">
8                 <div class="card">
9                     <h3 class="card-header">Agregar Contacto</h3>
10                     <div class="card-body">
11                         <p class="card-text">
12                             <form action="{{ route('contactos.guardar') }}" method="POST">
13                                 @csrf
14                                 <label for="">Codigo de entrada</label>
15                                 <input type="text" value="{{ $numeroEntrada }}" name="codigo" class="form-control">
16                                 <label for="">Nombre</label>
17                                 <input type="text" name="nombre" class="form-control">
18                                 <label for="">Apellido</label>
19                                 <input type="text" name="apellido" class="form-control">
20                                 <label for="">Telefono</label>
21                                 <input type="text" name="telefono" class="form-control">
22                                 <button type="submit" class="btn btn-primary">Guardar</button>
23                                 <a href="{{ route('directorios.contactos', $numeroEntrada) }}" class="btn btn-info">Ver</a>
24                             </form>
25                         </p>
26                     </div>
27                 </div>
28             </div>
29         </div>
30     </div>
```

```
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6
7 class ContactosController extends Controller
8 {
9     //
10 }
11
```

PS C:\wamp64\www\contactos> php artisan make:controller ContactosController

INFO Controller [C:\wamp64\www\contactos\app\Http\Controllers\ContactosController.php] created successfully.

PS C:\wamp64\www\contactos>

This screenshot shows the VS Code interface with the Explorer view on the left displaying the project structure. The main editor shows the file `eliminar.blade.php` in the `resources > views` directory. The code defines a modal dialog for deleting a contact, including a table with columns for ID, Name, Surname, Email, and Phone. The terminal at the bottom shows the command `php artisan make:controller ContactosController` and its successful execution.

```
resources > views > eliminar.blade.php > html > body > div.modal-dialog > div.modal-content > div.modal-body > table.table > tbody > tr
2 <html lang="en">
10 <body>
12
13 <div class="modal-dialog">
14 <div class="modal-content">
15 <div class="modal-header">
16 <h5 class="modal-title">Eliminacion de registros</h5>
17 </div>
18 <div class="modal-body">
19 <table class="table">
20 <thead>
21 <tr>
22 <th scope="col">Codigo</th>
23 <th scope="col">Nombre</th>
24 <th scope="col">Apellido</th>
25 <th scope="col">Correo</th>
26 <th scope="col">Telefono</th>
27 </tr>
28 </thead>
29 <tbody>
30 <tr>
31 <th scope="row">1</th>
```

PS C:\wamp64\www\contactos> php artisan make:controller ContactosController

INFO Controller [C:\wamp64\www\contactos\app\Http\Controllers\ContactosController.php] created successfully.

PS C:\wamp64\www\contactos>

This screenshot shows the VS Code interface with the Explorer view on the left. The main editor displays the `ContactosController.php` file in the `app > Http > Controllers` directory. The code implements three methods: `verContactos` for displaying a list of contacts, `agregarContacto` for adding a new contact, and `guardarContacto` for saving a contact. The terminal shows the successful execution of the `php artisan make:controller` command.

```
app > Http > Controllers > ContactosController.php > ContactosController > guardarContacto
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6 use App\Models\Contacto;
7
8 class ContactosController extends Controller
9 {
10     public function verContactos($id){
11         $contactos = Contacto::where('codigoEntrada', $id)->get();
12         echo $contactos;
13         return view('vercontactos', compact('contactos'))->with('numeroEntradaR', $id);
14     }
15
16     public function agregarContacto($id){
17         return view('agregarcontacto', ['numeroEntradaR' => $id]);
18     }
19
20     public function guardarContacto(Request $request){
21         $nvoContacto = new Contacto();
22         $nvoContacto->codigoEntrada = $request->codigo;
23         $nvoContacto->nombre = $request->nombre;
24         $nvoContacto->apellido = $request->apellido;
25         $nvoContacto->telefono = $request->telefono;
26         $nvoContacto->save();
27
28         return redirect('/directorios/contactos/'.$request->codigo);
29     }
30 }
31
```

PS C:\wamp64\www\contactos> php artisan make:controller ContactosController

INFO Controller [C:\wamp64\www\contactos\app\Http\Controllers\ContactosController.php] created successfully.

PS C:\wamp64\www\contactos>


This screenshot shows the VS Code interface with the Explorer view on the left. The main editor displays the `vercontactos.blade.php` file in the `resources > views` directory. The code defines a view for displaying a list of contacts, including a table with columns for ID, Name, Surname, Email, and Phone. The terminal shows the successful execution of the `php artisan make:controller` command.

```
resources > views > vercontactos.blade.php > html > body > div.grid.grid-cols-1.md:grid-cols-2 > div.card > div.card-body > p.card-text > table.table > tbody
3 <html lang="{{ str_replace('_', '-', app()->getLocale()) }}">
34 <body class="antialiased">
38 <div class="max-w-6xl mx-auto sm:px-6 lg:px-8">
40 <div class="mt-8 bg-white dark:bg-gray-800 overflow-hidden shadow sm:rounded-lg">
41 <div class="grid grid-cols-1 md:grid-cols-2">
42 <div class="card">
43 <h3 class="card-header">Lista de contactos</h3>
44 <div class="card-body">
45 <p class="card-text">
46 <label for="">Codigo</label>
47 <input type="text" class="form-control" readonly>
48 <label for="">Nombre</label>
49 <input type="text" class="form-control" readonly>
50 <label for="">Apellido</label>
51 <input type="text" class="form-control" readonly>
52
53 <p>
54 <a href="{{ route('contactos.agregar', $numeroEntradaR) }}">button class="btn b
55 <a href="{{ route('directorios.mostrar') }}" class="btn btn-info">Regresar</a>
56
57 </p>
```

PS C:\wamp64\www\contactos> php artisan make:controller ContactosController

INFO Controller [C:\wamp64\www\contactos\app\Http\Controllers\ContactosController.php] created successfully.

PS C:\wamp64\www\contactos>

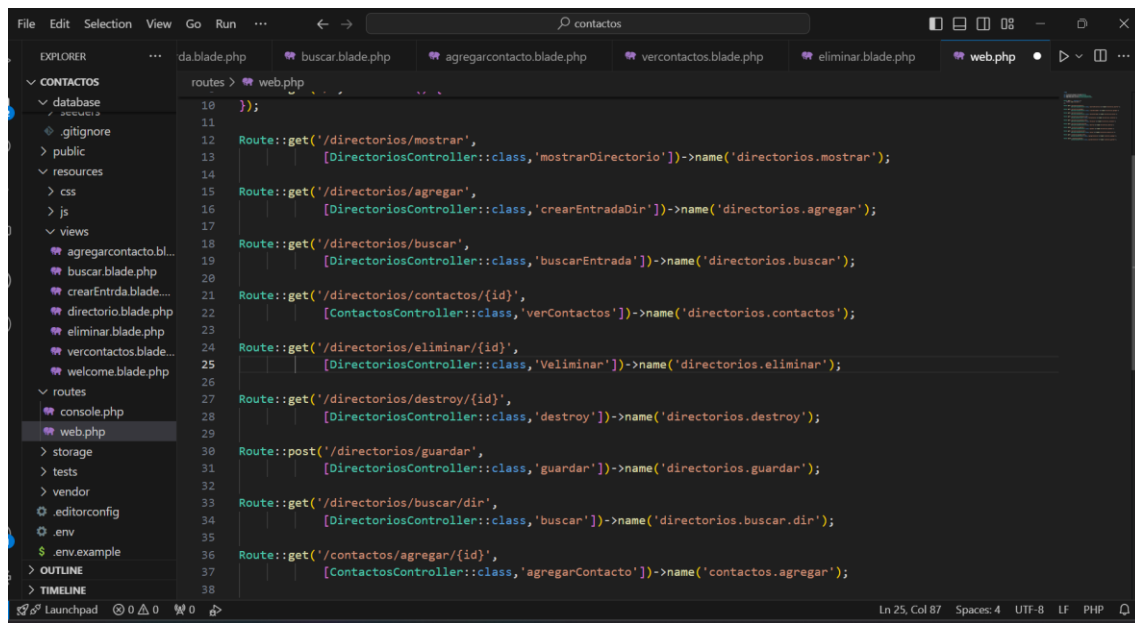

The image shows a code editor window with a dark theme. The Explorer panel on the left shows a project structure with folders like 'database', 'public', 'resources', 'css', 'js', 'views', 'routes', 'storage', 'tests', 'vendor', and files like '.gitignore', '.editorconfig', '.env', and '.env.example'. The 'routes' folder is expanded, showing 'web.php'. The main editor area displays the contents of 'web.php', which defines several routes for a 'directorios' and 'contactos' application. The routes are as follows:

```
10 }
11 };
12 Route::get('/directorios/mostrar',
13     [DirectoriosController::class, 'mostrarDirectorio'])->name('directorios.mostrar');
14
15 Route::get('/directorios/agregar',
16     [DirectoriosController::class, 'crearEntradaDir'])->name('directorios.agregar');
17
18 Route::get('/directorios/buscar',
19     [DirectoriosController::class, 'buscarEntrada'])->name('directorios.buscar');
20
21 Route::get('/directorios/contactos/{id}',
22     [ContactosController::class, 'verContactos'])->name('directorios.contactos');
23
24 Route::get('/directorios/eliminar/{id}',
25     [DirectoriosController::class, 'eliminar'])->name('directorios.eliminar');
26
27 Route::get('/directorios/destroy/{id}',
28     [DirectoriosController::class, 'destroy'])->name('directorios.destroy');
29
30 Route::post('/directorios/guardar',
31     [DirectoriosController::class, 'guardar'])->name('directorios.guardar');
32
33 Route::get('/directorios/buscar/dir',
34     [DirectoriosController::class, 'buscar'])->name('directorios.buscar.dir');
35
36 Route::get('/contactos/agregar/{id}',
37     [ContactosController::class, 'agregarContacto'])->name('contactos.agregar');
38
```

The status bar at the bottom indicates the cursor is at line 25, column 87, with 4 spaces, UTF-8 encoding, LF line endings, and the PHP file type.