

Analyzing GNN Architectures on ogbn-arxiv

Comparing Baseline and Attention Models for Large-Scale Classification

Pascu Ionut Alexandru | Group 507

Large-Scale Benchmark Context

169k

NODES

2.3M

EDGES

128

FEATURES

40

SUBJECT AREAS

Task: Node Classification

The goal is to predict paper categories in a realistic temporal split (Papers $\leq$ 2017 for training).

The Homophily Argument


A key theoretical reason for baseline performance lies in graph structure:

- **Homophilic Graph:** Citation networks naturally link similar nodes. Authors cite papers in their own field.
- **Selective Attention:** GAT/GATv2 are designed to filter "noise" from irrelevant neighbors.
- **Finding:** On [ogbn-arxiv](#), there is little noise to filter. Standard averaging is sufficient.

"Simple mean aggregation captures the neighborhood consensus more efficiently than learned weights."

Label-colored 1-hop subgraph around node 346 | global homophily=0.654 | local homophily=0.923

Label-colored 1-hop subgraph around node 346 | local edge homophily=0.923

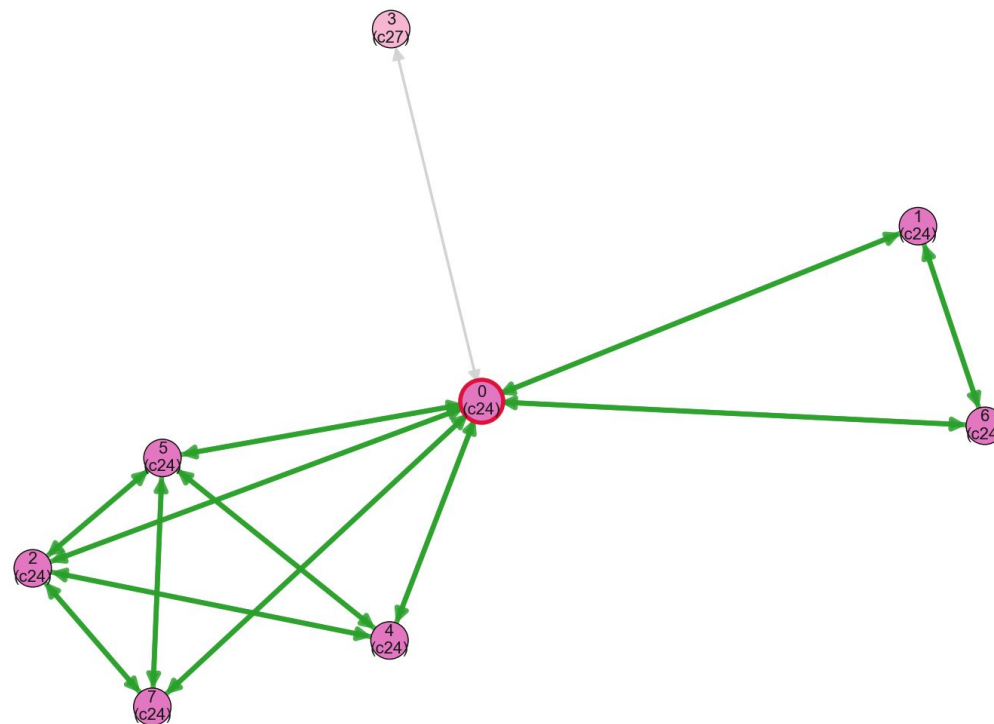

Architectures

GCN

Uses fixed, symmetric normalization to act as a perfect low-pass filter across neighborhoods.

GraphSAGE

Learns a generic function to sample and aggregate local neighborhoods, allowing it to scale massively.

GAT

Allows nodes to dynamically assign importance to neighbors to filter out noisy structural connections.

GATv2

Fixes a mathematical flaw in GAT to allow strictly superior expressive power for complex edge relations.

Static vs. Dynamic Attention

GAT (Static)

$$e_{ij} = \text{LeakyReLU}(\vec{a}^T [W\vec{h}_i \parallel W\vec{h}_j])$$

Ranking of neighbors j is the same for all query nodes i . Attention is strictly limited by the additive decomposition.

GATv2 (Dynamic)

$$e_{ij} = \vec{a}^T \cdot \text{LeakyReLU}(W[\vec{h}_i \parallel \vec{h}_j])$$

By reordering operations, GATv2 allows the query to change the ranking of neighbors. It is universally expressive.

Critical Result: Even with dynamic attention, GATv2 failed to outperform GCN on arxiv, proving the problem doesn't require selectivity.

Experimental Setup

Model	Hidden Size	Layers	Heads	Dropout	Learning Rate
GCN	128	2	-	0.5	0.01
GraphSAGE	128	2	-	0.5	0.01
GAT	32	2	4	0.5	0.005
GATv2	32	2	4	0.4	0.003

**All models trained using full-batch mode for 200 epochs.*

Representation Quality

t-SNE Takeaways

All models substantially improve the geometry of raw features, creating macro-clusters for dominant classes.

GraphSAGE: Produced the cleanest large-scale layout with well-separated class islands.


Insight: A visually strong t-SNE layout does not always guarantee the best downstream accuracy (e.g., GATv2 looked structured but scored lowest).

Representation Quality - GCN

Raw Features t-SNE



Learned Embeddings t-SNE (GCN)

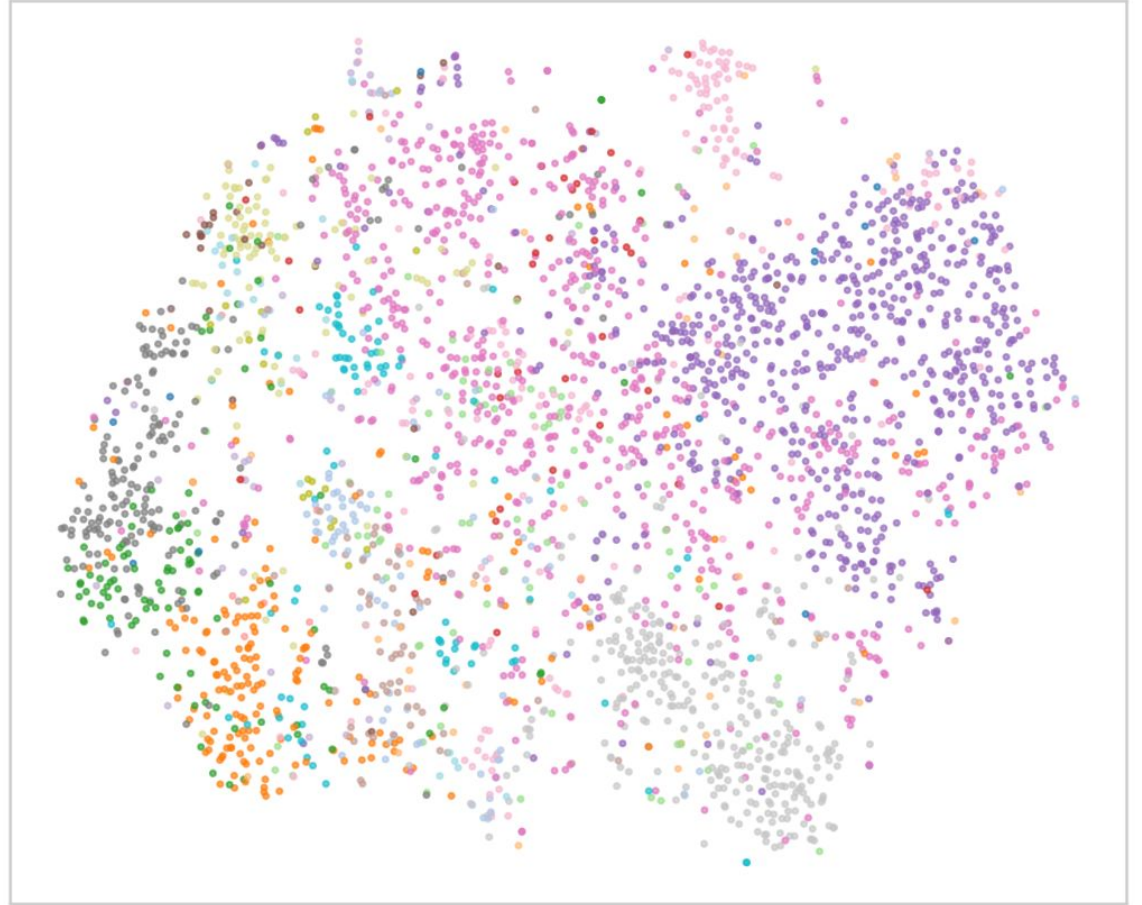


Representation Quality - GraphSAGE

Raw Features t-SNE



Learned Embeddings t-SNE (GraphSAGE)

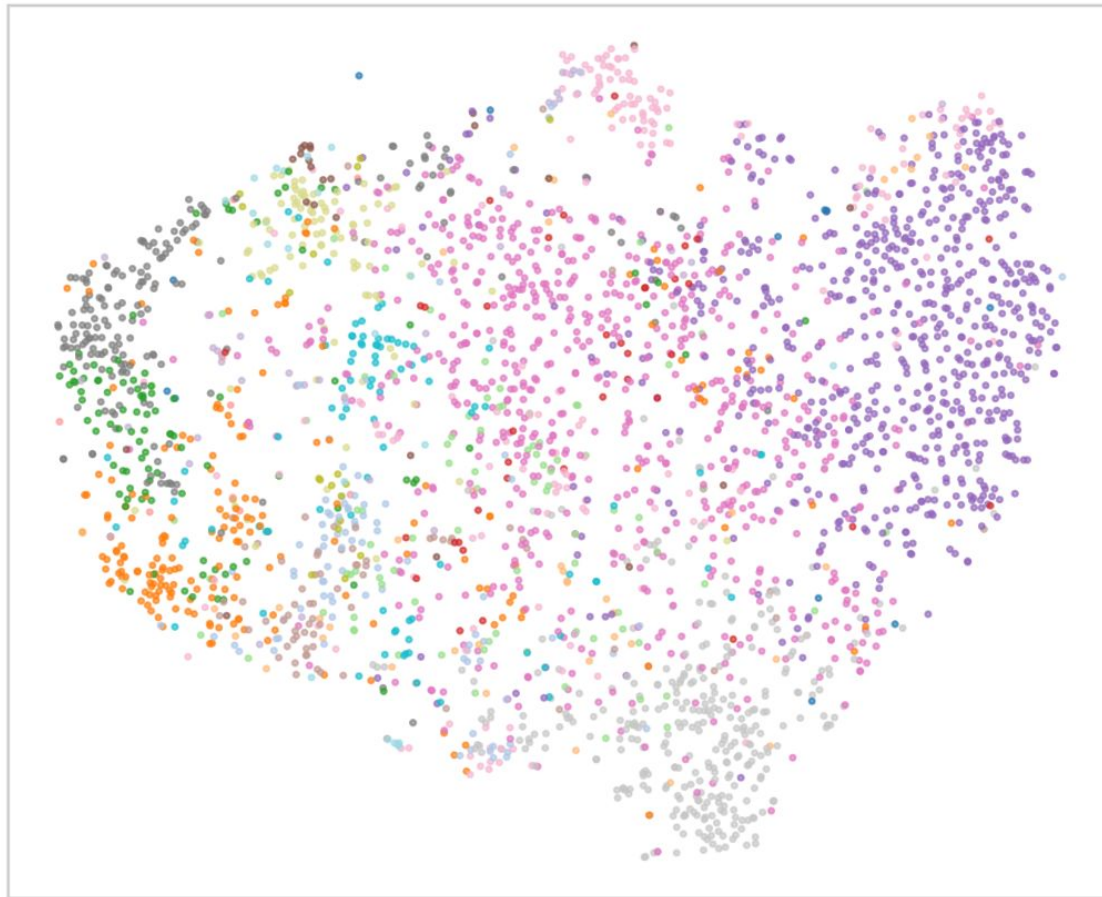

Representation Quality - GAT

Raw Features t-SNE



Learned Embeddings t-SNE (GAT)



Representation Quality - GATv2

Raw Features t-SNE



Learned Embeddings t-SNE (GATv2)




Quantitative Results



GraphSAGE emerged as the champion: highest accuracy and shortest training time (9.15s). Attention models underperformed relative to the baselines.



Convergence Analysis

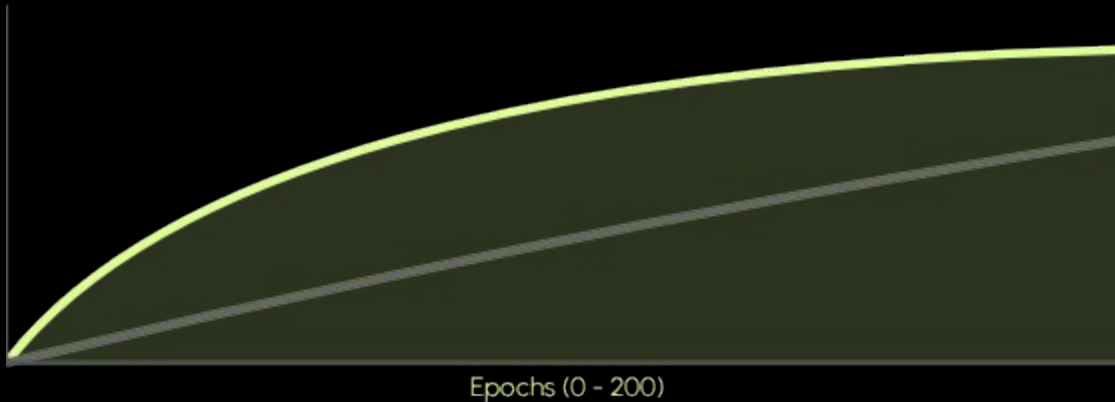

Key Observations

- GraphSAGE/GCN reach the 60% region significantly earlier (approx. Epoch 40).
- Attention models (GAT/GATv2) improve more slowly and plateau at lower accuracy levels.
- Higher training stability was observed in non-attention baselines.

Results

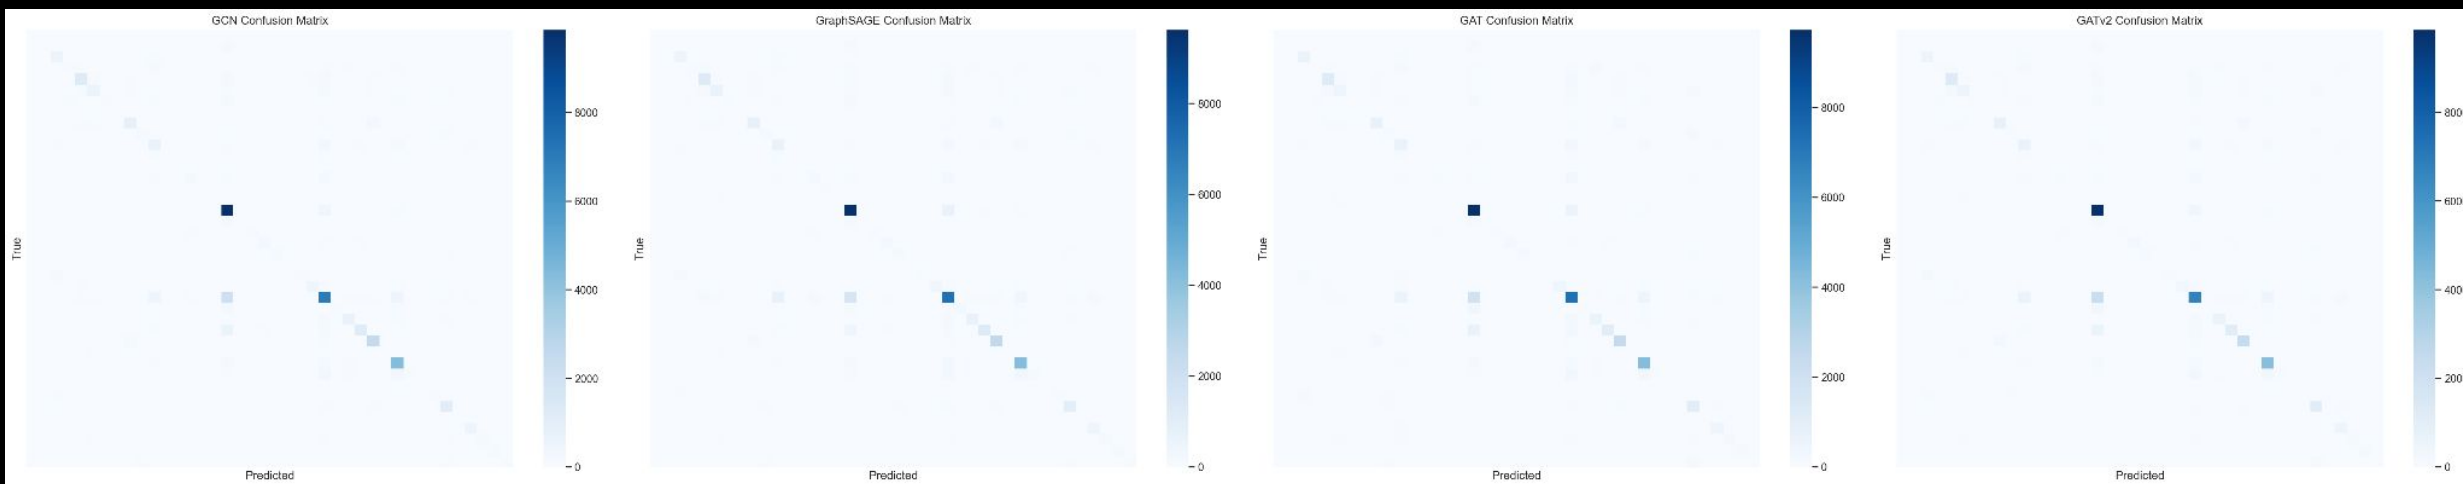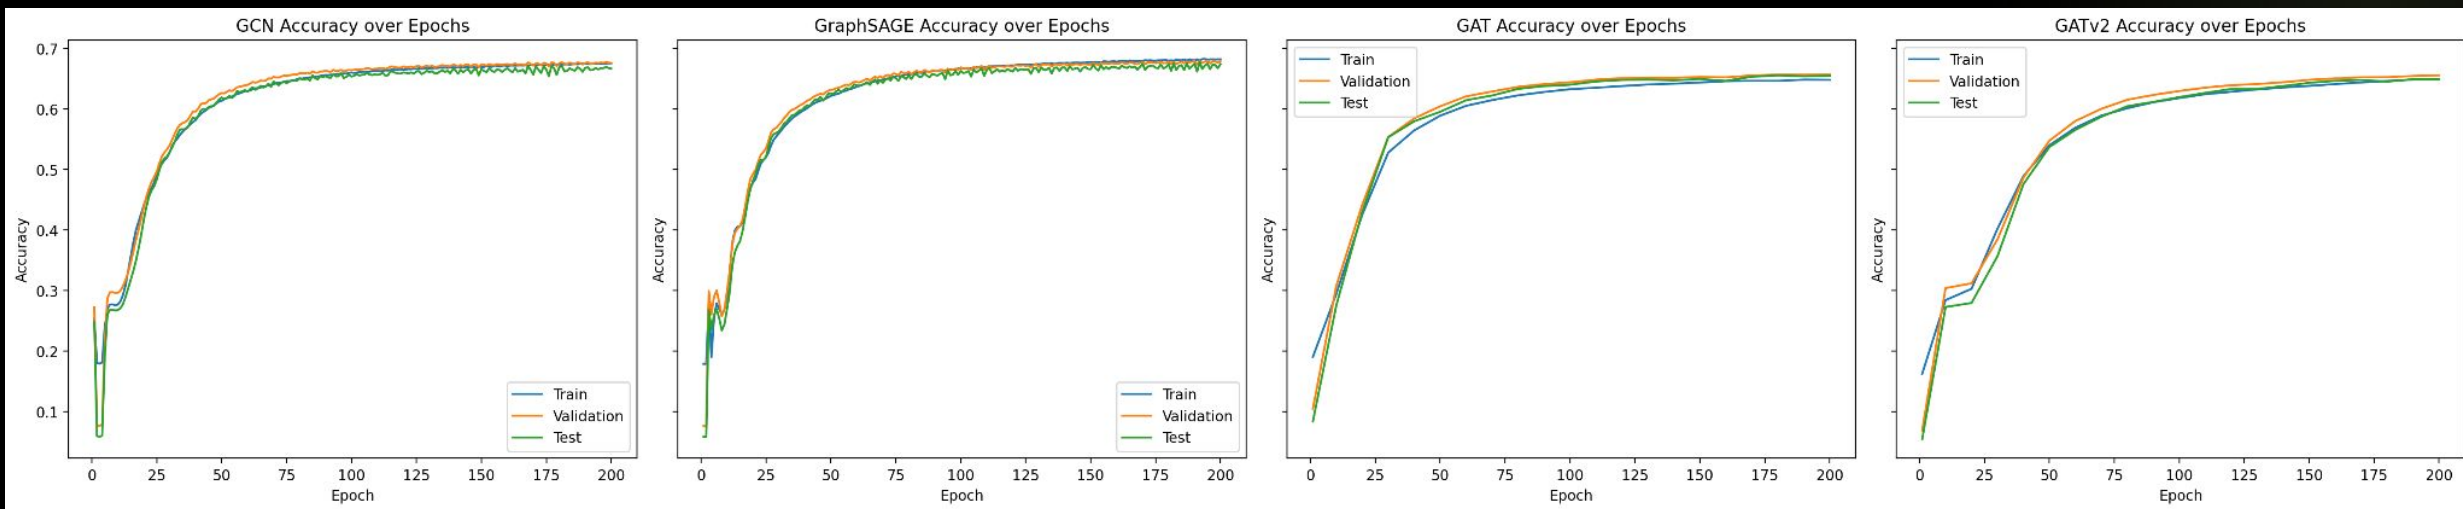

Main Findings



Efficiency

GraphSAGE was the fastest model, while GATv2 was the most expensive (2x compute).



Baseline Strength

Standard GCN is highly competitive with fewer parameters than attention models.



Attention Gap

Attention did not provide a better accuracy/compute tradeoff on this specific dataset.



Optimization

Higher optimization difficulty was noted for GAT/GATv2 variants.


Error Analysis

Confusion Patterns



Broad label structure captured by all models.

Persistent confusion in several class pairs suggests a bottleneck in feature overlap.

Label ambiguity remains a challenge beyond the aggregation operator.

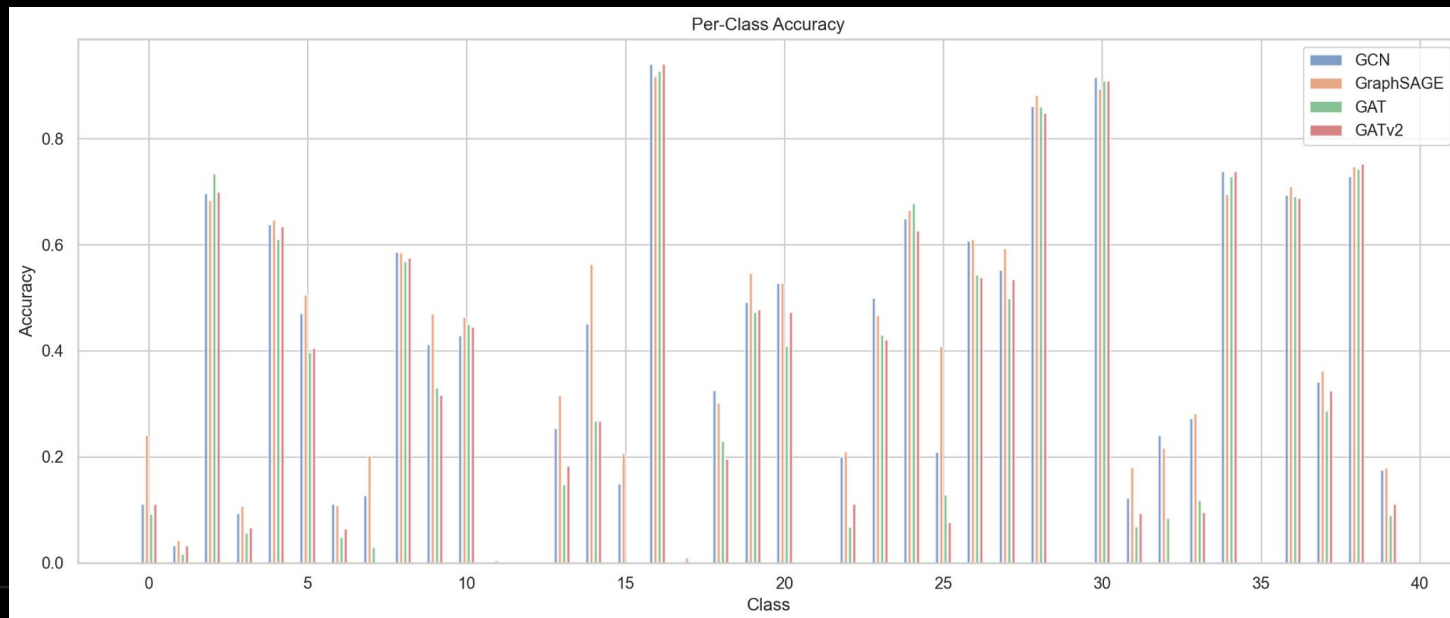

Attention Mechanisms

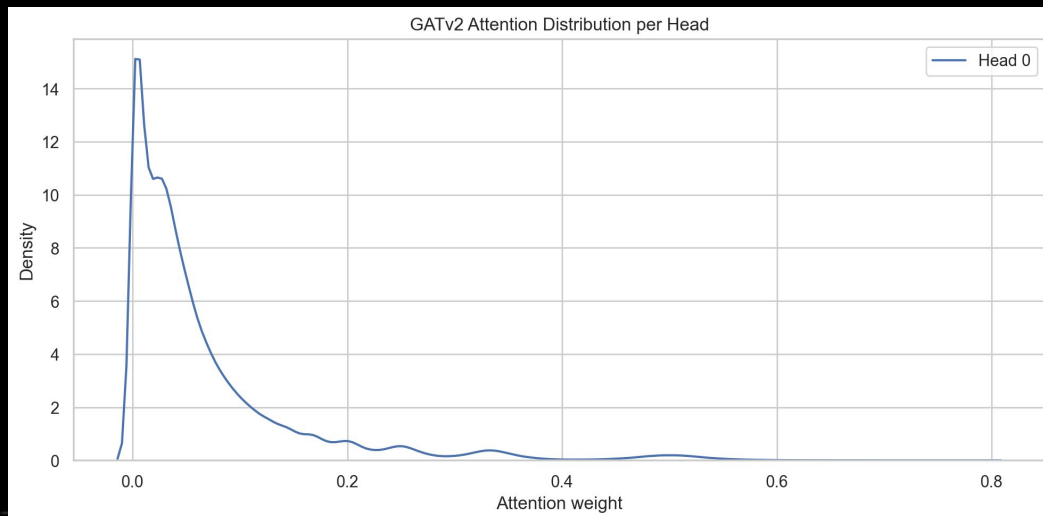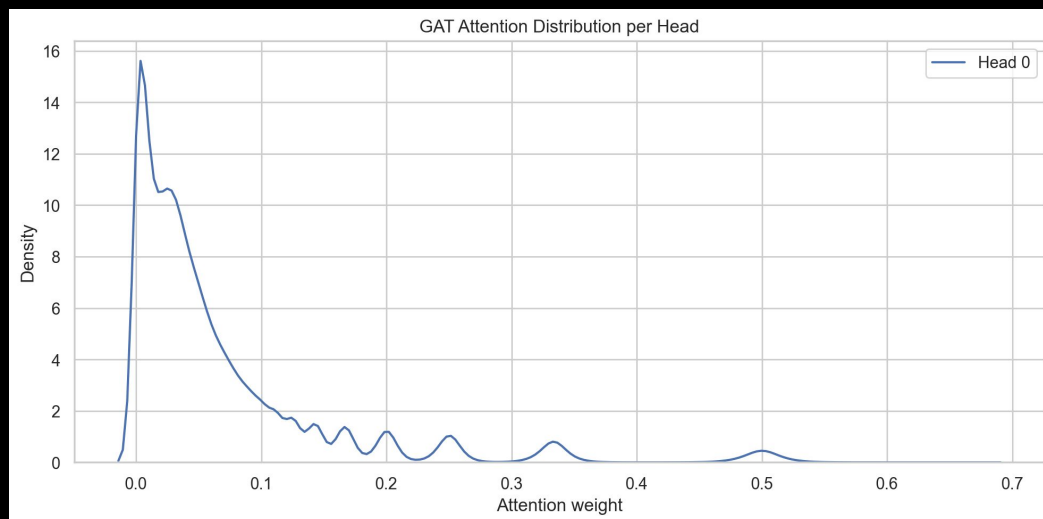

Internal Diagnostics

Sparse Aggregation: Most coefficients concentrated near zero; a few dominant neighbors drive the message.

Interpretation: While attention subgraphs are visually interpretable, they do not guarantee better final performance.

Flexibility: GATv2 showed a broader weighting tail but failed to translate flexibility into accuracy.

Practical Lessons

- ✓ **Baselines Matter:** GCN and GraphSAGE provide critical reference points.
- ▼ **Preprocessing is Key:** Disabling normalization was vital for attention stability.
- ⚙️ **Efficiency is Quality:** Model runtime is as important as accuracy in production.
- 👁️ **Interpretability vs Score:** Meaningful weight patterns != higher accuracy.

Thank You
