

Trouble shooting


What is Troubleshooting?

Definition:

Troubleshooting is the process of finding a problem, identifying its cause, and fixing it.

Root Password Troubleshooting

Step 1 shutdown and power on

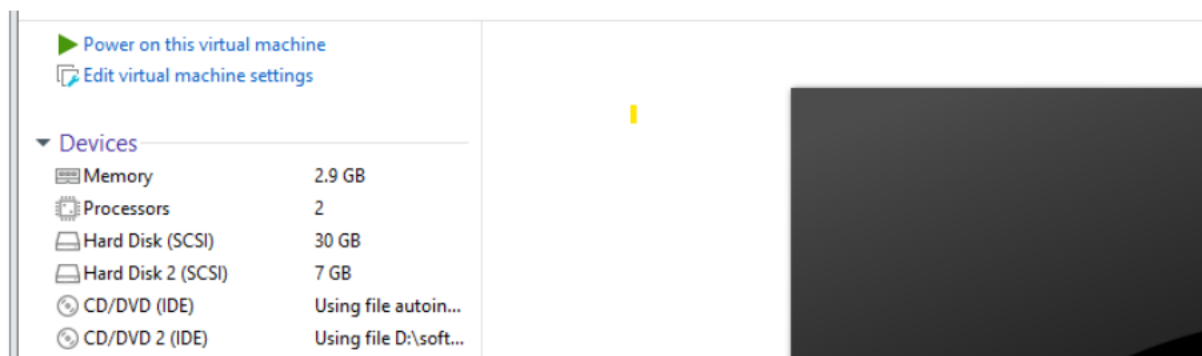

Step 2

Edit press e when the grub page is open

Ro →rw

Rhgb quiet →init=/bin/bash

Save and exit commend →ctrl +x

Step 3

```
[ OK ] Stopped target Socket Units.  
[ OK ] Stopped target System Initialization.  
[ OK ] Stopped target Local File Systems.  
[ OK ] Stopped target Preparation for Local File Systems.  
[ OK ] Stopped target Swaps.  
[ OK ] Stopped dracut initqueue hook.  
Starting Plymouth switch root service...  
[ OK ] Stopped Apply Kernel Variables.  
[ OK ] Stopped Load Kernel Modules.  
[ OK ] Stopped Create Volatile Files and Directories.  
[ OK ] Stopped Coldplug All udev Devices.  
Stopping Rule-based Manager for Device Events and Files...  
[ OK ] Finished Plymouth switch root service.  
[ 8.579266] systemd-journald[273]: Received SIGTERM from PID 1 (systemd).  
bash-5.1#
```

Step 4

Check the read only mode or read write mode (ro we change passwd)

#Mount |grep root

```
[ 8.579266] systemd-journald[273]: Received SIGTERM from PID 1 (systemd).  
bash-5.1# mount |grep root  
/dev/mapper/cs-root on / type xfs (rw,relatime,attr2,inode64,logbufs=8,logbsize=32k,noquota)  
bash-5.1#
```

Step 5

#passwd

```
[ OK ] Finished Plymouth switch root service.  
[ 8.579266] systemd-journald[273]: Received SIGTERM from PID 1 (systemd).  
bash-5.1# mount |grep root  
/dev/mapper/cs-root on / type xfs (rw,relatime,attr2,inode64,logbufs=8,logbsize=32k,noquota)  
bash-5.1# passwd  
Changing password for user root.  
New password:
```

Step 6

Touch /.autorelabel

```
passwd: all authentication tokens updated successfully.  
bash-5.1# touch /.autorelabel
```

Step 7

exec /sbin/init

```
bash: reboot: command not found
bash-5.1# exec /sbin/init
```

It will reboot and change passwd

Interview explain

"If I forget the root password,

I **shutdown and power on** then it will reboot

stop at the GRUB menu by pressing **e**.

I edit the Linux boot line add **ro-rw and rhgb quiet –
init=/bin/bash**

then boot with **Ctrl + X**.

The system enters emergency mode.

Bash #Mount |grep root

Check the read only mode or read write mode (ro we change
passwd)

reset the password using passwd. Then I create new password.

Then I create the touch /.autorelabel file for SELinux,

Exec /sbin/init or exit the rescue environment, reboot the
server, and log in using the new root password."