


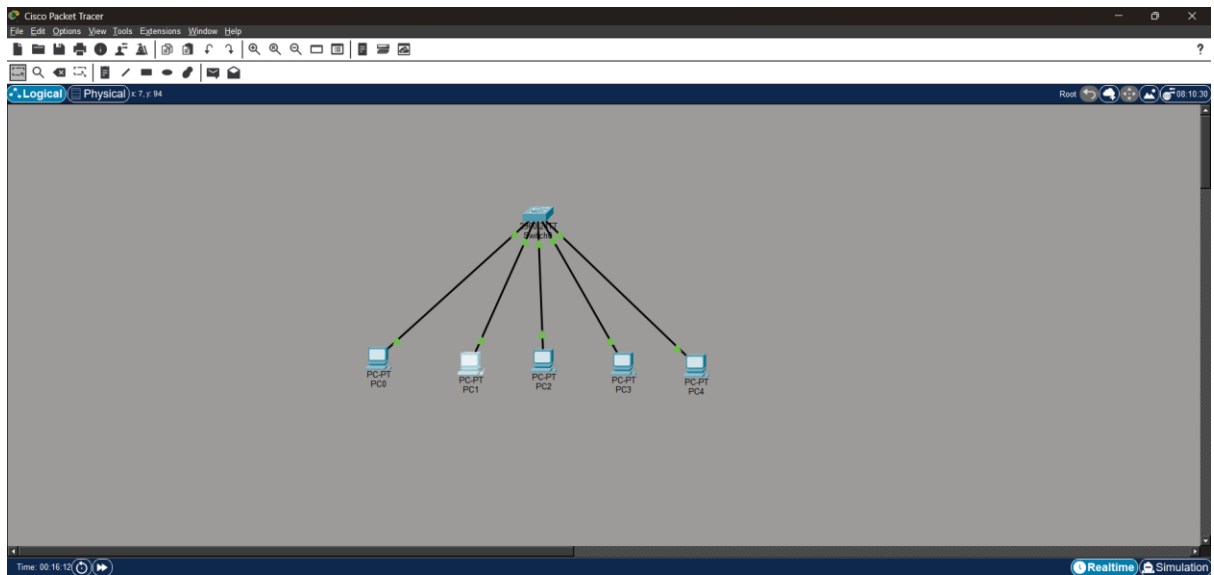

```
Switch0
Physical Config CLI Attributes
Switch>enable
Switch>configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name sales
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name HR
Switch(config-vlan)#exit
Switch(config)#interface range fa0/1 - 3
Switch(config-if-range)#switchport mode access
Switch(config-if-range)#switchport access vlan 10
Switch(config-if-range)#exit
Switch(config)#interface range fa0/4 - 5
Switch(config-if-range)#switchport mode access
Switch(config-if-range)#switchport access vlan 20
Switch(config-if-range)#exit
Switch(config)#do wr
Building configuration...
[OK]
Switch(config)#end
Switch#
M379-S-CWF120-1: Configured from console by console
Switch#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
Switch#show vlan brief

VLAN Name      Status      Ports
-----
1    default    active     Fa0/6, Fa0/7, Fa0/8, Fa0/9,
                Fa0/10, Fa0/11, Fa0/12, Fa0/13,
                Fa0/14, Fa0/15, Fa0/16, Fa0/17,
                Fa0/18, Fa0/19, Fa0/20, Fa0/21,
                Fa0/22, Fa0/23, Fa0/24, Gi0/1
10   sales      active     Fa0/1, Fa0/2, Fa0/3
20   HR         active     Fa0/4, Fa0/5
1002 fddi-default    active
1003 token-ring-default active
1004 fddinet-default active
1005 tennet-default active
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface fa0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#end
Switch#
M379-S-CWF120-1: Configured from console by console
Switch#show vlan brief
```

```
Switch#show vlan brief

VLAN Name      Status      Ports
-----
1    default    active     Fa0/6, Fa0/7, Fa0/8, Fa0/9,
                Fa0/10, Fa0/11, Fa0/12, Fa0/13,
                Fa0/14, Fa0/15, Fa0/16, Fa0/17,
                Fa0/18, Fa0/19, Fa0/20, Fa0/21,
                Fa0/22, Fa0/23, Fa0/24, Gi0/1
10   sales      active     Fa0/2, Fa0/3
20   HR         active     Fa0/1, Fa0/4, Fa0/5
1002 fddi-default    active
1003 token-ring-default active
1004 fddinet-default active
1005 tennet-default active
Switch#
```

```
C:\>ping 192.168.20.10
```

```
Pinging 192.168.20.10 with 32 bytes of data:
```

```
Reply from 192.168.20.10: bytes=32 time<1ms TTL=128
```

```
Reply from 192.168.20.10: bytes=32 time<1ms TTL=128
```

```
Reply from 192.168.20.10: bytes=32 time<1ms TTL=128
```

```
Reply from 192.168.20.10: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.20.10:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
```

```
Approximate round trip times in milli-seconds:
```

```
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```