


Q-Configure OSPF on each router using the router ospf 1 command and the network command to advertise all directly connected networks.

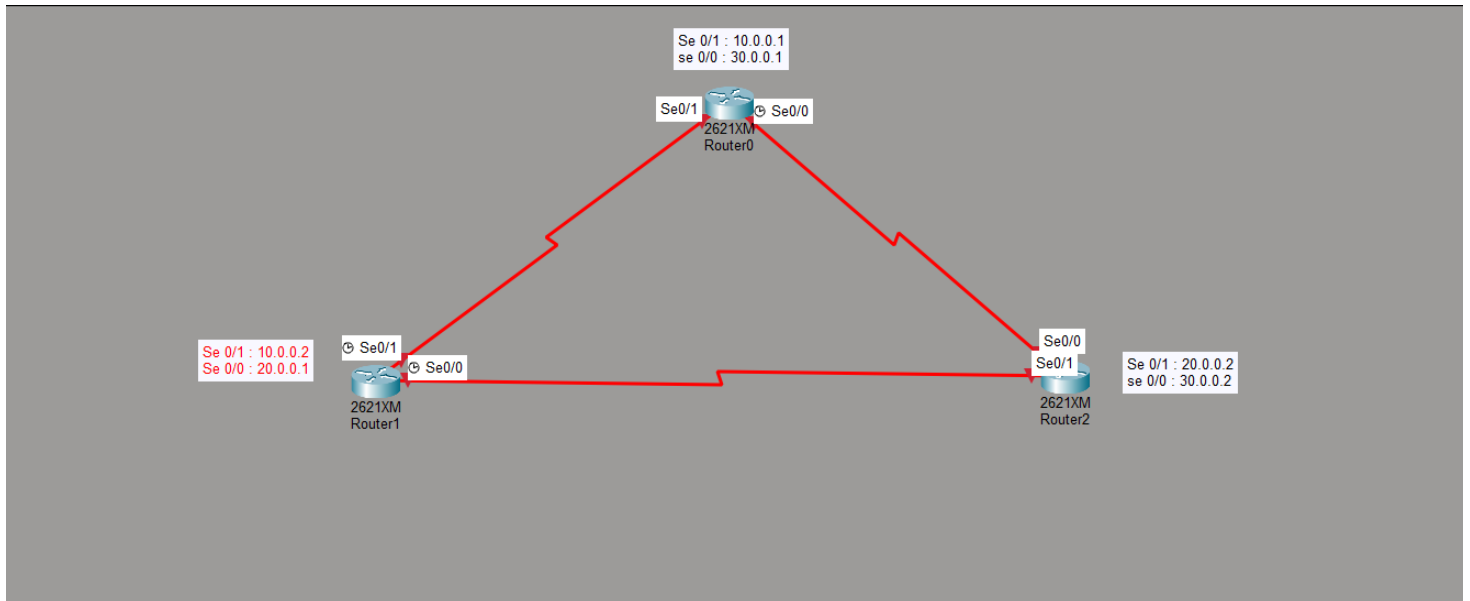

Router 0

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 10
Router(config-router)#network 10.0.0.0 0.255.255.255 area 0
Router(config-router)#network 30.0.0.0 0.255.255.255 area 0
Router(config-router)#exit
Router(config)#do wr
Building configuration...
[OK]
Router(config)#show ip route
^
% Invalid input detected at '^' marker.

Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, Serial0/1
C    30.0.0.0/8 is directly connected, Serial0/0
```

Router#

Router 1

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 10
Router(config-router)#network 10.0.0.0 0.255.255.255 area 0
Router(config-router)#network 10.0.0.0 0.255.255.255 area 0
00:17:58: %OSPF-5-ADJCHG: Process 10, Nbr 30.0.0.1 on Serial0/1 from LOADING to FULL, Loading Done

Router(config-router)#network 20.0.0.0 0.255.255.255 area 0
Router(config-router)#exit
Router(config)#do wr
Building configuration...
[OK]
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, Serial0/1
C    20.0.0.0/8 is directly connected, Serial0/0
O    30.0.0.0/8 [110/128] via 10.0.0.2, 00:00:09, Serial0/1

Router#
```

Router 2

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 10
Router(config-router)#network 30.0.0.0 0.255.255.255 area 0
Router(config-router)#network 20.0.0.0 0.255.255.255 area 0
Router(config-router)#
00:18:32: %OSPF-5-ADJCHG: Process 10, Nbr 30.0.0.1 on Serial0/0 from LOADING to FULL, Loading Done

00:18:32: %OSPF-5-ADJCHG: Process 10, Nbr 20.0.0.1 on Serial0/1 from LOADING to FULL, Loading Done

Router(config-router)#exit
Router(config)#do wr
Building configuration...
[OK]
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

O    10.0.0.0/8 [110/128] via 30.0.0.1, 00:00:13, Serial0/0
      [110/128] via 20.0.0.1, 00:00:13, Serial0/1
C    20.0.0.0/8 is directly connected, Serial0/1
C    30.0.0.0/8 is directly connected, Serial0/0

Router#
```