



DreamMax™ 700

U S E R G U I D E



BRINIUM
TECHNOLOGIES INC.

Notice

The information in this guide is subject to change without notice.

BRAINIUM TECHNOLOGIES INC. SHALL NOT BE LIABLE FOR TECHNICAL OR EDITORIAL ERRORS OR OMISSIONS CONTAINED HEREIN; NOR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE FURNISHING, PERFORMANCE, OR USE OF THIS MATERIAL.

This guide contains information protected by copyright. No part of this guide may be photocopied or reproduced in any form without prior written consent from Brainium Technologies Inc.

© 2001 Brainium Technologies Inc.

All rights reserved. Printed in Canada. ISBN: 1-55301-014-0

DreamMax 700, Rol-A-Lab, and Brainium Technologies Inc. are registered trademarks.

Mention of third-party products is for informational purposes only and constitutes neither endorsement nor recommendation. All other trademarks are the property of their respective companies.

REV 08/01/01

Contact Information

Brainium Technologies Inc.

Corporate Headquarters
11491 Kingston Street
Maple Ridge
British Columbia, Canada
V2X 0Y6

Telephone: 604.465.1040
Fax: 604.465.3323
Email: sales@brainium.com

European Sales Division
15 Imex House, Imex Business Park
Upper Villiers Street
Wolverhampton, United Kingdom
WV2 4NU

Telephone: 01.902.712.430
Fax: 01.902.425.294
Email: info@dreamwriter.co.uk

Customer Care

Toll Free: 1.800.663.7163
Email: support@brainium.com
Web site: www.brainium.com

CONTENTS

introduction

Using This Guide

Symbols & Conventions	1
-----------------------------	---

chapter 1

First Steps

Front View	2
Indicator Panel	3
Back View	3
Side View	4
Bottom View	4

chapter 2

Using the DreamMax 700

Computer Power	5
Power On	5
External Power	5
Internal Power	5
Removing	6
Inserting	6
Maintenance	6
Power Level	7
Charging	7
AC Adapter	7
Rol-A-Lab	7
Power Off	8
Auto	8
Manual	8
Touchpad	9
Keyboard	9
Floppy Disk Drive	10
Accessing	10
Saving	10
Removing	10
PCMCIA Cards	10
Display Settings	11
Contrast & Brightness	11
Backlight	11
Memory	12
Connecting External Devices	12
Monitor or Projector	12
Printer	13
Serial	13
Network	13
IRDA	13
Parallel	14
Video Out	14
Peripheral Devices	14

chapter 3

Windows CE Basics

Start Menu	15
Taskbar	15
Control Panel	16
Managing Files/Folders	17
Windows Explorer	17
Toolbar	18
Selecting Files	18
Copying Files	18
Pasting Files	19
Deleting Files	19
Passwords	19
Printing....	20

chapter 4

Networking

DreamMax 700 to Network	21
Connecting	21
Accessing Network Resources.....	23
Thin Client	23
DreamMax 700 to Internet	23
Configuring Internet Explorer	24
Toolbar Properties	25
Internet Properties	25
Search Tools	26
DreamMax 700 to Computer	27
Infrared File Transferring	28
Communications with a PC	28
	28

chapter 5

Curriculum Integration

Introduction.....	32
LessonLinks.....	32
Science Brainium	33
English Language Arts.....	33
Social Studies.....	34
Mathematics.....	35
Science	36

appendix

DreamMax 700 Details

Technical Specifications	38
Approvals & Warranties	40
Trouble Shooting	42
Common Questions.....	44

<i>glossary</i>	45
-----------------------	----

USING THIS GUIDE

Symbols & Conventions

The following symbols indicate important messages found throughout this guide:



Indicates a critical message. Failure to read could result in damage to the device or user.



Indicates an important message. Information relates to efficient and proper use of the device.

Instructions

The *italicized* text highlights the step-by-step on screen computer functions necessary to configure your DreamMax 700.

Glossary

Use this alphabetical resource to clarify titles, words and descriptors found throughout the guide.

Index

Use this alphabetical, numbered resource to locate specific information throughout the guide.

Online Help

For further assistance go to www.brainium.com for online customer support. Find manual updates, new reference guides, troubleshooting help and software downloads to help you use your DreamMax 700 effectively.


chapter **1**

FIRST STEPS

Congratulations on receiving your new DreamMax 700! There are many great aspects and features to explore, so let's get started.


Open your DreamMax 700 by pulling gently on the Display Latch and lifting the cover. Familiarize yourself with the basic parts of the device using the following tables and images. Once you have an understanding of the DreamMax 700, you can move onto [Chapter 2, Using the DreamMax 700](#).

Front View

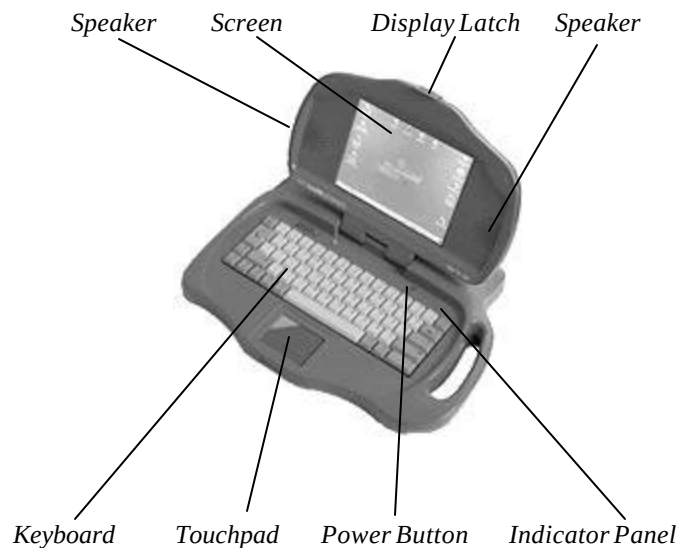


Item	Description
Speaker	One on either side of the screen for playing system sounds, alarms and audio recordings.
Screen	A liquid crystal display (LCD) screen with standard 640x480 resolution. Displays 256 colors with a backlight.
Display Latch	Locks the lid to the keyboard. Release the latch by pulling forward lightly.
Keyboard	Standard full size with 64 keys.
Touchpad	Moves the cursor/arrow around the screen. Has left and right button features like a standard mouse.
Power Button	Press to turn on, or to soft reset the DreamMax 700.
Indicator Panel	Lights indicate certain functionalities of the DreamMax 700.

Indicator Panel

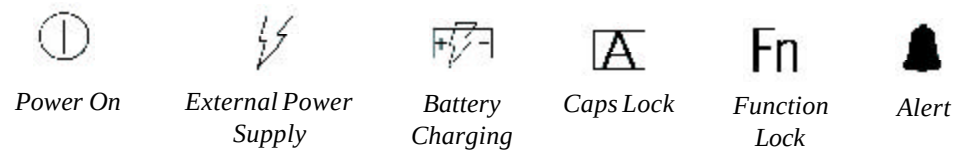


Item	Description
Power On	Illuminates when the DreamMax 700 is on (operating).
External Power Supply	Illuminates when the DreamMax 700 is connected to an external power source.
Battery Charging	Illuminates when fast charge is in progress. This light flashes when trickle charge is in progress.
Caps Lock	Illuminates when the Caps Lock is activated on the keyboard.
Function Lock	Illuminates when an application function is in operation.
Alert	Illuminates when appointments or reminders are due.

Back View

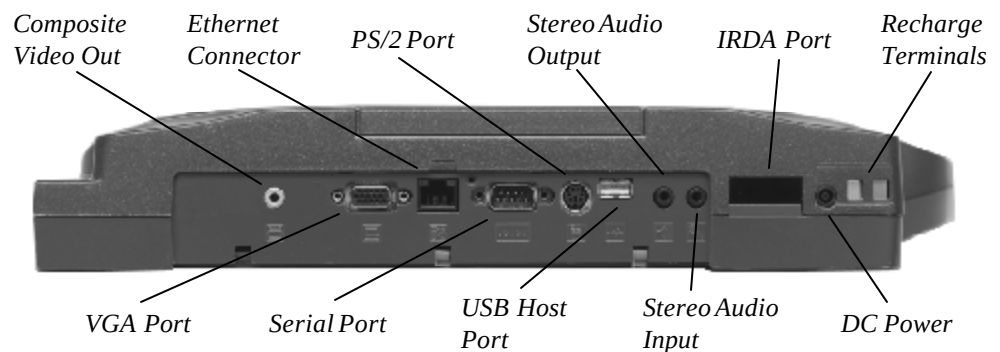


Item	Description
Composite Video Out	Connect a TV to the DreamMax 700 for large screen display.
VGA Port	Connect a standard external VGA monitor.
Ethernet Connector	Connect to a network using a RJ45 10Base Ethernet network connector.
Serial Port	Connect to a PC, serial printer or serial mouse.
PS/2 Port	Connect an external PS/2 mouse or keyboard.
USB Host Port	Connect various add-on peripheral devices.
Stereo Audio Output	Connect for stereo audio playback through headphones or external speakers.
Stereo Audio Input	Connect a microphone for stereo audio recordings.
IRDA Port	Transfer data, files or connect to a IRDA printer.
DC Power	Provides external power to the DreamMax 700.
Recharge Terminals	Connect to a Rol-A-Lab or Bookshelf for recharging purposes.

Side View

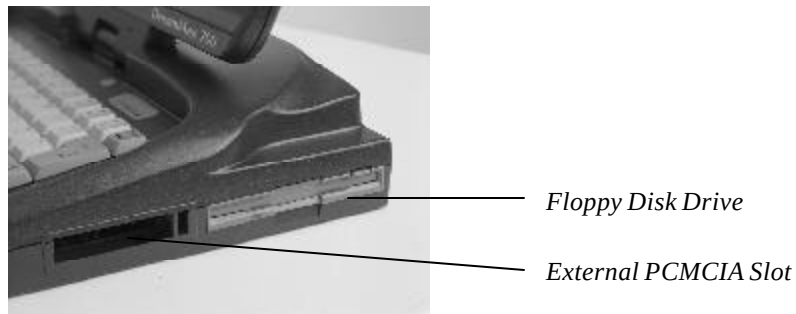

Item	Description
Floppy Disk Drive	Drive for a standard 3.5" 1.44MB Windows/DOS formatted diskette capable of storing files.
External PCMCIA Slot	External slot for a removable PCMCIA card for storage memory, modem or wireless communications.

Bottom View

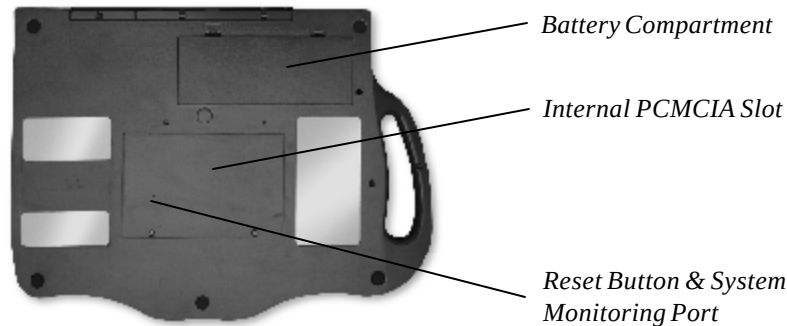

Item	Description
Battery Compartment	Easily accessible with two pull tabs for opening the compartment.
Internal PCMCIA Slot	Internal slot for a removable PCMCIA card for storage memory, modem or wireless communications.
System Monitoring Port	Monitor the system during start-up or make changes to the built-in ROM. Found under the cover to the right of the Reset button.
Reset Button	Press to Hard Reset the DreamMax 700. Found under the cover to the left of the System Monitoring Port.

! Initiating a Hard Reset is a drastic step. Performing a hard reset will restore the DreamMax 700 to the original factory settings and software that was shipped on it when purchased. All software and settings that you have loaded into the DreamMax 700 will be deleted. After resetting you will have to reload and reconfigure all software, drivers, peripherals and printers that you have setup in the past.

chapter 2

USING THE DREAMMAX 700

Computer Power

Power On

The DreamMax 700 can operate using 2 sources of power:

- Internal Ni-MH battery pack
 - Provides up to 12 hours of continuous use
 - Totally portable
- External AC adapter with power cord
 - Provides limitless use
 - Must be attached to an electrical outlet

To turn the power on:

1. Open the DreamMax 700.
2. Find the round Power On button on the keyboard above the number keys.
3. Press the button firmly for 2 seconds.
4. The DreamMax 700 will power on instantly (no boot up time).

External Power

Your DreamMax 700 is equipped with an AC adapter. This allows you to connect to a regular electrical outlet using a standard power cord.

To connect the DreamMax 700 to an electrical outlet:

1. Connect the AC adapter to the DC power jack on the back of the DreamMax 700.
2. Connect a power cord to the AC adapter.
3. Connect the opposite end of the power cord to an electrical outlet.
4. The power light will illuminate on the Indicator Panel.



Only use the AC Adapter from Brainium Technologies Inc. that is designed for the DreamMax 700.


Internal Power

Your DreamMax 700 is equipped with one Ni-MH battery pack. When fully charged, the battery provides up to 12 hours of continuous power. Recharging the battery pack takes approximately 8 hours.

Removing

To remove the battery pack from the DreamMax 700:

1. Press the two lock tabs on the battery compartment cover towards the center, then lift off.
2. Gently lift the battery until it clears the compartment and you can see the wire harness at one end.
3. Grip the plastic connector of the wire harness.
4. Gently rock the battery while pulling upwards until the snap-lock releases.
5. The battery is now free. If disposing, please do so safely.

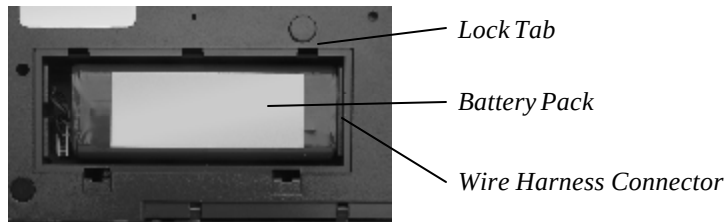

Inserting

To insert the battery pack into the DreamMax 700:

1. Line up the battery's connector with the six exposed connector pins in the compartment.
2. Press the connector down until the snap-lock engages. If it does not connect easily, try turning it around.
3. Place the battery into the compartment between the connector and the far end.
4. Replace the battery compartment cover. Insert the three ridged tabs first, then press down until both lock tabs snap into place.



Do not expose the battery pack to temperatures greater than 70 degrees Fahrenheit. Doing so may result in damage to the battery pack and subsequent bodily harm.

Maintenance

The battery pack has a limited charging life, as do all rechargeable batteries. Follow these instructions to optimize the battery life for your DreamMax 700.

- ☐ Turn off unnecessary sounds.
- ☐ Reduce screen brightness.
- ☐ Turn off computer when not in use.
- ☐ Use external power when feasible.

Power Level

To check the power level of the battery pack:

1. Select *My Handheld PC / Control Panel / Power*.
2. Select the *Battery* tab.
3. Read the *Backup Batteries* display of *Good*, *Low* or *Very Low*.



Charging



For your own safety, never use a charger or battery pack that has not been approved by Brainium Technologies Inc. Never modify the charger or battery pack in any way.

The battery pack can be charged in two ways:

- ☐ AC adapter & power cord
- ☐ Rol-A-Lab

Using either way, two types of charging occur within the DreamMax 700; fast-charge and trickle-charge. Fast-charging takes about 4 hours and provides the major percentage of power to the battery. Once fast-charge is complete, trickle-charging begins. Trickle-charging is a very slow process that provides minimal power to the battery pack. The DreamMax 700 can stay in trickle-charge mode indefinitely. Complete charging takes approximately 8 hours.

AC Adapter

Connect your DreamMax 700 to an electrical outlet using the AC adapter (Read [Chapter 2: Computer Power: External Power](#)). Once connected correctly, your DreamMax 700 will begin to charge. The Indicator Panel lights display the working status of your DreamMax 700. The Power light illuminates when your computer is connected correctly. The Battery Charging light illuminates when charging is in progress. The same light blinks when charging is almost complete (trickle-charge mode).

Rol-A-Lab

Ensure that the DreamMax 700 is powered off and closed correctly before charging. Insert your DreamMax 700 into a Rol-A-Lab battery recharge terminal. Once inserted correctly, your DreamMax 700 begins charging. The Charging light on the Rol-A-Lab illuminates when a secure connection is made. The light turns off when the DreamMax 700 is almost fully charged (trickle-charge mode).



To avoid damage which can shorten the life of the batteries:

- ☐ Do not charge in temperatures less than 32°F (0°C) or greater than 104°F (40°C).
 - ☐ Do not use any battery that shows signs of rust, corrosion, or fluid leakage.
 - ☐ If storing for several months, such as summer holidays, the main batteries should be removed. Save all files to a memory card, floppy disk or PC, as all data on the computer will be lost.
 - ☐ If storing longer than one year, the main batteries should also be recharged annually.
-

Power Off


The DreamMax 700 should be powered off when not in use. You can configure the computer to automatically shutdown when idle, or you can manually power off.

Auto

To conserve battery power you can set the DreamMax 700 to shut down automatically after being idle for a predetermined amount of time. The default setting for Auto Power Off is 30 minutes of idle time with external power, 3 minutes for battery power.

To configure the DreamMax 700 to automatically power off:

1. Select *My Handheld PC / Control Panel / Power*.
2. Select the *Power Off* tab.
3. Choose the desired options.
4. Click *OK*.

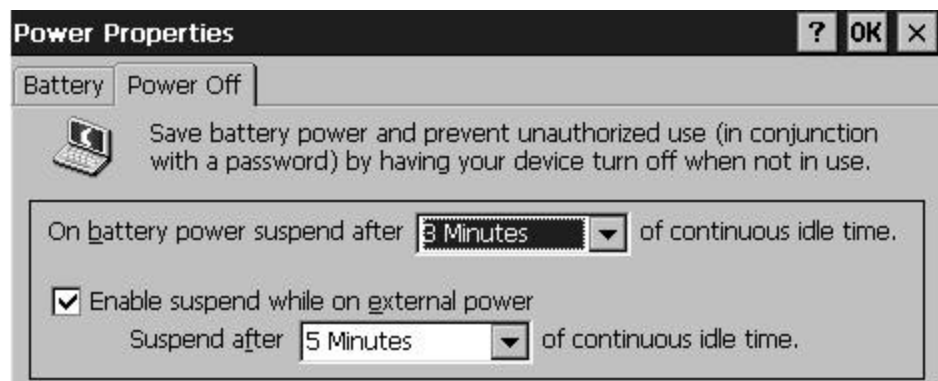

Manual

To manually power off the DreamMax 700:

- Select *Start / Suspend*.

Touchpad

The Touchpad is used to control the cursor (just like a standard mouse). The movements of your finger on the Touchpad coordinate with the cursors movements onscreen.

To use the Touchpad:


1. Touch a finger to the Touchpad.
2. Glide your finger lightly across the surface. The cursor should mimic your finger's movements.
3. If your finger reaches the edge of the Touchpad you can lift, place and glide again. Repeat if needed.



If you apply too much pressure to the Touchpad while moving your finger, it can slow the cursor's response onscreen.

To select an item onscreen:

1. Move the cursor over the item.
2. Give the Touchpad a light, quick tap.
3. Tap the dark area of the Touchpad to mimic a left-mouse click.
4. Tap the light gray area to mimic a right-mouse click.

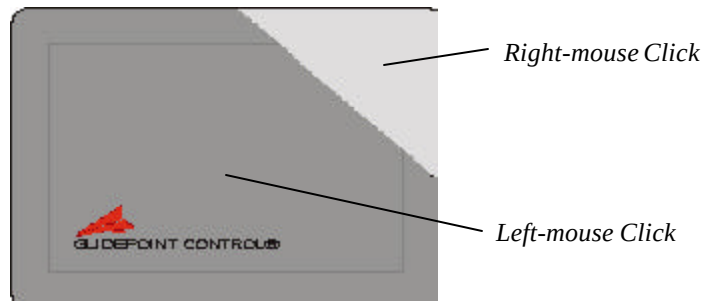

Item	Description
Single Click	Tap once on the surface of the Touchpad.
Double Click	Tap twice on the Touchpad.
Right Click	Tap once on the upper right corner of the Touchpad.
Highlight/Drag	Double tap, then hold the finger down on the second tap and glide to move cursor.

Keyboard

The DreamMax 700 has a fully functional, standard, full sized keyboard with letter, number and function keys.

Floppy Disk Drive

The Floppy Disk Drive is located on the right hand side of the DreamMax 700. The drive is compatible with 3.5" 1.44 MB Windows/DOS readable disks. Use the drive only when necessary, as it can drain the battery pack.



Accessing

Once you have inserted a floppy disk, you can access the contents by single clicking on the *Floppy Disk* icon in the lower right corner of the screen (next to the display time).

A new folder will appear in the My Handheld PC folder, titled Floppy Disk. This folder shows the contents of the disk in the drive. Any files/folders that you add to the Floppy Disk Folder are stored on the floppy disk until they are manually deleted. If you insert a new floppy disk, you must repeat the above step to view the new contents.

Saving

To save a file to the Floppy Disk:

1. Select *File / Save As*.
2. Find the *My Handheld PC / Floppy Disk* folder (the Up One Folder icon may be helpful).
3. Name your file.
4. Select the appropriate file type (.doc for Word documents, etc.).
5. Click *OK*. Your file is now saved to the floppy disk.

Removing

To remove the Floppy Disk from the drive:

1. Ensure all files are correctly saved to the disk.
2. Remove the disk by pressing the Eject button next to the drive.
3. Store the disk in a cool, waterproof location.



Do not store Floppy Disks near any magnetic material. All data saved on the disk may be erased.

PCMCIA Cards

The DreamMax 700 has two PCMCIA card slots that support Type I or Type II PC cards. These cards enable you to add ROM, RAM or even modem capabilities to your DreamMax 700. The Internal PCMCIA card slot (Read [Chapter 1: First Steps: Bottom View](#)) is for PC cards that will stay inserted in the DreamMax 700 for a long time, such as wireless network cards or long term memory upgrades. The external slot is for more regularly accessed PC cards such as temporary memory storage cards or modem cards.

Using a PC Card

To use a PC card, insert it into one of the two available PCMCIA slots.

Storage Card Access

The DreamMax 700 titles the first card you insert 'Storage Card'. If a second PCMCIA card is inserted its designation is 'Storage Card2'.

1. Insert the PC memory card it into one of the two available PCMCIA slots.
2. Double-click on *My Handheld PC / Storage Card* to view the contents.



Display Settings

Contrast & Brightness

When you first power on your DreamMax 700, the screen display may need some adjustments to suit your visual needs. The contrast and brightness settings will affect your ability to clearly view the screen contents.

To adjust the Contrast:


1. Select *My Handheld PC / Control Panel / LCD & Monitor*.
2. Select the *Settings* tab.
3. Adjust the sliding gauge to the appropriate level.
4. Click *OK*.

Backlight

Each DreamMax 700 has a Backlight that illuminates the screen for easy viewing. You can extend battery life by having the Backlight turn off when the DreamMax 700 is idle. With the Backlight off, your screen becomes dim but all programs/files remain active. The Backlight will automatically turn on when you touch the Keyboard or Touchpad.

To adjust the Backlight settings:

1. Select *My Handheld PC / Control Panel / Display / Backlight*.
2. Select *Automatically Turn off Backlight while on battery power and external power*.
3. Select the amount of time your computer will be idle before the backlight is turned off.
4. Click *OK*.

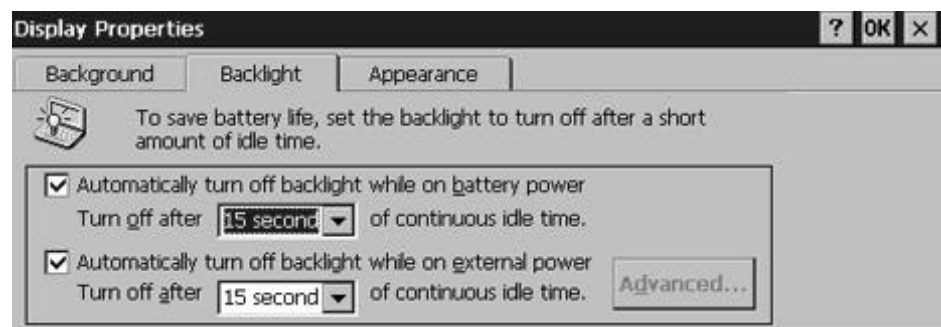


Memory

The amount of memory available on your DreamMax 700 can be adjusted to your preferences. You can allocate the RAM to Storage or Program Memory. Storage Memory affects your ability to save files. Program Memory affects your computer speed. The default setting for RAM allocation is 32 MB of Storage Memory and 16 MB of Program Memory. The default settings are efficient for most applications.

To adjust RAM allocation:

1. Double click on *My Handheld PC / Control Panel / System*.
2. Select the *Memory* tab.
3. Move the slider to adjust the Storage and Program memory.
4. Click *OK*.

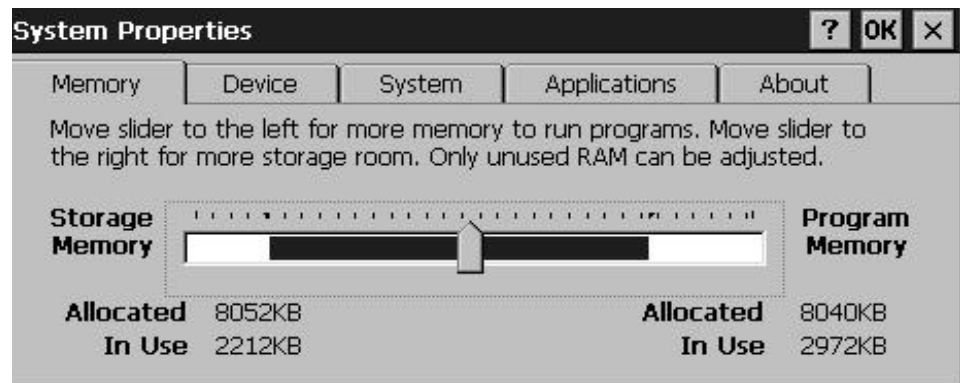

Connecting External Devices

You can connect your DreamMax 700 to a number of devices (monitors, printers, etc.). Different cables, ports and settings must be used with each type of device.

Monitor or Projector


Connecting a larger monitor or projector to your DreamMax 700 enables you to display information to a large group of students.

To connect a Monitor or Projector to the DreamMax 700:

1. Power off the Monitor or Projector and the DreamMax 700.
2. Connect the external device cable to the VGA port on the back of the DreamMax 700.
3. Turn on the DreamMax 700 and the Monitor or Projector.
4. Double click on *My Handheld PC / Control Panel / LCD & Monitor*.
5. Select the *Options* Tab.
6. In the *Display Option* area, select the appropriate setting.
7. Click *OK*.

Printer

You can connect your DreamMax 700 to a number of different types of printers. Speak with your Computer Technician to determine the best method for your school.

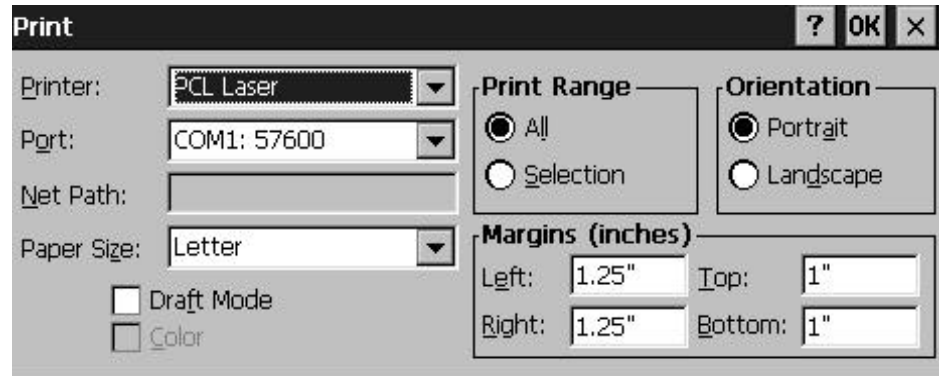

Serial

To connect a Serial printer to the DreamMax 700:

1. Insert a cable into the DreamMax 700 Serial port.
2. Insert the other end of the cable into the printer's Serial port.
3. Select *File / Print*.
4. Select the type of *Printer*.
5. Select *COM1: 57600* or *COM1: 9600* for the port.
6. Ensure all other settings are correct. Click *OK*.

Network

You need two additional pieces of information before you connect to a Network printer; the printer name and location (Ask your Network Administrator).

To connect a Network printer to the DreamMax 700:

1. Ensure the printer is connected to the Network.
2. On the DreamMax 700, select *File / Print*.
3. Select the type of *Printer*.
4. Select *Network* for the port.
5. Enter the printer's Network address into the *Net Path* (Read [Chapter 4: DreamMax to Network: Netpath](#)).
6. Ensure all other settings are correct. Click *OK*.

IRDA

To connect an IRDA printer to the DreamMax 700:

1. Line up the DreamMax 700 IRDA port with the printer IRDA port.
2. Select *File / Print*.
3. Select *IRDA* for the port.
4. Ensure all other settings are correct. Click *OK*.



Please read your printer manual for details on printing rates (baud rates) that might affect your printing capabilities.

Parallel

To connect the DreamMax 700 to a Parallel printer:

1. Insert a Parallel/USB cable into the DreamMax 700 USB Host port.
2. Insert the other end of the cable into the printer's Parallel port.
3. Select *File / Print*.
4. Select *USB2: printer name* for the port.
5. Ensure all other settings are correct. Click *OK*.


Video Out

Connecting your DreamMax 700 to a TV enables you to display information to a large group of students. The same content will be displayed on your DreamMax 700 and the TV monitor.

1. Power off the TV and the DreamMax 700.
2. Connect the TV cable to the Video Out connector on the back of the DreamMax 700.
3. Turn on the DreamMax 700.
4. Double click on *My Handheld PC / Control Panel / LCD & Monitor*.
5. Select the *Options* Tab.
6. In the *Display Option* area, select the appropriate setting.

In North America, select NTSC; in Europe, select PAL.

7. Click *OK* and turn on the TV.

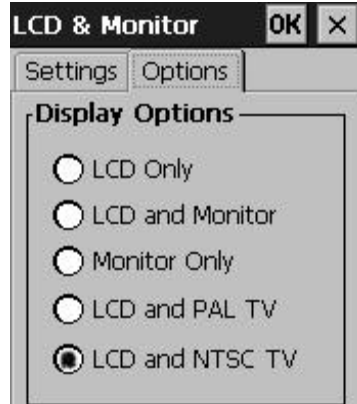

Peripheral Devices

Connecting an external device to your DreamMax 700 enables you to increase the variety of uses for the DreamMax 700. You can connect serial and USB devices by plugging the device into the appropriate port in the back of the DreamMax 700.

To connect a USB device:

- ❑ Plug-in the device to the USB port on the back of the DreamMax 700. USB devices are "hot-swappable", which means that they can be connected while the DreamMax 700 is powered on.

To connect a Serial device:

1. Power off the DreamMax 700 and the device.
2. Plug-in the device to the Serial port on the back of the DreamMax 700.
3. Power on the device and DreamMax 700.

chapter 3

WINDOWS CE BASICS

Windows CE 3.0 is a real-time embedded operating system specifically designed for portable computing. Using the familiar Windows interface Windows CE 3.0 delivers a rich, scalable system perfectly compatible with the needs of today's classroom environment.

Start Menu


The Windows CE Start menu gives you access to all programs available on the DreamMax 700.

Within the Start menu you can access:

- ☐ Suspend ☐ Help ☐ Documents ☐ Programs
- ☐ Run ☐ Settings ☐ Favorites

To open a program from the Start menu:

1. Select *Start*.
2. Select the program you wish to open.

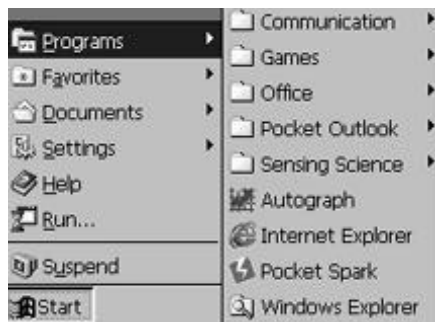

Taskbar

The Taskbar displays buttons of active programs and documents. Many programs and documents can be open at one time, each with a button displayed on the Taskbar. By clicking a button you will view (or maximize) and can work on that document. To view the desktop, and minimize (or remove from view) all documents, click the desktop icon in the lower right hand corner of the screen.

Status icons are found at the right end of the Taskbar. Permanent icons are Load Disk and Time. Other icons appear when connections are made (Power and Communication).

You can choose to have the Taskbar disappear when not being used. To Auto Hide the Taskbar:

1. Select *Start / Settings / Taskbar / Taskbar Options*.
2. Select *Auto hide*. Click *OK*.



When the Taskbar is hidden, move the cursor to the bottom edge of the screen to view the Taskbar. To hide the Taskbar again, move the cursor outside the Taskbar area.

To change the Taskbar settings:

1. Select *Start / Settings / Taskbar / Taskbar Options*.
2. Select the desired settings. Click *OK*.

Control Panel

Use the Control Panel to adjust various device settings to accommodate your needs.

There are two methods to view the adjustable device settings:

- Select *My Handheld PC / Control Panel* from the desktop.
- Select *Start / Settings / Control Panel*.

Item	Description
Communications Properties	Configure settings for the DreamMax 700 to exchange data with other computers and networks.
Dialing	Set up a modem to connect to your school network or an Internet Service Provider.
Display	Configure the background, backlight or appearance of the desktop.
Internet Options	Adjust various settings such as cache size, security and other important properties for using the Internet.
Keyboard	Configure the keyboard properties.
LCD & Monitor	Adjust monitor contrast and brightness. The Options section enables your desktop to be displayed on an external monitor or projector.
Network	Set the computer properties to connect directly to your school network.
Owner	Configure your computer with identification information. An owner screen displays this information when the computer is started.
Password	Setup a password that protects settings or locks the computer when not in use.
Power	Displays the amount of power remaining in the battery pack, and allows you to select Auto Power off settings.
Regional Settings	Change how applications display and sort dates, times, currency, and numbers.
Remove Programs	Automatically remove software installed on the DreamMax 700. This will remove all programs associated with the application, even those not displayed.
Soft Reset	Initiate a quick reboot of the DreamMax 700. All unsaved information will be lost.
Spectrum24 Settings	Configure settings for a wireless local area network.
System	View the computer's system information, and adjust memory allocation.
Volume & Sounds	Adjust the volume and listen to system sounds. If needed, sounds can be defined and enabled for all functions of Windows CE.
Wireless Network	Set and configure different profiles for connecting to a wireless network.
World Clock	Adjust date and time, set alarms and add custom cities. Airport codes, phone prefixes, sunrise and sunset for major cities and an extensive calendar are provided.



Managing Files and Folders

Windows Explorer

Accessing and moving files or folders on the DreamMax 700 is an important function to understand. These functions can be performed from any application on the DreamMax 700.

The basic method of finding and opening files, folders or programs is to use the file management program Windows Explorer. This program allows you to easily view and organize the contents of your computer's directories.

There are two methods to open Windows Explorer:

- Double click on the *My Handheld PC* icon.
- Select *Start / Programs / Windows Explorer*.

Windows Explorer will open to display its standard screen. This screen contains a menu bar, tool bar, an address line, plus the contents of the *My Handheld PC* folder.



Toolbar

Item	Description
Slider	Change the size or location of the Toolbar. Click and drag to use.
Forward	Open the folder one level down the directory hierarchy.
Back	Open the folder one level previous in the session.
Up One Level	Open the folder one level up in the directory hierarchy.
Delete	Send selected files to the Recycle Bin.
Properties	Open the Properties dialogue box of the selected item.
Display	Change the display settings for Windows Explorer.



Selecting Files

Files or folders can be selected in four ways:

- ☐ Click on a single file/folder.
- ☐ Press and hold the *Ctrl* key, then click on a few files/folders (random selection).
- ☐ Press and hold the *Shift* key, then click on the first item of a series you want to select. Click on the last item. This selects all items in the series (sequential selection).
- ☐ Draw a box around the selected items by clicking near the group of files then dragging the cursor so a box appears around the files. Release the cursor and the selected files are highlighted.

Copying Files

Copy is a feature that creates a replica of the file in the Clipboard, leaving the original file untouched. Files on the Clipboard cannot be seen but are stored in the computers memory until the Copy function is used again, or a Soft Reset is performed. Once you copy, you can then Paste the file in another location.

There are three methods to copy a file/folder:

- ☐ Select the file, then *Edit / Copy*.
- ☐ Place the cursor on the selected item, then *Right Click* and select *Copy*.
- ☐ Select the file, then press and hold the *Ctrl* key and press the *C* key.



Unlike Copy, Cut is a feature that REMOVES the file completely from the folder and places it onto the Clipboard. To see the file again, you must Paste it into a folder.

Pasting Files

Pasting is the computer term for inserting. To Paste a file into a particular folder, it must first be opened.

There are two methods for pasting a file/folder:

- Open the folder you want the file/folder placed into, then select *Edit / Paste*.
- Open the folder you want the file/folder placed into, then press and hold the *Ctrl* key, then press the *V* key.

Deleting Files

There are two methods for deleting a file/folder:

- Select the file/folder, then select *File / Delete*.
- Place the cursor on the selected item, then *Right Click* and select *Delete*.

When deleting a file/folder, the DreamMax 700 will ask for verification that you want to delete the selected item. To confirm, select *Yes*. To cancel, select *No*. Deleted items are placed into the Recycle Bin until it is 'emptied.' You should empty the Recycle Bin occasionally to permanently remove the files, as they can use up storage memory.

To view the Recycle Bin contents:

1. Double click the *Recycle Bin* icon on the desktop.

There are two methods to retrieve a deleted file:

- Select *Recycle Bin / File / Restore*.
- Select *Windows Explorer / Edit / Undo Delete* (if no other function has been performed).



If you delete an item from a Storage Card or a Floppy Disk, it is removed completely, and not placed in the Recycling Bin.

Passwords

To access the Password Settings for the DreamMax 700:

1. Double click on *My Handheld PC / Control Panel / Password*.
2. If a password already exists you must enter it to continue. If not, the Password Settings dialogue box will open automatically.
3. Enter all necessary information.
4. If needed, select *Enable Password Protection*.
5. Click *OK*.

You can not retrieve a forgotten or lost password. If you have forgotten your password, you must Hard Reset your DreamMax 700 (Read [Appendix: Trouble Shooting: Restarting: Hard Reset](#)) to erase the password settings and start again.



It is not recommended that you enable the DreamMax 700 Password. This will require you to always enter a password when starting the computer (Documents may be individually protected if needed).


Printing

Within the basic applications on the DreamMax 700 (Pocket Word, Pocket Excel, Pocket PowerPoint, Internet Explorer, etc), you can print documents easily with the appropriate connections and software. Ensure your DreamMax 700 is properly configured and the printer has sufficient paper to complete the task.

The DreamMax 700 can connect to a printer using an IR, Serial or USB port, as well as through a network. Read [Chapter 2: Connecting External Devices: Printer](#) to determine the correct configurations for your printer set up.

To print within an application:

1. Select *File / Print*.
2. Choose the appropriate type of *Printer & Port*.
3. Select the *Print Range*, *Orientation*, and other applicable settings.
4. Click *OK*.

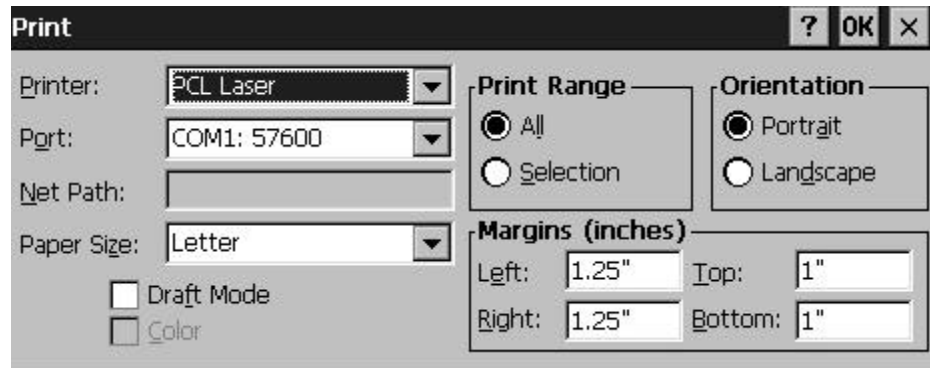

chapter **4**

NETWORKING

The word ‘network’ can be used in two ways related to computers:

1. A network (noun)
Made up of a number of computers connected together and able to share information, software and hardware.
2. To network (verb)
Connect your computer to another system, computer or other device.

Many schools have the need for computers to connect to each other, the Internet or the school’s network. The DreamMax 700 has the ability to perform these functions, making it a useful educational solution for the classroom.

DreamMax 700 to Network

Most schools have a network used to share information between various users (staff, students, etc.). Usually this system is a Local Area Network (LAN). Connecting your DreamMax 700 to your school’s network will enable you to access important files, folders and programs.

Connecting

To connect to your school’s network you will need to configure your DreamMax 700 with the correct settings. Discuss your network needs with your Network Administrator, then collect the necessary information from the list below.

- ☐ Whether your DreamMax 700 will use a Wired or Wireless LAN connection.
- ☐ If using a Wireless connection, determine which of the embedded drivers will be used. Wired connections automatically use the on-board driver.
- ☐ Your personal User name and Password and the network’s Domain name.
- ☐ Whether the network runs DHCP services or assigns static IP addresses to each device.
- ☐ A unique device name and description (ex. the serial number of the device).
- ☐ The proxy server address and port (as required for Internet connectivity).

The following 5 points only pertain to environments that assign static IP addresses.

- ☐ Your DreamMax 700 IP address.
- ☐ The Subnet Mask number.
- ☐ The Default Gateway number.
- ☐ The Primary and/or Secondary DNS.
- ☐ The Primary and/or Secondary WINS.

To configure your DreamMax 700 for network connectivity:

1. Select *My Handheld PC / Control Panel / Communications*.
2. Enter the unique *Device name* and *Description*.
3. Select *OK*.
4. Select *My Handheld PC / Control Panel / Network*.
5. Select the *Identification* tab.
6. Enter all information.




With the identification information entered you will not be prompted to log on when accessing network resources and subsequent network access will be granted based on the identification information entered.

If your network security requires that you log on each time a resource is accessed, do not fill in the identification information.

If using a wired network connection and static IP addressing, use the following instructions to configure your DreamMax 700. If using a wireless network connection you will be automatically prompted to configure the Adapter after installation and restart the DreamMax 700.

7. If using DHCP services, skip #8-11, click *OK*.
8. If using static IP addressing, select the *Adapters* tab.
9. Choose the appropriate *Adapter*.
10. Click the *Properties* button.
11. Enter all information, including the *IP address*, *Subnet Mask*, *Default Gateway*, *DNS* and *WINS*.
12. Click *OK* again.

A window will appear warning you that your settings will not take effect until the DreamMax 700 is restarted (Read [Appendix: Trouble Shooting: Restarting](#)). Click *OK*.

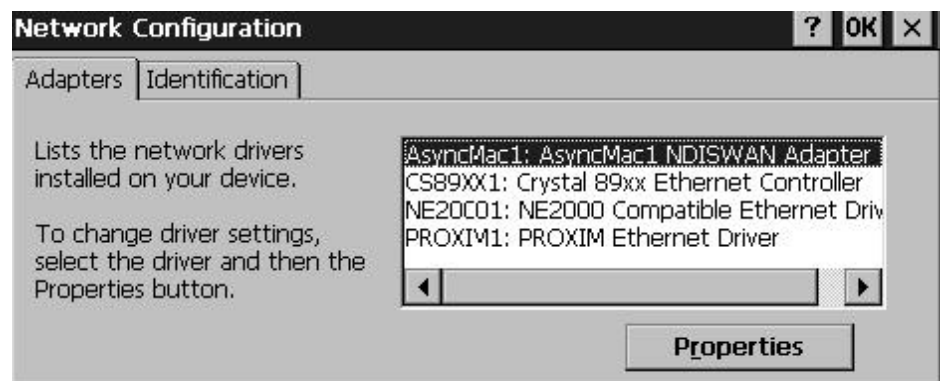

Accessing Network Resources

To access network resources from a DreamMax 700 you must provide the physical location of the resource on the network. Windows CE does not provide a network resource browser so you need to use Universal Naming Convention (UNC) paths for identifying the resource you wish to access. UNC naming conforms to the `\\servername\sharename` syntax, where 'servername' is the name of the server and 'sharename' is the name of the shared resource. UNC paths of directories or files can also include the directory path under the share name, with the following syntax: `\\servername\sharename\directory\filename`.

Two examples are:

- To access a Pocket Word document named 'assignment.doc' in the folder named 'Lessons' on the server named 'Classroom' you would use a UNC of `\\classroom\lessons\assignment.doc`.
- To access a network printer you will require the name of the print server and the printer. To use the 'class' printer that is accessed via the 'schoolfp' print server you'd enter `\\schoolfp\class` into the Net Path field for the printer. Once the printer Net Path is entered, the DreamMax 700 will store it in memory for future use.

Example of accessing a network share:

1. Open the *Windows Explorer* program.
2. Type the network location name in the address line preceeded by two backslashes. Example. `\\server\share\directory\document`
3. Press the *Enter* button.

The network location is placed into the computer's memory. When you want to access this resource again, click the down arrow at the far right of the address line. This will display all memorized locations. Select the appropriate location and press the enter button.

Thin Client

Thin client computing is a network-based approach for application access where all software applications run off of a centralized server. A thin client computer acts as a graphical user interface terminal to these applications.

Thin client computing provides low-cost, low-administration solutions to the desktop while centralizing control and management of applications at a server level.

To configure your DreamMax 700 to act as a Microsoft Terminal Server thin client:

1. Select *Start / Programs / Accessories / Terminal Server Client*.
2. Enter the name of the *Terminal Server*.
3. Select the setting for a low speed connection (defaulted)
4. Click *Connect*.
5. Fill in *Username* and *Password* (if necessary).
6. Click *OK*.

If the Thin Client software is connected to the Terminal Server desktop, select “Log Off Username” from the start menu to end your session. If you are connected to a specific application simply close the application and you will be logged off automatically.

DreamMax 700 to Internet

The Internet is a good resource for any teacher or student. Gaining access to the vast amount of knowledge available on the Internet can greatly assist with planning lessons, researching and collaborating with peers.

To use this tool you first need to ‘connect’ your DreamMax 700 to the Internet. There are two methods to access the Internet:

- Through your school’s network.
- Using a telephone line with the optional Dial-Up software.

Once you’re connected you can use Internet Explorer to search and view the millions of available Web sites.

To connect to the Internet through your school’s network, you first need to configure your DreamMax 700 with the proper network settings. Read Chapter 4: DreamMax 700 to Network.


To connect using a telephone line, you will need to purchase the optional Dial-up software, and follow the instructions found at www.brainium.com. Contact Brainium Technologies Inc. customer support for more information.

Configuring Internet Explorer

Internet Explorer is a Web browser that enables and simplifies navigation of the Internet. The layout is similar to Windows Explorer with enhancements specifically related to moving around the Internet.

There are two methods to access Internet Explorer:

- ❑ Double click on the *Internet Explorer* icon on the desktop.
- ❑ Select *Start / Programs / Internet Explorer*.

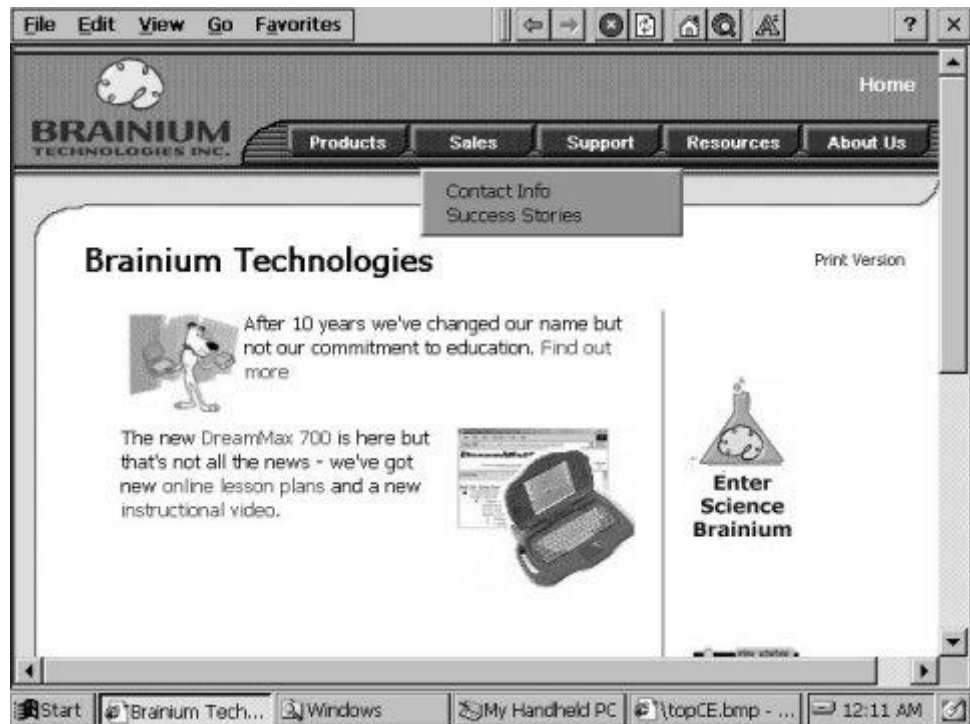

Toolbar Properties

Item	Description
Forward	Open the most recently visited web page.
Back	Open the last visited web page.
Stop Download	Stop a page loading onto your computer.
Refresh	Reload the page being viewed.
Home	Open your Home Web site.
Search	Open your Internet search page.
Font	Change the size of text. Continue clicking on the icon to change the font size.
Address Line	Type in a Web site address and press Enter to view.

Internet Options

Changes to Internet Explorer Options are not necessary. Unless otherwise directed by your Network Administrator, accept all default settings. The following Options are listed for informational purposes only.

To view the Internet Options:

1. Select *View / Internet Options*.
2. Choose the appropriate tabs and settings.

Item	Description
GENERAL TAB Enable Caching	When you Enable Caching, you allow the computer to store the Web site addresses you have visited. When you return to a site, the page loads from your computer's cache, instead of from the Internet. This makes the loading time much faster. It's helpful to empty your cache occasionally, since many Web sites renew their content regularly.
Empty Cache When Exiting	Automatically deletes all the stored Web sites in the cache when you close Internet Explorer.
Size of Cache	Dictates the amount of storage or file space your cache uses on your computer.
CONNECTIONS TAB Proxy Server	If you are connecting to the Internet through your school network, you may have to use a Proxy Server. If so, you must set up Internet Explorer to use the proxy server with an address and port. Your Network Administrator should have the required information.
ADVANCED TAB Enable Cookies	Cookies are found at most major Web sites. Cookies are small pieces of information that a Web site transfers to your computer for record-keeping purposes. Cookies do not contain any personally identifying information. You need to have cookies enabled to use most Web sites. Web sites cannot read the contents of any cookies stored by other sites.
Security Settings	Security protocols enable your computer to send and receive encrypted information over the Internet. This is important when you send personal or private information such as registration forms or emails. Secure connections encrypt or code the information so no one else on the Internet can read it. Unless told otherwise by your Network Administrator, all SSL protocols are usually allowed.



Sending data over the Internet is never completely secure. Although many companies endeavor to fully protect your information, they will not guarantee the security of the data you transmit. You do so at your own risk.

Search Tools

Search engines are an excellent method for finding information on the Internet. They use specialized computer programs called robots or spiders to search the Internet for Web documents and load these into a database. You actually search that database, rather than the whole Internet. The search engine returns with Web site descriptions and address (or URL's) that match your request. Most search engines now rank the results according to how well they match your request (such as a key word or phrase).

Search engine examples:


www.ajkids.com	www.searchopolis.com
www.google.com	www.eduhound.com

To use a search engine:

1. Open *Internet Explorer*.
2. Select *Go / Search the Web* or type a search engine address into the address line.
3. Type a topic name, key word or phrase into the Search box.
4. Select *Go* or press *Enter* to view your search results.

To make a search engine the default Search page:

1. Type the search engine address into the Address Line.
2. Click *OK*.
3. Select *View / Internet Options*.
4. Select the *General* Tab.
5. Select *Search Page* from the *Default Pages* drop-down menu.
6. Select *Use Current*.
7. Click *OK*.

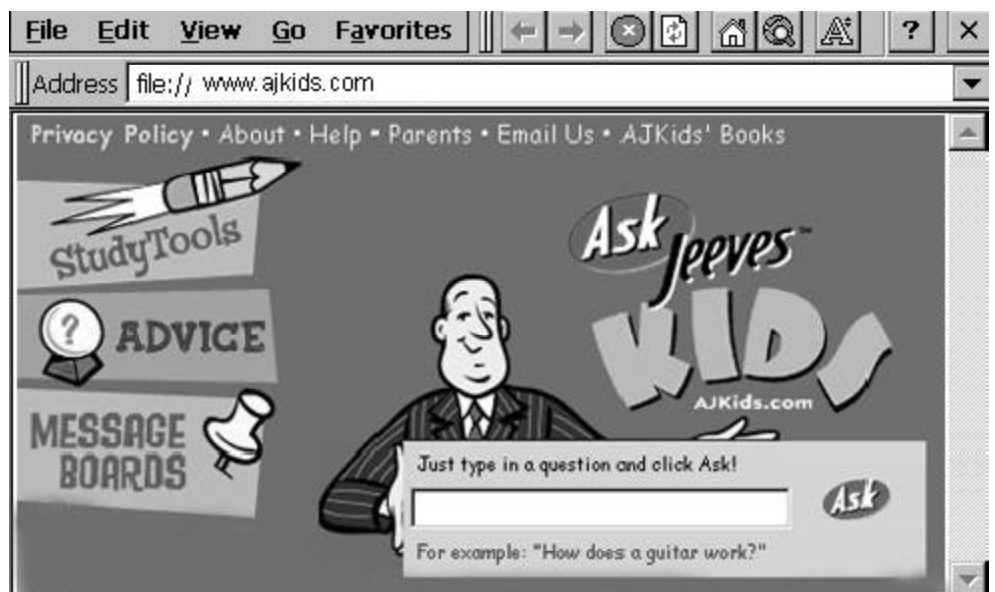

DreamMax 700 to Computer

There are many methods to transfer data between two computers. Here are two common methods available to you:

- Infrared Port (between two DreamMax 700 computers)
- Serial Port (between a DreamMax 700 and a personal computer)

Infrared File Transferring

To send or receive files between two DreamMax 700 computers:

1. Ensure both computers are powered on.
2. Double click the *My Handheld PC* icon on each computer.
3. Ensure both IR ports are directly inline with each other.
4. On one DreamMax 700, select the file you want to send.
5. On the other DreamMax 700, open the folder in which you want to store the received file.
6. On the first DreamMax 700, select *File / Send*.
7. On the second DreamMax 700, select *File / Receive*.

Communications with a PC

The DreamMax 700 can communicate or exchange information with a PC using the Microsoft ActiveSync 3.1 software. You can connect your DreamMax 700 to one or two desktop computers or you connect your PC to several DreamMax 700 laptops. Before using this program, a number of steps must be taken.

Install Microsoft ActiveSync 3.1 onto the PC and follow the instructions.



When you install ActiveSync on the PC, accept the defaults.

Ensure that each DreamMax 700 you want to connect has a unique name (Read [Chapter 4: DreamMax 700 to Network: pg 23](#)):


1. Select *Control Panel / Communications / Device Name*.
2. Type a *Device* name.
3. Click *OK*.

If using a Serial Port:

1. Connect the serial cable to the serial port on the DreamMax 700 and the PC.
2. On the DreamMax 700, select *My Handheld PC / Control Panel / Communications*.
3. Select the *PC Connection* tab.
4. Ensure that *Connect Using* properties are set to *My Connection* (default).

If using an Infrared Port:

1. Ensure the infrared software is properly installed and active on the PC.
2. On the DreamMax 700, select *Start / Programs / Communication / Remote Networking*.
3. Select *Create New Connection* and follow the steps.
4. Select *My Handheld PC / Control Panel / Communications*.
5. Click the *Change* button.
6. Select the new connection from the drop-down list.
7. Click *OK*.

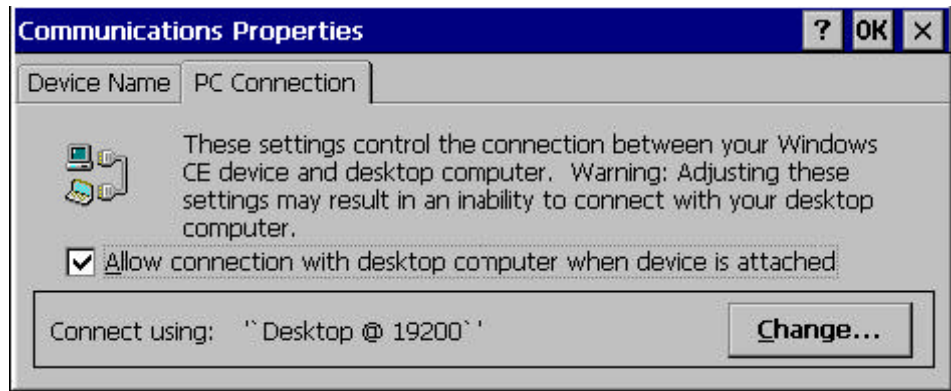

To create a new connection:

1. Select *Start / Programs / Communication / Remote Networking*.
2. Double click on *Make New Connection*.
3. Type a name for the connection. Click *Next*.
4. Select *Infrared Port* from the list of devices.
5. Click *Finish*.



Do not click the New Connection icon to connect to PC. See the instructions below for how to establish a connection.

There are two methods to access ActiveSync on the PC:

- Double click on the *Microsoft ActiveSync* icon on the desktop.
- Select *Start / Programs / Communication / Microsoft ActiveSync*.

An ActiveSync Partnership allows you to synchronize tasks or transfer files between two computers.

Once a connection has been made you can establish a 'Partnership' or a 'Guest' relationship between the two computers. With a Guest relationship, files can't be synchronized, but you can Cut/Paste files from one device to another and view the My Handheld PC directory on the PC for browsing.

To create a partnership and connect a PC and DreamMax 700:

1. Ensure the PC and DreamMax 700 are connected using the correct type of port.
2. On the PC, open the program *ActiveSync*.
3. Select *File / Connection*.
4. Ensure that *Allow serial or infrared connection* is enabled.
5. Ensure the correct *COM Port* is selected.
6. On the DreamMax 700 select *Start / Programs / Communication / PC Link*.
7. When ActiveSync establishes a connection a *New Partnership* dialog box appears on your PC screen.
8. On the PC, select *Yes* when prompted to create a new partnership. Selecting *No* will create a Guest Relationship.
9. Follow the prompts to choose the information types to be synchronized.
10. Select all other desired options.
11. Select *OK*.

To view the My Handheld PC directory on a PC:

1. In the ActiveSync window select *File / Explore*.
2. Follow the prompts. Click *OK*.
3. The *My Handheld PC* folder contents will be displayed.

With the creation of a Partnership, the selected information is synchronized automatically.

To change the timing of synchronization:

1. Ensure the DreamMax 700 and PC have a Partnership connection through ActiveSync.
2. In *ActiveSync* on the PC, select *Tools / Options*.
3. Select the *Sync Mode* tab.
4. Choose desired options for synchronization timing.
5. Select the *Sync Options* tab.
6. Choose desired information types to be synchronized.
7. Click *OK*.

A folder entitled Synchronized Files will be created on the PC and DreamMax 700 with a new Partnership. Files you want synchronized in the future must be placed into this folder on the PC or the DreamMax 700.

To connect your DreamMax 700 and PC for future sessions:

1. On the DreamMax 700, select *Start / Programs / Communication / ActiveSync*.
2. The DreamMax 700 will initiate the connection automatically.



If you have several partnerships established on your PC, you must select a device from the *File / Mobile Device* list in ActiveSync prior to making a connection.

Now that all the configurations are in place, you can share files between computers using the ActiveSync Program.

chapter 5

CURRICULUM INTEGRATION

Introduction

Now that your DreamMax 700 is configured, you can begin to use it in your classroom.

Just a few examples of what you can use the DreamMax 700 for:

- Research projects
- Essays and reports
- Data collection and evaluation
- Collaborative learning activities
- Presentations
- Online activities
- Cross curricular or thematic integrated projects

The DreamMax 700 is a valuable educational tool that can increase your students' interest, efficiency, understanding of curriculum and overall productivity. Use the DreamMax 700 functionality and applications to engage your students in a variety of curriculum activities.

You have 'anytime, anywhere learning' at your student's fingertips. Portable and durable, a student can take the DreamMax 700 into the field, to the classroom or home. Wherever your students need it, the DreamMax 700 can help them understand and utilize the curriculum.

At the Brainium Technologies Inc. Web site (www.brainium.com) there are a number of teaching and learning resources. This section will continue to expand, so make sure to return often to discover more educational solutions for your classroom.

LessonLinks

LessonLinks (www.brainium.com/lessonlinks) is a comprehensive collection of online lesson plans and activities for teachers. The lesson plans address national curriculum standards for Language Arts, Mathematics, Science, and Social Studies as well as the ISTE National Educational Technology Standards for Students. LessonLinks is designed to help teachers integrate the DreamMax 700 with relevant curriculum concepts in various subject areas.


Curriculum:

Nat'l SS - Early Grades

- ✕ STANDARDS AND PERFORMANCE EXPECTATIONS FOR EARLY GRADES
 - ✕ I. Culture. Social studies programs should include experiences that provide for the study of culture and cultural diversity, so that the learner can:
 - ✕ Performance Expectations
 - ✕ a. explore and describe similarities and differences in the ways groups, societies, and cultures address similar human needs and concerns; Related Themes: II, III, V, VI EG

Science Brainium

Science Brainium (www.sciencebrainium.com) is an interactive Web site for discovering key science concepts through educational activities and animated adventures. Teachers are provided rich lesson plans, full curriculum connections, and online training for a successful science experience in their classroom. Whether combined with the DreamMax 700 durable laptop or your existing web connected computer, this makes learning science fun and effective.

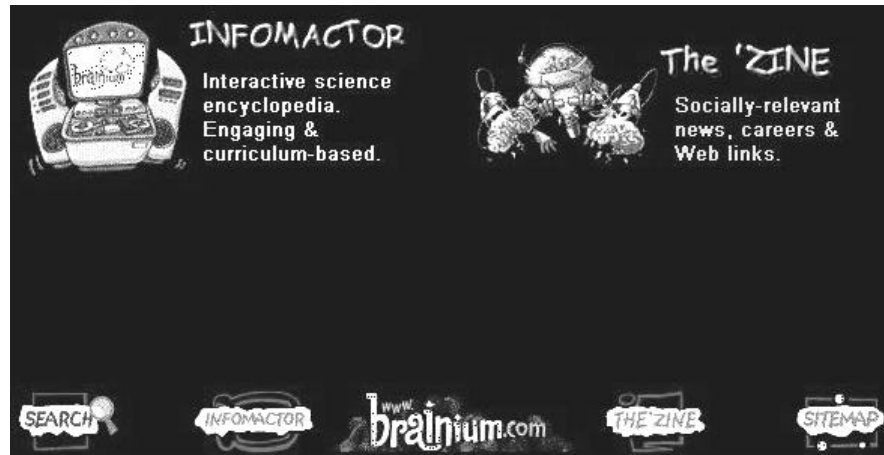

Integration

The following examples describe ways to integrate the DreamMax 700 with current classroom curriculum. You may wish to use these as general guidelines for developing engaging lessons that incorporate portable technology into your teaching. Brainium Technologies Inc. encourages the integration of technology as a learning tool to enhance methods for engaging students in learning.

English Language Arts

Most state and national curriculum standards for English Language Arts encourage growth and development in the areas of reading, writing, literacy, comprehension, research and acquisition of information, evaluation of information, communication, and discussion. Building your classroom lessons around an interactive learning experience with the DreamMax 700 will enhance your students' abilities to succeed in accomplishing their goals in this area of study.

Examples

Use the DreamMax 700 as a tool to conduct research on issues and interests. Students can gather, evaluate, and synthesize data from a variety of internet sources. They can create databases and spreadsheets from gathered information.

- ☐ Connect the DreamMax 700 to the Internet.
- ☐ Open the program Internet Explorer.
- ☐ Go to a favorite Search Engine (try www.ajkids.com).
- ☐ Enter keywords on a topic of interest such as “Shakespeare” or “modern poetry”.
- ☐ Browse through the related Web sites for information, activities and quotes.
- ☐ Collect information and categorize the data into a Pocket Access database or a Pocket Excel spreadsheet for analysis.

The DreamMax 700 and Pocket Word application are an obvious choice for a portable writing tool. Students can take the DreamMax 700 on field trips where inspired observations can be recorded as they happen. The DreamMax 700 is also great for in-class use as a word processor when writing essays, poems, plays, journals, and other compositions.

- Ensure the DreamMax 700 has a fully charged battery.
- Go to a local play, musical, art gallery or other venue.
- Open the program Pocket Word.
- Record observations, ideas and quotes.
- Save directly onto the DreamMax 700 or a floppy disk.
- Use the information to write a brief review of the event.

Students can apply different forms of written and visual language when using the DreamMax 700 as a presentation tool. Using Pocket PowerPoint and the Outline view of Pocket Word, students can work collaboratively or independently to develop a presentation of a completed subject unit.

- Open the Pocket Word program on the DreamMax 700.
- Using the Outline view of Pocket Word, create titles and key points for each PowerPoint slide.
- Add graphics or images to increase visual dynamics.
- Save document as a Pocket Word file in case you want to edit it later.
- Save document as a Power Point file (.ppv).
- Open the Pocket PowerPoint program on the DreamMax 700 and view your document.
- Connect the DreamMax 700 to a TV or overhead monitor.
- Show the presentation to the class.

Social Studies

Students can use the word processing, database, spreadsheet, and graphing applications to track trends, make predictions, evaluate data, and create illustrations. The DreamMax 700 can assist students in constructing Social Studies projects that involve people, events, innovations or issues and illustrate trends, products and opinions.

Example

- Connect the DreamMax 700 to the Internet.
- Open the program Internet Explorer to a search engine page.
- Research a historical event from a certain human perspective (ex. the American Civil War through the eyes of a slave).
- Copy and paste relevant information into a Pocket Word document.
- Using the information, write a journal, diary or series of letters from the chosen perspective.

Mathematics

Learning simple and complex mathematical concepts can be challenging for any student. To ensure your students are maximizing their comprehension of your lesson use the DreamMax 700 as an interactive, dynamic learning tool.

Examples

Bring a math problem to life using a TV monitor, Pocket PowerPoint and some creative thinking. Your students can also use this method to teach each other.

- Connect the DreamMax 700 to a TV monitor.
- Open the program Pocket PowerPoint.
- Display the math problem step-by-step using a real life, student-focused example.
- Pictures, graphs, video and audio will add to the presentation and student understanding.
- Everyone can follow along on their DreamMax 700.

Have your students complete an online math activity using Internet Explorer, where peer collaboration is a positive resource for information.

- Choose an interior design project (ex. painting a room).
- Connect the DreamMax 700 to the Internet.
- Open the program Internet Explorer.
- Using a search engine, research products and prices online.
- Measure the area to be painted.
- Record the information in a Pocket Excel worksheet.
- Construct formulae to compare price per unit and quantities needed to finish the project.
- Write a plan for implementing your design that describes all the costs you have estimated.
- Present your plan to the class using Pocket PowerPoint.

Pocket Excel and Pocket Access can be effective tools for students to learn organization of thoughts, data collection and math formulae.

- Open the DreamMax 700 program Pocket Access.
- Create a catalogue of every student in the class.
- Enter names, birthdays, favorite books, etc.
- Use the catalogue to create real-life math problems.

Science

Introducing students to scientific experimentation, observation, evaluation and complex theories is enhanced by using the DreamMax 700.

Examples

Take the portable DreamMax 700 outside to record observations in real-time using Pocket Word (general), Pocket Excel (numeric) or Data Harvest's Sensing Science software (optional science data collector).

- Ensure the DreamMax 700 has a fully charged battery.
- Take the DreamMax 700 to a nature area (woodland, pond, etc.).
- Open the program Pocket Word.
- Record observations of sight, sound and smell in two minute increments.
- Open the program Pocket Excel.
- Record the amount of light and the temperature during each increment.
- Create graphs with the collected data using the AutoGraph application.
- Present the information to the class using Pocket PowerPoint.

Collecting current data and making conjectures or hypotheses is one of the main activities in Science studies. Students can access current information on specific weather phenomenon or physical events (ex., earthquakes, tornadoes) using resources on the Internet

- Collect local data over a specified period of time.
- Use a Pocket Excel worksheet to organize and sort the data.
- Create graphs that illustrate trends and event frequencies using the AutoGraph application.
- Connect the DreamMax 700 to the Internet.
- Open the program Internet Explorer and go to a favourite search engine page.
- Research and gather data for a different area of the country.
- Use a Pocket Excel worksheet to organize and sort the data.
- Create graphs that illustrate trends and event frequencies using the AutoGraph application.
- Compare and contrast local data with the Internet data.
- In Pocket Word describe predictions, conclusions and supporting rationale.



Pocket Access can be an excellent tool for creating a database of scientific terms and definitions stored on a school network for easy use.

- ☐ Connect the DreamMax 700 to the school network.
- ☐ Open the program Pocket Access.
- ☐ Create a catalogue of science words and their definitions.
- ☐ Save the catalogue onto the network so everyone can use it.
- ☐ Continue to add new words each week.

DREAMMAX 700 DETAILS

Technical Specifications

Item	Description
Processor	206 MHz 32-bit Intel® StrongARM® RISC
Operating System	Microsoft Windows CE® 3.0
Internal Memory	16 MB Flash, 32 MB SDRAM
External Memory	Expandable memory support for CompactFlash and PC cards. Support for IBM Microdrives and Calluna HardDrives.
LCD Display	8.0" Diagonal STN LCD display, 640 x 480, 256 color with CCFL Back Light
VGA Video Out	640 x 480 VGA Monitor, Standard 15 pin connection for external monitor, Composite video out for TV display (NTSC and PAL)
Network	LAN IEEE 802.3 10 BaseT (RJ 45 connector) IP or NT4 supported
PC Slot	Two PCMCIA slots, one externally accessed and one located in a secure but conveniently accessed internal compartment. This internal slot can support a wide variety of Wireless Networking cards.
Disk Drive	Internal Floppy disk drive 3.5 inch 1.44 MB Windows/DOS compatible
Wireless Communication	802.11 & 802.11b compatible Infrared IRDA 1.1 compatible SIR OpenAir compatible (Proxim Rangelan2)
Sound	8 bit stereo playback and record Capability to playback wave files (.wav) Record using an externally connected microphone. Playback in stereo via built-in speakers or external headphones. Volume and balance controls
Multimedia Support	Windows Media Player 6.4 to play Windows Media or MP3 files
USB Port	USB port host for connection to add-on peripheral hardware.
Serial Port	DB-9 RS232 compatible port (115 Kbps) Connects to PC for 1:1 file transfer and prints to most serial port printers
Keyboard	Full size 64 key Windows CE compatible

Item	Description
Internal Pointing Device	Integral PS/2 TrackPad Integrated left and right mouse button functionality
External Mouse Support	PS/2, Serial and USB compatible
External Keyboard Support	PS/2 and USB compatible. Allows for 2 keyboards to be used at the same time
Remote Desktop/ Display Protocol (RPD) 5.0 Support	Connect to a Windows NT 4.0 or Windows 2000 based server. Enables full Windows applications on the Windows CE device.
Rechargeable Batteries	Ni-MH Battery Pack provides up to 12 hours typical use Takes approximately 8 hours to charge Memory backup during rechargeable battery swap
AC Adapter	Recharges batteries and powers unit while operational
Weight	5.5 lbs
Dimensions	15" x 11" x 2.5"
Model Design	Laptop design with hinged screen display and convenient handle
Internet Explorer 4.0	Compatible with the desktop version, optimized for Windows CE. Supports the following: ActiveX controls, Javascript, HTML version 4.0, Dynamic HTML (DHTML), and cascading style sheets (CSS) 40 bit and 128 bit Secure Sockets Layer (SSL) Extensible Markup Language (XML) JPEG, BMP, GIF and animated GIF image formats Offline browsing Plug-in support Web page print outs
Microsoft Windows for Handheld PC 2000	Pocket Word Pocket Excel Pocket PowerPoint Microsoft Foundation Class Visual Basic Runtime Windows Terminal Server Client Remote Networking Terminal I.E. 4.0 Pocket Access Pocket Outlook Calculator PC Links InkWriter ActiveSync 3.1
Other Applications	AutoGraph, license for Data Harvest Sensing Science 3 Data Logger Software (measures temperature, light level, sound level, humidity and barometric pressure).
RoI-A-Lab	16 or 20 unit storage cabinet on wheels Recharges all devices simultaneously Locks to secure contents
Bookshelf	4 unit storage bookshelf Recharges all devices simultaneously Locks to secure contents

Approvals & Warranties

FCC Conformity

DECLARATION OF CONFORMITY FCC and Industry Canada for a Class B Digital Device:

We, the Responsible Party

Brainium Technologies Inc.
11491 Kingston Street
Maple Ridge, BC, V2X 0Y6
800-663-7163

Declare that the product DreamMax 700, Document #2001093, Reference #QRTL01-007 is in conformity with Part 15 of the FCC Rules and ICES-003 of Industry Canada. Operation of this product is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CE Conformity

CE DECLARATION OF CONFORMITY

We, the Responsible Party

Brainium Technologies Inc.
11491 Kingston Street
Maple Ridge, BC, V2X 0Y6
800-663-7163

Declare that the DreamMax 700 is a Class B device, in conformance with the following Directives and EN standards.

Application of Council Directives : 89/336/EEC with
Amending Directives: 91/263/EEC, 92/31/EEC, 93/68/EEC, 93/97/EEC

Standards to which conformity is declared: EN55022:1998, EN61000-3-2:1995, EN61000-3-3:1995, EN55024:1998

ENGINEERING AND TESTING FOR EMC AND SAFETY COMPLIANCE
CONFORMANCE STATEMENT

Standards ICES-003:1997, FCC Part 15.107 & 15.109, AS/NZS3548:1995, EN55022:1998, EN61000-3-2:1995, EN61000-3-3 :1995, EN55024 :1998

License Agreements

Brainium Technologies Inc. has Expressed Licensing agreements with Microsoft Corporation, Intrinysc Software, Developer One Inc., WestTek LLC, Science Brainium, and DataHarvest Corporation to distribute with each Customer System one copy of Product software in Customer System ROM (“ROM Software”) and any end user documentation regarding said copy of Product Software.

These Software Products are protected by copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. This Software Product is licensed, not sold. The Software Product is provided “as is” without warranty of any kind. To the maximum extent permitted by applicable law, said companies disclaim all warranties, either express or implied, including, but not limited to, implied warranties of merchantability and fitness for a particular purpose and any warranty against infringement, with regard to the Software Product. This limited warranty gives you specific legal rights. You may have others that vary from state/jurisdiction to state/jurisdiction.

To the maximum extent permitted by applicable law, in no event shall said companies be liable for any damages whatsoever (including, without limitation, damages for loss of business profits, business interruption, loss of business information, or any other pecuniary loss) arising out of the use of or inability to use this Software Product. Because some jurisdictions do not allow the exclusion or limitation of liability for consequential or incidental damages, the above limitation may not apply to you.

Brainium Warranty

Brainium Technologies Inc. (“Brainium”) offers a limited one year warranty on the DreamMax 700 for one year from date of purchase. Brainium will repair or replace, free of charge, if proven defective in materials or workmanship by manufacturer. Replacement parts do not include damage caused by accident, neglect or misuse. The warranty does not cover DreamMax 700s damaged by using an AC adapter not supplied by Brainium. Batteries are not covered by warranty. The warranty ceases when you sell, rent, or otherwise dispose of either the DreamMax 700 or Rol-A-Lab in the warranty period. The product must be delivered or shipped freight prepaid to Brainium or authorized distributor for all warranty service. Please contact Brainium or distributor to inquire if your product is still under warranty and to receive a Return Merchandise Authorization number (R.M.A.). All returns require an R.M.A. number.

Trademark Recognition

DreamMax 700, Rol-A-Lab, the DreamMax logo, the Rol-A-Lab logo and the Brainium logo are trademarks of Brainium Technologies Inc. registered in the US and other countries. For further information, contact Brainium Customer Service. Product and company names mentioned herein may be trademarks or registered trademarks of their respective owners. Microsoft products are licensed to OEM’s by Microsoft Licensing Inc., a wholly owned subsidiary of Microsoft Corporation.

Trouble Shooting

The following are examples of issues that may occur with your DreamMax 700. As these are constantly being revised and updated, please visit our Web site (www.brainium.com) for further information.

Restarting

Software running on your DreamMax 700 may occasionally stop responding to keyboard and mouse input. If a program freezes in this way, there are three different procedures that can be used to try and resolve the problem:

Task Manager

The Task Manager allows you to close a frozen program or shutdown the entire computer. Either option will result in all unsaved information being lost. If the Task Manager is unable to fix the problem, you will have to perform a Soft Reset.

To access the Task Manager:

1. Press *Ctrl & Alt & Delete* keys at the same time.
2. Select desired closing method. This should unfreeze the computer.
3. Resume your work by opening the program again, or powering on.

Soft Reset

A Soft Reset initiates a quick reboot of the DreamMax 700. All unsaved information will be lost. If a Soft Reset does not fix the problem, you will have to perform a Hard Reset.

To initiate a Soft Reset:

1. Select *My Handheld PC / Control Panel / Soft Reset*.
OR press the Power button for 3 seconds.
2. When the screen becomes black release the button.
3. The DreamMax 700 will now power on.

Hard Reset

To initiate a Hard Reset you need a straightened, standard paper clip. The Hard Reset uses the memory module within the computer's hardware to reboot the DreamMax 700. The time and date will need to be adjusted after a Hard Reset. If a Hard Reset does not fix the problem, please contact the Brainium Technologies Inc. customer support department.

To initiate a Hard Reset:

1. Flip the DreamMax 700 so that you are looking at the bottom.
2. Locate the memory module compartment in the centre.
3. Press the straightened paper clip into the hole located in the upper right corner of the memory module compartment.
4. The DreamMax 700 will now reboot.



Initiating a Hard Reset is a drastic step. Performing a hard reset will restore the DreamMax 700 to the original factory settings and software that was shipped on it when purchased. All software and settings that you have loaded into the DreamMax 700 will be deleted. After resetting you will have to reload and reconfigure all software, drivers, peripherals and printers that you have setup in the past.

Communications with a PC

Active Sync

If you are having difficulties making a connection between your PC and the DreamMax 700, try the following steps.

On your PC:

1. Select *File / Connections Settings*.
2. Ensure the *Enable serial or infrared connection to COM Port* is selected.

Adjust the COM Port settings on the PC to match the DreamMax 700 settings (baud rate, etc):

1. Select *Control Panel / System / Device Manager*.
2. Select *Port COM1 / Port Settings*.

Review the DreamMax 700 settings by selecting *Start / Remote Networking / Your Connection*.

Common Questions

- | | |
|---|---|
| <i>I've saved a Pocket Word document on a floppy disk, but I can't open it on my PC.</i> | If you have saved the document in Pocket Word format, you must resave the document in a format that can be viewed on a standard PC, such as a .doc format (ex. filename.doc). |
| <i>It's difficult to use the Touchpad.</i> | Using a new device is sometimes challenging. The Touchpad offers the same functions as a standard mouse, but the operation is different. The larger dark gray area behaves like the left mouse button, the lighter gray triangle like the right mouse button. Tap the Touchpad to perform a mouse-click function. If you prefer, you can connect an external PS/2 mouse to the PS/2 port on the back of the DreamMax 700. |
| <i>Can I adjust the display on my DreamMax 700 to make it brighter?</i> | You can adjust both the brightness and the contrast on the screen from the Control Panel. Select <i>Start / Control Panel / Display</i> . Choose the appropriate settings and click <i>OK</i> . |
| <i>I'm trying to connect a new printer but I can't find the driver.</i> | Printer drivers are accessed through any DreamMax 700 application that has printer capabilities. Open Pocket Word and create a test document. Select <i>File / Print</i> . In the Printer dialogue box, choose the driver that most closely matches your printer. |
| <i>Do I have to completely drain the batteries before charging them again?</i> | No, your DreamMax 700 can be charged at any time. It is best to leave your Dreammax 700 charging when it is not in use, to ensure you have the maximum battery capacity possible. |
| <i>I've changed the floppy disk in the floppy disk drive, but I still see the contents of the first disk.</i> | Click the Floppy Disk icon in the right hand end of the Taskbar to view the new contents. |
| <i>What kind of storage cards can I use with my DreamMax 700?</i> | The two PCMCIA slots will hold Type I or Type II storage cards. Once the storage card is inserted, you will see a Storage Card icon in the My Computer folder. Double click the icon to view the contents of the card. |
| <i>Can I add other applications to my DreamMax 700?</i> | There are many additional applications available for Windows CE including games and utilities. You can find some of these at the Microsoft CE Web site (http://www.microsoft.com/mobile/pocketpc/default.asp). |

GLOSSARY

Item	Description
AC adapter	A connector that provides external power (not battery power) to your DreamMax 700.
ActiveSync	An application for your desktop computer that manages data synchronization between your DreamMax 700 and desktop computer when you are working remotely. You can specify the type of data you want to synchronize.
Attachment	An item included with an Email message.
Backup File	A duplicate copy of the program data on your DreamMax 700. This file does not include settings and information stored in ROM, such as factory-installed software. Use your backup file to return your DreamMax 700 to its previous state if your data is damaged or destroyed, or if you have performed a hard reset.
Baud Rate	The speed at which a modem transmits data.
COM Port	See communications port.
CommunicationsPort	A serial communications port used to connect equipment, such as mobile devices, modems, and printers.
Connection	The ability to interact with another device, computer, or the Internet by means of a serial, IR, Ethernet, or dial-up connection.
Data	Information that is stored in any of your Windows CE program files.
Dial-Up Connection	A connection between your DreamMax 700 and a remote computer by means of a modem. You can connect to an ISP, a network, or a modem attached to a PC.
Direct Connection	A connection between your DreamMax 700 and another computer by means of a serial cable or IR (infrared) ports.
Download	The process of transferring data from your desktop computer to your DreamMax 700.
Email	Messages and other items that you send and receive with Inbox.
Inbox Synchronization	A feature that enables you to synchronize mail between your DreamMax 700 and desktop computer. Your computer must be on and running Microsoft Exchange 5.5 or Outlook 97/98/2000.
InternetConnection	A communications method used to establish a link between your DreamMax 700 and a server that provides access to the Internet, typically, an Internet Service Provider (ISP).
Internet Service Provider	A company that provides access to the Internet.
Intranet	A network designed for information sharing within a company or organization.
IR Connection	A connection between your DreamMax 700 and another computer or device (such as a printer) by means of the Infrared.
LED	(light emitting diode) Indicator Panel lights to show current state of unit.

Item	Description
My Documents Folder	The folder that stores files you create on your DreamMax 700.
Network Connection	A connection between your DreamMax 700 and a network.
Net Path	A specific location of a file, program, device, etc. on a network, usually in the form of an address. Ex. \\server name\program.
Partnership	The process for establishing a connection between your desktop computer and your DreamMax 700 for the purpose of synchronizing and transferring data. Your DreamMax 700 can have partnerships with up to two desktop computers.
PC Card	A removable card, such as modem, Ethernet, or storage card, that conforms to the PCMCIA specification.
PCMCIA	(Personal Computer Memory Card International Association) Storage cards that enable a computer to have added ROM, RAM or modem capabilities.
Port Settings	The settings used to configure a communications port on a computer.
Remote Connection	A connection between your DreamMax 700 and a remote computer. You make a remote connection by using a modem.
Remote Networking	The Windows CE folder where you establish a dial-up connection between a mobile device and a remote computer.
Restore	To return your DreamMax 700 to the state it was in when it was backed up. This involves copying your backup data to your DreamMax 700.
Serial Cable	A cable that is used to connect your DreamMax 700 to your desktop computer, printer, etc.
Serial Connection	A connection between your DreamMax 700 and a desktop computer or other device by means of a serial cable.
Slider	The vertical double bar used to switch between displaying toolbar buttons and menu names.
Synchronization	The process of comparing the data on your DreamMax 700 with the corresponding data on your desktop computer and updating either computer with the most up-to-date data.
TCP/IP	(Transmission Control Protocol/Internet Protocol) The protocol that your DreamMax 700 uses to communicate remotely.
Toolbar	A bar at the top of the screen that contains buttons that perform specific tasks.
Trickle-charging	A method of battery charging that is very slow with minimal power fluctuations and can last indefinitely.
URLAddress	(Universal Resource Locator) To view Web pages on the Internet or an intranet, type a URL in the Address box in Pocket Internet Explorer.

INDEX

- AC Adapter 7
- Accessing Network Resources 23
- ActiveSync 28
- Audio Input 3
- Audio Output 3
- Back View 3
- Backlight 11
- Battery Charging 7
- Battery Compartment 4
- Battery Inserting/Removing 6
- Bottom View 4
- Common Questions 44
- Communications with a PC 28
- Computer Power 5
- Connecting External Devices 12
- Contrast & Brightness 11
- Control Panel 16
- Copying Files 18
- Curriculum Integration 32
- DC Power 3
- Deleting Files 19
- DHCP Services 21
- Display Settings 11
- DreamMax 700 to Computer 28
- DreamMax 700 to Internet 24
- DreamMax 700 to Network 21
- English Language Arts 33
- Ethernet Connector 3
- External Power 5
- Floppy Disk Drive 4
- Front View 2
- Function Lock 3
- Glossary 45
- Hard Reset 42
- Indicator Panel 3
- Infrared File Transferring 28
- Internal PCMCIA Slot 4
- Internal Power 5
- Internet Explorer 25
- IRDA Port 13
- Keyboard 9
- LAN 21
- LessonLinks 32
- Logging On 22
- Managing Files/Folders 17
- Mathematics 35
- Memory 12
- Monitor or Projector 12
- Network 13, 21
- Ni-MH battery pack 5
- Parallel Port 14
- Passwords 19
- Pasting Files 19
- PCMCIA Cards 10
- Peripheral Devices 14
- Power Level 7
- Power Off 8
- Power On 5
- Printing 13, 20
- PS/2 Port 3
- Recharge Terminals 3
- Recycle Bin 19
- Right-mouse Click 9
- Rol-A-Lab 7
- Science 36
- Science Brainium 33
- Search Tools 27
- Selecting Files 18
- Serial Port 13
- Side View 4
- Social Studies 34
- Start Menu 15
- Symbols 1
- Task Manager 42
- Taskbar 15
- Technical Specifications 38
- Thin Client 23
- Touchpad 9
- Trickle Charge 7
- Trouble Shooting 42
- USB Host Port 3, 14
- VGA Port 3
- Video Out 14
- Windows Explorer 17