

Федеральное государственное бюджетное образовательное учреждение высшего
профессионального образования
«Московский государственный технический университет имени Н.Э. Баумана»
(МГТУ им. Н.Э. Баумана)

Отчет по лабораторной работе № 6 по
дисциплине «Разработка интернет приложений».

ИСПОЛНИТЕЛЬ:

студент группы

ИУ5Ц73Б

Щелчков А.В.

Москва, 2017

Задание

В этой лабораторной работе вы познакомитесь с популярной СУБД MySQL, создадите свою базу данных. Также вам нужно будет дополнить свои классы предметной области, связав их с созданной базой. После этого вы создадите свои модели с помощью Django ORM, отобразите объекты из БД с помощью этих моделей и ClassBasedViews. Для сдачи вы должны иметь:

1. Скрипт с подключением к БД и несколькими запросами.
2. Набор классов вашей предметной области с привязкой к СУБД (класс должен уметь хотя бы получать нужные записи из БД и преобразовывать их в объекты этого класса)
3. Модели вашей предметной области
4. View для отображения списка ваших сущностей

Код программы

Base.html

```
{% load static %}
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <!-- The above 3 meta tags *must* come first in the head; any other head
    content must come *after* these tags -->
    <title>{% block title %}{% endblock %}</title>
    <link href="css/my_style.css" rel="stylesheet" type="text/css">
    <link rel="stylesheet" type="text/css" href="{% static 'css/my_style.css'
    %}">
    <!-- Bootstrap -->
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <link rel="stylesheet" type="text/css" href="{% static
    'css/bootstrap.min.css' %}">
    <!-- HTML5 shim and Respond.js for IE8 support of HTML5 elements and media
    queries -->
    <!-- WARNING: Respond.js doesn't work if you view the page via file:// ->
    <!--[if lt IE 9]>
    <script
    src="https://oss.maxcdn.com/html5shiv/3.7.3/html5shiv.min.js"></script>
    <script
    src="https://oss.maxcdn.com/respond/1.4.2/respond.min.js"></script>
    <![endif]-->
  </head>
  <body>

    {% block body %}Переопределяется в наследниках{% endblock %}
    <!-- jQuery (necessary for Bootstrap's JavaScript plugins) -->
    <script
    src="https://ajax.googleapis.com/ajax/libs/jquery/1.12.4/jquery.min.js"></scr
    ipt>
```

```

    <!-- Include all compiled plugins (below), or include individual files as
needed -->
    <script src="static/js/bootstrap.min.js"></script>
</body>
</html>

```

Groups.html

```

{% extends 'base.html' %}
{% load static %}
{% block title %}Музыкальные группы{% endblock %}
{% block body %}
    <div>
        {% for order in orders %}
            <div class="alert alert-success" role="alert">
<!---->
                <a href="#">
                    {{ order.name }} {{ order.date_create }}
                </a>
            </div>
        {% empty %}
            <li>пустой список</li>
        {% endfor %}
    </div>
{% endblock %}

```

Views.py

```

from django.shortcuts import render from
django.views.generic import ListView from
dz_v1 import models # Create your views
here.
class
musical_group_view(ListView):
    model = models.MusicalGroup
    def get(self,
request):
        d = dict(orders=self.model.objects.values('name', 'date_create',
'description'))
        return render(request, "groups.html", d)

```

Urls.py

```

"""untitled10 URL Configuration

```

The `urlpatterns` list routes URLs to views. For more information please see:
<https://docs.djangoproject.com/en/1.11/topics/http/urls/>

Examples:

Function views

1. Add an import: `from my_app import views`
2. Add a URL to `urlpatterns`: `url(r'^$', views.home, name='home')`

Class-based views

1. Add an import: `from other_app.views import Home`
2. Add a URL to `urlpatterns`: `url(r'^$', Home.as_view(), name='home')`

Including another `URLconf`

1. Import the `include()` function: `from django.conf.urls import url, include`
2. Add a URL to `urlpatterns`: `url(r'^blog/', include('blog.urls'))` """


```
from django.conf.urls import url from
```

```
django.contrib import admin from
```

```
dz_v1 import views
```

```
urlpatterns = [  
    url(r'^admin/', admin.site.urls),  
    url(r'^groups/', views.musical_group_view.as_view()),  
]
```

Результаты

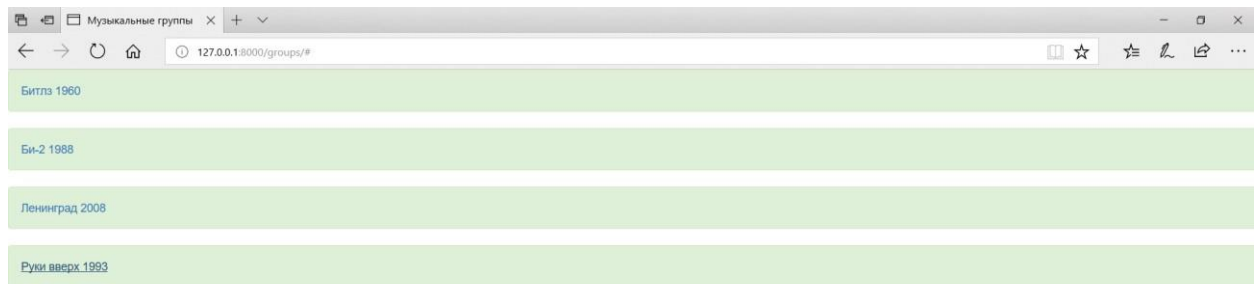

Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

SCHEMAS

Filter objects

- first_db
 - Tables
 - django_migrations
 - dz_v1_musicalgroup

Information

No object selected

Result Grid

id	name	date_create	description
1	Битлз	1960	рок-группа.
2	Бит-2	1988	Рок-группа.
3	Лен...	2008	Российск...
4	Рок...	1993	«Руки Ве...
NUL	NUL	NUL	NUL

musicalgroup 1

Apply Revert Context Help

Output

Action Output

#	Time	Action	Message
1	21:35:04	SELECT * FROM first_db.django_migrations LIMIT 0, 1000	0 row(s) returned
2	21:35:18	SELECT * FROM first_db.dz_v1_musicalgroup LIMIT 0, 1000	2 row(s) returned
3	21:41:09	UPDATE first_db.dz_v1_musicalgroup SET 'name'='Битлз', 'date_create'='1960', 'description'='The Beatles ...	1406: Data too long for col
4	21:41:09	UPDATE first_db.dz_v1_musicalgroup SET 'name'='Бит-2', 'date_create'='1988', 'description'='В 1991 году Ш...	1406: Data too long for col
5	21:41:09	INSERT INTO first_db.dz_v1_musicalgroup ('id', 'name', 'date_create', 'description') VALUES (3, 'Ленингра...	1406: Data too long for col
6	21:41:09	INSERT INTO first_db.dz_v1_musicalgroup ('id', 'name', 'date_create', 'description') VALUES (4, 'Руки вверх...	1406: Data too long for col

Object Info Session

