

$$T \rightarrow BCE$$

$$B \rightarrow \text{int}$$

$$B \rightarrow \text{float}$$

$$C \rightarrow \epsilon$$

$$C \rightarrow [\text{num}]C$$

Augmented Grammar:

$$T' \rightarrow T$$

$$\textcircled{1} \quad T \rightarrow BCE$$

$$\textcircled{2} \quad B \rightarrow \text{int}$$

$$\textcircled{3} \quad B \rightarrow \text{float}$$


$$\textcircled{4} \quad C \rightarrow \epsilon$$

$$\textcircled{5} \quad C \rightarrow [\text{num}]C$$

reduction of HWT stack

(if can item
pop 20 or more

ϵ is nothing.

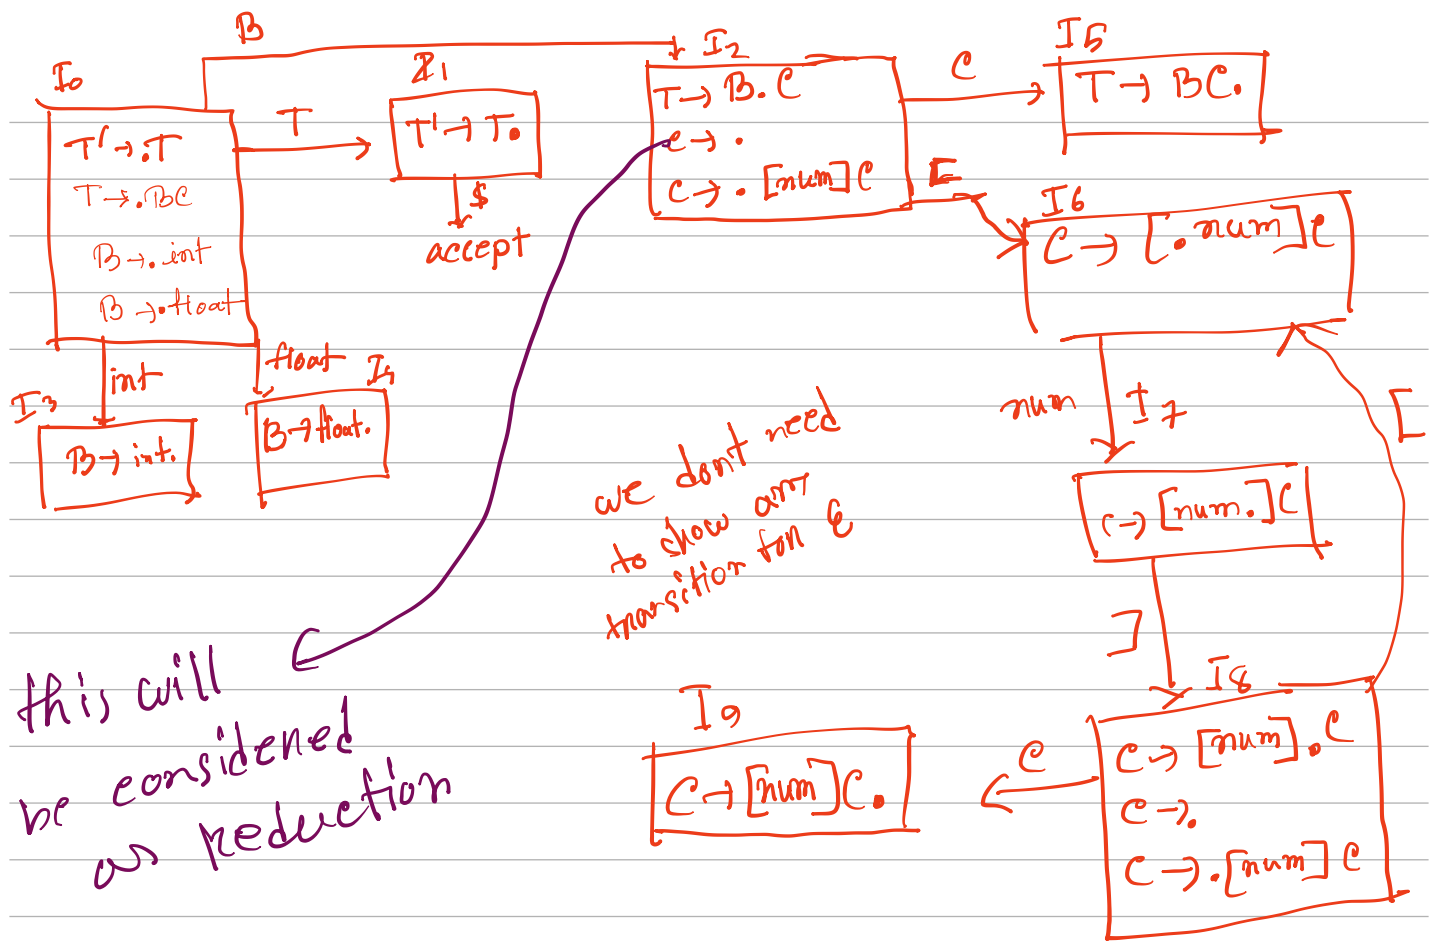

~~A~~

Firsts	
e	{E, e}
B	{int, float}
T	{int, float}
T'	{int, float}

$A \rightarrow \alpha B$

looking at the head

looking at the body	follows	
	T'	{ \$ }
	T	{ \$ }
	B	{ E, \$ }
	C	{ \$ }

	int	float	num	[	]	\$	+	B	C
I ₀	s3	s9					1	2	
I ₁						acc			
I ₂				s6		r4			5
I ₃				r2		r2			
I ₄				r3		r3			
I ₅						r1			
I ₆			s7						
I ₇					s8				
I ₈				s6		r4			9
I ₉						r5			

stack

\$0

\$03

\$0 → \$02

\$026

action

shift

reduce

shift

input

int [num] [num] [num] \$

[num] x3 \$

»

num] [num] [n] \$

\$ 0267

shift

] [n] [n] \$

\$ 02678

shift

[a] [n] \$

\$ 026786

shift

n] [n] \$

\$ 0267867

shift

] [a] \$

\$ 02678678

shift

[a] \$

\$ 026786786

S

n] \$

\$ 0267867867

S

] \$

\$ 02678678678

S

\$

\$ 026786786789

reduce

\$

↳ nothing popped since ε

\$ 02678678 → \$ 026786789

reduce

\$

\$ 026789

reduce

\$

\$ 028

reduce

\$

\$ 01

reduce

\$

[accept]