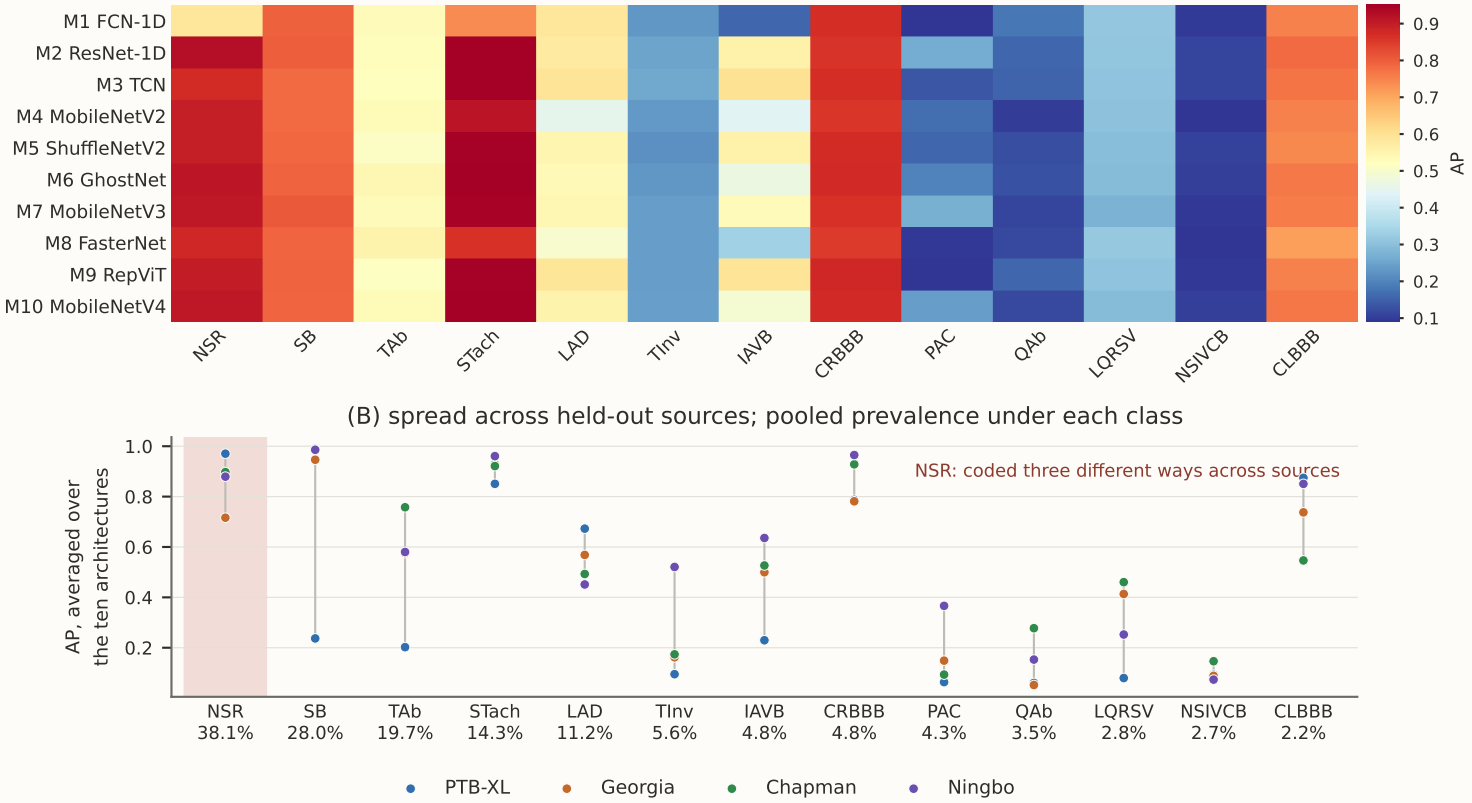
(A) equal-source mean AP per diagnosis, reference tier (float32, published depth, unconstrained)
M1 FCN-1D
M2 ResNet-1D
M3 TCN
M4 MobileNetV2
M5 ShuffleNetV2
M6 GhostNet
M7 MobileNetV3
M8 FasterNet
M9 RepViT
M10 MobileNetV4
NSR
SB
TAb
STach
LAD
TInv
IAVB
CRBBB
PAC
QAb
LQRSV
NSIVCB
CLBBB
AP
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.1
(B) spread across held-out sources; pooled prevalence under each class
AP, averaged over the ten architectures
1.0
0.8
0.6
0.4
0.2
NSR: coded three different ways across sources
NSR 38.1%
SB 28.0%
TAb 19.7%
STach 14.3%
LAD 11.2%
TInv 5.6%
IAVB 4.8%
CRBBB 4.8%
PAC 4.3%
QAb 3.5%
LQRSV 2.8%
NSIVCB 2.7%
CLBBB 2.2%
PTB-XL
Georgia
Chapman
Ningbo