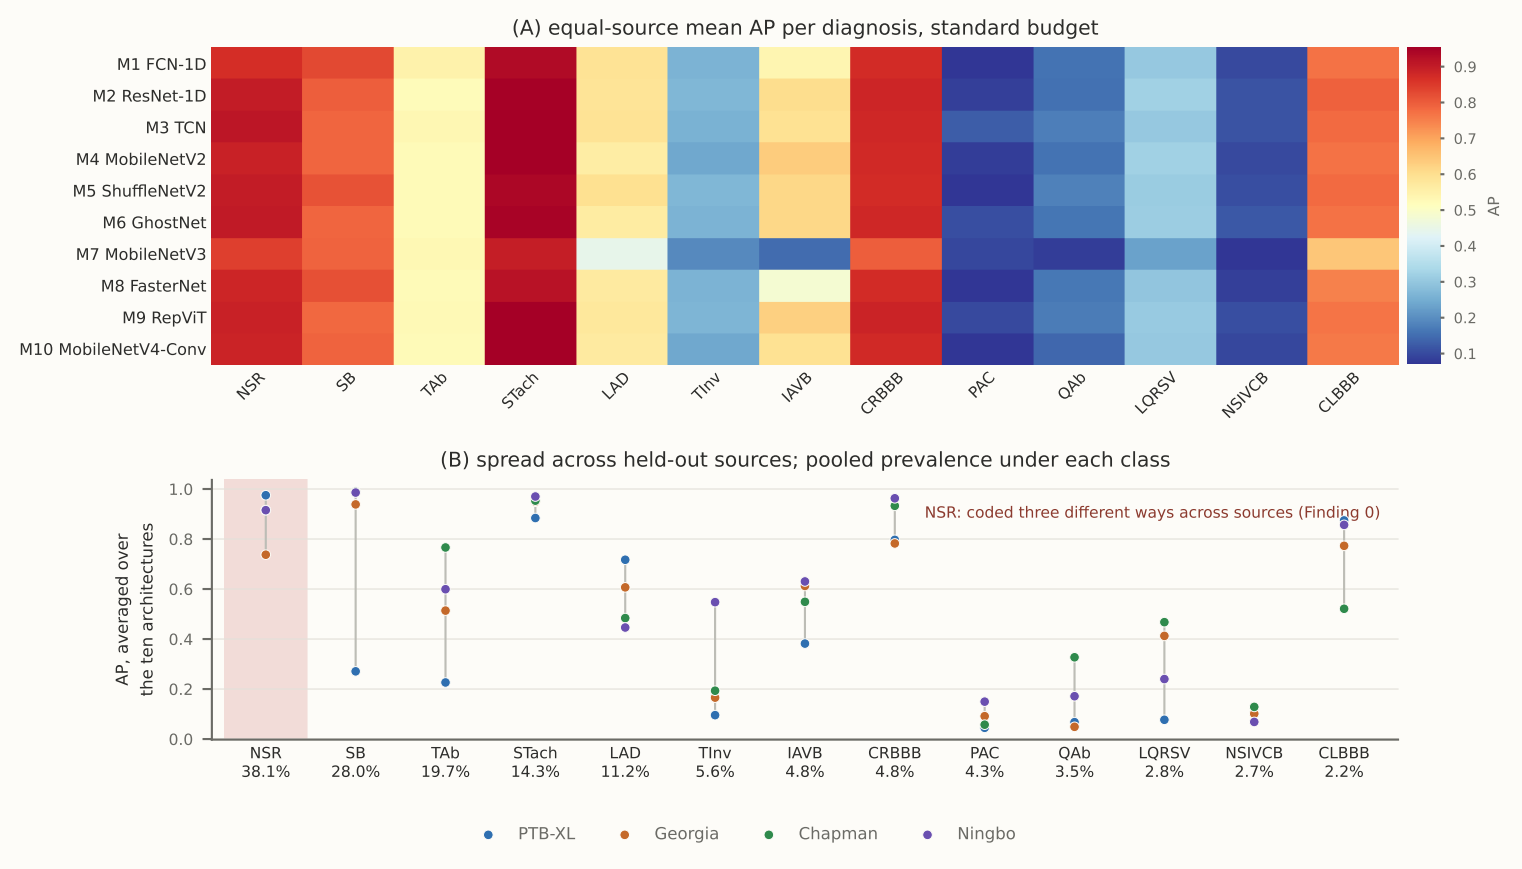
(A) equal-source mean AP per diagnosis, standard budget
M1 FCN-1D
M2 ResNet-1D
M3 TCN
M4 MobileNetV2
M5 ShuffleNetV2
M6 GhostNet
M7 MobileNetV3
M8 FasterNet
M9 RepViT
M10 MobileNetV4-Conv
NSR
SB
TAb
STach
LAD
TInv
IAVB
CRBBB
PAC
QAb
LQRSV
NSIVCB
CLBBB
AP
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.1
(B) spread across held-out sources; pooled prevalence under each class
AP, averaged over the ten architectures
1.0
0.8
0.6
0.4
0.2
0.0
NSR: coded three different ways across sources (Finding 0)
NSR 38.1%
SB 28.0%
TAb 19.7%
STach 14.3%
LAD 11.2%
TInv 5.6%
IAVB 4.8%
CRBBB 4.8%
PAC 4.3%
QAb 3.5%
LQRSV 2.8%
NSIVCB 2.7%
CLBBB 2.2%
PTB-XL
Georgia
Chapman
Ningbo