


Signal rich. Action poor.

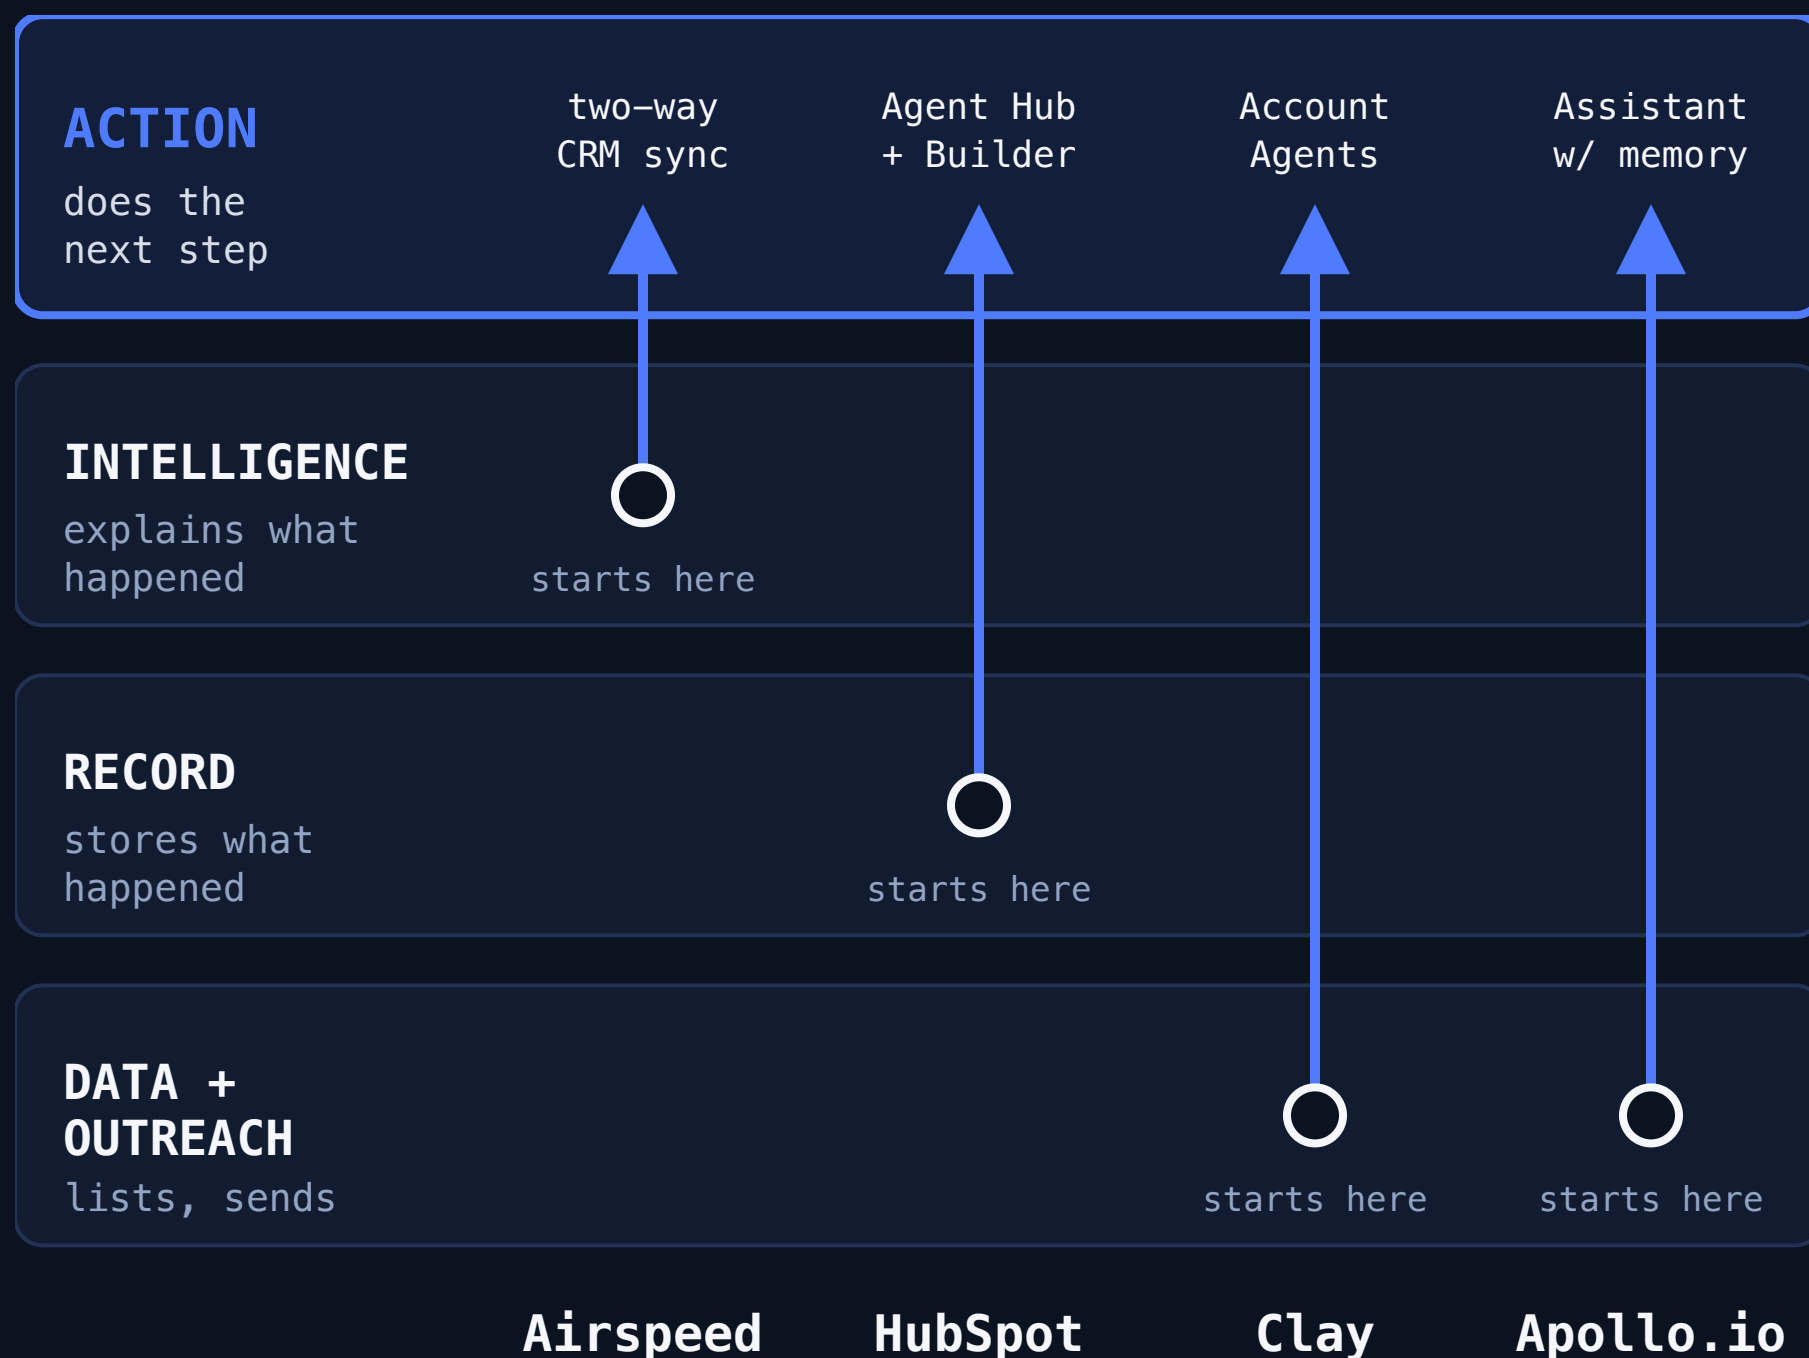

Four starting points. One layer.

Layer names: Airspeed's framing (goairspeed.com). Moves: Airspeed site; HubSpot news Jul 23; Clay blog Aug 25; Apollo release notes Jul 2026.

Five checks for trusted execution

1 Scoped write access

A valet key: starts the car, won't open the trunk. Named objects and fields only.

SHIPPED · Apollo: Salesforce custom objects sync read-only

2 Its own identity

A service account, not the rep's login, so every change traces to the agent.

LISTEN FOR · who the log says made the change

3 Blast-radius limits

Cap the batch size; stop the job when something looks wrong.

SHIPPED · Apollo: sequences auto-pause on high bounce rates

4 Audit trail with undo

Before-and-after values, so a bad run reverses field by field.

LISTEN FOR · undo path, not a backup restore

5 Sign-off scaled to reversibility


The harder an action is to undo, the more it needs a human first.

LISTEN FOR · where the line sits (slide 4)


THE UNSOLVED CONFLICT

Two agents. One field. **No referee.**

WITHOUT: LAST WRITE WINS

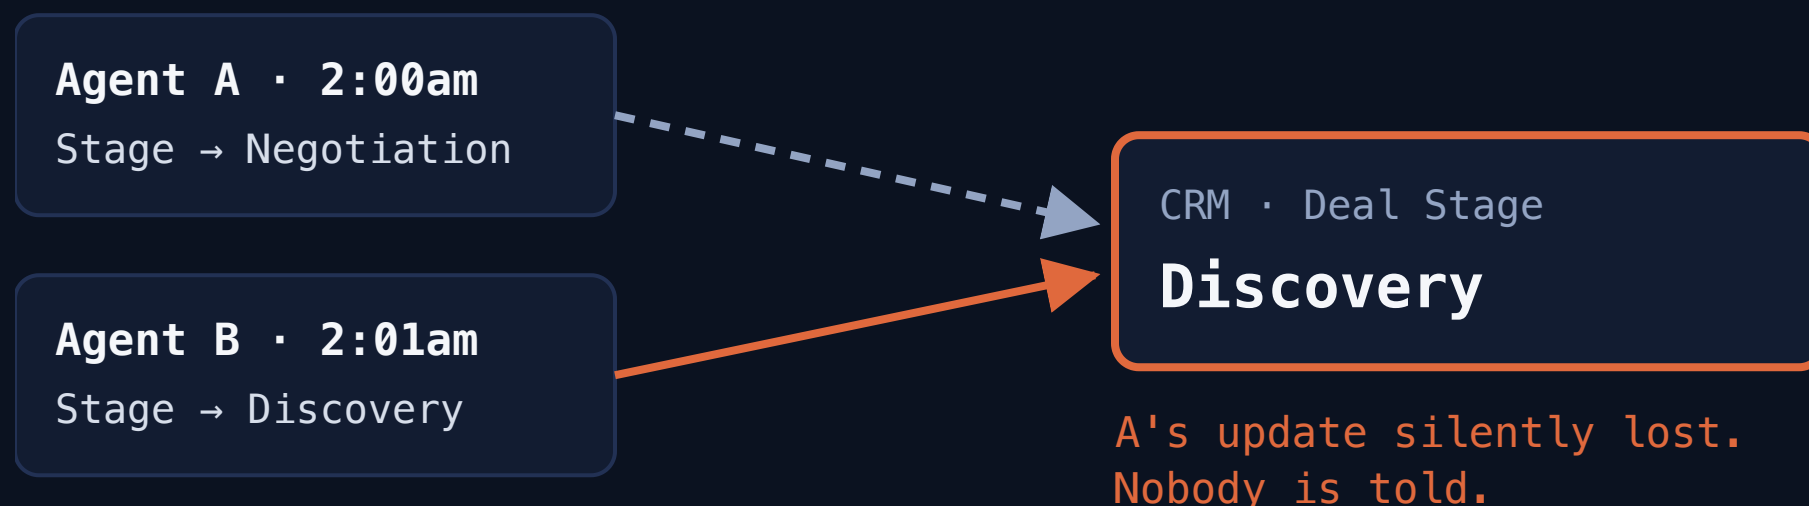


WITH: ONE SINGLE WRITER

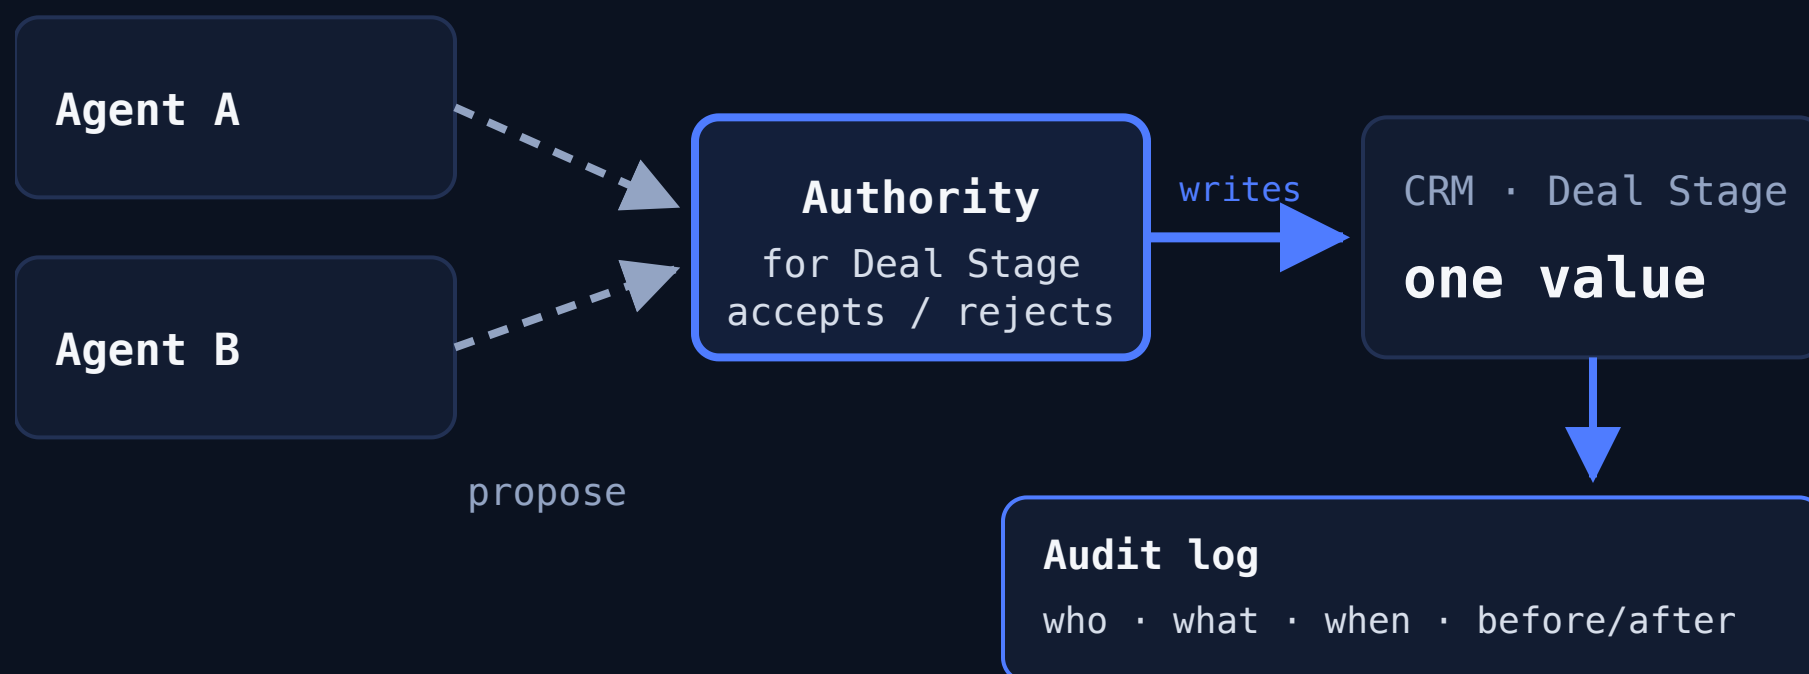

Schematic. Single-writer is a data-engineering pattern; no cross-vendor arbitration standard found as of Sept 2026.

THE QUESTION FOR THURSDAY

Where does the **sign-off** line go?

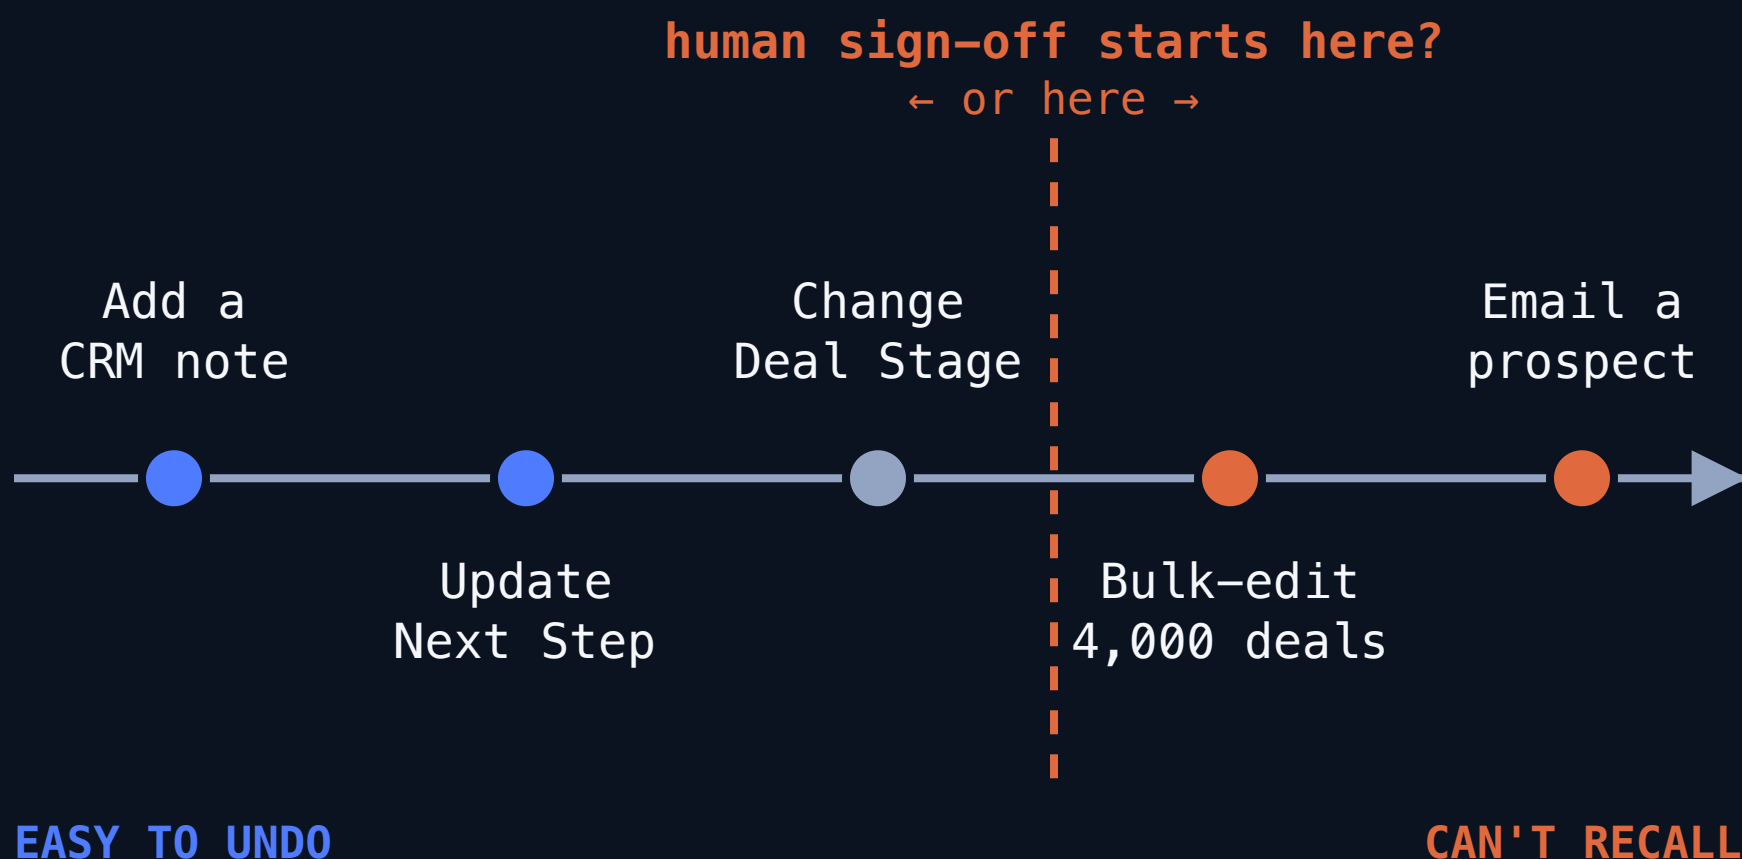

Four panelists, four answers to listen for:

Devang Agrawal (Airspeed) · **Alex Lindahl** (Clay) · **Mintis Sow** (HubSpot) · **Tyler Phillips** (Apollo.io)
Hosted by **Jared Robin** (RevGenius)

Illustrative actions; placement is a schematic, not any vendor's spec. Sources in the first comment.