

HTML

A. HTML Introduction :-

HTML - Hypertext markup language (Only language) ^{Not an software,}

HTML - Standard markup language for creating web pages

HTML founder - Berners Lee.

(HTML published - 1995.)

HTML Tools - Text editor, web browser.

Tags :-

.... (define paragraph)	} <u>Container Tags</u>
<html>.... </html> (open - close)	
<head>.... </head> (header)	
<style>.... </style> (define style)	
<body>.... </body> (define contents)	

Empty Tags

<hr>

Basic Code of HTML :-

<html>

<head>

<title>.... </title>

<style>.... </style>

</head>

<body>.... </body>

</html>

HTML

Notepad ++ (Install)

```
<html>
<head>
<title>
Career Resource
</title>
<style>
body {
background-color: #633974;
Color: white;
font-weight: bold;
margin: 2%;
font-family: Colonna MT;
font-size: 50px;
}
</style>
</head>
<body>
Career Resource
<hr height="5" color="white">
</body>
</html>
```

Save (*.html)

Advantage of HTML:-

(HTML is easy to learn and use.)

(HTML is supported by all web browsers.)

(HTML is simple to Edit.)


Disadvantages of HTML:-

(The time it takes to choose the color scheme of a page and to create lists, tables and forms.)

(Need to write lot of code for making simple webpages.)

2. HTML Development Tools:-

Tools needed:

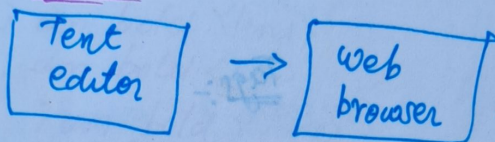

Formatting Text:-

<!doctype.html>

<html>

<head>

<title> Formatting Text </title>

</head>

<body>

<h1> My Programming Line </h1>

<body>

</html>

3. HTML Formatting Text Part - 1

<mark>

<u>

<tt> not support HTML5

<strike> not support HTML5

<sup>

<sub>

<ins>

<big>

<small>

Font

 ...

Attributes of font:

* face

* size

* color

<hr>

bg color

text

Tags:-

<face = "name">

Heading:-

<h1> ... </h1>

<h2> ... </h2>

<h3> ... </h3>

<h4> ... </h4>

<h5> ... </h5>

<h6> ... </h6>

4. Formatting text part - 2:-

Paragraph:-

<p> ... </p>

<p align = "Left">

<p align = "Right">

<p align = "Center">

<p align = "justify">

<!doctype.html>

<html>

<head>

<title>

</title>

Formatting Text

</body>

→ <body color=pink>

 i am bold

 i am bold

} same output

<i> i am bold </i>

 i am bold

} same output

<big> i am bold </big>

<small> i am bold </small>

 i am bold

<ins> i am bold </ins>

<tt> i am bold </tt>

<strike> i am bold </strike>

<u> i am bold </u>

<mark> i am bold </mark>

face="Verdana"

face="Arial"

Hi I am HTML

<p>→

<p style="color:red", background-color:red">

<p> The paragraph is single.

</p>

5. HTML Links:

* Links created <a>...

* HREF

<a>...

HREF

Link attribute:

Link

A link

✓ link

link = "pink" a link = "blue"
✓ link = "yellow"

<body link = "pink">

Click to Google

Click to <a href = "http://www.google.com"
target = "_blank"> Google.com

target = "_self"> google.com

target = "_top"> google.com

target = "_parent"> google.com

<a href = "http://www.youtube.com/" target
= "_parent">

img src = "C:\user\sandosh\Desktop\images
for html tutorial\micky.jpg">
↑
file name

6. HTML file path:-

Types of url:-

Absolute URL

Relative URL

URL - Uniform Resource
locator.

complete URL

Lbody>

Click to

<a href="c:\user\Alem\image.jpg" - Absolute URL.
< href="dhora ab.jpg" target="

7. HTML image Tag - part 1 :-

It is empty tag. Eg:
 no closing tag
Attribute :-

src

Alt

Align

Height

Width

Sound Attribute :-

File format.

(.Wav)

(.Av)

(.Mid)

<Bgsound>

Attribute :-

src

loop

Background Picture :-

<body>

<background="C:\ips">

<!doctype. html>

<head>

<title> image </title>

</head>

<body> style="width: 500px; height: 300px;"

</body> Alt="no image" ☒ no image

</html>

8. HTML Image Tag part 2 :-

<a> target="_blank" href="C:\Users\mike\mike.jpg">

<!doctype. html>

<html>

<head>

<bgound src="audio.wav" loop="1">

</head>

background image :-

<body background="C:\Users\mike\mike.jpg">

9. HTML Style & Color Tags :-

<style>...</style> - container Tag

Attributes :-

Background color
color

border font family :-

font-size

text-align

Color attribute:-

Back ground color

Text color

Border

RGB (red ~~blue~~ ^{blue} green) rgb (255, 0, 0)

Hex or Hexadecimal Notation (# FF0000)

HSL (Hue, Saturation, Lightness) (0, 50%, 50%)

<!doctype html>

<html>

<head>

<title>

Style & Colors

</title>

</head>

<body>

<h1> Programming Line </h1>

<p> font-family : century

any fonts

or any

Articles related fonts

</p>

</body>

</html>

10. HTML STYLE & COLOR Tag Part-2:-

<p style="color:red; border:"solid"; border-color:red;
padding: 100 px; padding: 50 px;
border: dotted;

```

<!doctype. html>
<html>
<head>
<title>... </title>
<del>head</del>
<style>
{
background color : blue;
color : white;
font-size : 40px;
}
</style>
</head>

```

(visit on www.colorcodes.com)

11. HTML Marquee Tags PART-1:-

```
<Marquee>.... </Marquee>
```

Attributes of Marquee Tag:-

bg color

Direction:-

xleft

xright

up

down

Behaviour:-

Alternate

Scroll

Slide

Scroll amount

Scroll Delay

V. space

width

Height

<Marquee> used also.

<!doctype. html>

<html>

<head>

<style>

<title>... </title>

</style>

</head>

<body>

<Marquee style = "background-color: pink;
color: white;"

<h2> Program </h2>

</Marquee>

<Marquee direction = "right"> <

= "left"> >

= "up" ↑

= "down" ↓

style = 'font-size = 30 px; font-family: columbia

12. HTML Marquee Tag part - 2 :-

<Marquee bgcolor = "yellow" behaviour = "Alternate";
width, height

specify this place.

behaviour = "scroll">

behaviour = "slide">

<marquee scrollamount = "50" > Speed
scroll delay = "50" </marquee>

<Marquee Vspace = "20">

13. HTML Div Tag Part - 1 :-

<div>... </div> -> container tag

Attributes :-

Text-align

Background color

Text-color

float

border

Span Tag :-

 applying styles to inline elements.

 ...

Attributes of tag :-

background color

Text-color

border

span tag - inline elements

div tag - block-level content.

<!doctype.html>

<html>

<head>

16. What should we learn in HTML?

```
<html>
<head>
<title>... </title>
<style>... </style>
</head>
<body>... </body>
</html>
```

html

Structure Layer (HTML)

Presentation Layer (CSS)

Behaviour Layer (JavaScript)

Position

1. Static
2. Relative
3. Fixed

`<p style = "position = static">` ~~left~~

The file is secured.

`</p>`

`<p style = "position = Relative">` ^{working on attribute} `</p>` worked

`<p style = "position = fixed">` ^{working} `</p>` worked

17.

HTML Overflow, Float, Inline & Block Part-1:

→ border: 20px;

<p style="Overflow: auto; color: red;">

HTML elements are delineated by tags, written using angle brackets.

</p>

18.

HTML Overflow, Float, Inline & Block Part-2:

<p>

This is a html files.

</p>

→ float: left;

<p>

This is a html file.

</p>

<p style="clear: left;">

<h1> My programming Line </h1>

<h2> My programming line </h2>

 Siva

 Raksh

 nam

 :

<div>

My program This is not safe

</div>

```

<span style="display: inline;"
display: none; >
</span>
display: inline-block;

```

```

<span style="border-color: blue; border:
3px; border-style: solid;

```

19. HTML Meta Tag Part - 1 :-

<meta -> empty tag

UTF = Unicode
Transformation
Format

<head>

<meta charset = "utf-8"

<meta name = "author" content = "Rakesh">

<meta http-equiv = "refresh" content = "20

url = http://www.google.com">

20. HTML Meta Tag Part - 2 :-

<meta name = "viewport" content = "width=device-width, initial-scale=1">

<meta name = "revised" content = "2019">

name = "keyword" content = "html" >

name = "description" content = "meta tutorials" >

21. HTML audio Tag part - 1 :-

<audio> new support html 5

<audio> ... </audio>

<source> ... </source>

Attributes :-

Control

Auto play

Loop

src

Type

Format :-

• MP3

• OGG

• Wav

Browser	MP3	Wav	ogg
Internet explorer 9.0	YES	<u>NO</u>	<u>NO</u>
chrome 4.0	YES	YES	YES
Firefox 3.5	YES	YES	YES
Safari 4.0	YES	YES	<u>NO</u>
Opera 10.5	YES	yes	YES

22. HTML audio Tag part - 2 :-

<!doctype.html>

<html>

<head>

<meta charset = "UTF-8">

<meta name = "View port" content = "width=device-width, initial-scale=1.0">

<body>

<h1>

Programmin line (h1)

<audio

loop autoplay controls src = "audio.wav"

</audio>

<audio loop = "2" autoplay controls src = "audio.wav"

</audio>

23.

HTML audio Tag Part-3 :-

<html>

<body>

<audio loop controls >

<source

src = "audio.wav" type = "audio.wav"

</source>

<audio

src

<source src = "audio-3.mps" type = "audio/mp3">

</source>

<source src = "audio-2.099" type = "audio/ogg">

</source>

</audio>

</body>

</html>

Link

src = "image.jpg"

24.

HTML Video Tag Part-1 :-

<video> is new in HTML 5

<video> .. </video>

< source > </source>

Attributes:-

Control	Width
Autoplay	Height
Loop	Poster
src	Muted
Type	

File Format

- MP4
- OGG
- WebM

Browser	MP4	WebM	OGG
Internet Explorer	Yes	no	no
Google chrome	Yes	Yes	Yes
Mozilla Firefox	Yes	Yes	Yes
Opera	no	Yes	Yes
Apple Safari	Yes	no	no

25. HTML Video Tag Part-2 :-

```

<!doctype.html>
<html>
<head>
</head>
<body>
<h2> My Programming Line </h2>
<video loop control width="50%" height="40%"
src="video-2. Webm">
</video>
<video loop control poster="c:\url.jpg" src="ol.webm">

```

26. HTML Video Tag Part - 3 :-

<Video src = "video.2.jpg">

<Source src = "video.webm" type = "video/webm">
</source>

<Source src = "video.mp4" type = "video/mp4">
</source>

<Source src = "video.ogg" type = "video/ogg">
</source>

</video>

<audio ^{control} src = "audio.ogg">

<Marquee width = "50 px">

Comment tag :-

<!--

...-->

-->

27. HTML Comment Tag Part - 1 :-

<!-- comment --> tags.

<meta> - empty tag

HTML Computer Code Elements

Tag	Description
<Code>	Defines Programming Code
<Kbd>	Defines Keyboard input

< samp>	Defines computer Output
< var>	Defines a Variable
< pre>	Define preformatted text

↑
It is a container tag

28. HTML Comment Tag Part-2 :-

< body>

< h1> My Programming Line < /h1>

< h3> Responsive < /h3>

< p>

Responsive web Design is about using HTML and CSS to automatically or enlarge, a website, to make it look good on all devices (desktop, tablet).

29. HTML entity URL Encode Part-1 :-

less than < or greater than > sign

< - write < ; or <

Result	Description	Entity Name	Entity Number
	non-breaking space	 ;	
<	Less than	< ;	<
>	Greater than	> ;	>
&	ampersand	& ;	&
"	double quotation mark	" ;	"
'	single quotation mark (apostrophe)	' ;	'

Result	Description	Entity Name	Entity Number
¢	cent	¢	¢
£	pound	£	£
¥	yen	¥	¥
€	euro	€	¦
©	Copy right	©	©
®	registered trademark	®	®

URL

URL - Uniform Resource Locator

A word of web address.

Web browsers request pages from web servers by using a URL.

It used to address document on the web.

A web address like `http://www.schools-com/html/default.asp` follow these syntax rules:-

scheme : // prefix . domain : port / Path
file name

Explanation :-

Scheme - type of internet service

Prefix - a domain prefix (www)

domain - Internet domain name (wsschools.com)

port - port number at the host (http is 80)

path - a path at the server (If omitted: the root directory of the site)

file name - a name of a document or resource.

Common URL Schemes :-

Scheme	Short for	used for
http	Hypertext Transfer Protocol	Common web pages. Not encrypted.
https	Secure Hypertext Transfer Protocol	Secure web pages. Encrypted.
ftp	File Transfer Protocol	Downloading or uploading files.
file		A file on your computer

2509 1 309 : URL Encode

non-ASCII - % followed by hexadecimal
- 1 digits.

(+) or %20 - replaces the space

30. HTML Entity URL Encode Part-2:-

<body>

Hii... a <b I am Rakesh display<

> >

& & amp;

Rakesh & nbsp; Raja

" & quot;

' & apos;

Hii ...

a & #60; b I am Rakesh

31. HTML ID & Class Tutorial in Tamil part-1

(#) write hash character.

Write a dot (.) character, followed by the
Name of the element.

<body>

<p id="Rakesh">

The id attribute specifies a unique

</p>

<style>

Rakesh {

background - color : pink

font - size : 20 px ;

color : white ;

}

32.

HIML IP & Class Tutorial in Tamil part-2:-

Id:

<p id = "Rakesh">

</p>

<p id = "Radha">

</p>

<p id = "Raja">

</p>

← Link id

 Click to first paragraph

Class:-

<p class = "Ramya">

blue , red , yellow

</p>

<style>

- Ramya {

border: 1

background - color : blue;

border-color : red

font - size : 15px ;

border-style: solid

color : yellow;

margin: 40px;

} padding : 60px;

-> Class defined.

33.

HTML List Part-1:-Types :-

List → display list of things

Order list

UnOrder list

Description List

Ordered List:-

 - ordered list.

list item start

Ordered List:-

| Type | Description |
|------------|--|
| Type = "1" | The list item will be numbered with numbers (default) |
| type = "A" | The list items will be numbered with uppercase letters. |
| Type = "a" | The lists item will be numbered with lowercase letters. |
| Type = "I" | The lists items will be numbered with uppercase roman numbers. |
| Type = "i" | The lists items will be numbered with lowercase roman numbers. |

UnOrder List:-

→ Disc

UnOrdered List:-

| Value | Description |
|-------|-------------|
|-------|-------------|

| | |
|--------|---|
| disc | sets the list item marker to a bullet (default) |
| Circle | sets the list item marker to a circle |
| Square | set the lists item marker to a square. |
| none | The list items will not be marked. |

Description List;

<dl> ... </dl>

<dt> → description term

<dd> → description data

<!doctype.html>

<html>

<head>

<title> List </title>

</head>

<body>

<h1> My programming Line </h1>

</body>

</html>

34.

HTML List - Ordered List in Tamil Part-2:-

<body>

 Rakesh

 Ramya

 Ramesh

 Rakesh

 Ramya

 Ramya

 Rakesh

 Ramya

 Rakesh

Types:-

<ol type = "A">

<ol type = "a">

<ol type = "i">

<ol type = "I">

 Ramya

.ol {

color : pink ;

background-color : black ;

<ol class = "ol" type = "I">

 Rakesh

.ol {

color : pink ;

background-color : black ;

}

95. HTML List - Unordered List in Tamil part-3

<ul type = "circle">

 One

 two

 three

 four

 Five

 Six

.ul {

color : white ;

background-color : pink

list-style-type : none ;

}

width = "200px" height = "150px"

 <img src = "c:\www\www.jpg"

36. HTML List - Ordered & Unordered List in Tamil
Part - 4.

```
<body>
<ol type="A" class="list 1">
<li> - - - - - </li>
<li> - - - - - </li>
<li> - - - - - </li>
<li> - - - - - </li>
</ol>
<ol>
<li> - - - - - </li>
<li> - - - - - </li>
<ul type="square" class="list 2">
<li> Rakesh </li>
<li> Ramesh </li>
</ul>
```

```
. list 1 {
    color : red;
    background-color : pink;
```

37. HTML List - Description List in Tamil
Part - 5 :-

```
<!doctype html>
<html>
<head>
<title> Description List </title>
</head>
<body>
<h1> My Programming Line </h1>
```


<dl> style = "color: red;"
<dt> html </dt>
<dd> style = "color: blue;"
Hypertext Markup Language, a standard system for tagging text files to achieve font, colour, graphic, and hyper link effects on world wide web pages

<dd>
 style = "color: pink;"

 HTML

 Rakesh

 Ramya

 ~~Ramya~~

 Ramesh

 Ordered list

<ul class = "list">

. list {

color : yellow;

background-color : black;

padding : 20 px;

font-size : 10 px;

margin : 20 px;

}

38. Table Tag Tutorial for HTML :-

<Table> . . . </Table>

⌞ contains tag

Attributes :-

Width

Cell Spacing

Cell padding

Border

Bg color.

Row Tag:-

<TR> <TR>

Heading Tag:-

<TH> </TH>

Data Tag:-

<TD> </TD>

Attributes:-

Align

Bg color.

Attributes:-

ROWSPAN <TH ROWSPAN = 2> Browser </TH>

COLSPAN <TH COLSPAN = 2> Visitors </TH>

<TH> or <TD> get Row span or Column span.

Adding picture to table:-

Html allows to add pictures to a table cell

Eg:-

<td>


```
<img src = "I. jpg">
```

```
</td>
```

39. HTML Table Tag Part - 2 Tutorial:

```
<body>
```

```
<table>
```

```
    style="border="2" color: red;"
```

```
<tr>
```

```
<td> Days </td>
```

```
<td> Time </td>
```

```
<td> class <td>
```

```
<td> 11-12 <td>
```

```
</tr> style = "background-color: yellow;"
```

```
<tr>
```

```
<td> Friday </td>
```

```
<td> Saturday </td>
```

```
<td> Monday </td>
```

```
</tr>
```

```
<th> Days <th>
```

```
<th> 10.00 - 11.00 </th>
```

```
<th> 11.00 - 12.00 </th> - font are
```

```
<th> 12.00 - 1.00 </th> bold
```

40. HTML Table Tag Part - 3 Tutorial:

```
<body>
```

```
<tr>
```

```
<td> Tuesday </td>
```

```
<td colspan="2"> English </td>
```

```
</tr>
```

<tr>

<td> Science </td>

<td rowspan="2"> English </td>

</tr>

<tr>

<td style="color: red; text-align: center;">

</td>

<tbody>

<table border="1">

> style="color: white; font-size: white;"

<caption> Time Table </caption>

41. HTML Table Tag Part - 4 Tutorial:-

<body>

width="40%"

<table

class="table" border="3">

. table {

border-spacing: 10px;

font-align: center;

border-collapse: collapse;

& cell padding="6px";

border-color: pink

border-style: solid;

}

42. HTML Table Tag Part-5 Tutorial:-

<body>

<tr>

<td rowspan="2"> Days </td>

<td> Timing </td>

<td> </td>

<td> </td>

</tr>

<tr>

<td> Friday </td>

<td> </td>

<td> width="120px"

img src="c:\user.jpg">

</td>

<tr>

<caption> Time Table </caption>

<caption> <marquee> Time Table </marquee>
</caption>

<th> <marquee direction="up"> Days </marquee>
</th>

42. HTML Forms Basics : part-1

FORM Tag:-

name, email address, password, phone number
are the forms.

<form> </form> contains tag

Attributes:-

Action <form action = "/action_page.php">

Method:-

Get

Post

Tags

Description

<form>

It defines an HTML form to enter inputs by the user side.

<input>

It defines an input control.

<text area>

It defines a multi-line input control.

<label>

It defines a label for an input element.

<fieldset>

It groups the related elements in a form.

<legend>

It defines a caption for a <fieldset> element.

<select>

It defines a drop-down list.

<optgroup>

It defines a ~~drop-down~~ group of related options in a drop-down list.

<option>

It defines an option in a drop-down list.

<button>

It defines a clickable button.

43. HTML FORMS Input Tag: Part-2:

Input Tag:-

Attributes :-

Type :-

Text,

check box

Email

Attributes of <input> Tag:-

→ Type

→ Name

→ Value

→ Readonly

→ Disabled

→ Place holder

→ Auto complete

→ Max length

Radio button

Auto focus

Height

Width

File

Month

<body>

44. HTML FORMS Part-3 :-

<body> background-color: pink;

<form> style = "color: green; padding: 20px; margin: 10px;"

Name <input type = "text" name = "Name">

Phone Number <input type = "text" name = "phone number">

Email ID <input type = "text" name = "email id">

Gender <input type = "radio" name = "gender">

<input type = "radio" name = "gender"> female

<input type = "radio" name = "gender"> male

<input type = "submit" value = "submit">

45. HTML Forms Part - 4 :-

<body>

D. D. B <input type = "select" size = "3">

<option> One </option>

<option> Two </option>

<option> three </option>

<option> four </option>

</select>

<select>

<option> Jan </option>

<option> Feb </option>

<option> March </option>

</select> April </option>

name <input type = "text" name = "name" autofocus>

Gender <input disabled type = "submit" value = "submit">

< text area > rows = "6" Cols = "7"

Hi...

</ text area >

46. HTML Forms Part-5:-

< body >

< Name < input type = "text" name = "Name" place
holder = "enter your
Name" >

Number < input max length = "7" type = "text" Name =
"Number" >

< form action = "sample.html" target = "_blank" >

47. HTML Forms Part-6 Tutorial:-

< body >

< form method = "get" → Display URL >
method = "post" → no URL >

< input type = "submit" value = "submit" >

< input type = "submit" value = "clear" >

button tag:-

< button > clear </ button >

< form >

< field set >

Name < input type = "text" Name = "username" >

```
password <input type="password" name="pw">
<input type="submit" value="submit">
</fieldset>
```

```
<form>
```

```
<fieldset>
```

```
<legend>
```

```
name <input type="password" name="pw">
```

```
password <input type="submit" value="submit">
```

```
</legend>
```

```
</fieldset>
```

```
</form>
```

```
<form>
```

Number

```
<input list="data">
```

```
<datalist id="data">
```

```
<option>1 </option>
```

```
<option>2 </option>
```

```
<option>3 </option>
```

```
<option>4 </option>
```

```
<option>5 </option>
```

```
</datalist>
```

```
<input type="submit" value="submit">
```

```
</form>
```

48. HIMC Forms Part-7:-

```
<body>
```

```
<form>
```

```
select color <input type="color" name="fav color">
```


Date

Date & Time

File

Month

work experience

Telephone
Pattern = "[0-9]{3} - [0-9]{3} - [0-9]{3}"
Format : 123 - 456 - 789

Time

Week

49. HTML Forms Part - A :-

<body>

<form>

Name

Password

</form>

<form>

<tr>

> <td>

<td> Name <td>
</td>

</td>

</table>

</form>

<form>

<td> <select>

<option> 1 </option>

<option> 2 </option>

<option> 3 </option>

<option> 4 </option>

<option> 5 </option>

</select>

Gender <td> <input type="radio" name="gender"> Male
</td>

<td> <input type="radio" name="gender"> Female
</td>

<input type="radio" name="gender"> Other

</td>

50. HTML FRAME & IFRAME Part - I :-

<frame> → empty tag

Attribute :-

Name

src

Frameset Tag:-

< frameset > ... < / frameset >

Attributes of < frameset > Tag:-

cols

rows

IFRAME Tag:-

→ contains tag

< i frame > → inline frames.

< i frame > → create inline frame.

< i frame > ... < / i frame >

Attributes of < i frame > :-

width

height

src

11. HTML FRAME & IFRAME PART-2:-

< html >

< body >

< h1 > My Programming Line < / h1 >

< / body >

< / html >

< ! doctype html >

< html >

< head >

< title >

Frames & IFrame

< / title >

```

</head> rows = "30%, 50%, 40%">
<frameset> cols = "30%, 30%, 40%">
  <frame src = "Forms.html">
  <frame src = "List.html">
  <frame src = "E:\user1.jpg">
</frameset>

```

```

<body>
  <a href = "List.html" target = "sec"> List
</a>
  <a href = "Forms.html"> List

```

```

</head>
<frameset rows = "30%, 30%, 40%">
  <frame src = "main.html">
  <frame src = "second.html" name =
    "second">

```

52. HTML Frame & I Frame part-3 Tutorial

```

<body>
  <iframe width = "800px" height = "600px" src = "if.html">

```

```

  <a href = "green.html"> green </a> <br>
  <a href = "pink.html"> pink </a> <br>
  <a href = "yellow.html"> yellow </a> <br>

```


53. HTML Frame & IFrame Part-4 :-

```

<body>
<a href = "green.html" target = "iframe">
    green </a>
<a href = "pink.html" target = "iframe">
    pink </a> <br>
<a href = "yellow.html" target = "iframe">
    yellow </a> <br>
<iframe width = "800px" height = "600px"
    src = "iframe.html"
    name = "iframe">

```

Youtube

Embedded link

```

<iframe src = "height, width, ...

```

53. HTML Navigation Bar Part-1 :-

```

<Nav> .... </Nav> → newly added HTML5
<body>
<h1> My Programming Line </h1>
<nav style = "background-color: red; color:
    white; padding: 50px" width = "90%">
    Home
    Product
    services
    Contact us
</nav>

```

<nav>

Home & nbsp

Product & nbsp

contact & nbsp

</nav>

54. HTML Navigation Bar Part - 2 :-

<body>

<nav>

<ul style="list-style-type: none ;

background-color: pink ;

<li style="display: inline;" Home


 Product & a href: c: \ur. Man.

 services

 Contact us

</nav>

55. HTML Layout Part - 1 :-

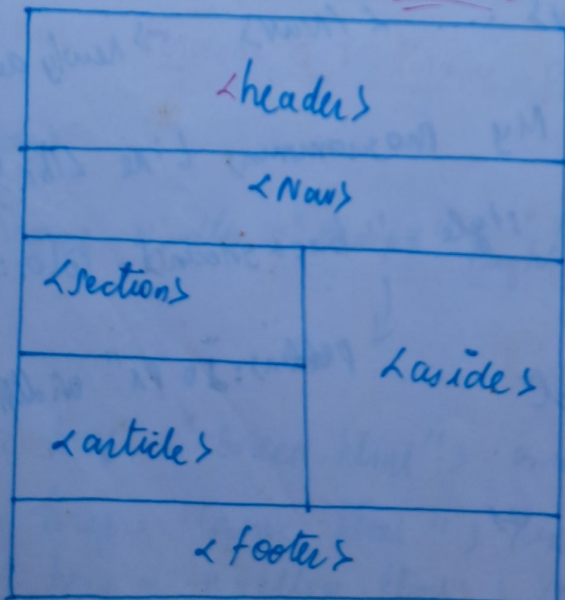

<header>

<nav>

<section>

<article>

<aside>

<footer>

<details>

<summary>

<!doctype.html>

<html>

<head>

<title>

</title>

<style> ... </style>

</head>

<body>

<nav> ... </nav>

<header> My Prog Line </header>

<section> Microprogramming </section>

</section>

<article> HTML is a para </article>

<details> <summary> Please click me

</summary>

<p> Have a good day </p>

</details>

< footer >
href = "#"

< a > If you want visit main
page please click me < /a >

< section style = "width: 35%; float: left;
background-color: green;
padding: 10px; margin: 20px"

< header >

< h1 style = "text-align: center;"

56. HTML LAYOUT Part - 3 :-

< body >

< article style = "clear: left;" >

< section > style = "float: left;"

< img src = " " width: "150px" height: "60px" >

< footer style = "margin: 30px;" >

< details >

< summary >

< /summary >

< /details >

< footer >

< /footer >