

Important points:

We should try to solve all problems. Only network coverage problem we are unable to solve (But it should be handled by Area ID – 241 user)

FAQ-020625-0425 Latest Hardware Automation Link:

Winman Tunnel exe 1.9.2.0 : <http://bit.ly/wfh1920>

Original Path: \\pc2\E\Technical\Server\RDP server\Client setups\For all servers

FAQ-020625-0426 Public keys backup of all WFH users:

In event of Public key deletion from Servers you can find the copy of Clients public keys stored here:

\\PC2\e\Technical\Server\RDP server\Client Public keys

FAQ-020625-0427 Unable to access the WFH server (Is not responding to any user)

To solve this problem, we can restart the server. To restart the server remotely, use the AiryTec shutdown tool.

FAQ-020625-0428 Alternate IP address to connect:

All the IP addresses are updated in WFH server details interface. So, no need of entering any IP address manually.

Note: All the above internets are changed automatically if set internet is not available using the Ping Website exe running in the WFH servers. Users will experience disconnection for a brief time and the session will resume when proper gateway is in the server again.

For some users the session might not be resumed after disconnection, in that case ask the user to reconnect by exiting the hardware automation exe and opening again.

Default for server means every day the server will have that internet gateway unless there is a problem in that internet connection.

FAQ-020625-0429 SSH Ports of all servers

Refer ServerDetails table in WorkFromHome program.

FAQ-030625-0250 Desktop not available error in local PC (PC given from Office)

This error may occur due to Desktop was mapped to PC2 here in Office. To set local path for Desktop, change the below registry:

Open REGEDIT and navigate to below path

HKEY_CURRENT_USER\Software\Microsoft\Windows\CurrentVersion\Explorer\User Shell Folders

Edit the key “Desktop” and enter path as “D:\Desktop”.

Log off and login again.

FAQ-020625-0430 Common problems & solutions

- Connection Problem for all users
- Internet / Remote Connection Problem
- Server Permission Errors /App problems
- Clear temp
- Installing Software's
- Other Software Problems
- Pub Key Generation troubleshooting:
- Laptop Issue

Connection Problem for all users

FAQ-020625-0431 If RDP is not working for any WFH user then, it might be Office Internet issue

Check the Internet in the RDP server .If no internet then Change the internet Gateway in RDP servers.

Follow WFH problem CL if problem not solved in 10 mins.

FAQ-020625-0432 Internet is working fine in Server but RDP is not connecting for any user

Might be 3 cases:

SSH service in cygwin is not in running state.

Check if "sshd" service is running if not start the service in Cygwin terminal

> net start sshd (for old cygwin servers)

> net start cygsshd (for new cygwin servers)

If was not started automatically, check start mode in services.msc & change to automatic

Firewall might be on.

If firewall is ON then turn off the Firewall in Server.

The Internet used in server might not have a Static IP or has different static IP address than what is mentioned in Server Details table of Work from Home Server Details DB.

Confirm that the Port forwarding rules in the router are set up properly.

Inform Systems team to check if user's IP is not banned in SSH-OTP server (Linux server). Check using command `sudo fail2ban-client status sshd`. Check the IP of user in his PC in Google by searching 'what's my IP'. If genuine user IP found, remove it by taking permission.

Internet/Remote Connection Problem:

FAQ-020625-0433 **Basic troubleshooting:**

Collecting details:

Ask whether they get proper internet connection first

- Check if Dongle is connected through USB. If not detected, add ticket to **Hardware** (Refer USB not detecting section for solution).
- If Wi-Fi not enabled in NUC, add ticket to **Hardware**
- Ask to open browser and navigate to **google.com**
- Ask to open browser and navigate to **winman.in**
- Ask to open browser and navigate to **fast.com** and check how much speed they are getting
- "Winman tunnel over SSH" exe has **Speed test** feature built-in. in **Others** - > **Speed Test** Feature for checking the Internet speed
- If internet speed is below 100kbps and Green/blue then Data usage problem
 - Restart the Dongle and check once if the speed improves,
 - Connect directly through USB and check. (Google DNS needs to be set while using dongle with USB)
 - Close the SSH window (Blue window) or Hardware automation exe and reopen open and try again.
 - If not solved Inform Area ID – 241 to check data usage details and recharge if exceeded (Check why more internet consumed).
- If internet is more than 1 Mbps and still having this problem then check if any app updates are being downloaded in the background, you can make use of Netbalancer to check which app is more consuming data Or in the Task manager -> Process tab sort the column 'Network'. If Windows Update is showing at the top after sorting expand it and stop the running service.

Note:

User connection logs are written into "Report" folder, this folder exists in the 'Winman tunnel over SSH' folder. (C:/Program Files/Winman Tunnel Over SSH)

Checking internet stability of user:

- Check Users present Internet speed in local PC (In Winman Tunnel over SSH → Check internet speed) . Wait for about 30 seconds, Note the Upload, Download speed and latency from that Speed check result.If speed is lesser than 500 kbps, ask the user to restart the dongle, if similar speeds inform Area ID – 241 to check if the Data plan state.
- Check the users ping log csv file for continuous timeouts for the time when the problem was noted / occurred. If there are constant timeouts for the user when he gets Speeds above 2 Mbps, the internet might not be stable for RDP.

FAQ-020625-0444 More data consumed OR 90% exhausted OR Data usage exceeded limit

1. First check the number of devices connected to the data card. Login to the device by typing <http://jiofi.local.html> in address bar, use user name and password as “administrator”.
 - Check the Wi-Fi section and number of devices which are currently connected. To know the device details, copy the MAC address and search it in “<https://dnschecker.org/mac-lookup.php>”.
2. Install NetBalancer to track data usage in the PC

FAQ-020625-0447 USB not detecting

- First ensure that USB cable is connected to Dongle
- To check cable faults, check whether Dongle is being changed
- Dongle powered ON? (Not only just charging)
- Try another USB port
- If above all are proper, then the USB port might be disabled.
- To enable USB, do below things:

If the internet is available, then send the below registr to user through Skype & import -

[\\pc2\E\Common\Documentations\Technical\Training\ms dos commands\PC settings automation\Required reg files\Enable USB.reg](#)

If internet is not available, do the below registry setting manually (Send it to user's whatsapp and inform to type as it is)

Run(Win key +R) And type 'Regedit'

In Regedit Browse

HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\USBSTOR

On right side Double Click on 'Start' And Change 'Value Data' To 3


Then Restart Windows Explorer.


FAQ-020625-0501 Remote session disconnecting /cannot connect:

1. Check if the user is using the latest version of Winman tunnel over SSH.
Latest version: 1.9.6.0, if using older version inform TNA to send the latest version to such users and Install it in their PC.
2. Please complete the questionnaire
\\pc2\e\Common\Documentations\Technical\Training\Work from home training\Internet issueuse.xlsx.
3. If users internet speed is below 100kbps or Red Indicator then ask the user to
 - a. Restart the Dongle and check if the speed improves,
 - b. Re-insert the SIM into the dongle and try again.
 - c. Connect directly through USB and check if there is any speed improvement,
 - d. If above steps did not improve the speed, then Inform Area ID – 241 to check data usage details and recharge if data validity has exceeded (Check why more internet consumed).
4. If data usage was exceeded (i.e. Area ID – 241(leave charge) have recharged and added booster pack), check if data usage exceeded due to Windows update.[Windows updating in background] by installing Net balancer : Allows to see which app has consumed large amounts of bandwidth.

Not Data usage problem

1. In users PC close the connected session. Manually open RDP connection(type mstsc in run) once Winman Tunnel Over SSH exe connects to server. In the PC name placeholder type “localhost:6754”.
2. Click on “show options”

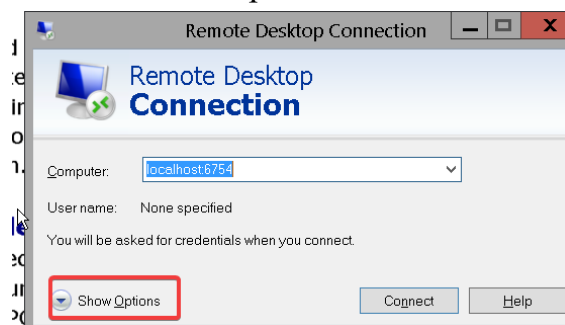

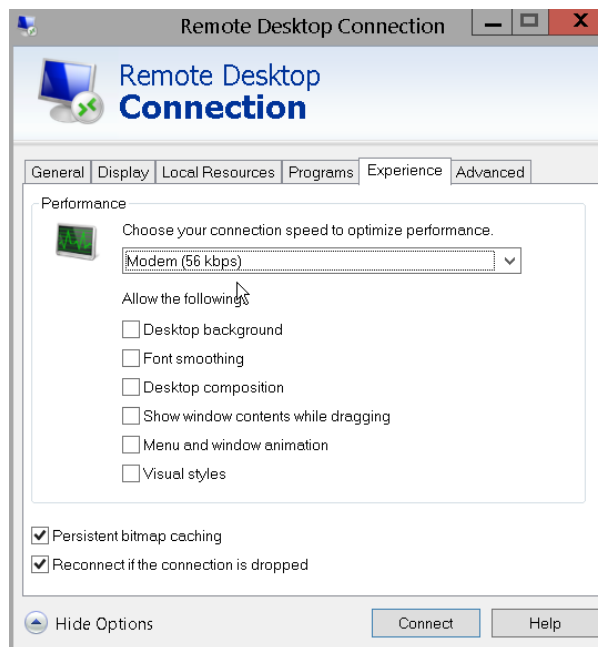

3. In the Experience Tab under Performance choose the option “Modem (56 kbps)” and click on connect.
4. Not Data Usage problem then copy ping log /trace route log to users startup –
5. Note: Adding and checking ping/trace Logs: - Search for string—“Trace the problem using PING & Trace Route:”
6. Check the ping/trace logs for timeouts.
7. Inform SAM with log paths.
8. Check if the WFH Problem CL is being done in parallel.

Further troubleshooting:

1. Check the ping/trace logs for timeouts.
2. Find paping.exe in ‘Winman tunnel over SSH’ folder in users PC.
3. Open command prompt in the paping.exe path
4. Enter the following commands :

> *paping.exe [target IP address] -p [target port]*
5. If the **paping** statistics show **packet loss**, change the target IP and target port and check for which IPs and Ports there are no packet loss. [Use each server’s respective specified ip address and ports]
6. If the user’s current remote server is PC 2-43 and there is packet loss when connecting to pc 2-43’s IP and port then check the ping statistics for pc2-44. If there is no packet loss when checking the **paping** statistics of PC2-44, then shift the user to pc 2-44.
7. Also check vice – versa case and shift user from pc 2-44 to pc 2-43, if no packet loss when pinging pc2-43.

Note: Inform SAM before shifting the user.

Note:

When checking if the router port forwarding rules are working or not, Do not use the same Internet that the router which has to be checked is using in Local PC.

FAQ-020625-0502 Remote desktop is very slow (Delay in each action) and Not User Internet problem:**Request remote control of user in netchat:**

- If you see delay in every action of user, proceed to check Server Resource usage and Server Internet. Call Handler should be working in office.
- If you don't see any delay in users action on netchat remote display window, while the user says there is delay then server is not slow.

Server internet slow check:

- Check internet speed in server (Using fast.com).
- If the upload & download speeds are below 30mbps, then change the server internet to alternate and inform Hardware Department to check the office internet.
- Add 500kbps upload speed to the upload speed shown in fast.com for each connected user in that server (Because when users connected, some internet will be used for their connection also). If total upload speed is below 50Mbps, then the experience may become slower.
- Note: For connecting RDP, download speed of the user and upload speed of the server will matter.

Check if the server itself is slow,


- Check server CPU & RAM usage. If CPU & RAM usage is more, check and inform users/user to close unwanted programs, also close unwanted programs in admin.
- If problem not solved within 30 mins and recurring then disconnect the heavy usage users and shift them to Alternative servers.
- If still not able to get it right, check whether separate PC can be given to the user.
- If no, then there is no option than stopping that program being used by that user in the server.
- If everything is proper in server then, check if “**Basic troubleshooting:**” steps are followed.

FAQ-140825-0249 Internet Slow for only one WFH server but other Server Faster

Solution: Do Internet Load balancing for issue server
In WorkfromHome program – Go to Server Details table
Check for VPC-Linux and VPC alt server
Give Internet IP in IP Address different in order for each server.

Example: For VPC-Linux3 – IP of Internet A, Internet B, Internet C
Then for VPC3-Alt server- IP of Internet B, Internet C, Internet A
Similarly, do it for other servers.

FAQ-020625-0503 Winman TunnelOverSSH not responding and taking long time to open OTP window.

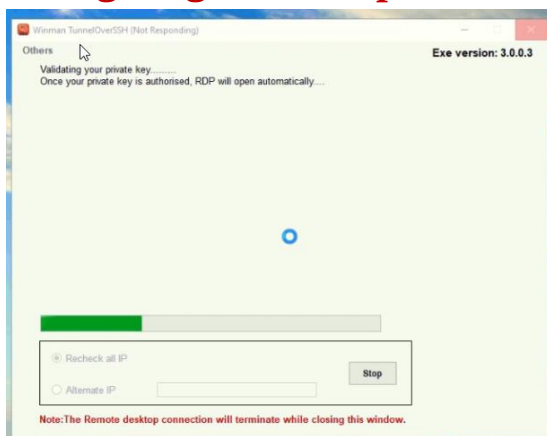

Update Winman TunnelOverSSH to latest version.

If above solution not working then, Rename “reportweb.txt” as “reportweb_old.txt” in “C:\Program Files\Winman TunnelOverSSH” then collect required log details and note ticket to Coding team.

FAQ-020625-0512 User was able to connect to same server and now he is not able to connect:

It might be internet problem.

Ask the user to check his internet connection once. Restart or re-insert the SIM card to dongle

FAQ-020625-0515 Wi-Fi is not available in laptop or not working:

Connect the Jio-Fi device to computer with USB cable. It will directly connect to the internet.

If WiFi- is disabled (But internet is available via USB), import this registry to Enable the Wi-Fi - [\\pc2\E\Common\Documentations\Technical\Training\ms dos commands\PC settings automation\wireless disable in nuc\wireless_enable.reg](#)

Run the command `sc start wlansvc`

Note: Send this reg file via Skype to the user. If even importing registry Wi-Fi not enabled then restart the PC.

If there is no internet, then follow the below steps to manually enable Wi-Fi:

Run(Win key +R) And type 'Regedit'

In Regedit Browse

HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\WlanSvc

On right side Double Click on ImagePath and enter this value (User should type this carefully. Send this to him via Whatsapp and inform to type as it is)

25,00,53,00,79,00,73,00,74,00,65,00,6d,00,52,00,6f,00,6f,00,\
74,00,25,00,5c,00,73,00,79,00,73,00,74,00,65,00,6d,00,33,00,32,00,5c,00,73,\
00,76,00,63,00,68,00,6f,00,73,00,74,00,2e,00,65,00,78,00,65,00,20,00,2d,00,\
6b,00,20,00,4c,00,6f,00,63,00,61,00,6c,00,53,00,79,00,73,00,74,00,65,00,6d,\
00,4e,00,65,00,74,00,77,00,6f,00,72,00,6b,00,52,00,65,00,73,00,74,00,72,00,\
69,00,63,00,74,00,65,00,64,00,20,00,2d,00,70,00,00,00

Restart the PC.

Also refer [\\pc2\e\Common\Documentations\Technical\Training\Work from home training\Work from home training.docx](#) for additional troubleshooting.

Note:

If the Wi-Fi is enabled, but the laptop cannot be connected to dongle via Wi-Fi, the MAC address based blocking might be enabled in dongle. Login to Dongle via USB and check.

FAQ-020625-0517 User cannot open any of the sites except google.com

OR

Only few sites are accessible , Other sites are not accessible including Winman Tunnel.

Open NCPA.CPL from Run, Right click on the Wi-Fi adapter (If connected through USB cable, then right click on the Ethernet adapter, go to Properties -> Select Internet Protocol Version 4(TCP/IPv4) ->Properties ->

1. Select Obtain an IP address automatically

2. Use the following DNS server addresses:

- Preferred DNS server: 8.8.8.8
- Alternate DNS server: 8.8.4.4

Click OK -> Close.

Now the user should be able to connect to internet.

If above mentioned method is not working. Please reset the dongle.

Method to reset the dongle:

Open the cover of the dongle, find the reset button (it is a small button, to press it you need a pin type object).

Press and hold the reset button for 30sec.

Now the user should be able to connect above mentioned sites and applications.

Tutorial link: https://www.youtube.com/watch?v=zE_RLqfvMGY

FAQ-020625-0520 User able to connect all sites, but “IP not connected”, or Please Try with alternate IP option message shown in TunneloverSSH

Try after restart dongle.

Set internet as Metered connection to avoid internet being used in background by windows.

Setback DNS : If DNS value is set as 8.8.8.8 manually , then try with the option “Obtain DNS server address automatically”.

FAQ-020625-0521 User only see partial screen in remote PC after successful RDP

Press “Win + R” to open the “Run” dialog box. Type “logoff” and hit enter to sign out of your account. Then sign in again to RDP server.

Now user will see full screen in RDP server.

Note: Confirm with user if any Changes are pending to be saved, logoff may close all open files.

FAQ-020625-0522 If the remote desktop is showing Attempting to reconnect 2 out of 20 etc.:

Check if internet connection is proper in Server.

Was there any Ping failure message received in Netchat for that server. If Ping failure message was received, but now internet proper,

Ask the user to exit ‘Winman Tunnel over SSH’ and reopen again.


[Most of the times this happens due to internet problem. Search the SSH error string in this FAQ.]

FAQ-020625-0523 Remote Desktop Connection is not opened automatically after SSH is connected

Click on **start** button >> **RUN** >> Type **MSTSC** >> **OK**

In the **Remote Desktop Connection** window enter **localhost: 6754** and click on **Connect**.


FAQ-020625-0524 While connecting Local to DC account in WFH server RDP Connection window not displayed to change login credential Or “The user account is currently disabled and cannot be used” issue found refer below,

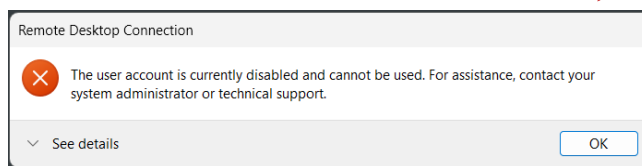

This issue happens due to previously ticked Remember me in credential window.

To solve this issue Delete saved credentials (Remember me).

- Open Remote Desktop connection by Start menu -> Run -> type '**mstsc**' -> press enter.
- Click on '**delete**' option as shown below image.

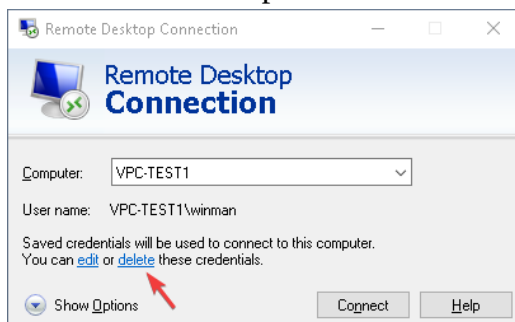

- Choose '**Yes**' for the message '**Are you sure you want to delete the saved credentials?**'.

FAQ-020625-0525 Getting errors like “No authentication methods available (publickey)” or “Plink error: FATAL ERROR: Network error: Software caused connection abort”:

It is Plink SSH error & needs to be handled by technical team (inform sam)

Problem would be due to wrong server public key used for the user.

Check the logs in Report folder or check the UI it should display the error messages with the new **‘Winman Tunnel over SSH’** exe update.

Try recreating the user public key with latest setup and adding it to proper server.

If this error comes up again after adding creating and adding new pub key,

Delete the added key of the user and all other keys (old keys that are not required) associated with the user using the Ssh user deletion commands:

```
unzip -o master-delete.zip
chmod u+x SSHDeletePublicKeymaster/SSHDeletePublicKey
SSHDeletePublicKey-master/SSHDeletePublicKey
```

After deleting the keys re-add just the new key and check.

If still having problems ,

Check the users name in Users group by typing ‘lusrmgr.msc’ in run window.

Look under ‘name’ column and make changes in “config_username.cmd” in WinmanTunnelOverSSH folder and change the the value to match the value of name from Users Group in server.

FAQ-020625-0526 Getting errors like “ERROR: 'C:\Program Files\Winman TunnelOverSSH\config_Username.cmd' file is not available.”:

Error would be due to Cmd file and Key is missing in the path 'C:\Program Files\Winman TunnelOverSSH.

Please add the key folder and cmd file from exisiting Winman TunnelOverSSH_old folder

If exisiting old folder not present please add ticket to sng/ruv for new key and cmd file generation

FAQ-020625-0527 Remote desktop getting disconnected frequently (Fatal error: Software caused connection abort):

This applies only for the cases where users were working and suddenly SSH got disconnected with above message (Not applicable for not able to connect cases).

Possible reasons are:

- Low speed internet connection (may be because of low network coverage or data exhausted)
- Internet connection is not stable
- Packets loss in internet connection.

Specific solution is not found for the problem. But we can try the following in case this error is due to unstable internet connection or packet loss.

1. Run the following command to disable **Receive Window Auto-Tuning Level**

netsh int tcp set global autotuninglevel=disabled

2. Modify the following registry to increase
TcpMaxDataRetransmissions

HKEY_LOCAL_MACHINE\System\CurrentControlSet\Services\Tcpip\Parameters

Value Name: TcpMaxDataRetransmissions

Data Type: REG_DWORD

Value: 16

3. Restart the PC and check.

FAQ-020625-0528 Checking internet stability of user:

Add the ping bat file from “\\pc2\e\Technical\Server\RDP server\Ping files\Simple_Google_Ping.bat” to user’s startup.

Get the log file and search for “Timed out”.

If there are 2 or more “Timed out” cases in each ping set

Trace the problem using PING & Trace Route:

1. Copy and add all the bat files in “\\pc2\e\Documents under ~~Revision\Tech\jb\SSH checking~~” to user’s startup (To run immediately, select all & hit enter).
2. When remote desktop is disconnected, check the log files written in D:\PingSSH and D:\TraceSSH folders of user’s computer.
3. Copy both PingSSH and TraceSSH folders to your desktop.
4. Search for “timed out” in Google_Date log file first. If it has more than 3 timed out strings continuously, then internet is not proper.
5. If timed out is less than 3, then check the server’s IP named ping log file. If it has timed out strings, check in other server IPs. If timeout string is not there for any of the IP, then we can change the server’s internet to that IP in case more users are facing problem or we can give the server with that IP address to that user.
6. If Google ping is proper, but other logs has timed out strings, then check the Trace route log of the server’s IP. Check after which network the connection timed out. That IP location and provider can be traced using URL:
<https://www.maxmind.com/en/geoip2-precision-demo>.

FAQ-020625-0529 Remote users cannot connect to Server even after changing the internet connection of the server:

After changing the Internet connection if users find trouble connecting using the Winman tunnel over ssh exe

1. Check whether internet connection is available on the server.
2. Use 'mstsc' to log into any user account on the server from other Servers.
[To check if RDS license is the problem]
3. Check if "Windows Firewall" is active on the server. If it is active, disable "Windows Firewall".

FAQ-020625-0530 WFH not connecting for a User and WFH server has Firewall Gateway

- All ISP connections/routers are connected to Firewall and All ISP connection/router will have port forwarding enabled.
- The WFH users can connect to WFH servers with any one of the Static Public IP address of the router that is connected to Firewall.
- Checking of Next Static Public IP address will be done automatically by Winman Tunnel over SSH.

Troubleshooting step:

- If Auto-retry does not work for a User, then ask the user to connect by pasting the Public Static IP directly to Alternate IP field in Winman Tunnel over SSH.
- (Details of public static IP can be found in "serverDetails" table of WFH program.)

FAQ-020625-0531 SSH is not connecting and keeps on asking for server IP:

This could be due to either internet problem or sometimes other technical error too.

1. Check if the user is using the latest Exe, if not download and use the new Exe.
2. Other Technical Problem:

Check if SSH user creation done for the user. Can check the path "C:\Program Files\Winman Tunnel over SSH" and then in folder keys check if a pub key exists with the users name.

- a. If there is a pub key, confirm that the same key is added to the Servers Authorized key list. (Find the key in Server – "C:\Cygwin\home\Administrators\").
- b. If the same key already exists in Server and getting the error, then delete that key from the server and then re-add the key and check.

- c. If there is no pub key with Users name, then first create ssh keys for the user and add the same to the server. Now check if the user can connect.

New method:

Check whether it is old setup (If server name shown in title, it is new setup). If old, download & install the new setup (According to user's server) from link provided at the top of this file [Unselect Generate Keypair in the finish window]. Now try to connect.

If still not solved, try connecting using the public IP address of the server directly. Paste the public IP address of the server in Alternate IP address Text box of Winman TunnelOverSSH exe. Refer first page of this FAQ for Public IP's.

If still not solved :

Search for string **“Remote session disconnecting /cannot connect:”**, follow the steps under **“Further Troubleshooting”**.

FAQ-020625-0532 Winman server not available in Hardware automation:

If Winman server is not available in Hardware automation then manually check if the url **“https://office.winman.in/Workfromhome.aspx”** is accessible from the users Browser for confirmation .

FAQ-020625-0538 Internet usage getting exceeded limit for the user in personal laptop:

Setting Metered Connection

Option 1 [Required]: Go to Settings, here under Network & Internet

If using Wifi Connection:

Click on Wifi -> click on **“Manage known networks”**.

Here select the Wifi id or name that the employee is using **(eg:JioFi3_xx)** , then click on **“Properties”**.

Under **“Metered Connection”** toggle **“set as metered connection”** to on.

If using Ethernet Connection:

1. Click on Ethernet option.
2. Select the connected network under Ethernet.
3. Under **“Metered Connection”** toggle **“set as metered connection”** to on.

After Setting the Connection as Metered, go to “Data usage” and reset the “Usage Details”.

Option 2: Track and block all internet consuming apps using Glass Wire Download and install GlassWire from “<https://www.glasswire.com/>” (Search for GlassWire in Google).[installation steps in “Installations”]

After installing, open the GlassWire app, check the Down rate and Up rate columns by sorting. If any unwanted app is shown with internet usage, right click on that app and set **Download priority** as ‘Block’. Repeat the same for other unwanted apps also.

In most of the times, blocking ‘svchost.exe’ will stop windows updates. In some cases, some other apps like culauncher.exe was downloading windows update.

Note: Windows update is disabled in almost all office computers.

Disable Windows update:

Note: If the Employee is using his own personal laptop, Please take permission from the Employee before disabling Windows Update and Automatic updates in antivirus settings.

Option 3: Download the Windows Update Blocker from ‘<https://www.sordum.org/9470/windows-update-blocker-v1-5/>’ (Search for Windows Update Blocker in Google).

Run the downloaded exe, **select Disable updates** and select **Protect Service Settings**, now click on **Apply now**. If the Service status is Red, then windows updates are disabled.

Note: Procedure for manually stopping windows update is mentioned in Hardware FAQ.


Also disable antivirus automatic updates in antivirus settings. (Ask users Permission if using his Personal laptop, if office PC confirm with Tjb become making this change).

FAQ-020625-0539 Check how many users are connected to JIOFI device in JioFi3 & JioFi2

Login to jiofi.local.html and default username & password will be “administrator”


JioFi2 device :

While on **JioFi2** goto LAN Info and check LAN Client List as shown in below print screen.

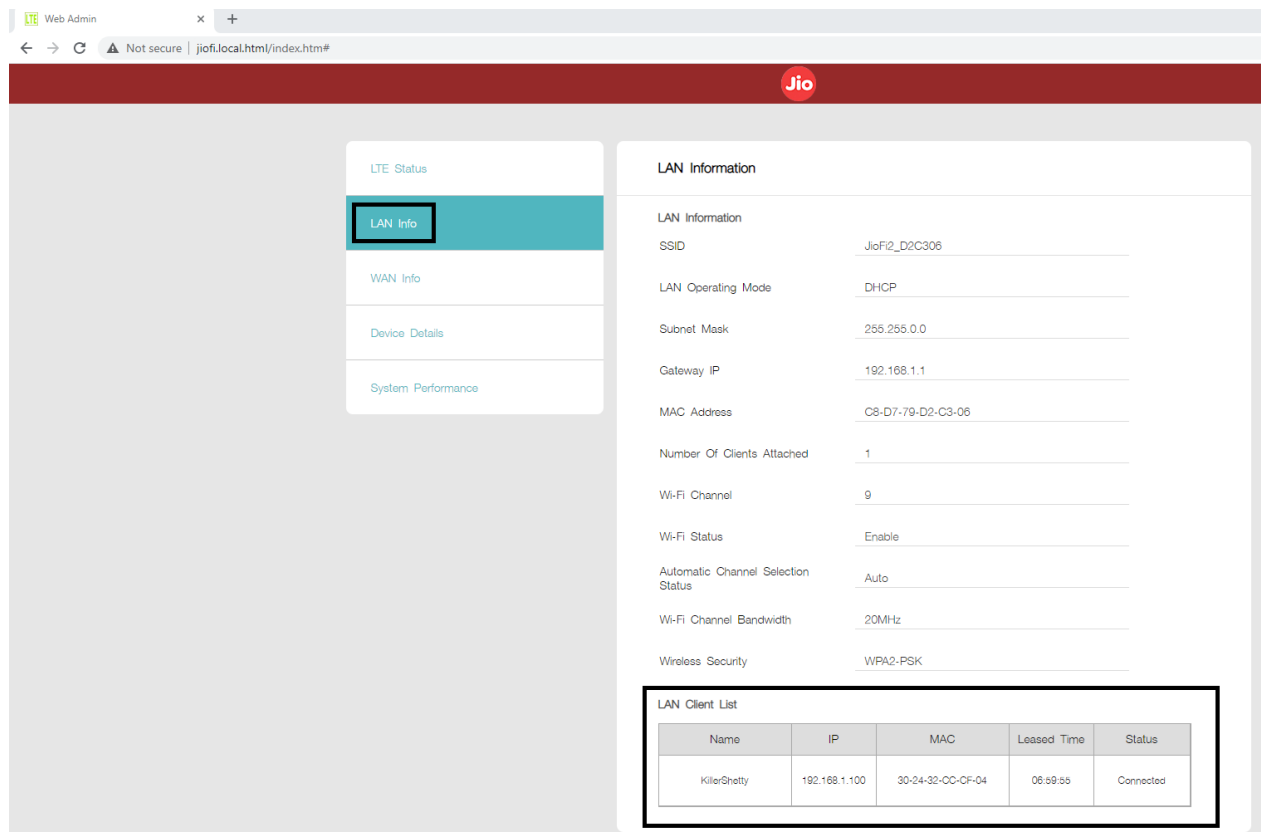

JioFi3 device:

In **JioFi3**, Login and goto Network-- > client list and you can see connected devices on your JioFi3 Device

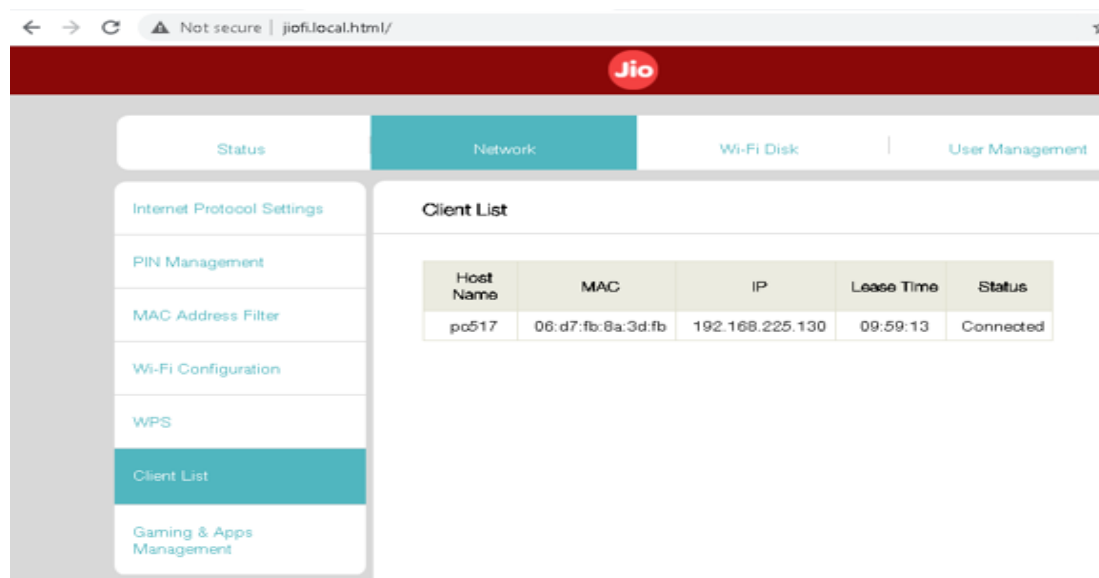

Server Permission Errors /App problems

FAQ-020625-0540 Excel file is opening in Libre Office:

Right click on any excel file (Create a new text file and rename its extension to .xlsx) - > Properties -> Change the Opens with option to Microsoft Excel or Excel.exe (Whichever available).

Do this for both .xls and .xlsx

FAQ-020625-0541 Can't create folders in desktop (PC2):

Give full permission to all users for the folder '\\pc2\Desktop(Multi)' and try again (Permission to be given by Hardware).

FAQ-020625-0542 Can't create folders in other drives (PC2):

Create subfolders with user's short name inside '\\pc2\User folders' and use that folder for saving temporary files-

FAQ-020625-0543 Can't see logoff or sign out button in server:

Open Run and type '**logoff**' and hit enter

FAQ-020625-0544 Can't open emails (No permission to open Internet Explorer):

Run the below exe. After that, while opening the email if a window opens with options to select program to open with, select 'WinmanWebBrowser' from list & click OK.

"\\pc2\\Internal Programs\\Internal ExeFiles\\Hardware Automation\\File association\\Current user\\Hardware_Automation.exe"

FAQ-020625-0545 Getting permission errors while copying CODE using Copy_Wintax:

Uncheck the Register OCX checkbox at top and then copy

FAQ-020625-0546 Getting permission errors while copying SETUP using Copy_Wintax:

Copy the contents of [\\pc2\\d\\saral tax released](#) to required folder, then overwrite the wintax.exe with "\\pc2\\h\\dummycoding\\WinTaxRele.exe".

FAQ-020625-0547 Getting permission errors while running VB6 codes after copying in Copy_Wintax (PC2 users):

Copy the code to '\\pc2\\G\\Development\\[Your shortnamed folders]' (Should be UNC path as [\\pc2](#). Not local path as G:).

Now open the code from there and start work. If you get Chrome & IE version error, can ignore them.

FAQ-020625-0548 Asking Administrator permission while running VB6 codes after copying in Copy_Wintax or just when opening Vb6 IDE:

Navigate to this path “C:\Program Files (x86)\Microsoft Visual Studio\VB98” in the server PC to which the user is connected to.

Ask the user to right click on “VB6.EXE” and choose ‘Properties’.

Here goto “compatibility” and uncheck “Run this program as an administrator”.

FAQ-020625-0549 Skype call notification not visible while working in remote desktop:

To solve Skype notification problem, sign in to your Skype account in your local computer as well as in server (PC2/PC3/PC72). Now incoming call notifications will be shown in the server.

Note:

Do not make or accept Skype calls directly in server through remote desktop (Audio will not be proper. This is only for notification purpose). Instead, minimize the remote desktop window and make calls on your local computer. You can maximize and start working on remote desktop while you are on call.

FAQ-020625-0550 Excel files are opening slow (Showing ‘Accessing Printers’ message):

Close the remote desktop (Not SSH), open MSTSC again (Type MSTSC in Run), expand Show options, Unselect Printers in Local Resources tab, now connect & check excel opening.

FAQ-020625-0551 Excel not responding problem in Pc 2-43/2-45

[This issue now fixed by the having PC3 image in PC2-43 and PC2-45]

Temporary fix:

1. Close the non responding excel file from Task manager
2. press "windows key +r" and then type "services.msc"
3. Minimize services.msc window
4. Now open Excel and check if the problem exists

FAQ-020625-0552 Net Chat Text Alignment Problem / messages not visible in second line :

Solution :

Logout of the server rdp session.

In the users Local PC, Change the scaling in display settings from 125% to 100%.

Then signout from the User account in Local PC.

Log back into local Pc user account and then connect to remote PC.

FAQ-020625-0553 WFH icon not showing in Quick Chat:

Wfh user logged in wfh server but wfh icon not showing in Quick Chat and receiving "Urgent Note! You have not marked the morning attendance."

Solution:

This issue comes if user internet is not proper, Inform user to restart internet device (dongle\router) and check.

FAQ-020625-0554 Java Virtual Machine Launcher Error:

If users get an error: "could not find the main class :"

Solution:

Run the itr.bat (or any other .bat if it exists) in the folder that you are getting the error.

Build Errors:

FAQ-020625-0559 Project OCX file not registered in that Server

If users get Error while building the projects in some servers and the error states "Axwingrid" not referenced or other OCX references missing then,

Open "CopyWinTax" as Administrator user in that server.

Select **Register OCX** and Copy the same project **testing** copy using **CopyWintax** that the user is getting build error. (suppose user has error for CAERP project copy the project CAERP(testing from CopyWintax).

Once it's done ask the user to check.

FAQ-020625-0600 "Couldn't process file resx due to its being in the Internet or Restricted zone or having the mark of the web on the file"

Open Internet Explorer in User's account.

Navigate to Settings -> Internet Options -> Local Intranet -> Sites and add \\PCname\ to sites list.

FAQ-020625-0601 .sln files to be opened in respective Visual Studio Version when double clicking them:

Right click on any .sln file and select Properties.


Under General tab -> Opens with, click on 'Change' and choose 'Version Selector'.

FAQ-020625-0602 GSTR Offline tool does not start (White screen):

Create a bat file with the following commands to start the node app.js file.

```
>node app.js
```

Z drive is full

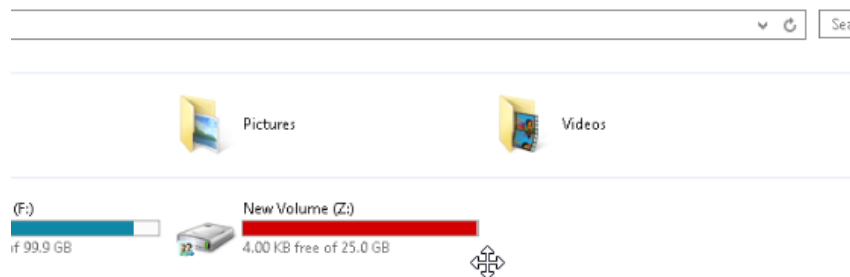

25 GB user quota set for **Z Drive** in WFH servers.

If the Z drive shows as full for any user then inform the users to delete their unwanted files from Z drive.

FAQ-020625-0603 Clear temp:

How to clear temporary files:

- For clear temp from local user run “\\pc2\\Internal Programs\\Internal ExeFiles\\Hardware Automation\\HW_Auto_EXE_Link\\WFH_Temp_Clear\\User_Temp_Clear.lnk”
- For clear temp from windows run “\\pc2\\Internal Programs\\Internal ExeFiles\\Hardware Automation\\HW_Auto_EXE_Link\\WFH_Temp_Clear\\Windows_Temp_Clear.lnk”

Installing Softwares:

FAQ-020625-0604 Asking for Admin Passwords while user tries to install any setup files.

This is expected behavior as Users are not given permission to install any softwares in WFH servers.

Solution:

If Software to be installed, will be required by more than 1 user, then such tools/softwares (eg .. sharex, GST offline utility, etc) can be installed from Administrator Account (usually it prompts a question to install for current user or all user choose all user) .

Users can use the Software by clicking on the software's desktop shortcut.

If the Software to be installed will be used only by 1 user (or testing copy that keeps changing) then ask permission from Sam/tjb before installing that software even for that user also in Servers.

FAQ-020625-0612 Excel Hyperlinks showing “Operation has been cancelled due to restrictions in effect in this computer”.

- Place a copy of Google Chrome from C:\Users\Administrator\AppData\Local\Google\
- Do not copy the folder 'User Data' from inside the above folder
- Now make Chrome as default browser.
- Once done, go to Control Panel -> Default Programs-> Set Associations
- Here Under Protocol
- Change FTP , HTTP and HTTPS to Chrome.
- Ask the user to Logout and Login again.
- Check if the Problem is solved now.
- If Hyperlinks are working , then change the FTP , HTTP and HTTPS protocols back to Internet Explorer.
- Delete the pasted Google exe (google folder) from users desktop.

Server Troubleshooting:

FAQ-020625-0613 Shortcut Problem (DM program problem after PC2 NW problem or Server NW problem)


Follow below steps below restarting the server. WFH server must be restarted.

1. Notify Call handlers to send a Whatsapp message in WFH users group asking Server users to save their work in the server. Template: PCx will be restarted. Please save all your Works. Send a Admin message from the Server:
2. Login to the server as Administrator Open up Command prompt Type in “msg */time:10 “MSG to be sent” without quotes. Eg: > msg */time:10 Server will be restarted now, Please save all your works. Proceed to Restart the Server only after both the steps are followed.


FAQ-020625-0614 Pub Key Generation troubleshooting:

When installing winmantunnel.exe(key generation exe) for user creation, if the key generation doesnt start automatically, go to “C:\Program files\Winman tunnel over ssh\bin\” then follow the below steps:

1. In order to create a pair, open **PuTTYgen.exe** from the files attached with this Document. Choose the key type as **SSH-2 RSA** , key bit size as **2048** minimum (you can enter 4096 for more security), then click on **Generate**.

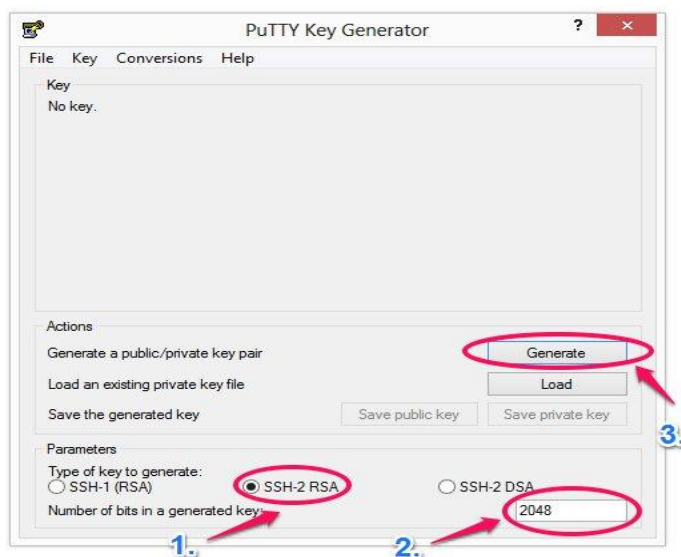

2. It will ask you to create some randomness by moving the mouse around: this gives the system some additional entropy (random data) which helps create better keys. This takes just 5 seconds to fully generate the key-pair
3. The next step is to enter a comment for the Key pair. The comment will help in identifying keys on the server. Then set a passphrase for the private key. Please follow good password policies when setting the passphrase. The passphrase can never be changed for the private key.

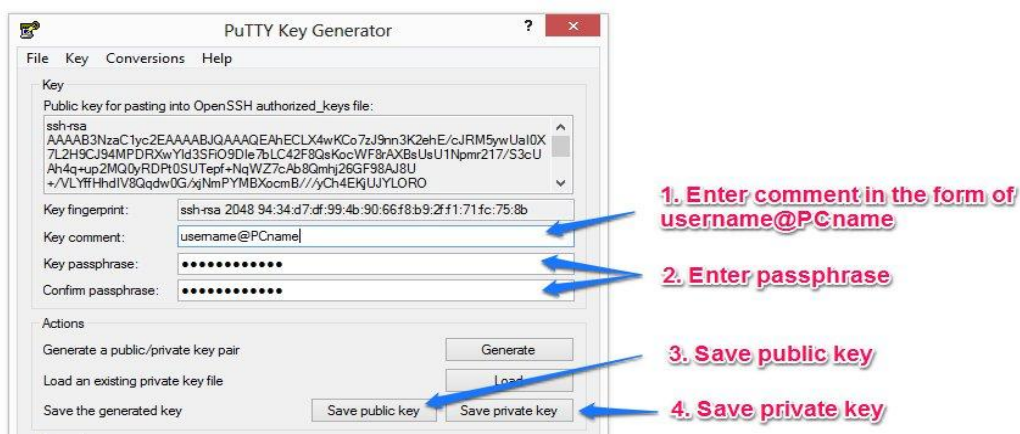

4. Save the public key with filename **username@PCname.pub** and private key as **username@PCname.ppk**. PCname will be the name of the PC that the user will eventually use, e.g. thilak@DellLaptop1.pub

Note:

The **PRIVATE** key **MUST BE** secured –store it in the users **directory on the client machine** and set the file properties such that

- The private should be **NOT WRITABLE** by any user on PC.
- The Private Key should be **READABLE** only by a user who will be accessing the SSH server.

PuTTYgen can be closed after **BOTH** the public key and private key are saved.

Laptop Issue:

FAQ-020625-0615 Laptop turning off automatically:

If users complain Laptop switches off automatically, then ask

1. If it is turning off at scheduled intervals?
If yes check if there are any scheduled tasks running.
2. Is the laptop getting hot on use?
Make use of HW Monitor to monitor temperatures.
3. Where are they placing their laptops, on flat surface or on rough surface. If not placing on table ask them to use on top of the table with some space underneath for air flow.

Determine if it's a battery problem:

If the Batteries are removable, ask the user to remove the battery and then plug in charger and use laptop using direct power. Ask them to monitor if the problem repeats while following this method.

FAQ-020625-0616 If Personal laptop - repair case:

1. Delete the coding files in local pc if copied - confirm with user once.
2. Delete the SSH created in User PC & as well as in Workfromhome program user.
3. Remove the public key in server (for temp purpose and add/create key once solved).
4. After repair, discard the old keys if present and create new SSH keys in users PC.

5. Add the new keys to Server, If old key still present in Server somehow delete it.

FAQ-020625-0617 WFH tunnel exe updates upload to Google Drive

Login to Google drive using rdseeker2@gmail.com

Go to the path “**My Drive -> Winman Tunnel exe ->WFH exe-> 3.0.0.0 “**

(Note: before deleting the file keep a backup of the file in “\\pc91\\waste\\Tech & HW Waste\\Documentations\\Technical\\Training\\Work from home training\\Old Setup Exe's”

Once backup is stored delete the files from drive that needs to be updated.

Once the old file is deleted, upload the new file.

If new **bitly** link is to be created then share the Google Drive file uploaded link to “**Sam**” and inform to create a **short url** link using **bitly**.

FAQ-020625-0618 If any user asks for QR code for Microsoft authentication app

If any user reset his/her mobile or uninstalls authentication app then,

Share the old QR code using Skype. If old QR code is not working after trying for many times, then inform the hardware team to generate a new QR.

FAQ-020625-0619 If user can't access OTP app (Microsoft authenticator), In case of Mobile issues.

In case of user doesn't have access to SSH OTP/device lost, revoke old OTP QR & add new QR to office mobile (Don't register in any device if user requests for temporary registration), verify the user by taking mail confirmation from company registered email ID (Linked to salary) and then only give OTP over phone (Email ID to be confirmed by HR dept).

[Inform user to login to their registered e-mail ID and revoke or sign-out from every other logged-in sessions for safety.](#)

In case of urgent works, if takes more time to create new QR code (for OTP) , can give temp Backup code from “.google_authenticator” files under that user folder in Linux SSH server after following above user verification method.

In both the above cases, Systems Manager & HR Manager permission to be taken.

Note: If there is [no alternate device](#) present with WFH user to send the email from, [then user needs to come to office or must take MD approval](#). (WFH access cannot be given due to security reasons).

FAQ-020625-0620 Connection to RDP failed – Access Denied : Error due to invalid OTP or port not connected



Solution: Check RDP exe (mstsc) working proper, if not then download and install the exe from this link - <https://go.microsoft.com/fwlink/?linkid=2139369> (direct download link 64 bit version).