



BASE24 VisaNet ISO Interface Manual

Copyright 2010 by ACI Worldwide, Inc.

All information contained in this documentation, as well as the software described in it, is confidential and proprietary to ACI Worldwide, Inc., or one of its subsidiaries, is subject to a license agreement, and may be used or copied only in accordance with the terms of such license. Except as permitted by such license, no part of this documentation may be reproduced, stored in a retrieval system, or transmitted in any form or by electronic, mechanical, recording, or any other means, without the prior written permission of ACI Worldwide, Inc., or one of its subsidiaries.

ACI, ACI Worldwide, and the ACI product names used in this documentation are trademarks or registered trademarks of ACI Worldwide, Inc., or one of its subsidiaries.

Other companies' trademarks, service marks, or registered trademarks and service marks are trademarks, service marks, or registered trademarks and service marks of their respective companies.

Version Record

03/2010, Version 49

Table Of Contents

Preface	ix
Reading Prerequisites	ix
Document Location	ix
Document Control	x
Document History	xv
Document History	xv
Section 1	1-1
Introduction	1-1
VisaNet ISO Interface Process.....	1-1
The VisaNet Interchange	1-1
The VisaNet ISO Interface Process Functions.....	1-1
Supported Transaction Types.....	1-2
Transaction Processing.....	1-3
Normal Message Flow	1-4
Link Down Message Flow	1-5
Supported Message Types	1-5
Network Management Messages	1-7
BASE24 Files	1-7
Control Files.....	1-7
Transaction Files	1-8
Pin Encryption	1-9
Triple To Single Des Encryption	1-9
Triple Des Encryption Via Security Services.....	1-10
Single Des Encryption	1-10
Message Formats.....	1-11
Gateway Support.....	1-11
Alternate Merchant ID Support.....	1-12
Suppression of Discretionary Data	1-13
RSAF Support	1-13
Custom Payment Service (CPS) Support.....	1-14
Dynamic Key Management Support.....	1-15
Noncurrency Dispense Support.....	1-16
Check Authorization Support.....	1-16
Format 2 File Support.....	1-17
Data Communication Lines	1-18
Full V.I.P. Support	1-19
Transactional Interface Monitoring (T.I.M.).....	1-19
International Address Verification Service (IAVS) Support.....	1-20

Offline PIN Management	1-20
Event Message Documentation.....	1-21
Section 2.....	2-1
Installation and Configuration	2-1
VisaNet ISO Interface Process Files	2-1
Installation Steps	2-4
LCONF Assigns and Params	2-24
Assigns	2-24
Params	2-29
ICFE Settings	2-49
ICFE Screen 1 Settings	2-49
ICFE Screen 2 Settings	2-53
ICFE Screen 3 Settings	2-55
ICFE Screen 8 Settings	2-61
ICFE Screen 10 Settings	2-64
ICFE Screen 11 Settings	2-68
ICFE Screen 12 Settings	2-70
KEYF Settings	2-76
KEYF Screen 1 Settings	2-76
KEYF Screen 2 Settings	2-82
KEYF Screen 3 Settings	2-90
KEY6 Settings	2-101
KEY6 Screen 1 Settings	2-101
KEY6 Screen 2 Settings	2-101
KEY6 Screen 3 Settings	2-104
Acquirer Information File (AIF)	2-106
Accessing the AIF Screen	2-106
AIF Screen Settings	2-106
Station Name File (SNF)	2-109
Accessing the SNF Screen	2-109
SNF Screen Settings	2-110
Switch Terminal File (STF)	2-113
ACCESSING THE STF SCREEN	2-113
STF SCREEN SETTINGS	2-115
Token File (TKN)	2-123
VisaNet Blocked Bin File (VBBF)	2-124
Accessing the VBBF Screen	2-124
VBBF Screen Settings	2-125
VisaNet Institution Identification File (VIIF)	2-127
Accessing the VIIF Screen	2-127
VIIF Screen Settings	2-127
VisaNet ISO Services File (VISF)	2-133
Accessing the VISF Screen	2-133
VISF Screen 1 Settings	2-133
VISF Screen 2 Settings	2-136

VISF Screen 3 Settings	2-138
VISF Screen 4 Settings	2-140
Section 3.....	3-1
Startup and Control	3-1
Process Configuration	3-1
Startup	3-1
Event Messages	3-1
Initialization	3-1
Network Control Commands	3-4
Timers	3-12
Outbound Request Timer	3-12
Inbound Request Timer	3-12
Store-and-Forward Timer	3-12
Repeat Timer	3-13
Network Management Timer.....	3-13
Extended Network Management Timer	3-13
Wait For Traffic Timer	3-14
Report Startup Timer	3-15
Performance Timer	3-15
Section 4.....	4-1
Transaction Handling	4-1
Logging To The ILF	4-1
Trace Numbers	4-1
Message Flows From BASE24 To VisaNet.....	4-2
Request Message To VisaNet	4-3
Partial Reversal Of A SMS Transaction To VisaNet	4-4
Full Reversal Of A SMS Transaction To VisaNet.....	4-6
Reversal Of A Base Transaction To VisaNet.....	4-7
Timeout Of A Request To VisaNet.....	4-9
Force Post To VisaNet.....	4-11
File Maintenance Request To VisaNet	4-12
Copy/Original Request, Confirmation, Or Free Text	4-13
Collection-Only Transactions	4-14
Store-And-Forward Message To VisaNet	4-15
RSAF Processing	4-16
Switch Dispute File Transaction To VisaNet.....	4-18
Message Flows From VisaNet to BASE24	4-19
Request Message From VisaNet.....	4-20
Partial Reversal Of A SMS Transaction From VisaNet.....	4-21
Full Reversal Of A SMS Transaction From VisaNet	4-22
Reversal Of A BASE Transaction From VisaNet	4-23
Timeout Of A Request Message From VisaNet.....	4-24
Force Post From VisaNet	4-25
Disputed Transaction From VisaNet.....	4-26

Network Management Message Flows	4-27
Logon/Echo Test Initiated By BASE24	4-27
Echo Test Initiated By VisaNet	4-28
Logoff Initiated By BASE24	4-29
Section 5.....	5-1
Cutover and Reporting	5-1
Cutover Processing	5-1
Settlement Advice Messages	5-2
Starting Reports	5-2
Report Overview.....	5-3
SETL01-VisaNet Clearings Statement Report.....	5-3
STAT09- VisaNet Transaction Detail Report	5-4
Section 6.....	6-1
BASE24 CRT Operations.....	6-1
VisaNet Operations Screens.....	6-2
Accessing The VisaNet Operation Screens.....	6-2
VisaNet Maintenance Control (VNMC) Screen.....	6-4
VisaNet File Request Log File (FRLF) Screens.....	6-7
VisaNet File Request Log File (FRLF) Screen 1	6-7
VisaNet File Request Log File (FRLF) Screen 2.....	6-15
VisaNet Collection-Only Transaction (VCOT) Screen	6-20
VisaNet Copy Request Confirmation (VCRC) Screens	6-25
VisaNet Copy Request Confirmation (VCRC) Screen 1	6-26
VisaNet Copy Request Confirmation (VCRC) Screen2	6-39
VisaNet Copy Request Confirmation (VCRC) Screen 3	6-44
VisaNet Copy Request Confirmation (VCRC) Screen 4	6-55
Switch Dispute File (SDF) Screens	6-59
Switch Dispute File (SDF) Menu.....	6-59
Switch Dispute File (SDF) Adjustment Screen 1.....	6-60
Switch Dispute File (SDF) Adjustment Screen 2.....	6-72
Switch Dispute File (SDF) Chargebacks Screen 1	6-75
Switch Dispute File (SDF) Chargebacks Screen 2	6-89
Switch Dispute File (SDF) Representations Screen 1	6-91
Switch Dispute File (SDF) Representations Screen 2	6-105
Switch Dispute File (SDF) Sales Drafts	6-108
Switch Dispute File (SDF) Fee Collections/Funds Disbursements	6-114
Switch Dispute File (SDF) Pos Check Chargeback Screen.....	6-119
Switch Dispute File (SDF) Pos Check Representations Screen	6-128
Section 7.....	7-1
Interchange Log File (ILF)	7-1
VisaNet ILF Record Structure.....	7-2

Section 8	8-1
Switch Dispute File (SDF)	8-1
VisaNet SDF Record Structure.....	8-2
Section 9	9-1
Resubmittal Store and Forward File (RSAF)	9-1
VisaNet RSAF Record Structure	9-1
Section 10	10-1
Transaction and Response Codes	10-1
Transaction And Response Code Mapping	10-1
Appendix A	A-1
SNA LU-2 Protocol	A-1
Network Environment Declarations	A-1
RDT File	A-3
Creating An RDT File.....	A-6
Operating SNAX/HLS	A-7
CMI OBEY File	A-8
Appendix B	B-1
HLS/SNAX Support Using A 36XX Controller	B-1
HLS/SNAX LU-0 Protocol.....	B-1
Appendix C	C-1
X.25 Protocol	C-1
Network Environment Declarations	C-1
CMI OBEY File	C-3
Appendix D	D-1
3270 Multipoint Protocol	D-1
Network Environment Declarations	D-1
Appendix E	E-1
TCP/IP Protocol	E-1
Network Environment Declarations	E-1
HEARTBEAT AND SHUTDOWN MESSAGES	E-2
Appendix F	F-1
Tokens	F-1
Switch Token (Token Ids B0 And B1).....	F-3

ACI Worldwide, Inc.

Preface

This manual describes the VisaNet ISO Interface process, which is used to establish a communications link between a BASE24 network and the VisaNet Interchange. This manual is intended as a reference source for persons responsible for the interface between BASE24 and VisaNet. It provides a comprehensive description of all the functions performed by the VisaNet ISO Interface process involving incoming and outgoing message traffic for both acquirer and issuer processors.

Reading Prerequisites

While no firm prerequisites exist for reading this manual, it is helpful if readers are somewhat knowledgeable about BASE24 and BASE24 files maintenance.

Document Location

This document is located on the SW60VISA subvolume in a file called VISAMNWD. It may be printed using Microsoft Word and copied as needed by ACI customers who have purchased ACI's VisaNet ISO Interface process. The document may also be ordered, at a cost, through ACI Publications.

Document Control

Version 1- 06/01

VisaNet ISO Interface Release 6.0

Version 2 - 08/01

VisaNet October 2001 Mandates, Multinational Transaction Support Enhancement, Correction of APPROVAL CODE LENGTH ICF field, Check Authorization Support Enhancement, and removal of PCS/PLF support.

Version 3 - 01/02

Triple/Single DES Enhancement and Format 2 File Support Enhancement

Version 4 - 02/02

VisaNet April 2002 Mandates

Version 5 - 06/02

Transaction Security Services Enhancement

Version 6 – 08/02

Visa October 2002 Mandates

Version 7 – 10/02

Visa Discretionary Data Suppression Enhancement

Version 8 – 02/03

Visa April 2003 Mandates

Version 9 – 02/03

Offline PIN Management Enhancement

Version 10 – 05/03

Added new LCONF parameter VISA-CAVV-APPRV-RSLT-CDE

Version 11 – 08/03

Visa October 2003 Mandates

Version 12 – 06/04

Corrected RESUB-MAX-DAYS-LIMIT LCONF parameter.

Version 13 – 08/04

Visa October 2004 Mandates

Version 14 – 01/05

Corrected documentation for additional data in SDF Chargeback and Representment Screens.

Version 15 – 02/05

Visa April 2005 Mandates and Miscellaneous Enhancements.

Version 16 – 04/05

Visa Greek/South Africa Installment Transaction Support

Version 17 – 05/05

Case #393556

Version 18 – 08/05

Visa October 2005 Mandates and Miscellaneous Enhancements.

Version 19 – 09/05

Visa SDF Requester Updates

Version 20 – 10/05

Visa ATM Interchange Reimbursement Fees Support

Version 21 – 12/05

Updated Visa FRLF Installation Steps

Version 22 – 02/06

Visa April 2006 Mandates

Version 23 – 05/06

Added Switch FIID as part of primary key to Acquirer Information File (AIF)

Version 24 – 06/06

Updated device, line and station defs for the TCP/IP protocol.

Version 25 – 08/06

VisaNet October 2006 Mandates and VisaNet April 2006 Last Minute Updates

Version 26 – 11/06

SPDH & RTAU Enhancements for Visa and MasterCard

Version 27 – 12/06

Added ATC documentation on SDF Adjustment screen 1.

Version 28 – 02/07

VisaNet April 2007 Mandates and VisaNet October 2006 Optional Enhancements.

Version 29 – 05/07

ATM Priority Routing functionality added.

Version 30 – 07/07

Case #437393 – Added Network Id Codes to File Maintenance Messages sent to VISA

Version 31 – 07/07

Case #436629

Version 32 – 08/07

Case #435017 – Add LCONF param to control de-48 usage 11.

Version 33 – 08/07

VisaNet October 2007 Mandates and Track Elimination Enhancement

Version 34 – 11/07

Case #432391 – Add LCONF param to control sending DE-63.5, PLUS Proprietary Member Center ID

Version 35 -12/07

Case #449712 – Updated Timeout of a VisaNet Request Message.

Version 36 – 02/08

Case #455119 - VISAMNWD contains old BASE24 screens

Version 37 – 01/08

Visa SDF Requester Updates and VisaNet Support E3 File For NEG File Updates Enhancement

Version 38 – 02/08

VisaNet April 2008 Mandates

Version 39 – 02/08

Removed VISA card exclusion from ATM Priority Routing

Version 40 – 03/08

VisaNet Healthcare Update for April 2008

Version 41 – 08/08

VisaNet October 2008 Business Enhancements

Version 42 – 11/08

CPS bitmap format requirement

Version 43 – 02/09

VisaNet April 2009 Business Enhancements

Version 44 – 03/09

Case #493241 – Uptdated intallation steps to include STF_ON flag

Version 45 – 03/09

LCONF param name correction from VISA-CAVV-APPRV-RSLT-CDE to VISA-CAVV-APPRV-RSLT-CDES

Version 46 – 06/09

LCONF param VISA-CAVV-APPRV-RSLT-CDES required if CAVV could not be authenticated because both sides do not participate in VerifiedByVisa and transactions still are to be sent on to BASE24.

Version 47 – 07/09

VisaNet October 2009 Business Enhancements

Version 48 – 09/09

Case #929760 – Added Card Sequence Number field to the Switch Dispute File (SDF) Adjustment 1 screen

Version 49 – 03/10

Case #1065799 – Added entry for new LCONF param SEND-B1-COMPL-AS-PRTL-RVSL

Document History

12JUN2001	tmh/173
Symptom:	Release 6.0 Enhancements.
Problem:	None.
Fix:	Created Release 6.0 manual for VisaNet ISO Interface.
Dependency:	Restore VISAMAN.
Reference:	WO #000101-1 (General Release 6.0)
22AUG2001	DLH/158 gg/724
Symptom:	Check Authorization Support in Visa Interface and SPDH.
Problem:	None.
Fix:	Added check authorization documentation. Modified: Supported Transaction Types LCONF Assigns and Params VisaNet Copy Request Confirmation (VCRC) Screen 1 SDF Adjustment Screen 1 SDF Chargeback Screen 1 SDF Representation Screen 1
Added:	Check Authorization Support
Dependency:	Replace VISAMAN.
Reference:	(retro of SW5P538 from WO #001013-05)
22AUG2001	RAF/100 gg/724
Symptom:	This manual states that the approval code must be 5 characters long.
Problem:	There was an old VISA requirement that the approval code be only 5 characters long. That requirement is no longer valid.
Fix:	Deleted the requirement in the manual that states the ICF's APPROVAL CODE LENGTH must be a 5.
Dependency:	Replace VISAMAN.
Reference:	(retro of SW5P556 from Case #336039)

22AUG2001 gg/724 gg/724

Symptom: Acquiring Institution Country Code, field 19, is not always correctly set for multinational transactions.

Problem: The interface sets this field using the ISO Country Code from the ICF. If the acquirer processes for multiple institutions based in more than one country, an incorrect value can be used in field 19.

Fix: Added a new field, Acquiring Institution Country Code, to the VIIF processing. VIIF documentation updated in this file.
Section modified:
VIIF Screen Settings

Dependency: Replace files SCRNVIIIF, VISAMAN, and VISAUPDT. Apply corresponding fixes to RQVIIIFS, SVVIIIFS, VISADDLS, VISAG, VISAFMTS, VISALIBS, and VISAS. Run Make. Convert the VIIF to its new format using conversion program VII1001.

Reference: (retro of SW5P591 from Case #334741)

22AUG2001 gg/724 gg/724

Symptom: VisaNet October 2001 Mandates

Problem: None.

Fix: Added documentation for the VisaNet October 2001 Mandates.
Sections added:
Electronic Commerce Goods Indicator Support
Funding Transaction Support
Sections modified:
LCONF Assigns and Params
Switch Token
VisaNet ISO Interface Process Files

Dependency: Replace files SCRNVCRRC, VISALOGM, VISAM, VISAMAN, VISAMM, AND VISAUPDT. Restore new file VISAEGIS. Apply corresponding fixes to RQVCRCS, RQVSDFS, VISADDLS, VISAFMTS, VISAG, VISALIBS, VISAMSGS, and VISAS. VisaNet Interlink Gateway users apply fix to VISIS. Run Make.

Reference: (retro of SW5P591 from WO #001013-02)

22AUG2001 gg/724

Symptom: Removal of PCS/PLF support from the VisaNet Release 6.0 Interface.

Problem: None.

Fix: Removed references to PCS/PLF from this manual.

Dependency: Apply fix to VISAG and VISAS and run MAKE. Replace VISALOGM and VISAMAN.

Reference: Case #337091

08JAN2002	tmh/173
Symptom:	Triple/Single DES Enhancement.
Problem:	None.
Fix:	Modified the following sections in order to support the Triple/Single DES Enhancement: BASE24 Files PIN Encryption Dynamic Key Management Support LCONF Assigns and Params Initialization Section added: KEY6 Settings
Dependency:	Apply fixes to VISADDLS, VISAG, VISALIBS, VISAM, VISAMSGS, and VISAS. Replace files VISALOGM, VISAMAN, and VISAUPDT. Apply corresponding fixes to HISWUTLS and SECUTILS. Run MAKE.
Reference:	WO #000211-01.
08JAN2002	gg/724
Symptom:	Release 6.0 Format 2 File Support
Problem:	None
Fix:	Added the following section for support of format 2 ILF files. Format 2 File Support
Dependency:	Apply fixes to RP09VISS, VISADDLS, VISAG, VISALIBS, VISAM, and VISAS. Replace files VISALOGM, VISAMAN, and VISAUPDT. Apply corresponding fixes to BAUTILS, HISWUTLS, and OKLIBTS. Run MAKE.
Reference:	WO #000202-01
06FEB2002	kjw/571 gg/724
Symptom:	Field 62 needs to be suppressed in certain countries.
Problem:	The interface uses country code <> 840 when determining to send field 62. This does not allow the control necessary for countries in Europe that wish to suppress field 62.
Fix:	Added new flag, CPS^POS^G, to control sending of field 62. Setting is controlled by LCONF parameter, CPS-POS. Sections modified: LCONF Assigns and Params
Dependency:	Replace file VISAMAN. Apply corresponding fixes to VISAG, VISAS, and VISAFMTS. Run Make. Customers wishing to suppress field 62, add the new param, CPS-POS and set it to N.
Reference:	(retro of SCN SW5P658 from Case #339377)

06FEB2002	gg/724 gg/724
Symptom:	VisaNet April 2002 Mandates
Problem:	None
Fix:	Added documentation for the VisaNet April 2002 Mandates. Section added : International Address Verification Service Support
Dependency:	Replace files VISALOGM, VISAMAN, and VISAUPDT. Apply fixes to base files BACOUTLS, COBNAMS, DDLPSTKN, PSTKNCVS, and PSTKNID. Apply fixes to RQVCRCS, RQVSDFS, VISADDLS, VISAFMTS, VISAG, and VISALIBS and run MAKE.
Reference:	(retro of SCN SW5P676 from WO #011112-01 and #011112-04)
30JUN2002	tmh/173
Symptom:	Transaction Security Services Enhancement
Problem:	None.
Fix:	Added support for Transaction Security Services. Sections modified: Pin Encryption Dynamic Key Management Support Installation Steps LCONF Assigns and Params KEYF Settings KEY6 Settings
Dependency:	Apply fixes to VISAS, VISAMSGS, VISAG, HISWUTLS and run MAKE. Replace VISALOGM, VISAMAN and VISAUPDT.
Reference:	WO #000211-01
07JUN2002	ahs/3152
Symptom:	Since both VISA and Interlink use the same FRLF file for maintenance, there is no way to determine which network rejected a hot card update when there is a problem.
Problem:	The Network ID was not included in the FRLF screen.
Fix:	Added network ID field to the FRLF Screens. Modified Section: VisaNet File Request Log File (FRLF) Screen 2
Dependency:	Apply fixes to VISADDLS, VISAMSGS and SVRLFS and re-MAKE. Replace VISAMAN. The FRLF structure changed, and must be recreated from the new VISAFUP file after the MAKE stream is run.
Reference:	Case #347471.

19AUG2002 kjw/571 cal/283
Symptom: Timeouts increase dramatically when testing TCP/IP.
Problem: The LCONF parameter SEND-ETX, was not placed in the
 test network as it was not listed in this file as a
 requirement. Visa's TCP/IP does not work well if ETX
 is part of a message.
Fix: Modified documentation to include SEND-ETX parameter
 when using TCP/IP.
 Section modified :
 APPENDIX E: TCP/IP PROTOCOL
Dependency: Replace file VISAMAN.
Reference: (retro of SCN SW5P715 for Case #343492)

19AUG2002 cal/283
Symptom: October 2002 Mandates
Problem: None
Fix: Added information for the October 2002 Mandates.
Dependency: Replace VISAUPDT, VISALOGM and VISAMAN. Apply
 corresponding fixes to DDLSDf, RQVSDfS, RQVCRCS,
 SCRNVSDF, VISADDLS, VISAEMVS, VISAFMTS, VISAG,
 VISALIBS, VISAMM, VISAMSGS, VISAS, and VISIS. Run
 MAKE.
Reference: WO #020424-01

08OCT2002 gg/724
Symptom: Discretionary Data Suppression
Problem: None
Fix: Added documentation for the Discretionary Data
 Suppression enhancement.
Dependency: Replace VISAMAN and VISAUPDT. Apply fixes to BAUTILS,
 HISWITLS, VISAG, VISALIBS, VISAMSGS, and VISAS. Run
 MAKE.
Reference: WO #020625-04

31OCT2002	kke/872
Symptom:	When trying to access the VISA specific ICFE screens in a 6.0 network environment, the following error was received: "ERROR ON REQUESTER CALL. TERMINATION STATUS: 0007".
Problem:	Documentation indicated that the VISA_ENHANCED_MODE_ON macro needed to be set to false.
Fix:	Corrected documentation to indicate that the VISA_ENHANCED_MODE_ON macro needed to be set to true if the interface was to be run in a 6.0 network environment.
Dependency:	Replace VISAMAN.
Reference:	Case #354352.
19NOV2002	cal/283
Symptom:	Documentation does not match documentation from Visa.
Problem:	Visa changed the name of the PS2000 program to CPS.
Fix:	Changed reference to the PS2000 Visa program to be CPS.
Dependency:	Replace VISAMNWD.
Reference:	Case #355980
19AUG2002	DOO/1693
Symptom:	Visa April 2003 Mandates
Problem:	None
Fix:	Added documentation for changes made to support the VisaNet April 2003 Mandates.
Dependency:	Apply fixes to VISADDLS, VISAFMTS, VISAG, VISAMSGS, VISALIBS, VISAS, DDLSDf, SCRNRfL, SCRNVSDf, RQRLfS, RQVCRCs, RQVSDfS, and SVELfS and re-MAKE. Replace VISALOGM, VISAMAN, and VISAUPDT.
Reference:	WO #020424-01
19FEB2003	gg/724
Symptom:	Offline PIN Management enhancement
Problem:	None
Fix:	Added documetation for Offline PIN Management.
Dependency:	Apply changes to VISAD, VISADDLS, VISAEMVS, VISAFMTS, VISAG, and VISAMSGS. Apply fixes to DDLGILF and HISWUTLS. Run MAKE. Replace VISALOGM, VISAMNWD, and VISAUPDT.
Reference:	WO #020818-01

19MAY2003	cal/283
Symptom:	None.
Problem:	Visa has added values in the CAVV result code field (DE 44.13). Some new values are for denials which the interface should send a denial to Visa and discontinue processing. When a denial is sent to Visa due to a denial CAVV result code, there is no record of the denial in the PTLF.
Fix:	Added an LCONF parameter that is set to the values that should be considered approvals. The interface will compare the value in DE 44.13 with the values in the LCONF parameter. If they match, processing will continue. If they don't match, a denial is sent back Visa and a 9900 log only message is sent to RTAU.
Dependency:	Added new LCONF parameter VISA-CAVV-APPRV-RSLT-CDE. Apply fix to VISAG, VISAS, VISAMSGS and re-MAKE. Replace VISAMNWD.
Reference:	Case #357628
08AUG2003	cal/283
Symptom:	Visa October 2003 Mandates
Problem:	None.
Fix:	Removed wording for the ad hoc totals command. Added new parameter VISA-CURRENCY-PRECISION-SRV.
Dependency:	Apply fix to DDLPSTKN, PSTKNCSV, RQVBBFS, RQVCRCS, RQVNMCS, RQVSDFS, VISADDLS, VISAG, VISAFMTS, VISALIBS, VISAS and VISIS. Replace files VISAMNWD, VISALOGM and VISAUPDT. New files ILV1003M, ILV1003S and ILV1003R. Run MAKE.
Reference:	WO #030504-04
18FEB2004	linkec
Symptom:	Visa April 2004 Mandates
Problem:	None.
Fix:	Added STF settings for UK ATM Cash Disbursement at remote terminals.
Dependency:	Apply fix to BAUTILS, HISWUTLS, RQVCRCS, RQVSDFS, VISAFMTS, VISAG and VISALIBS. Replace files VISAMNWD and VISAUPDT. Run MAKE.
Reference:	WO #031104-06.

15JUN2004	engelk
Symptom:	The Visa interface does not limit the number of resubmission attempts to the number specified by the LCONF parameter RESUB-MAX-DAYS.
Problem:	This LCONF parameter should have been documented as RESUB-MAX-DAYS-LIMIT.
Fix:	Changed reference from RESUB-MAX-DAYS to RESUB-MAX-DAYS-LIMIT as is expected by the code.
Dependency:	Replace files VISAMNWD and VISAUPDT. Correct LCONF param and warmboot the interface process.
Reference:	Case #380800.
16AUG2004	hayest
Symptom:	Visa October 2004 Mandates
Problem:	None.
Fix:	Added new LCONF parameter FRWD-UNMATCHED-RVSLs to subsection LCONF Assigns and Params. Added value "R3" to the STOP ORDER TYPE field on screen 1 of the FRLF of subsection VisaNet File Request Log File (FRLF) Screens. Added new screen fields TRAN FEE IND and TRAN FEE to screen 1 of SDF Adjustment, SDF Chargeback, SDF Representations, and SDF Fee Collections/Funds Disbursements of subsection Switch Dispute File Screens. Removed field TIMESTAMP from screen 2 of SDF Chargeback and SDF Representations of subsection Switch Dispute File Screens. Added TRAN-FEE to subsection VisaNet SDF Record Structure.
Dependency:	Apply fix to DDLATTKN, DDLPSTKN, DDLSDf, PSCOUTLS, RQRLFS, RQVCRCS, RQVSDfS, RQPTLS, SCRNPtL, SCRNVSDf, SVPTLS, VISADDLS, VISAEMVS, VISAFMTS, VISAG, VISAMSGS, VISAS, and VISPS. Replace files VISALOGM, VISAMNWD, and VISAUPDT. Run MAKE.
Reference:	WO #040515-02
06JAN2004	gruberg
Symptom:	Improper default value sent in field 48, usage 7a for Reference Number for Chargebacks and Representations.
Problem:	Reference Number is initialized to blanks. Visa specs say that this subfield should be zero filled if no value is entered. Field name "VISA FREE TEXT" does not accurately reflect the current usage of the field.
Fix:	Update the SDF Chargeback and Representation screen documentation as follows: 1. Reference Number will be initialized to zeroes.

	2. "VISA FREE TEXT" was changed to "MESSAGE TEXT"
	3. Update other fields as appropriate for additional data in SDF Chargeback and Representation screen documentation to match current Visa specifications.
Dependency:	Replace VISAMNWD and SCRNVSDF. Apply fix to RQVSDFS. Run MAKE.
Reference:	Case #387818
10FEB2005	sanderj
Symptom:	VisaNet RSAF and Miscellaneous Enhancements.
Problem:	None.
Fix:	Added new field (rvsl-prikey) to the VRSDF definition.
Dependency:	Apply fix to VISADDLM, VISADDLS, VISAFMTS, VISAG, VISALIBS, VISAMSGS and VISAS. Replace files VISALOGM, VISAMNWD and VISAUPDT. Restore new files RSV0105M, RSV0105R and RSV0105S to the sw60visa subvol. Run MAKE. Run RSAF conversion program RSV0105.
Reference:	WO #040824-03, Case #378466, #379448 and #386906.
10FEB2005	linkec
Symptom:	VisaNet April 2005 Mandates.
Problem:	None.
Fix:	Modified to reflect changes for April 2005 Mandates.
Dependency:	Apply fix to RQVCRCS, RQVSDFS, SCRNVCRC, SCRNVSDF, VISADDLS, VISAG, VISAS, VISAFMTS, VISALIBS, VISIS, VISPS and VISAEMVS. Replace VISALOGM, VISAMNWD and VISAUPDT. Restore new files ILV0405M, ILV0405R and ILV0405S to the sw60visa subvol. Run MAKE. Obey conversion run file ILV0405R.
Reference:	WO #041103-04
26APR2005	owallad
Symptom:	Dependency correction for enhancement "Added Switch Common Data token support"
Problem:	Code would not compile because of missing token DDL.
Fix:	Apply changes necessary to add the "BY" token to the system. Apply fixes to BATKN CVS, BATKNID, COBTKN and DDLBATKN (WO #050111-01).
Dependency:	None.
Reference:	Case #392758
26APR2005	hayest
Symptom:	Visa Greek/South Africa Installment Transaction Mandate.
Problem:	None.
Fix:	Modified section SUPPORTED TRAN TYPES to include installments and modified section LCONF

	PARAMS in order to support new parameters SPPT-ACQ-INSTL-TXN, SPPT-ISS-INSTL-TXN, INSTL-TXN-DATA-LOC, and INSTL-TXN-DATA-OFST.
Dependency:	Apply fixes to DDLPSTKN, PSTKNCVS, VISADDLS, VISAFMTS, VISAG, VISALIBS, VISAMSGS, and VISAS and run MAKE. Replace VISALOGM, VISAMNWD, and VISAUPDT.
Reference:	WO #041130-02
05MAY2005	linkec
Symptom:	Customers forced to migrate to EMV CCD compliant message format.
Problem:	Configurability was not added with the EMV CCD compliant changes that would allow to customers to migrate to the new message format when they were ready.
Fix:	Added a new parameter, EMV-CCD-COMPLIANT, that can be set to allow migration to the new EMV message format.
Dependency:	Apply fixes to VISAG, VISAS and VISAEMVS. Run MAKE. Replace VISAMNWD.
Reference:	Case #393556
12AUG2005	linkec
Symptom:	VisaNet October 2005 Mandates and Miscellaneous Enhancements
Problem:	None.
Fix:	Added documentation for changes made to support the Visa October 2005 Business Enhancements. Also included is support for Discretionary Data Suppresion for Issuer Transactions and forwarding declined advice messages.
Dependency:	Apply fix to BAUTILS, COBTKN, OKLIBTS, PSTKNID, RQVCRCS, DDLPSTKN, PSTKNCVS, SUBTPTBL, VISADDLS, VISAG, VISAFMTS, VISALIBS, VISAMSGS and VISAS. Run MAKE. Replace VISALOGM, VISAMNWD and VISAUPDT.
Reference:	WO #050426-04
30SEP2005	huac
Symptom:	Visa SDF Requester Updates.
Problem:	None.
Fix:	Added documentation for changes made to support the Visa SDF Requester Updates.
Dependency:	Apply fixes to DDLSDF, RQVSDFS, SCRNVSDF, VISAD, VISAEMVS, and VISAFMTS and run MAKE. Replace VISAMAN and VISAUPDT.
Reference:	WO #050303-01

14OCT2005	hayest
Symptom:	Visa ATM Interchange Reimbursement Fees Support
Problem:	Visa is modifying the Visa and Plus ATM Interchange Reimbursement Fee structure to provide tiered reimbursement levels. Each ATM Acquirer Member will be assigned a unique Acquirer ID to designate the appropriate Tier (1 or 2). This Acquirer ID will be mapped to data element 32 in all external ATM messages outbound from the interface to the network.
Fix:	The Acquirer Information File (AIF) has been created to support network supplied acquirer data that will be mapped from the file to the external message by the interchange interfaces. An AIF requester/server has been created on new subvolume SW60AIF in order to enable file maintenance functions on the AIF. The interface has been modified to create and initialize an AIF extended memory table and to map the Acquirer ID from the AIF record within the extended memory table to data element 32, if configured to do so. A new utility has been created in HISWUTLS to retrieve a record from the AIF extended memory table for the BASE24 interchange interfaces. Modified sections: CONTROL FILES, NTERFACE PROCESS FILES, INSTALLATION STEPS, LCONF ASSIGNS AND PARAMS, INITIALIZATION and added section AIF Settings.
Dependency:	Restore new subvolume SW60AIF. Apply fix to BACOUTLS, CUSTMACS, FLGSDOC, HISWUTLS, SWIFM, SWIM, SWIMM, RQVISAS, SCRNVISA, VISAFMTS, VISAG, VISAMM and VISAS and run MAKE. Replace VISALOGM, VISAMNWD and VISAUPDT.
Reference:	WO #050830-02
03NOV2005	huac
Symptom:	Healthcare token used a resered token id.
Problem:	Healthcare token id should be "CP" instead of "CL".
Fix:	Renamed Healthcare token id to "CP".
Dependency:	Apply fixes to COBTKN, DDL PSTKN, PSTKN CVS and PSTKNID. Replace VISAUPDT and VISAMNWD.
Reference:	Case #403004

23DEC2005	engelk
Symptom:	Visa FRLF pathway to interface process documentation was unclear.
Problem:	The installation documentation did not indicate the need to add a Visa server path device or give specifics on setting up its Visa server path line and Visa server path station.
Fix:	Modified the Installation Steps to include the Visa server path device and specifics for setting up the Visa server path line and the Visa server path station.
Dependency:	Replace VISAMNWD.
Reference:	Case #401211
17FEB2006	huac
Symptom:	VisaNet April 2006 Mandates
Problem:	None.
Fix:	Added documentation for changes made to support the Visa April 2006 Business Enhancements.
Dependency:	Apply fixes to COBTKN, PSTKNCVS, PSTKNID, DDLBATKN and DDL PSTKN. Apply fixes to RP09VISS, RQVDSFS, VISADDLS, VISAFMTS, VISAG, VISALIBS and VISIS. Replace VISALOGM, VISAMNWD and VISAUPDT. Run MAKE.
Reference:	WO #051109-02.
04MAY2006	hayest
Symptom:	Some customers support devices that participate in several networks. These devices require a different Sponsor ID for each network.
Problem:	The AIF does not support the switch FIID and therefore is unable to support devices that participate in several networks.
Fix:	Modified documentation to support the Switch FIID as part of the primary key of the AIF. Section modified: AIF SETTINGS
Dependency:	Apply fixes to HISWUTLS, AIFDDLs, RQAIFS, SCRNAIF, SVAIFS, and VISAFMTS. Run MAKE. Replace VISAMNWD and VISAUPDT. Restore new AIF conversion files AIF0506M, AIF0506R and AIF0506S. MAKE the AIF conversion programs using AIF0506M. Run the AIF conversion using AIF0506R.
Reference:	WO #060107-03.

13JUN2006	frederr
Symptom:	The Device, Line and Station declarations for the TCP/IP Protocol in Appendix E are incorrect.
Problem:	Some of the declarations in Appendix E need to be updated with current BASE24 standards.
Fix:	Updated the Device, Line and Station declarations in Appendix E.
Dependency:	Replace VISAMNWD.
Reference:	Case #411540.
23AUG2006	huac
Symptom:	VisaNet October 2006 Mandates and VisaNet April 2006 Last Minute Updates.
Problem:	None.
Fix:	Added documentation for changes made to support the Visa October 2006 Business Enhancements and VisaNet April 2006 Last Minute Updates. Section modified : VisaNet File Request Log File (FRLF) Screens Switch Dispute File (SDF) Screens VisaNet SDF Record Structure Tokens
Dependency:	Apply fixes to COBTKN, BATKNCVS, BATKNID, BAUTILS DDLBATKN, DDLSDf and OKLIBTS. Apply fixes to IPF3DDLs, RQRLFS, RQVCRCS, RQVDSFS, SCRNRFL, SCRNVSDf, VISADDLS, VISAEMVS, VISAFMTS, VISAG, VISALIBS and VISAS. Replace VISALOGM, VISAMNWD and VISAUPDT. Run MAKE.
Reference:	WO #060521-01 and WO #060325-02.
03NOV2006	sanderj
Symptom:	SPDH & RTAU Enhancements for Visa and MasterCard
Problem:	None.
Fix:	Added documentation for the Healthcare Service Token and the Healthcare Transit Token. Removed the entry for the Healthcare Token. Section modified : Tokens
Dependency:	Apply fixes to COBTKN, DDL PSTKN, PSTKN CVS, PSTKNID, VISAFMTS, VISAG and VISAS. Replace VISALOGM and VISAMNWD. Run MAKE.
Reference:	WO #050909-01.

14DEC2006	frederr
Symptom:	The ATC field on SDF Adjustment Screen 1 is not documented.
Problem:	The ATC field was added to the SDF Adjustment Screen 1 without being documented.
Fix:	Added documentation for the ATC field found on the SDF Adjustment Screen 1.
Section modified :	SDF Adjustment Screen 1.
Dependency:	Replace VISAMNWD.
Reference:	Case #422763.
16FEB2007	gruberg
Symptom:	VisaNet April 2007 Mandates and VisaNet October 2006 Optional Enhancements.
Problem:	None.
Fix:	Added documentation for changes made to support the Visa April 2007Mandates and VisaNet October 2006 Optional Enhancements. Sections modified : Switch Dispute File (SDF) Screens VisaNet SDF Record Structure Tokens
Dependency:	Replace VISALOGM, VISAMNWD and VISAUPDT. Apply fixes to DDLPSTKN, DDLSDf, RQVSDfS, SCRNVSDF, SVVSDFs, VISADDLS, VISAFMTS, VISAG, VISALIBS, VISAMSGS and VISPS. Run Make.
Reference:	WO #061027-01 and WO #060531-01.
04MAY2007	DwivediS
Symptom:	Visa SDF Requester Updates.
Problem:	None.
Fix:	Added documentation for changes made to support the Visa SDF Requester Updates.
Dependency:	Apply fixes to RQVSDfS, SCRNVSDF, SVVSDFs, VISAG, VISAFMTS and VISALIBS and run Make. Replace VISALOGM, VISAMNWD and VISAUPDT.
Reference:	WO #050303-01
14MAY2007	engelk
Symptom:	Interface is unable to invoke ATM Priority Routing for transactions to be sent to other networks using VISA as a gateway.
Problem:	The interface was not enhanced for ATM Priority Routing as part of the VisaNet October 2006 mandates.
Fix:	Added documentation for changes made to support ATM Priority Routing.

	Sections modified : LCONF Params
Dependency:	Apply fixes to VISAG, VISAS, VISAFMTS, VISALIBS, and VISAMSGS. Run Make. Replace VISAMNWD and VISALOGM.
Reference:	Case #434062.
11JUL2007	engelk
Symptom:	Data entry of a PLUS network id code (0004) was not allowed on the RLF screen. Also, negative file updates for ATM networks for which VISA is being used as a gateway need to be able to use "0000" as a network id.
Problem:	The original network id code edit check did not allow entry of 0004 or 0000.
Fix:	Modified the network id code check to allow 0004 and 0000. Negative File updates for POS cards using VISA as a gateway cards should use "0003" (Interlink). Sections modified : VisaNet File Request Log File (FRLF) Screens
Dependency:	Apply fix to RQRLFS. Run Make. Replace VISAMNWD.
Reference:	Case #437393.
18JUL2007	SaderC
Symptom:	The read of the STF does not work correctly in certain situations when the prikey contains asterisk (wildcard) characters.
Problem:	The ascii sort of the STF places the asterisk character before the alpha and numeric characters. As a result, the STF records that contain asterisk characters are selected first by the interface, which is incorrect.
Fix:	Updated documentation for changes made to the Terminal FIID, Merchant ID and Terminal ID primary key fields found on the STF Screen 1. Sections modified : Switch Terminal File (STF)
Dependency:	BA10SC04 subvolume. New files: STF0707M, STF0707R and STF0707S. Apply fix to RQSTFS, VISAFMTS, VISAG, VISALIBS and VISAS. Run Make. Make the STF conversion using STF0707M. Run the STF conversion using STF0707R. Replace VISAMNWD.
Reference:	Case #436629.

06AUG2007	wielerk
Symptom:	When the LCONF param ADDL-DATA-SEND is turned off, de-48 is still sent.
Problem:	The interface adds de-48 usage 11 if de-48 is not already being sent for usage 7. Usage 11 is optional and should be configurable.
Fix:	Updated documentation for the new LCONF param, ADDL-DATA-SEND-USG11. Section modified: LCONF Params
Dependency:	Apply fixes to VISAG, VISAS,VISAFMTS. Run Make. Replace VISAMNWD.
Reference:	Case #435017.
22AUG2007	huac
Symptom:	VisaNet October 2007 Mandates and Track Elimination Enhancement.
Fix:	Added documentation for changes made to support the Visa October 2007 Mandates and Track Elimination Enhancement. Section modified: LCONF Assigns and Params Appendix F BASE24 CRT Operations
Dependency:	Apply fixes to BATKNCVS, BATKNID, COBTKN, DDLBATKN, DDL PSTKN, PSTKNCVS, PSTKNID, RQVSDFS, SCRNVSDF, VISADDLS, VISAEMVS, VISAFMTS, VISAG, VISALIBS, VISAMSGS, VISAS, VISIS. Run Make. Replace VISALOGM, VISAMNWD and VISAUPDT.
Reference:	WO #070430-01
20SEP2007	bensone
Symptom:	Addendum to VisaNet October 2007 Mandates and Track Elimination Enhancement for article 2.6.
Fix:	Added documentation for new LCONF parameter ELIMINATE-ACQ-TRK-DATA Section modified: LCONF Assigns and Params
Dependency:	Apply fixes to VISAFMTS, VISAG, VISALIBS, VISAS, VISIS. Run Make. Replace VISAMNWD and VISAUPDT.
Reference:	WO #070430-01
26NOV2007	engelk
Symptom:	Plus transactions to VISA were being rejected with code 347

	(missing PMC) at some installations and not required at all at other installations.
Problem:	Visa is in the process of removing PMC from de-63.5 and the removal is not evenly executed. An LCONF parameter, SEND-PMC, was added to control this for case #432391, but it was not documented in this manual.
Fix:	Added documentation for new LCONF parameter SEND-PMC. This parameter was added in the fix for case #432391 to VISAG, VISAS and SW60VISP.VISPS. Section modified: LCONF Assigns and Params
Dependency:	Replace VISAMNWD.
Reference:	Case #444822
21DEC2007	frederr
Symptom:	This document states that a cancellation message is sent to VisaNet upon receipt of a late response and not when a request message to VisaNet times out. This is not how the code behaves.
Problem:	The interface was modified in April 2007 to send a cancellation message to VisaNet when a request message to VisaNet times out. If a late response is received the interface simply drops the message.
Fix:	Modified the documentation to reflect how the code handles timeouts of request messages to VisaNet and late response messages from VisaNet. Section Modified: Timeout of a Request to VisaNet.
Dependency:	Replace VISAMNWD.
Reference:	Case #449712.
02FEB2008	engelk
Symptom:	This document contained an SDF Adjustment Screen 2 which was out of date and referenced version 4.0.
Problem:	This page was not updated when the rest of the SDF screens were updated.
Fix:	Modified the documentation to reflect how the SDF Adjustment screen 2 now looks. Changes included: 1) Correcting screen heading to use <ln> instead of SW40 2) Correcting screen heading to use <date> instead of an actual date 3) Correcting screen heading to user <time> instead of an actual time 4) Changing Contact for info to Contact Name and Contact Phone. 5) Shortening Free text length. Section Modified: Switch Dispute File (SDF) Adjustment

Dependency:	Screen 2
Reference:	Replace VISAMNWD. Case #455119.
06FEB2008	hayest
Symptom:	VISA SDF Update.
Fix:	Added documentation for new POS Check Chargeback and POS Check Representment screens. Modified POS Chargeback and POS Representment screens. Modified section: Switch Dispute File (SDF) Screens
Dependency:	Apply fixes to RQVSDFS, SCRNVSDF, SVVSDFS, VISAG, VISAFMTS and VISALIBS and run Make. Replace VISALOGM, VISAMNWD and VISAUPDT.
Reference:	WO #050303-01
06FEB2008	RasaIV
Symptom:	VisaNet Support E3 File for Neg File Updates Enhancement.
Fix:	Added support for E3 file processing. Section modified: VisaNet File Request Log File (FRLF) Screens.
Dependency:	Apply fix to RQRLFS, VISADDLS, VISALIBS, VISAS and VISAMSGS. Replace VISALOGM, VISAMNWD and VISAUPDT. Run Make.
Reference:	WO #070702-03
08FEB2008	hayest
Symptom:	VisaNet April 2008 Mandates
Fix:	Removed support for PMC ID throughout manual. Added Partail Authorization Indicator field to the Switch Token definition. Added support for new LCONF parameters SEND-FWD-INST-IN-DKE-MSG and IDNTFY-MCC-6012- AS-QUASI-CASH. Modified sections: LCONF Assigns and Params VIIF Screens VCRC Screens Switch Dispute File (SDF) Screens Switch Dispute File (SDF) Switch Token
Dependency:	Apply fixes to DDLBATKN, DDLPSTKN, DDLSDF, PSTKNCVS, RP09VISS, RQVCRCS, RQVIIFS, RQVSDFS, SCRNVCRCS, SCRNVIIIF, SCRNVSDF, SVVSDFS, SUBTPTBL, VISAD, VISADDLS, VISAEMVS, VISAFMTS, VISAG, VISALIBS, VISAMSGS, VISAS, VISIS and VISPS. Run Make. Replace VISALOGM, VISAMNWD and VISAUPDT.
Reference:	WO #071025-01

18FEB2008	engelk
Symptom:	Acquired ATM transactions using Visa cards are declined for invalid card when sent to VISA with a network id of "0004" (PLUS).
Problem:	Acquirers who apply surcharges to transactions originating at their ATMs have different surcharging agreements with VISA. Some bins that begin with '4' can be Visa only, some both Visa and Plus, and some Plus only. In the legacy PLUS network the decision of how to route the bins was handled at PLUS. In the PLUS SMS environment, Visa only routes by network ID, if a specific network ID is provided. VISA will decline transactions for invalid card if the wrong network id is provided. When ATM Priority Routing was added to the interface, VISA cards were excluded. This was in hopes of speeding transaction throughput; VISA international had specified that the first sharing group to be checked would be P (PLUS). VISA cards were assumed to begin with "4" and have a length of 13 or 16. With Visa taking over PLUS, this is no longer necessarily the case.
Fix:	Removed code which checked for VISA cards to exclude them from ATM Priority Routing. Updated documentation to reflect change. Section modified: LCONF Params
Dependency:	Apply fixes to VISAFMTS and VISAMSGS. Run Make. Replace VISAMNWD.
Reference:	Case #454799 and #455829.
24MAR2008	gruberg
Symptom:	VisaNet Healthcare Update for April 2008
Problem:	None
Fix:	Added new field MKT SPFC DATA ID to the SDF Adjustment, Chargeback and Representment screens. Section modified: Switch Dispute File (SDF) Screens
Dependency:	Apply fixes to DDLSDf, RQVSDfS, SCRNVSDf, SVVSDfS, VISAFMTS and VISAG. Run Make. Replace VISAMNWD and VISAUPDT.
Reference:	WO #080227-01
17AUG2008	gruberg
Symptom:	VisaNet October 2008 Business Enhancements
Problem:	None
Fix:	Updated documentation for the VisaNet October 2008 Business Enhancements. Sections modified:

	Supported Message Types
	VisaNet ISO Interface Process Files
	STF Screen Settings
	Store-And-Forward Message to VisaNet
	BASE24 CRT Operations
	VisaNet Operations Screens
	Appendix F – Tokens
	Sections added:
	Collection-Only Transactions
	VisaNet Collection-Only Transaction (VCOT) Screen
Dependency:	Apply fixes to the following files:
	BA60AFT subvolume: COBTKN
	BA60DDL subvolume: DDLBATKN, DDLFSTF and DDL PSTKN
	BA60SRC subvolume: BATKN CVS, BATKNID and PSTKN CVS
	SW60IPF3 subvolume: IPF3DDL S
	SW60STF subvolume: SCR NSTF
	SW60IVIS subvolume: VISA EMVS
	SW60VISA subvolume: RQVCRCS, RQVISAS, SCR NVISA, SCR NVCRC, SVVSDFS, SWVISAM, VISADDLS, VISAFMTS, VISAG, VISALIBS, VISAMM, VISAMSGS and VISAS. Restore new files RQVCOTM, RQVCOTS and SCR NVCOT. Replace existing files VISALOGM, VISAMNWD and VISAUPDT.
	SW60VISI subvolume: VISIS
	Run Make.
Reference:	WO #080521-01
10NOV2008	engelk
Symptom:	EMS message #5040, Bit 062 bad length on expand, emitted,
Problem:	Bit 62, Custom Payment Service Field, was received in fixed format. The interface expects this field in bitmap format
Fix:	Added to the documentation the requirement that the Custom Payment Service fields must be sent in bitmap format.
	Section modified: Custom Payment Service (CPS) Support
Dependency:	Apply fixes to VISAMNWD, VISALOGM, and VISALIBS.
	Run Make.
Reference:	Case #478260

13FEB2009	gruberg
Symptom:	VisaNet April 2009 Business Enhancements
Problem:	None
Fix:	Updated documentation for the VisaNet April 2009 Business Enhancements. Sections modified: LCONF Assigns and Params Switch Terminal File (STF) Network Control Commands VisaNet Collection-Only Transaction (VCOT) Screen Switch Dispute File (SDF) Screens Switch Token
Dependency:	Apply fixes to the following files: BA60DDL subvolume: DDLFSTF and DDLPSTKN BA60SRC subvolume: BAUTILS OK60LIB subvolume: OKLIBTS SW60STF subvolume: RQSTFS, SCRNSTF and SVSTFS. New STF conversion files STF0409M, STF0409R and STF0409S. The BA10SC04 subvolume is required for the file conversion. SW60IVIS subvolume: VISAEMVS SW60VISA subvolume: RQVCOTS, SCRNVcot, SVSTFS, VISADDLS, VISAFMTS, VISAG, VISALIBS, VISAMSGS and VISAS. Replace VISALOGM, VISAMNWD and VISAUPDT. SW60VISI subvolume: VISIS Make the STF conversion using STF0409M. Run Make.
Reference:	WO #081007-02
26MAR2009	SaderC
Symptom:	A COBOL85 Library Error 113 is experienced when the user accesses the STF screen.
Problem:	The server was accessing the old STF file. The old STF file does not contain the changes to the STF record structure. A new STF file will need to be created per the VisaNet April 2009 Business Enhancements.
Fix:	Updated the installation steps to include STF_ON flag.
Dependency:	Replace STF0409R, VISAUPDT and VISAMNWD.
Reference:	Case #493241

31MAR2009	EngelK
Symptom:	The interface was declining requests received from Visa with values in DE-44.13 (CAVV results codes) that were included in the list of CAVV results codes for which processing should continue when the PROCESS-FAILED-CAVV LCONF param is set to "N".
Problem:	The interface did not read the VISA-CAVV-APPRV-RSLT-CDES LCONF param. This document incorrectly identified this LCONF param as ending in CDE as opposed to CDES.
Fix:	Updated the spelling of this LCONF param.
Dependency:	Replace VISAMNWD.
Reference:	Case #492885
16JUN2009	EngelK
Symptom:	The interface was declining requests received from Visa with values in DE-44.13 (CAVV results codes) that indicated that CAVV validation could not complete.
Problem:	Visa makes a distinction between CAVV authentication and attempts. When the an issuer is configured for Visa to perform CAVV validations on the issuer's behalf, Visa forwards status results in transactions that it did not decline to the issuer. However, this does not mean that it passed authentication. If either the issuer or acquirer do not participate in VerifiedByVisa, CAVV validation is not possible and passes a value in DE-44.13 which indicates the status of the validation attempt. The interface treats values in DE-44.13 (CAVV results codes) as failing if validation was not performed and passed. That means that issuers should either: 1) configure the LCONF param PROCESS-FAILED-CAVV to "N" and add the LCONF param VISA-CAVV-APPRV-RSLT-CDES with values which indicate that Visa could not perform authentication 2) configure the LCONF param PROCESS-FAILED-CAVV to "Y". unless only transactions fully qualifying for VerifiedByVisa and passing CAVV authentication will be sent into BASE24 for authorization.
Fix:	Updated the description of the PROCESS-FAILED-CAVV LCONF param.
Dependency:	Replace VISAMNWD.
Reference:	Case #500789

05AUG2009	PrasadS
Symptom:	VisaNet October 2009 Business Enhancements
Problem:	None.
Fix:	Updated documentation for the VisaNet October 2009 Business Enhancements. Sections modified: Reversal Of A Base Transaction To VisaNet Reversal Of A BASE Transaction From VisaNet Supported Message Types Store-And-Forward Message To VisaNet Switch Dispute File (SDF) Chargebacks Screen 1 VisaNet File Request Log File (FRLF) Screens
Dependency:	Apply fixes to DDLBATKN, RQRLFS, SVVSDFS, VISADDLS, VISAEMVS, VISALIBS, VISAMSGS, VISAFMTS, VISAS and VISAG. Run Make. Replace VISALOGM, VISAMNWD and VISAUPDT.
Reference:	WO #090331-02
01SEP2009	saderc
Symptom:	DE 23 (Card Sequence Number) is not being sent in Plus adjustment message.
Problem:	The Card Sequence Number field does not exist on the SDF Adjustment screen. Per the VISA technical specification, DE 23 is a required field for 0220 adjustments if present in the original message.
Fix:	Added new field CARD SEQ NUM to the SDF Adjustments screen 1. Section modified: Switch Dispute File (SDF) Screens
Dependency:	Apply fixes to RQVSDFS, SCRNVSDF, SVVSDFS and VISAFMTS. Replace VISAMNWD. Run Make.
Reference:	Case #929760
01MAR2010	gruberg
Symptom:	No external message sent for a preauth completion when the internal completion is received with message type 0220 and the interface is configured for BASE 1 acquiring.
Problem:	Users receiving the internal 0220 completions may require a BASE1 0400 partial reversal be sent to Visa. There is a note in the April 2010 VisaNet Tech Spec, Article 5.5, that states "Authorization reversals:-VIOR has been amended to require when: the final transaction amount is less than the auth amount.
Fix:	Added processing to format and send an external 0400 partial reversal when the internal completion is

received with an 0220 message type and the interface is configured for BASE 1 acquiring. The logic will be executed if new LCONF param SEND-B1-COMPL-AS-PRTL-RVSL is added and set with a value "Y". Updated the LCONF section to include an entry for the new param.

Dependency: Apply fixes to VISAG, VISAMSGS and VISAS. Run Make. Replace VISAMNWD and VISAUPDT.

Reference: Case #1065799

ACI Worldwide, Inc.

Section 1

Introduction

VisaNet ISO Interface Process

This section introduces the VisaNet ISO Interface and provides an overview of the VisaNet ISO Interface process functionality. This section also identifies the BASE24 files used by the VisaNet ISO Interface process.

The VisaNet Interchange

The VisaNet Interchange serves as a link between two networks. It allows a cardholder on one network to initiate a transaction at a terminal belonging to the other network.

VisaNet connects an acquirer with an issuer. Both the acquirer and the issuer must conform to VisaNet's standards. These standards include sending and accepting the appropriate form of the VisaNet external message and providing the correct message flows.

The VisaNet ISO Interface supports BASE and SMS message formats.

The VisaNet ISO Interface Process Functions

The VisaNet ISO Interface process is responsible for maintaining the relationship between BASE24 and VisaNet. In order to maintain this relationship, the VisaNet ISO Interface process must perform a variety of functions. These functions include:

- Facilitating message exchange between BASE24 and VisaNet.

When BASE24 receives an inbound transaction from VisaNet, the VisaNet ISO Interface process translates the message into the appropriate internal message and sends the message to a BASE24 Authorization process. When BASE24 receives a transaction and sends it to VisaNet, the VisaNet ISO Interface process translates the message from the internal message format to the external message format and forwards the message to VisaNet.

Providing store-and-forward capabilities.

When the link between BASE24 and VisaNet is down, the VisaNet ISO Interface process stores non-interactive messages intended for VisaNet in its Store-and-Forward File (SAF). Non-interactive messages are messages not requiring an immediate response to complete a transaction. When the link is restored, the messages are retrieved from the SAF and sent to VisaNet.

Facilitating settlement between BASE24 and VisaNet.

The VisaNet ISO Interface process processes transactions based on VisaNet's reporting day. Since VisaNet's cutover rarely occurs at the same time as the BASE24 cutover, the reporting day and the transactions to be settled will differ between the two. The VisaNet ISO Interface process produces a set of interchange reports to reconcile these points of view. These reports allow the BASE24 participants to reconcile the settlement positions of VisaNet and BASE24.

Managing communications between BASE24 and VisaNet.

The VisaNet ISO Interface process sends and receives network management messages to determine the status of the link between BASE24 and VisaNet. Network management messages include logon, logoff, echo test, and key management messages.

Supported Transaction Types

The VisaNet ISO Interface process provides support for BASE24-atm transactions. These include:

- Deposits
- Withdrawals
- Transfers
- Balance Inquiries
- Check Guarantees

The VisaNet ISO Interface process also provides support for BASE24-pos transactions. These include:

- Partial authorizations
- Purchases
- Purchase with Cashback
- Preauthorization Purchase
- Preauthorization Purchase with Cashback
- Cash Advances
- CVV2 Verification Only
- Debit Adjustments
- Purchase Returns
- Mail/Phone Orders
- Check Guarantees
- Check Verifications
- Card Verifications
- Balance Inquiries
- Funding Transactions (Issuer Support only)
- Installments (Greek and South Africa)
- Payment Transactions
- Original Credits

Any of the above transactions can be received from or sent to VisaNet for authorization. The VisaNet ISO Interface process can also function on behalf of both issuers and acquirers.

An issuer processes transactions on behalf of the card-issuing financial institution. In the case of VisaNet, this means that the VisaNet ISO Interface process receives transactions from VisaNet that require authorization by a BASE24 Authorization process.

An acquirer accepts transaction requests that must be sent to another network for authorization. In the case of VisaNet, this means that the VisaNet ISO Interface process forwards transactions initiated on the BASE24 network to VisaNet for authorization.

Transaction Processing

The following paragraphs provide an overview of transaction flows for normal and link-down processing. They also identify the message set (different than the transaction set) supported by VisaNet.

Normal Message Flow

When a message from BASE24 is received by the VisaNet ISO Interface process, it is translated from the internal message into the external message format. The external message is then sent to the interchange for authorization. When the message has been processed, VisaNet sends an external response message to the VisaNet ISO Interface process. Using information from the external response message, the VisaNet ISO Interface process formats an internal response message and sends it to BASE24.

When a message from VisaNet is received by the VisaNet ISO Interface process, it is translated from the external message format into the appropriate internal message format. The internal message is then sent to BASE24-atm or BASE24-pos to be authorized depending on the transaction type. The authorizing entity sends an internal response message to the VisaNet ISO Interface process. Using information from the internal message, the VisaNet ISO Interface process formats an external response message and sends it to VisaNet.

Link Down Message Flow

If the link to VisaNet is down and an alternate destination is available, the link-down situation is handled by using alternate routing to send the transaction to an alternate destination. If an alternate destination is not available, the VisaNet ISO Interface process responds to a link-down situation by denying all interactive transactions. All non-interactive messages (i.e., reversals) are logged to the Store-and-Forward File (SAF).

Supported Message Types

The VisaNet ISO Interface process supports the following internal and external message types:

Type	Description	Internal	External
0100	Authorization Request		X
0101	Authorization Request Repeat		X
0110	Authorization Request Response		X
0120	Authorization Request Advice		X
0130	Authorization Request Advice Response		X
0200	Financial Transaction Request	X	X
0201	Financial Transaction Request Repeat		X
0210	Financial Transaction Request Response	X	X
0220	Financial Transaction Advice	X	X
0221	Financial Transaction Advice Repeat		X
0228	Financial Transaction Advice Response		X
0230	Financial Transaction Advice Response		X
0282	Representment Stat Advice		X
0300	Acquirer File Update Request		X
0302	Issuer File Update Request		X
0310	BASE I File Update/Inquiry Response		X
0312	MS File Update/Inquiry Response		X
0322	ASE I Exception File Update Advice		X
0400	Acquirer Reversal Request		X
0401	Acquirer Reversal Request Repeat		X
0402	Issuer Reversal Request		X
0408	Acquirer Reversal Request Response		X
0410	Acquirer Reversal Request Response		X
0412	Issuer Reversal Request Response	X	X
0420	Acquirer Reversal Advice	X	X
0421	Acquirer Reversal Advice Repeat		X

Type	Description	Internal	External
0422	Chargeback Reversal Request Advice	X	X
0423	Chargeback Reversal Rqst. Advice Repeat		X
0429	Chargeback Request Response Advice		X
0430	Acquirer Reversal Advice Response		X
0432	Chargeback Request Response		X
0480	Chargeback Reversal Stat Advice		X

Type	Description	Internal	External
0500	Acquirer Reconciliation Request		X
0510	Acquirer Reconciliation Request Response		X
0520	Acquirer Reconciliation Advice		X
0530	Acquirer Reconciliation Advice Response		X
0600	Administrative Request		X
0601	Administrative Request Repeat		X
0610	Administrative Request Response		X
0620	Administrative Request Advice		X
0630	Administrative Request Advice Response		X
0800	Network Management Request		X
0810	Network Management Request Response		X
9240	Collection-Only Transaction		X
9250	Collection-Only Response		X
9620	Fraud Advice		X
9630	Fraud Advice Response		X
9900	POS Log Only Message	X	

Network Management Messages

Network management messages are used to manage the operational status of the communications lines between BASE24 and VisaNet. These messages are sent as 0800 messages and require 0810 messages in response. BASE24 supports the following types of network management messages.

- Logon messages
- Logoff messages
- Advice Logon messages
- Advice Logoff messages
- Echo Test messages
- Key Change Request messages
- Totals Request messages
- Suppress Inquiry
- Request Current Totals

BASE24 Files

The VisaNet ISO Interface process uses several files. These files can be divided into control files and transaction files and are identified below.

Control Files

Control files contain configuration information and parameters that determine how the VisaNet ISO Interface process performs certain functions. The control files used by the VisaNet ISO Interface process include:

- Acquirer Information File (AIF)
- Acquirer Processing Code File (APCF)
- Enhanced Interchange Configuration File (ICFE)
- Issuer Processing Code File (IPCF)
- Key File (KEYF)
- Key6 File (KEY6)
- Logical Network Configuration File (LCONF)
- Network Environment Source File (NEFS)
- Station Name File (SNF)
- VisaNet Blocked Bin File (VBBF)
- VisaNet Institution Identification File (VIIF)
- VisaNet ISO Services File (VISF)
- Token File (TKN)

For more information on these files and how they are used by the VisaNet ISO Interface process, see section 2.

Transaction Files

Transaction files are used to store information about individual transactions processed through the VisaNet ISO Interface process. The transaction files used by the VisaNet ISO Interface process include:

- Interchange Log File (ILF)
- Resubmission Store-and-Forward File (RSAF)
- Store-and-Forward File (SAF)
- Switch Dispute File (SDF)
- Switch Terminal File (STF)
- VisaNet File Request Log File (FRLF)

For more information on the ILF and SAF files, see the "BASE24 Files and Record Structures Manual". More information on the FRLF can be found in section 6.

The Switch Dispute File (SDF) is used by the VisaNet ISO Interface process for chargebacks, representations, funds disbursements, fee collections, and sales drafts. The file may be created through FUP and the records entered through a series of input screens. More information on the SDF screens can be found in section 6. Also, the SDF can be created by the host and refreshed to the Tandem. More information on SDF processing and disputed transactions can be found in section 4.

The Switch Terminal File (STF) is used by the VisaNet ISO Interface process to store the Merchant Verification Value (MVV) for BASE24 acquirers that are unable to get this information from the Alternate Merchant ID token. For more information on the STF can be found in section 2.

Pin Encryption

The VisaNet ISO Interface process supports three PIN encryption options:

Clear PIN processing. PINs are handled in the clear. They are not encrypted.

Hardware encrypted PINs. A security module is accessed for PIN processing. PINs are encrypted under the secure keys of a security module. A PIN will be encrypted at the point of entry (the ATM) and will remain encrypted until it is received by the issuer (the final destination) for verification. The PIN never appears in clear text, except at the point of entry and at the final destination. The security modules that can be used include the Atalla Security Module, the Atalla High Performance Security Module, and the Racal Guardata Security Module.

Software encrypted PINs. PINs are encrypted via software code, using a DES (Data Encryption Standard) algorithm. No security module is in use. The PINs are in clear text within the processor itself. The VisaNet ISO Interface process can be set up to use software encryption/decryption even when VisaNet is set up to use hardware on their end.

Triple To Single Des Encryption

The VisaNet ISO Interface supports Triple to Single DES encryption where PINs may be translated from encryption under a double length key (3DEA) to encryption under a single length key (DEA) or translated from DEA to 3DEA. Triple to Single DES encryption is supported when translating PINs in the following situations:

Internal clear PIN to external PIN encrypted in hardware

Internal PIN encrypted in hardware to external PIN encrypted in hardware

External PIN encrypted in hardware to internal PIN encrypted in hardware

If LCONF parameter DES-TRIPLE-SINGLE is 'Y', this indicates that the interface will translate PINs from being single DES encrypted inside BASE24 to triple DES encrypted when sent to the interchange and will translate PINs from being triple DES encrypted when received from an interchange to being single DES encrypted inside BASE24. The Key6 File (KEY6) is used instead of the Key File (KEYF) in order to store and process the double length PIN encryption keys. The KEY6 supports double length PIN encryption and key encryption keys. The intermediate keys remain single length within the KEY6.

Triple Des Encryption Via Security Services

The VisaNet ISO Interface supports Triple DES encryption using Transaction Security Services only in a Release 6.0 network environment. PINs may be translated from encryption under a single or double length key to encryption under a single or double length key. Triple DES encryption using Transaction Security Services is supported when translating PINs in the following situations:

- Internal clear PIN to external PIN encrypted in hardware

- Internal PIN encrypted in hardware to external PIN encrypted in hardware

- External PIN encrypted in hardware to internal PIN encrypted in hardware

The interface will translate PINs from being single or triple DES encrypted inside BASE24 to single or triple DES encrypted when sent to the interchange and will translate PINs from being single or triple DES encrypted when received from an interchange to being single or triple encrypted inside BASE24.

LCONF parameter DES-TRIPLE-SINGLE must not exist or may exist with the value 'N' if the VisaNet ISO Interface is to support Triple DES encryption using Transaction Security Services. The Key File (KEYF) is utilized. LCONF parameter SECURE-DEV-TYP must have the value 'TSS'. LCONF assign SECURE-DEV-1 must specify the name of the primary IAS process and may be process specific. LCONF assign SECURE-DEV-2 may specify the name of the secondary IAS process and may be process specific.

Single Des Encryption

If LCONF parameter DES-TRIPLE-SINGLE does not exist or has the value 'N' and LCONF parameter SECURE-DEV-TYP does not have the value 'TSS', single DES encryption is supported by the VisaNet ISO Interface and the KEYF is used instead of the KEY6.

Message Formats

The VisaNet ISO Interface process routes messages using two different formats; internal or external.

The internal message format is used whenever information is routed between the VisaNet ISO Interface process and the rest of BASE24. For BASE24-atm, the internal message is called the BASE24-atm Standard Internal Message (STM). For more information on the STM, see the "BASE24-atm Transaction Processing Manual". For BASE24-pos, the internal message is called the BASE24-pos Standard Internal Message (PSTM). For more information on the PSTM, see the "BASE24-pos Transaction Processing Manual".

The external message format is used whenever information is routed between the VisaNet ISO Interface process and the interchange. A message sent in the external message format is called a Standard External Message (SEM).

An internal Pathway message is used whenever information is routed between the BASE24 CRT operations screens and the VisaNet ISO Interface process. The following types of messages are generated from BASE24 CRT operations screens:

- Maintenance control commands
- File requests
- Copy request confirmations

More information on these types of messages can be found in section 6.

Gateway Support

The VisaNet ISO Interface can also be used to provide gateways for transactions to other networks. Two of those networks are PLUS and Interlink. Different rules apply when formatting a message for either PLUS or Interlink. Bindable modules may be purchased for the VisaNet ISO Interface process that will follow these rules.

The Interlink gateway requires that the VIP SMS message format be used.

The PLUS gateway can be accessed two different ways. For acquirers and issuers in the United States, it is required by VisaNet that the VIP SMS message format be used. The VisaNet ISO Interface uses the SMS message format for the PLUS gateway. For acquirers and issuers outside the United States, it is possible to access the PLUS gateway via the BASE system. The PLUS module supports both methods.

Alternate Merchant ID Support

The VisaNet ISO Interface uses the alternate merchant ID (first field in the "ALTERNATE MERCHANT ID" token) as the value for the Card Acceptor ID field (P-42) for Discover and AMEX transactions being sent to Visa for authorization.

When the VisaNet ISO Interface formats a BASE24-pos acquired request to a Visa external request, it checks the card type of the card being used in the transaction. If the card is an AMEX or Discover card, the Interface checks for the presence of the Alternate Merchant ID token. If the token is present and contains a non-blank, non-zero value, the Interface uses the value to fill the Card Acceptor ID Code field (P-42) in the Visa external message. Visa requires the assigned AMEX or Discover merchant ID for any merchant using Visa to get transactions for these cards authorized.

The VisaNet ISO Interface uses the PSTM.RETL^ID field to fill the Card Acceptor ID Code field in the Visa external message for Release 3.4. The BASE24 user is required to set the PSTM.RETL^ID field to the correct value for a Discover merchant, when sending a Discover card transaction to Visa for authorizing. Only one retailer ID field is available to use in the PTDF or PRDF.

In Release 5.0 and above BASE24-pos the Retailer Definition File (PRDF) allows an alternate merchant ID for each card type a merchant accepts (there is a limit of 30 card types per merchant). The Release 5.0 and above BASE24-pos Router/Auth (RTAU) module fills the Alternate Merchant ID token in the PSTM with the alternate merchant ID for the corresponding card type in the PRDF. This is only done for transactions acquired by a BASE24-pos Device Handler.

As of October 2002, Visa has mandated that certain merchants in the U.S. submit a Merchant Verification Value (MVV) in data element 62, subfield 20. U.S. acquirers can populate the alternate merchant id field for Visa cards with the MVV value and the VisaNet Interface will use the MVV obtained in the token in the external messages to Visa.

U.S. acquirers that are presently using the alternate merchant ID field on the PRDF for Visa cards for other purposes must use the Switch Terminal File (STF) to match a merchant to the correct MVV. For more information on using the STF, please refer to the Switch Terminal File instructions in section 2 of this manual.

Suppression of Discretionary Data

The VisaNet ISO interface has the ability to suppress discretionary data in the ILF log file for both issuer and acquirer transactions. Suppression of discretionary data is controlled by LCONF parameters and can be turned off for acquirer, issuer or acquirer and issuer transactions. The following parameters control the suppression of discretionary data for acquirer transactions:

SWI-ACQ-AVS-DATA-SUPPRS[
SWI-ACQ-CVD2-DATA-SUPPRS
SWI-ACQ-DISC-DATA-SUPPRS

The following parameters control the suppression of discretionary data for issuer transactions:

SWI-ISS-AVS-DATA-SUPPRS
SWI-ISS-CVD2-DATA-SUPPRS
SWI-ISS-DISC-DATA-SUPPRS

For more information on setting the above parameters, refer to the LCONF section of this manual.

RSAF Support

Visa SMS merchants can store original transactions when the transaction is undeliverable to the issuer. Delivery of the transaction can fail because: a) the link from the merchant to the acquirer is down; b) the link from the acquirer to the Visa interchange is down; or c) the Visa Interchange is unable to deliver the transaction to the issuer. If any of these scenarios occur, the merchant or the acquirer may approve the transaction and store the original transaction in a file for delivery once the connection has been restored. E-check transactions may also be stored in the RSAF and submitted at a later time for processing.

NOTE: ORIGINAL STORE-AND-FORWARD TRANSACTIONS MAY BE DENIED BY THE ISSUER.

The VisaNet Interface has been enhanced to support Original Store-and-Forward (SAF) transactions from the merchant or acquirer. By Visa definition, the Original SAF transaction must have PIN data. The VisaNet Interface has been modified to recognize an Original SAF transaction from a merchant or acquirer by looking for (1) a POS 0220 transaction with (2) PIN data and (3) the resub^stat field in the PS51 token set to "S" or "R", or (3) the point of service data token, transaction stat indicator set to 8. If ALL three conditions are met, the interface will create an external request message and send this message for approval. The message, along with the 0220 POS message, will be used to create a Resubmission Store and Forward (RSAF) record and logged in the RSAF file. The RSAF file and the RSAF record are new to the VisaNet Interface. The record structure of the file will be discussed in section 9.

When the response to the external request message is received from Visa, if the transaction is approved, the RSAF record will be deleted. If the issuer is still unavailable, the transaction will remain an Original SAF Transaction and will be sent again later. If the transaction is denied due to insufficient funds, over the daily usage limit or over the daily amount limit, the Original SAF Transaction will be converted to a Resubmittal Transaction, stored in the RSAF file and resubmitted at a later time. A Resubmittal Transaction does not have PIN data.

NOTE: RESUBMITTAL TRANSACTIONS MAY BE DENIED BY THE ISSUER.

A Resubmittal Transaction that is denied for insufficient funds, over the daily usage limit, over the daily amount limit or due to the issuer being unavailable may be resubmitted once a day for 9 days. The only exception to this is that Resubmitted Transactions that are denied due to the issuer being unavailable can be resubmitted more than once a day. Any other reason for denial will make the transaction ineligible for resubmission.

An RSAF record will remain in the RSAF file until it is declined for reasons other than listed above, it is over 9 days old or has been approved.

In order to track the progress of the Original SAF and Resubmittal Transactions, the Visa Interface has been enhanced to support a POS Log Only message. This message is sent to the Router/Auth Process that sent the Original SAF transaction to the Visa Interface. A Log only message type is "9900", which BASE24-pos Router/Auth converts to an 0210 before logging to the PTLF. How often the log only message is sent to RTAU is configurable by a new LCONF parameter. As with normal processing, all transactions will be logged to the ILF.

Custom Payment Service (CPS) Support

CPS, formerly known as PS2000, is a program implemented by Visa to ensure that the authorizations are exactly the same as the transactions that are cleared and settled. This is possible by linking the offline clearing transaction to the original authorization message. Also, dispute processing gets improved because the transaction id must be present in all disputed transactions (copy requests, copy confirmations, chargebacks and representations).

The VisaNet ISO Interface can support CPS processing in Release 5.0 and above BASE24-pos, as well as in Release 3.4 BASE24-pos. The only difference is that the PS2000 token and PS2000 offline token are added in Release 5.0 and above PSTM and will be used to store the CPS required data for logging to the Release 5.0 and above PTLF and ILF. The Release 3.4 PSTM will use the User Data area to store the information.

The VisaNet ISO Interface can also support CPS processing in Release 5.0 and above BASE24-atm. For Release 5.0 and above BASE24-atm, there is a new token added at the end of the STM which is used to store the CPS data required

for logging to the Release 5.0 and above TLF and ILF. BASE24 Release 4.0 will be able to log the CPS data to the ILF but not to the TLF.

The VisaNet ISO Interface supports only the bitmap format for Custom Payment Service fields. If the VisaNet ISO Interface receives messages from Visa which contain Custom Payment Service fields in fixed format, they will fail message expansion.

Dynamic Key Management Support

The VisaNet ISO Interface supports dynamically changing the working keys online.

There are two methods to initiate a key change. A processor may request a new key or VisaNet will generate new keys on a daily basis.

An NCS command is one of the option to be used to request a new key. This command will be able to request the inactive keys to be changed and become the active keys.

If LCONF parameter DES-TRIPLE-SINGLE is 'Y', the interchange will send a double length PIN encryption key in the external 0800 message. The Key6 File (KEY6) is used instead of the Key File (KEYF).

If LCONF parameter SECURE-DEV-TYP is 'TSS', the interchange may send a single or double length PIN encryption key in the external 0800 message. The Key File (KEYF) is used.

If LCONF parameter DES-TRIPLE-SINGLE is 'N' or does not exist and LCONF parameter SECURE-DEV-TYP does not contain the value 'TSS', the interchange will send a single length PIN encryption key in the external 0800 message. The KEYF is used.

The Key Exchange Key (KEK) in the KEYF or KEY6 is required to be set up as per the BASE24 Transaction Security manual.

Depending on the type (described in NCS commands), two timers are inserted and these will expire depending on the value set in the KEYF or KEY6 record. Upon their expiration a newkey request will be generated.

VISA will then send a key change request to the VisaNet ISO Interface with the new PIN Encryption key (KPE) encrypted under the first variant of the KEK.

For more information refer to "BASE24 Transaction Security Manual".

Noncurrency Dispense Support

The VisaNet ISO Interface has the ability to receive ATM noncurrency dispense transactions. The action taken is determined by the presence and contents of the noncurrency dispense segment of the ICFE and the value of the hopper contents field in the NCD token. If the hopper contents is an 02 (traveler's cheques) a withdrawal is formatted. If the hopper contents is any other value, a normal purchase transaction is formatted.

Check Authorization Support

Electronic check authorization transactions are becoming more prevalent in the retail banking industry. These transactions allow merchants the ability to convert paper checks to electronic transactions at the point of sale. As electronic transactions, converted checks can be cleared and settled quickly and efficiently reducing the amount of paper as well as the number of returned checks to be handled for both the issuer and acquirer.

Visa has specifications which support these transactions as both an issuer and an acquirer through the Visa Interface. BASE24 will be enhanced to support the following types of transactions to/from Visa:

'030000' - Check Conversion-Only Request/Response/Reversal/Ack

'040000' - Check Verification with Conversion Request/Response/Reversal/Ack

'180000' - Check Guarantee with Conversion Request/Response/Reversal/Ack

Exception transactions such as Copy Requests, Chargebacks, Representments, and Adjustments will also be supported.

When BASE24 is the issuer, the above listed transactions will not have any follow up from the merchant or Visa (i.e. no check will be received and no tape/file from Visa for settlement items); therefore, these transactions will all be processed as check guarantee transactions since this is the only time for the account to be debited. The actual processing code from Visa will be contained in the CHK^AUTH2^TKN for settlement with Visa in case of a non-sufficient funds situation to determine who is liable for the funds. Different levels of protection are provided to the merchant based on the processing code selection and the fee associated with the transaction.

When BASE24 is the acquirer, the above listed transactions may or may not have any follow up from the merchant or Visa depending on the settlement flag received from Visa (field 44.12). The actual processing code sent to Visa will be contained in the switch token for settlement with Visa in case of a non-sufficient funds situation to determine who is liable for the funds. Different levels of protection are provided to the merchant based on the processing code selection and the fee associated with the transaction. A new token (CHK^CALLBACK^TKN) will be added by the Visa Interface if a non-bank authorizer denies a check authorization transaction and returns call back information.

Format 2 File Support

The VisaNet ISO Interface supports format 2 ILFs for D46 and higher Compaq NSK operating systems. Format 2 file support allows BASE24 customers the ability to format Enscribe disk file (ILF) partitions to accommodate format 2 files. Files with format 2 partitions can contain much more data than the existing format 1 files. Files, whether format 1 or format 2, can have up to 16 partitions. Format 1 files are limited to 4 gigabytes (each partition can have up to 2 gigabytes). Format 2 files have new block and label formats and can hold as much as 1024 gigabytes of data per partition and are currently limited by disk volume size. Large format 1 files, limited by the capacity of a single disk volume, have used partitioning as a means to increase file capacity.

Customers wishing to use format 2 ILFs should start at cutover. Create a new ILF format 2 template file and its altfile. To do so, create an obey file named FRMT2ILF with the following text:

```
-RESET
-SET TYPE E
-SET FORMAT 2
-SET EXT ( 4 PAGES, 32 PAGES )
-SET REC 4048
-SET BLOCK 4096
-SET ALTKEY ( "PR", FILE 0, KEYOFF 0, KEYLEN 55 )
-SET ALTFILE ( 0, $<VOL>.<SUBVOL>.xxYYMMDD )
-SET MAXEXTENTS <NUMBER OF MAXEXTENTS>
-CREATE $<VOL>.<SUBVOL>.xxYYMMDD
```

The format 2 ILF template file in the create command will need to be set to the value specified in the LCONF assign for the ILF for the interface process. The existing ILF template and altfile should be renamed, as the new files created should use the same locations.

Create the format 2 ILF and altfile with the following command

```
FUP/IN FRMT2ILF/
```

When the interface is cutover, it will create and begin using the new format 2 ILF and new format 2 altfile. The altfile can remain format 1 or change to format 2 along with the new format 2 ILF. Previous ILF files can be format 1 and current ILF files can be format 2.

Data Communication Lines

The VisaNet ISO Interface process supports bisynchronous multipoint (3270) and bisynchronous point-to-point (2780/3780), SNA LU-0, SNA LU-2, TCP/IP and X.25 data communications lines between BASE24 and VisaNet.

The VisaNet ISO Interface allows members to use multiple lines and stations. The Interface has a capacity of supporting up to sixteen station pairs.

The stations can be used as send/receive pairs. One station will be used to send the message and the other will be used to receive the message. This can be done through the Station Name File (SNF) or the ICFE. The customer can use the same ICFE station to send and receive the message. This provides increased throughput and greater flexibility to the customer.

The customer can choose to send or not to send an end_of_text (ETX) character with a message by setting a parameter in the LCONF.

This will help in providing support to customers who choose to use X.25 protocol.

The VisaNet ISO Interface supports the SNA LU-2 protocol with VISA. When using the SNA LU-2 protocol with VISA, the VisaNet ISO Interface is required to use a station as send only or receive only. This is different from the current processing of using a station for sending and receiving messages to/from VISA. Also, due to VISA's unique implementation of the protocol the VisaNet ISO Interface is required to do some protocol level processing that is not supported in the BASE24-span LU-2 implementation. This includes inserting special protocol characters in the front of each message sent to VISA, and supplying a special text level acknowledgement message in response to every message received from VISA. This type of processing is not required in the VisaNet ISO Interface for any other current protocol used between BASE24 and VISA. To support the SNA LU-2 enhancement, the BASE24 user must license protocol for SNA LU-2, BASE24 product ID.

SP-PL213.

For more information about configuring the various protocol used by the VisaNet ISO Interface process, see section 2.

Full V.I.P. Support

The VisaNet Interface has full V.I.P. support. Only one copy of the interface is required to process all card types and systems. When a STM or PSTM is received, the VisaNet Interface will determine the card type (VISA, PLUS, Interlink or CHECK CARD II) and system type (BASE I or SMS). The actions taken are determined by settings on the four VISF screens. On the Visa and CHECK CARD II Screens there are two service fields, one for ATM and one for POS. Traffic for either may be routed to BASE I or SMS. The PLUS Screen has one service field, as PLUS is ATM only. There are no service fields on the Interlink screen as Interlink is SMS only.

Transactional Interface Monitoring (T.I.M.)

This Interchange Interface supports the Transactional Interface Monitoring (T.I.M.) Enhancement. This enhancement provides the ability to monitor, in real-time, the actual transaction health between BASE24 and the interchange. T.I.M. provides tracking of more than a dozen transaction conditions/counters at the process level. Depending upon the particular interface, this enhancement supports issuer and acquirer traffic for both BASE24-atm and BASE24-pos transactions. This enhancement requires ACI's NET24-OM (XN-NT100) and Compaq's Measure product.

International Address Verification Service (IAVS) Support

The VisaNet Interface supports extended international address verification (IAVS) data in field 123. The interface will accept data in either the standard format or the extended TLV (tag-length-value) format supported by Visa. Up to 40 bytes of address data may be received in the TLV format.

Processing for address data received in field 123 in an inbound transaction in the standard format has not changed. If the data-id subfield received from Visa indicates that the data in field 123 is in TLV format, the postal code and the first 20 bytes of the address data will be moved into the pstm zip code and address fields. If more than 20 bytes of address data is received in field 123, the interface will also format and add the IAVS data token to the pstm with the postal code and the expanded address data.

Processing for address verification data received in the pstm address and zip code fields in outbound transactions in the U.S. and U.K. has not changed. If the VisaNet Interface receives address verification data in an international transaction (country code not equal to "840" or "826"), it will format field 123 in TLV format. Field 123 will be filled with data from the new IAVS token if it is present, or from the pstm address and zip code fields.

Offline PIN Management

When a customer using an EMV card enters the wrong PIN at a POS device, the chip in the card keeps track of how many tries have been attempted. When the counter reaches a predetermined count, the card is blocked and is not usable in an offline environment.

With this enhancement, customers are able to take their card to an EMV capable ATM device and have the PIN unblocked, or they may choose to change the PIN at the same time that the PIN is unblocked.

Visa now supports two new processing codes to handle PIN Change/Unblock (700000) or PIN Unblock (720000) transactions. BASE24 supports these transactions via tran codes "81" to specify PIN Change/Unblock, and "82" to specify PIN Unblock. Support has been added for two new fields in the external message for these transactions. Field 143 will contain the Issuer Script Results. Internally this data will be carried in the new EMV-ISS-SCRIPT-RSLTS-TKN, token ID = BJ. Field 152 will contain the Secondary PIN Block.

Event Message Documentation

Event messages generated by the VisaNet ISO Interface process are documented in the SW60VISA subvolume in a file named VISALOGM.

ACI Worldwide, Inc.

Section 2

Installation and Configuration

This section lists the steps required to install the VisaNet ISO Interface process. In addition, it provides guidelines for configuring the required control files, such as the NEFS, LCONF, ICFE, KEYF and KEY6. Information on how to access and configure the VisaNet Blocked Bin File (VBBF), the VisaNet Institution Identification File (VIIF), and the VisaNet ISO Services File (VISF) are also provided.

VisaNet ISO Interface Process Files

The following is list of all the files on the SW60VISA subvolume and a brief description of each file.

RP01VIS	EXECUTABLE REPORT FOR SETL01
RP01VISM	MAKE FILE FOR SETL01
RP01VISS	SOURCE FILE FOR REPORT SETL01
RP09VIS	EXECUTABLE REPORT FOR STAT09
RP09VISM	MAKE FILE FOR STAT09
RP09VISS	SOURCE FILE FOR REPORT STAT09
RQRLFM	MAKE FILE FOR REQUESTER RLF
RQRLFO	PSEUDO TARGET FOR RQRLFS
RQRLFS	SOURCE FILE FOR REQUESTER RLF
RQVBBFM	MAKE FILE FOR REQUESTER VBBF
RQVBBFO	PSEUDO TARGET FOR RQVBBFS
RQVBBFS	SOURCE FILE FOR REQUESTER VBBF
RQVCOTM	MAKE FILE FOR REQUESTER VCOT
RQVCOTO	PSEUDO TARGET FOR RQVCOTS
RQVCOTS	SOURCE FILE FOR RQVCOTS
RQVCRCM	MAKE FILE FOR REQUESTER VCRC
RQVCRCO	PSEUDO FILE FOR RQVCRCS
RQVCRCS	SOURCE FILE FOR REQUESTER VCRC
RQVIIFM	MAKE FILE FOR REQUESTER VIIF
RQVIIFO	PSEUDO FILE FOR RQVIIFS
RQVIIFS	SOURCE FILE FOR REQUESTER VIIF
RQVISAM	MAKE FILE FOR REQUESTER ICFE VISA
RQVISAO	PSEUDO FILE FOR RQVISAS
RQVISAS	SOURCE FILE FOR REQUESTER ICFE VISA
RQVISFM	MAKE FILE FOR REQUESTER VISF
RQVISFO	PSEUDO FILE FOR RQVISFS
RQVISFS	SOURCE FILE FOR REQUESTER VISF

RQVNMCM	MAKE FILE FOR REQUESTER VNMC
RQVNMCO	PSEUDO FILE FOR RQVNMCS
RQVNMCS	SOURCE FILE FOR REQUESTER VNMC
RQVSDFM	MAKE FILE FOR REQUESTER VSDF
RQVSDFO	PSEUDO FILE FOR RQVSDFS
RQVSDFS	SOURCE FILE FOR REQUESTER VSDF
SCRNRLF	PATHWAY SCREENS FOR RLF REQUESTER
SCRNVBBF	PATHWAY SCREENS FOR VBBF REQUESTER
SCRNVCOT	PATHWAY SCREENS FOR VCOT REQUESTER
SCRNVCRC	PATHWAY SCREENS FOR VCRC REQUESTER
SCRNVIIF	PATHWAY SCREENS FOR VIIF REQUESTER
SCRNVISA	PATHWAY SCREENS FOR VISA REQUESTER
SCRNVISF	PATHWAY SCREENS FOR VISF REQUESTER
SCRNVNMC	PATHWAY SCREENS FOR VNMC REQUESTER
SCRNVSDF	PATHWAY SCREENS FOR VSDF REQUESTER
SVRLF	EXECUTABLE OBJECT FOR SERVER RLF
SVRLFM	MAKE FILE FOR SERVER RLF
SVRLFS	SOURCE FILE FOR SERVER RLF
SVVBBF	EXECUTABLE OBJECT FOR SERVER VBBF
SVVBBFM	MAKE FILE FOR SERVER VBBF
SVVBBFS	SOURCE FILE FOR SERVER VBBF
SVVIIF	EXECUTABLE OBJECT FOR SERVER VIIF
SVVIIFM	MAKE FILE FOR SERVER VIIF
SVVIIFS	SOURCE FILE FOR SERVER VIIF
SVVISF	EXECUTABLE OBJECT FOR SERVER VISF
SVVISFM	MAKE FILE FOR SERVER VISF
SVVISFS	SOURCE FILE FOR SERVER VISF
SVVSDF	EXECUTABLE OBJECT FOR SERVER VSDF
SVVSDFM	MAKE FILE FOR SERVER VSDF
SVVSDFS	SOURCE FILE FOR SERVER VSDF
SWVISAM	MAKE FILE FOR SW60VISA SUBVOLUME
VISA	EXECUTABLE OBJECT FOR VISANET ISO INTERFACE
VISACOB	DDL COBOL FILE SOURCED IN BY REPORTS, REQUESTERS, AND SERVERS
VISAD	DUMMY INTERLINK AND PLUS PROCEDURES
VISADDLM	MAKE FILE FOR VISA DDL'S
VISADDLS	DDL SOURCE FILE USED TO CREATE VISACOB, VISAFUP, AND VISATAL
VISAE	EXTERNALS FOR VISAS SOURCE
VISAEGIS	SOURCE FILE CONTAINING A TABLE TO MAP MCC VALUES TO THE ASSOCIATED ELECTRONIC COMMERCE GOODS INDICATOR
VISAFM	MAKE CONFIGURATION FILE FOR VISANET ISO INTERFACE

VISAFMTE	EXTERNALS FOR VISAFMTS SOURCE
VISAFMTO	NON EXECUTABLE OBJECT FROM VISAFMTS COMPILE
VISAFMTS	SOURCE FILE CONTAINING FORMATTING PROCS FOR VISANET ISO INTERFACE
VISAFUP	DDL FUP FILE USED TO CREATE VIIF, VBBF, VISF, FRLF AND VSAF
VISAG	GLOBALS SOURCED IN BY VISAFMTS, VISALIBS, VISAMSGS, AND VISAS.
VISALIBE	EXTERNALS FOR VISALIBS SOURCE
VISALIBO	NON EXECUTABLE OBJECT FROM VISALIBS COMPILE
VISALIBS	SOURCE FILE CONTAINING TIME OUT AND UTILITY PROCS FOR VISANET ISO INTERFACE
VISAEMWD	EVENT MESSAGE FILE
VISAM	MAKE FILE FOR VISANET ISO INTERFACE
VISAMNWD	THIS MANUAL
VISAMM	MAKE MACRO FILE FOR VISANET ISO INTERFACE
VISAMSGE	EXTERNALS FOR VISAMSGS SOURCE
VISAMSGO	NON EXECUTABLE OBJECT FROM VISAMSGS COMPILE
VISAMSGS	SOURCE FILE CONTAINING MESSAGE DIRECTING PROCS FOR VISANET ISO INTERFACE
VISAO	NON EXECUTABLE OBJECT FROM VISAS COMPILE
VISAS	SOURCE FILE CONTAINING COMMAND, INITIALIZATION, AND MISCELLANEOUS PROCS FOR VISANET ISO INTERFACE
VISATAL	DDL TAL FILE SOURCED IN BY VISAS AND VISALIBS

* **NOTE:** There may also be a VISAUPDT file on the SW60VISA subvolume which contains fixes and/or enhancements to the VisaNet ISO Interface process.

The following is list of all the files on the SW60VISI subvolume and a brief description of each file.

SWVISIM	MAKE FILE FOR SW60VISI SUBVOLUME
VISIE	EXTERNALS FOR INTERLINK BINDABLE MODULE
VISIFM	MAKE CONFIGURATION FILE FOR VISI
VISIM	MAKE FILE FOR INTERLINK BINDABLE MODULE
VISIMM	MAKE MACRO FILE FOR VISI
VISIO	NON EXECUTABLE OBJECT FROM VISIS COMPILE
VISIS	SOURCE FILE FOR INTERLINK BINDABLE MODULE

The following is list of all the files on the SW60VISP subvolume and a brief description of each file.

VISPE	EXTERNALS FOR PLUS BINDABLE MODULE
VISPFM	MAKE CONFIGURATION FILE FOR VISP
VISPM	MAKE FILE FOR PLUS BINDABLE MODULE
VISPM	MAKE MACRO FILE FOR VISP
VISPO	NON EXECUTABLE OBJECT FROM VISPS COMPILE
VISPS	SOURCE FILE FOR PLUS BINDABLE MODULE

The following is list of all the files on the SW60IVIS subvolume and a brief description of each file.

IVISFM	Make configuration file for the EMV bindable module
IVISMAN	Manual for the EMV bindable module
IVISMM	Make macro file for the EMV bindable module
SWIVISM	Make file for SW60IVIS subvolume
VISAEMVE	Externals file for the EMV bindable module
VISAEMVM	Make file for the EMV bindable module
VISAEMVO	non executable object from the VISAEMVS COMPILE
VISAEMVS	Source file for the EMV bindable module

Installation Steps

During the course of the installation, it may be necessary to refer to the following manuals:

- ACI MAKE User Guide (Preliminary Version)
- BASE24-atm EMV Support Manual
- BASE24-atm Transaction Processing Manual
- BASE24-pos EMV Support Manual
- BASE24-pos Transaction Processing Manual
- BASE24 Base Files Maintenance Manual
- BASE24 Device Control Manual
- BASE24 Logical Network Configuration File Manual
- BASE24 Text Command Reference Manual
- BASE24 Tokens Manual
- BASE24 Transaction Security Manual
- NET24-XPNET Network Control Command Reference Manual
- NET24-XPNET Network Control Operations Guide
- Tandem's Communication Management Interface Operator Reference Manual
- Tandem's Subsystem Control Facility (SCF) Reference Manual
- Tandem's System Management Manual

1. Restore the software tape to the appropriate volume and subvolume by entering the following command at the TACL prompt:

```
RESTORE /OUT $S.#VISA/ $TAPE, *.*.*,LISTALL,TAPEDATE,  
OPEN,MYID,VOL ($your vol)
```

2. Configure a Tandem port and line via a network control facility. If a Tandem communication subsystem controller (CSS 6100) is used, the line should be configured using the EBCDIC character set qualifier.
3. Volume to \$vol.BA60MAKE and edit CUSTMACS:
 - a) Set CLASSIC_ON to true.
 - b) Set SWITCH_ON to true.
 - c) If the VisaNet ISO Interface will be run in a release 6.0 network environment, set SW_PRE_60_LCONF_ON to false. If the VisaNet ISO Interface will be run in a pre-release 6.0 network environment, set SW_PRE_60_LCONF_ON to true.
 - d) Set SWI_RPT_ON to true if intending to use the VisaNet ISO Interface ILF reports.
 - e) Set SDF_ON to true.
 - f) Set SNF_ON to true if required.
 - g) Set STF_ON to true if required.
 - h) Set VISA_ON to true.
 - i) Set AIF_ON to true.
 - j) If the VisaNet ISO Interface will be run in a release 6.0 network environment, set VISA_ENHANCED_MODE_ON to true. If the VisaNet ISO Interface will be run in a pre-release 6.0 network environment, set VISA_ENHANCED_MODE_ON to false.
 - k) Set VISA_EMV_ON to true if required.
 - l) Set VISA_INTERLINK_ON to true if required.
 - m) Set VISA_PLUS_ON to true if required.
 - n) Set SWITCH_PERFMON_ON to true if required.

NOTE: It is recommended that you use B24C/B24M files so all necessary modules are rebuilt. If using B24C/B24M files, part b in steps 4 thru 6 may be skipped.

4. Volume \$vol.SW60AIF and perform the following:

a) Edit the macro Make file AIFMM and ensure that the system, volume and subvolume references are correct.

b) Make the SW60AIF subvolume by entering the following command at the TACL prompt:

```
RUN $vol.subvol.makevXXX/OUT $S.#AIF/SWAIFM -FORCE  
where: XXX is the Make version.
```

5. Volume \$vol.SW60SNF and perform the following:

a) Edit the macro Make file SNFMM and ensure that the system, volume and subvolume references are correct.

b) Make the SW60SNF subvolume by entering the following command at the TACL prompt:

```
RUN $vol.subvol.makevXXX/OUT $S.#SNF/SWSNFM -FORCE  
where: XXX is the Make version.
```

6. Volume to \$vol.SW60SDF and perform the following:

a) Edit the macro Make file SDFMM and ensure that the system, volume and subvolume references are correct.

b) Make the SW60SDF subvolume by entering the following command at the TACL prompt:

```
RUN $vol.subvol.makevXXX/OUT $S.#SDF/SDFDDLMM -FORCE  
where: XXX is the Make version.
```

7. Volume to \$vol.SW60STF and perform the following:

a) Edit the macro Make file STFMM and ensure that the system, volume and subvolume references are correct.

b) Make the SW60STF subvolume by entering the following command at the TACL prompt:

```
RUN $vol.subvol.makevXXX/OUT $S.#STF/SWSTFM -FORCE  
where: XXX is the Make version.
```

8. Volume to \$vol.SW60VISA and perform the following:
 - a) Edit the macro Make file VISAMM and ensure that the system, volume and subvolume references are correct.
 - b) Make the SW60VISA subvolume by entering the following command at the TACL prompt:
RUN \$vol.subvol.makevXXX/OUT \$S.#VISA/SWVISAM -FORCE
where: XXX is the Make version.
9. If part b in steps 4 thru 6 above was skipped in order to run the B24C/B24M files, perform the following:
 - a) Volume to \$vol.SW60SRC.
 - b) Edit configuration Make files SWICSEFM and SWIFM and ensure that the system, volume and subvolume references are correct.
 - c) Volume to \$vol.BA60SRC.
 - d) Edit B24C and ensure that the -force option is NOT included in the Make command unless this is a first time install.
 - e) Make all necessary modules on your BASE24 system by entering the following command at the TACL prompt:
/IN B24C/
10. Make will move the object files to the locations specified in the configuration Make file if the move_obj_subvolume_on define is set to TRUE. Whoever runs the Make must have security to write to the subvolume where Make attempts to place the objects.
11. Add the ICFE, VPATH, VBBF, VIIF, VRLF, VISF, SNF, STF, VSDF and AIF servers to the PATHCONF.

The following are server definition examples. Different values may be used for various fields. Use previous server definitions in the PATHCONF to assist in determining values.

```
RESET SERVER
SET SERVER CPUS          x:y
SET SERVER PROGRAM       \sys.$vol.xxxxOBJ.SVICFE
SET SERVER DELETEDELAY   10 MINS
SET SERVER PRI           145
SET SERVER NUMSTATIC     0
```

```
SET SERVER HOMETERM      \sys.$PLOG
SET SERVER TIMEOUT        60 SECS
ADD SERVER SERVER-ICFE
```

This Vpath server definition example is for XPNET 2.1 or above. For additional configuration information regarding SERVER-VPATH for XPNET 2.1 or above, refer to the XPNET CTS/E PWS XN-PL320-01 Implementation Guide.

```
RESET SERVER
SET SERVER AUTORESTART    0
SET SERVER CPUS           x:y (must be valid CPUs, e.g., 0:1)
SET SERVER CREATEDELAY    30 SECS
SET SERVER DEBUG          OFF
SET SERVER DELETEDELAY    1 MINS
SET SERVER HOMETERM      \sys.$PLOG
SET SERVER LINKDEPTH      1
SET SERVER MAXLINKS       1
SET SERVER MAXSERVERS     1
SET SERVER NUMSTATIC      1
SET SERVER PRI            145
SET SERVER PARAM EXT      "yes"
SET SERVER PARAM GENERIC  "no"
SET SERVER PARAM MODE     "path"
SET SERVER PROCESS        $S1AP.#VISAxxx (ASSOCIATIVE ON)
SET SERVER PROGRAM        \sys.$SYSACI.XPNET.PATH
SET SERVER TIMEOUT        60 SECS
SET SERVER TMF            OFF
SET SERVER VOLUME         \sys.$volume.LNETEXEC
ADD SERVER SERVER-VPATHxxx
```

* Where \$S1AP is any valid unique PPD name and xxx is the VISA process number. The Server Process and the port attribute in the Visa server path line declaration in the Network Environment File (NEF) must be the same as this server process name. xxx is optional. If used, the process number field on the pathway screen must contain the same value. When server-vpathxxx is started, a path process with this PPD name will be created which will pass messages from pathway to the VISA process.

```
RESET SERVER
SET SERVER AUTORESTART 0
SET SERVER CPUS x:y (must be valid CPUs, e.g., 0:1)
SET SERVER CREATEDELAY 1 MINS
SET SERVER DEBUG OFF
SET SERVER DELETEDELAY 20 MINS
SET SERVER HOMETERM \sys.$PLOG
SET SERVER LINKDEPTH 1
SET SERVER MAXSERVERS 1
SET SERVER NUMSTATIC 0
SET SERVER PRI 145
SET SERVER PROGRAM \sys.$volume.SW60OBJ.SVVBBF
SET SERVER TIMEOUT 60 SECS
SET SERVER TMF OFF
SET SERVER VOLUME \sys.$volume.LNETEXEC
ADD SERVER SERVER-VBBF
```

RESET SERVER	
SET SERVER AUTORESTART	0
SET SERVER CPUS	x:y
SET SERVER CREATEDELAY	1 MINS
SET SERVER DEBUG	OFF
SET SERVER DELETEDELAY	20 MINS
SET SERVER HOMETERM	\sys.\$PLOG
SET SERVER LINKDEPTH	1
SET SERVER MAXSERVERS	1
SET SERVER NUMSTATIC	0
SET SERVER PRI	145
SET SERVER PROGRAM	\sys.\$volume.SW60OBJ.SVVIIF
SET SERVER TIMEOUT	60 SECS
SET SERVER TMF	OFF
SET SERVER VOLUME	\sys.\$volume.LNETEXEC
ADD SERVER SERVER-VIIF	

RESET SERVER	
SET SERVER AUTORESTART	0
SET SERVER CPUS	x:y
SET SERVER CREATEDELAY	1 MINS
SET SERVER DEBUG	OFF
SET SERVER DELETEDELAY	20 MINS
SET SERVER HOMETERM	\sys.\$PLOG
SET SERVER LINKDEPTH	1
SET SERVER MAXSERVERS	1
SET SERVER NUMSTATIC	0
SET SERVER PRI	145
SET SERVER PROGRAM	\sys.\$volume.SW60OBJ.SVVRLF
SET SERVER TIMEOUT	60 SECS
SET SERVER TMF	OFF
SET SERVER VOLUME	\sys.\$volume.LNETEXEC
ADD SERVER SERVER-VRLF	

RESET SERVER	
SET SERVER AUTORESTART	0
SET SERVER CPUS	x:y
SET SERVER CREATEDELAY	1 MINS
SET SERVER DEBUG	OFF
SET SERVER DELETEDELAY	20 MINS
SET SERVER HOMETERM	\sys.\$PLOG
SET SERVER LINKDEPTH	1
SET SERVER MAXSERVERS	1
SET SERVER NUMSTATIC	0
SET SERVER PRI	145
SET SERVER PROGRAM	\sys.\$volume.SW60OBJ.SVVISF
SET SERVER TIMEOUT	60 SECS
SET SERVER TMF	OFF
SET SERVER VOLUME	\sys.\$volume.LNETEXEC
ADD SERVER SERVER-VISF	

RESET SERVER
SET SERVER AUTORESTART 0
SET SERVER CPUS x:y
SET SERVER CREATEDELAY 1 MINS
SET SERVER DEBUG OFF
SET SERVER DELETEDELAY 20 MINS
SET SERVER HOMETERM \sys.\$PLOG
SET SERVER LINKDEPTH 1
SET SERVER MAXSERVERS 1
SET SERVER NUMSTATIC 0
SET SERVER PRI 145
SET SERVER PROGRAM \sys.\$volume.SW60OBJ.SVSNF
SET SERVER TIMEOUT 60 SECS
SET SERVER TMF OFF
SET SERVER VOLUME \sys.\$volume.LNETEXEC
ADD SERVER SERVER-SNF

RESET SERVER	
SET SERVER AUTORESTART	0
SET SERVER CPUS	x:y
SET SERVER CREATEDELAY	1 MINS
SET SERVER DEBUG	OFF
SET SERVER DELETEDELAY	20 MINS
SET SERVER HOMETERM	\sys.\$PLOG
SET SERVER LINKDEPTH	1
SET SERVER MAXSERVERS	1
SET SERVER NUMSTATIC	0
SET SERVER PRI	145
SET SERVER PROGRAM	\sys.\$volume.SW60OBJ.SVSTF
SET SERVER TIMEOUT	60 SECS
SET SERVER TMF	OFF
SET SERVER VOLUME	\sys.\$volume.LNETEXEC
ADD SERVER SERVER-STF	

```
RESET SERVER
SET SERVER AUTORESTART    0
SET SERVER CPUS           x:y
SET SERVER CREATEDELAY    1 MINS
SET SERVER DEBUG          OFF
SET SERVER DELETEDELAY    20 MINS
SET SERVER HOMETERM       \sys.$PLOG
SET SERVER LINKDEPTH      1
SET SERVER MAXSERVERS     1
SET SERVER NUMSTATIC      0
SET SERVER PRI            145
SET SERVER PROGRAM        \sys.$volume.SW60OBJ.SVVSDF
SET SERVER TIMEOUT        60 SECS
SET SERVER TMF            OFF
SET SERVER VOLUME         \sys.$volume.LNETEXEC
ADD SERVER SERVER-VISA-SDF
```

```
RESET SERVER
SET SERVER AUTORESTART    0
SET SERVER CPUS           x:y
SET SERVER CREATEDELAY    1 MINS
SET SERVER DEBUG          OFF
SET SERVER DELETEDELAY    20 MINS
SET SERVER HOMETERM       \sys.$PLOG
SET SERVER LINKDEPTH      1
SET SERVER MAXSERVERS     1
SET SERVER NUMSTATIC      0
SET SERVER PRI            145
SET SERVER PROGRAM        \sys.$volume.SW60OBJ.SVAIF
SET SERVER TIMEOUT        60 SECS
SET SERVER TMF            OFF
SET SERVER VOLUME         \sys.$volume.LNETEXEC
```

ADD SERVER SERVER-AIF

Upon completion of the changes, a PATHCOLD should be performed, generating the new PATHCTL file. A REFRESH-COLD<tcp> will also be required.

The modifications noted above may be made online via PATHCOM as well.

12. Move to the location of the template files used by the network. Create the template files by entering the following commands:

```
FUP /IN $vol.SW60AIF.AIFFUP, OUT $$.#AIFFUP/
FUP /IN $vol.SW60VISA.VISAFUP, OUT $$.#VISAFUP /
FUP /IN $vol.SW60SNF.SNFFUP, OUT $$.#SNFFUP/
FUP /IN $vol.SW60SDF.SDDDLFUP, OUT $$.#SDFFUP /
```

13. Add an ICFE record for the VisaNet ISO Interface process using the information provided later in this document and in the "BASE24 Base Files Maintenance Manual".
14. If Triple to Single DES encryption is required, add a KEY6 record for the VisaNet ISO Interface process. Otherwise, add a KEYF record for the VisaNet ISO Interface process. For information on the KEYF and KEY6, refer to information provided later in this document, in the "Base24 Base Files Maintenance Manual" and in the "BASE24 Transaction Security Manual".

15. Add the necessary assigns and params to the Logical Network Configuration File for the VisaNet ISO Interface process using the information provided later in this document and in the "BASE24 Logical Network Configuration File Manual".
16. Ensure that the following are defined in the Network Environment File (NEF). If the following are not defined, add the declarations via a network control facility.
 - a) A VisaNet ISO Interface process declaration
 - b) A VisaNet station declaration (VisaNet can support sixteen pairs of stations.)
 - c) A VisaNet device declaration When using a Tandem communication subsystem controller (CSS 6100) the TRANSMIT TRANSPARENT ENABLED declaration must be set.
 - d) A VisaNet line declaration (VisaNet can support multiple lines.)
 - e) A Visa Server Path device declaration (XPNET 2.1 or greater) See example below:

RESET DEVICE

SET DEVICE TYPE 20

SET DEVICE RECVLEN 4095

SET DEVICE ACLLENGTH 2

SET DEVICE TRADDRESS OFF

SET DEVICE DEFRSP OFF

SET DEVICE SELECTION NORMAL

SET DEVICE INPUTFORMAT TXT

SET DEVICE OUTPUTFORMAT TXT

SET DEVICE POLLFORMAT EOT P1 P2

SET DEVICE SELECTFORMAT EOT P1 P2

SET DEVICE XMITLEN 4095

SET DEVICE UAPOSITION 2

SET DEVICE TTRANSPARENT OFF

SET DEVICE TRLEN 0

SET DEVICE NRSSCP OFF

ADD DEVICE \sys.<nodename>.D1B^VFRLFxxx

- f) A Visa Server Path line declaration (XPNET 2.1 or greater) which has
 - i) as its port, the Visa Path server process specified when the SERVER-VPATHxxx was added
 - ii) CTS as its protocol

See the example below:

RESET LINE

SET LINE PORT	\$S1AP.#VISAxxx.P1
SET LINE PROTOCOL	CTS
SET LINE TIMEOUT	100
SET LINE ERANALYSIS	30
SET LINE INPUT	ON
SET LINE RETRY	1
SET LINE OUTPUT	ON
SET LINE CINIT	IMMEDIATE
SET LINE CMETHOD	ACCEPT
SET LINE EXPDATA	ROUTE
SET LINE FMM	STATUS
SET LINE SENDCONFIRM	REQUEST
SET LINE ATIMER	0
SET LINE BTIMER	0
SET LINE TIMER	OFF
SET LINE TIMERINT	100
SET LINE DUPLEX	HALFREM

ADD LINE \sys.<nodename>.L1B^VFRLFxxx

* must have a PORT of \$PPD.#VISAxxx.P1, where \$PPD.#VISAxxx matches the PPD of the SERVER-VPATH process and P1 is an additional qualifier used by XPNET for internal configuration purposes.

- g) A Visa Server Path station declaration (XPNET 2.1 or greater) which has
 - i) as its line the Visa server path line referenced above
 - ii) as its destination the VISA interface process
 - iii) as its devicename the Visa server path device referenced above

See the example below:

RESET STATION

SET STATION LINENAME L1B^VFRLFxxx

SET STATION DESTINATION P1B^VISAxxx

SET STATION DEVICENAME D1B^VFRLFxxx

SET STATION ERRORACT MARKDOWN

SET STATION AUTOPRI 128

SET STATION QAT 0

SET STATION QMT 0

SET STATION QMI 0

SET STATION RETRY 0

SET STATION IAUDIT OFF

SET STATION OAUDIT OFF

SET STATION IBAUDIT OFF

SET STATION NOMOVERRIDE OFF

SET STATION REINSTATE 0

SET STATION WARMPRI 128

SET STATION OINTERVAL 0

ADD STATION \sys.<nodename>.S1B^VFRLFxxx

For details on the previous declarations, refer to the "NET24-XPNET Network Control Command Reference Manual".

The BASE24 user needs to bind the protocol with the Nucleus for the SNA LU-2 implementation using the NUCLB file located at \$SYSTEM.SPANNET. Steps 'a' through 'e' are only necessary to implement the SNA LU-2 enhancement. These steps should be skipped if the user does not want to implement the SNA LU-2 enhancement. Also the protocol field on Screen 12 of the ICFE should be modified to a value of "2" for SNA LU-2 protocol.

- a. Move RDTTEXT, RDTCOMP, VISHLSX and CMICNFG to the appropriate exec subvolume. See appendix A for the above mentioned files.
- b. Declare new SNA type Device, Stations and Lines via a network control system. Examples of these declarations can be found in appendix A. The Device defined is VISA^LU^T2. S1BVISALU1 and S1BVISALU2 are the stations defined for this enhancement. The lines defined are L1BPLU1 and L1BPLU2.
- c. RDTTEXT contains all the bind commands needed to complete the link. Obey the RDTCOMP to compile the bind commands into the RDTDATA object file.

- d. VISHLSX must be obeyed to create the HLS process which communicates with PLU protocol bound into XPNET and Tandem's SNAX product.
- e. The file CMICNFG is used to define and start the lines and LU's associated with the lines. To execute from a TACL prompt enter CMI/IN CMICNFG/.
- f. The PU-SSCP-state and the LU-SSCP-state should be active. It can be found through the CMI by entering the following commands at a TACL prompt.


```

      cmi
      assume line $snap3
      status lu under
      status pu under
      
```
- g. The PLU state of the stations should be idle. Perform an inquiry on the station name using a network control facility.
- h. Once the PU/LU are active and the station PLU state is idle and the process is started logons can be sent.

The steps required to install the X.25 protocol for the VisaNet ISO Interface are described below in the order in which they should be performed.

- a. Move CMICNFG to the appropriate exec subvolume. See appendix C for the above mentioned file.
- b. Declare new X.25 type Device, Stations and Lines via a network control facility. Examples of these definitions can be found in Appendix C. The Device defined is VISA1^SWITCH^X25. S1BVISA1 is the station defined for this enhancement. The line defined is L1B^VISA1.

If 3270 multipoint protocol is to be used, only one station and one line may be configured. Poll and select characters for the station must be "4040 4040" and "6161 4040", respectively. These can be defined for the station using the PADDRESS attribute. An example of this declaration for an environment using 3270-multipoint is in Appendix D.

LCONF Assigns and Params

The VisaNet ISO Interface process reads the LCONF whenever it is initialized or reinitialized for the assigns and params required during processing. The assigns and params required by the VisaNet ISO Interface process are described below. Refer to the "BASE24 Logical Network Configuration File Manual" for instructions on adding assigns and params to the LCONF.

Assigns

The following assigns are used in processing by the VisaNet ISO Interface process. Those assigns marked with asterisks (**) are required if reports are to be generated.

AIF

The fully-qualified file name of the Acquirer Information File. This assign is optional.

APCFEMT

The physical file name of the Acquirer Processing Code File Extended Memory Table. Required.

FRLF

The physical file name of the VisaNet File Request Log File. Required.

ICF

The physical file name of the Interchange Configuration File. Required if the BASE24-REL param does not contain the value of 60.

ICFE

The physical file name of the Enhanced Interchange Configuration File. Required if the BASE24-REL param contains the value of 60.

ILF

The physical file name of the Interchange Log File. Required.

IPCFEMT

The physical file name of the Issuer Processing Code File Extended Memory Table. Required.

KEYF

The physical file name of the Key File. Required if the BASE24-REL param is present and contains the value of 50 or greater and LCONF parameter DES-TRIPLE-SINGLE does not exist or does exist with the value 'N'.

KEY5

The physical file name of the Key File. Required if the BASE24-REL param is not present or does not contain the value of 50 or greater.

KEY6

The physical file name of the Key6 File. Required if the BASE24-REL param is present and contains the value of 50 or greater and LCONF parameter DES-TRIPLE-SINGLE has the value 'Y'.

LMCF

The physical file name of the Log Message Configuration File. Required.

RPT **

The physical file name of the Report Perusal File.

RPT-ERROR-FILE **

The name used when creating the file to receive report error messages.

RSF

The physical file name of the Resubmittal Store-and-Forward File. This assign is required if the VisaNet Interface will be configured to support Original Store-and-Forward and Resubmittal transactions.

SAF

The physical file name of the Store-and-Forward File. Required.

SDF

The physical file name of the Switch Dispute File. Required.

SECURE-DEV1

The Tandem SYSGEN device name of the primary security module. However, if the interface is running in a Release 6.0 network environment using Transaction Security Services, this parameter must contain the PPD name of the primary IAS process and may be process specific. Required.

SECURE-DEV2

The Tandem SYSGEN device name of the secondary security module. However, if the interface is running in a Release 6.0 network environment using Transaction Security Services, this parameter must contain the PPD name of the secondary IAS process and may be process specific. Optional.

SNF

The fully-qualified file name of the Station Name File. This assign is required if the BASE24 customer wants to use the station pairs from the SNF for send/receive processing. (STATION-TYP param = 1)

STF

The fully-qualified file name of the Switch Terminal File. This assign is required for US acquirer processing when the Alternate Merchant ID token is not available to hold the MVV value. If the STF assign already exists, then the interface will use that assign.

SW-RPT-OBHEY-FILE **

The name of the obey file used to start the interchange reports.

SW-RPT01-PROG-NAME **

The physical file name of the SETL01 report program.

SW-RPT09-PROG-NAME **

The physical file name of the STAT09 report program.

TKN

The physical file name of the Token File. This assign is optional and is only used if the BASE24-REL param contains a value of 50 or greater.

VISA-ISF

The physical file name of the VisaNet ISO Services File (VISF).

The following are examples of LCONF entries for the assigns described above.

ASSIGN: AIF

TO: \sys.\$vol.xxxxDATA.AIF

Template:

ASSIGN: APCFEMT
TO: \sys.\$vol.xxxxDATA.APCFEMT
Template:

ASSIGN: ICF
TO: \sys.\$vol.xxxxDATA.ICF
Template:

ASSIGN: ICFE
TO: \sys.\$vol.xxxxDATA.ICFE
Template:

PROCESS NAME: P1A^VISA
ASSIGN: ILF
TO: \sys.\$vol.xxxxDATA.S1YYMMDD
Template: \sys.\$vol.xxxxTPLT.S1ILF

ASSIGN: IPCFEMT
TO: \sys.\$vol.xxxxDATA.IPCFEMT
Template:

ASSIGN: KEYF
TO: \sys.\$vol.xxxxDATA.KEYF
Template:

ASSIGN: KEY6
TO: \sys.\$vol.xxxxDATA.KEY6
Template:

ASSIGN: RPT
TO: \sys.\$vol.xxxxDATA.RPYMMDD
Template: \sys.\$vol.xxxxTPLT.RPYMMDD

ASSIGN: RPT-ERROR-FILE
TO: \$S.#RPT
Template:

PROCESS NAME: P1A^VISA
ASSIGN: RSAF
TO: \sys.\$vol.xxxxDATA.VRSAF
Template: \sys.\$vol.xxxxTPLT.VRSAF

PROCESS NAME: P1A^VISA
ASSIGN: SAF
TO: \sys.\$vol.xxxxDATA.VSAF
Template: \sys.\$vol.xxxxTPLT.VSAF

PROCESS NAME: P1A^VISA
ASSIGN: SW-RPT01-PROG-NAME
TO: \sys.\$vol.xxxxOBJ.RP01VIS
Template:

PROCESS NAME: P1A^VISA
ASSIGN: SW-RPT09-PROG-NAME
TO: \sys.\$vol.xxxxOBJ.RP09VIS
Template:

PROCESS NAME: P1A^VISA
ASSIGN: SW-RPT-OBEY-FILE
TO: \sys.\$vol.xxxxDATA.SRYMMDD
Template:

PROCESS NAME: P1A^VISA
ASSIGN: SECURE-DEV1
TO: \sys.\$ATALLA
Template:

PROCESS NAME: P1A^VISA
ASSIGN: SECURE-DEV2
TO: \sys.\$ATALLA
Template:

NOTE: If either SECURE-DEV1 or SECURE-DEV2 are set to \$ATALLA, the type of Atalla box (A1, A2, or A3) must also be declared in the USER FIELD portion of the LNCF screen.

PROCESS NAME: P1A^VISA
ASSIGN: VISA-ISF
TO: \sys.\$vol.xxxxDATA.VISF
Template:

Params

The following params are used in processing by the VisaNet ISO Interface process. Those marked with asterisks (**) are required if reports are to be generated.

ACCT-NUM-TYP

A value indicating whether account numbers are stored in binary or decimal form. The binary form allows the account number to be up to 28 digits in length. The decimal form allows the account number to be up to 19 digits in length. Valid values are:

D = Decimal format (default)

B = Binary format (not supported)

ADDL-DATA-SEND-USG11

A value indicating whether the additional data field should be sent in BASE requests for commercial card type. Usage 11 cannot be used if usage 7 is configured. Valid values are:

Y = Send additional data field, usage 11 commercial card type request

N = Do not send additional data field, usage 11 (default)

ATM-BALANCE-OPTION

A value indicating the field that international issuers are supposed to use for balance amounts in the response message.

Y = The international issuers will use field 54 to send the balance amount in the response. (Default)

N = The international issuers can use field 6 to send the balance amount in the response.

Domestic issuers are allowed to use field 54 and the default for this allows domestic users to not use this param.

ATM-DISCR-DATA-STM-SUPPRS

A value indicating whether discretionary data from track 1 and/or track 2 will be suppressed in the 0210 response messages to BASE24. Valid values are:

Y = Suppress discretionary data in the STM

N = Do not suppress discretionary data (default)

ATM-LN-CUTOVER

The time (HH:MM) all BASE24-atm processes in the logical network are cut over. All institutions must be cut over by this time. Valid values, in military time, are from 00:00 to 23:59 (no default value).

ATM-PRIORITY-RTE-SHRG-GRPS

A series of up to 30 VISA defined sharing group codes to identify the priority order to be used for ATM gateway networks. The Priority Routing Service allows Acquirers to send V.I.P. all ATM transactions regardless of network or program destination. V.I.P. determines which network and card program rules apply based on the account number and the Acquirer-established preferences. Plus and Visa values are required in position 1 and 2 of this field. The other networks may be in any order determined by the Acquirer and only networks supported by the Acquirer need to be included. The values for these sharing groups should be obtained from the VISA SMS ATM Technical Specification description of field 63.12, sharing group codes, as they are subject to change by VISA. Below find a list as they existed at the time this feature was added.

IMPORTANT: ATM Priority Routing is not required for configurations including only Visa, Plus, and Interlink. Transactions destined for Visa, Plus, and Interlink are already sent with the appropriate Network Identifier via VISF configuration. Use of this feature is only necessary if an acquirer is using VISA as a gateway to other networks for their ATM traffic. If this LCONF parameter is included, **ALL** ATM traffic will invoke VISA's ATM Priority Routing Service.

Valid values are:

<u>Code</u>	<u>Network</u>
V	VisaNet
B	Plus
O	Cirrus
J	MasterCard
T	Electronic Benefits Transfer (EBT)
A	American Express

D	Discover
1	AFFN

BASE24-REL

A value indicating the release level of BASE24. Valid values are:

40 = BASE24-atm Release 4.0 and/or BASE24-pos Release 3.4
50 = BASE24 Release 5.0/5.1.2/5.3
60 = BASE24 Release 6.0 or above

CHK-RTG-GRP

Indicates the check routing group used for routing check authorization transactions. May contain up to 11 characters (default zeroes).

COUNTER-UPDATE-INTERVAL

A value indicating the number of transactions processed before updating the ILF trace record. Valid values are:

0 - 32767 (default 500)

CPS-ATM

A value indicating whether the user wants to use Custom Payment Service (CPS) for ATM. If this field is set to N, the interface will not use field 62 for ATM transactions.

N = The VisaNet ISO Interface will not be using the Custom Payment Service.

Y = The VisaNet ISO Interface will be using the Custom Payment Service.
(Default)

CPS-POS

A value indicating whether the user wants to use Custom Payment Service (CPS) for POS. If this field is set to N, the interface will not use field 62 for POS transactions.

N = The VisaNet ISO Interface will not be using the Custom Payment Service.

Y = The VisaNet ISO Interface will be using the Custom Payment Service.
(Default)

CURRENCY-CONVERSION-ACQ

A value indicating whether the VisaNet ISO Interface will perform currency conversion as an acquirer.

Y = The VisaNet ISO Interface will convert the amount to US Dollars

N = The VisaNet ISO Interface will not convert the amount to US Dollars (Default)

CURRENCY-CONVERSION-ISS

A value indicating whether the VisaNet ISO Interface will perform currency conversion as an issuer.

Y = The VisaNet ISO Interface will convert the amount to local

BASE24 Currency

N = The VisaNet ISO Interface will not convert the amount to local BASE24 Currency (Default) This param must be set to "N" if you are an International Interlink Issuer.

CVV-ON-BASE24

A value indicating if the VisaNet ISO Interface should decline a request from VisaNet if VisaNet has already determined the CVV to be bad or to pass the request to the authorization process. Valid values are:

Y = Pass the request to the authorization

N = Decline the request (default)

DATE-DISPLAY-TYPE

A value indicating the format of the month and day portion of the dates on reports. This param does not affect dates that include the year. Valid values are:

1 = DDMM

2 = MMDD (default)

DES-TRIPLE-SINGLE

A value indicating if Triple to Single DES encryption is required. Valid values are:

Y = Triple to Single DES encryption is required (KEY6 assign must exist)

N = Triple to Single DES encryption is not required (KEYF assign must exist)

NOTE: If Triple to Single DES encryption is being supported in the interface via Transaction Security Services in Release 6.0, DES-TRIPLE-SINGLE must not exist or may exist with the value 'N'.

ELIMINATE-ACQ-TRK-DATA

A value indicating whether track and PIN data will be eliminated from SMS and Interlink nonoriginals from an acquirer. Valid values are:

Y = Eliminate the data in acquirer nonoriginal messages to Visa

N = Do not eliminate the data in acquirer nonoriginal messages to Visa (default)

EMV-CCD-COMPLIANT

Indicates if the acquirer supports bit 134 in the expanded format request message, and expects bit 140 instead of 139 in the response.

Y = Use expanded bit 134 format. Bit 135 will not be sent. Expect bit 140 instead of bit 139 in response messages.

N = Continue to use the old format of bit 134. Bit 135 will be sent. Expect bit 139 instead of bit 140 in response messages. (default)

FIRST-VISA-TRACE-NUM

The starting value for the trace number. This param is necessary when multiple copies of the VisaNet Interface are processing transactions. When used, the value of this param must be unique for each VisaNet Interface.

FRLF-NOTIFY-INTERVAL

The number of writes made to the VisaNet File Request Log File (FRLF) between calculating the percentage of file full. Valid values are 10 through 32766 (default 50).

FRLF-NOTIFY-PERCENTAGE

The percentage of available file space at which the VisaNet ISO Interface process logs a message indicating the FRLF is becoming full. The VisaNet ISO Interface process continues to send event messages at the interval indicated in the FRLF-NOTIFY-INTERVAL param until more file space is made available. Valid values are 10 through 99 (default 80).

FRWD-UNMATCHED-RVSL

A value indicating whether or not the interface is to format internal reversal messages from external reversal messages and forward these to BASE24-pos Router Authorization, when the original transactions cannot be found on the ILF. Valid values are:

Y = Format an internal reversal message from the unmatched external reversal message and forward the message to BASE24-pos Router Authorization.

N = Drop unmatched external reversal messages. (default)

FRWD-DCLN-ADVC

This parameter indicates if advice messages received from Visa that have a declined value in the response code field (DE 39) should be processed and sent to the authorization process where it can be logged.

N = Advices with a declined response code value will not be forwarded to the authorization process (default).

Y = Advices with a declined response code value will be forwarded to the authorization process.

FUND-TRAN-TO-CASH-ADV

A value indicating whether the customer wishes to process funding transactions as normal purchase transactions or cash advance transactions. Valid values are:

Y - Process funding transactions as cash advance transactions

N - Process funding transactions as purchase transactions (default)

ICHG-COMPLIANCE-ACQ-DATA-LOC

A value indicating the offset into the PSTM User Data which the VisaNet ISO Interface will use to store the Interchange Compliance data for the acquirer traffic (i.e., outbound transactions to VisaNet). Valid values are 0 - 184. Default value is 0. Required for Release 4.0.

ICHG-COMPLIANCE-ISS-DATA-LOC

A value indicating the offset into the PSTM User Data which the VisaNet ISO Interface will use to store the Interchange Compliance data for the issuer traffic (i.e., inbound transactions from VisaNet). Valid values are 0 - 184. Default value is 0. Required for Release 4.0.

IDNTFY-MCC-6012-AS-QUASI-CASH

This param will let the interface know whether a transaction with an MCC value of 6012 should be processed as a quasi-cash transaction or not. Valid values include the following:

Y = Process transaction with MCC value 6012 as a quasi-cash transaction

N = Do not process transaction with MCC value 6012 as a quasi-cash transaction (default)

ILF-NOTIFY-INTERVAL

The number of writes made to the Interchange Log File (ILF) between calculating the percentage of file full. Valid values are 10 through 32766 (default 50).

ILF-NOTIFY-PERCENTAGE

The percentage of available file space at which the VisaNet ISO Interface process logs a message indicating the ILF is becoming full. The VisaNet ISO Interface process continues to send event messages at the interval indicated in the VISA-ILF-NOTIFY-INTERVAL param until more file space is made available. Valid values are 10 through 99 (default 80).

ILF-PURGE-ATTEMPT

The number of days prior to the ILF retention period to attempt to find and purge ILFs.

1 - 99 (Default = 5)

INCR-VISA-TRACE-NUM-BY

The value to increment the trace number by. This param is necessary when multiple copies of the VisaNet Interface are processing transactions. When used, the value of this param should equal the number of VisaNet Interfaces that are being used.

INSTL-TXN-DATA-LOC

This parameter indicates the location of the installment transaction data for installment transactions acquired by BASE24-pos or a Host (transactions sent outbound from the interface to the network). Installment transaction data may reside in FID a, (optional data), of the terminal data or in the POS Data1 token. Valid values are:

- 0 = The installment transaction data is located in FID a, (optional data), of the terminal data. This parameter is required if installment transactions are to be supported in the acquirer processing of the VisaNet Interface and the installment transaction data is located in FID a of the terminal data. (installment transactions acquired by terminal via SPDH)
- 1 = The installment transaction data is located in the POS Data1 token. This parameter is required if installment transactions are to be supported in the acquirer processing of the VisaNet Interface and the installment transaction data is located in the POS Data1 token. (Host acquired installment transactions)

NOTE: This parameter is required if parameter SPPT-ACQ-INSTL-TXN contains the value "Y". If parameter SPPT-ACQ-INSTL-TXN contains the value "Y" and parameter INSTL-TXN-DATA-LOC does not exist or exists with an invalid value, the interface will not support installment transactions in its acquirer processing.

INSTL-TXN-DATA-OFST

This parameter indicates the offset in bytes of the BASE24-pos installment transaction data from the base of structure FID a in the terminal data. Valid values are 0-243. The default is 0.

NOTE: This parameter is required if parameter INSTL-TXN-DATA-LOC contains the value of 0. If parameter INSTL-TXN-DATA-LOC contains the value 0 and parameter INSTL-TXN-DATA-OFST does not exist or exists with an invalid value, the interface will not support installment transactions acquired by BASE24-pos.

MAX-CHK-AUTH-TRAN-AMT

Indicates the maximum amount allowed for any check authorization transaction. It should be a whole unit/dollar amount. If the amount is zero the value will not be used. Valid values up to 16 digits (default 0).

MVV-IN-ALT-MERCH-TKN

This param will let the interface know whether the MVV is located in the Alternate Merchant ID Token or in the STF.

Valid values include the following:

Y = Merchant Verification Value (MVV) in Alternate Merchant ID Token.

N = Merchant Verification Value (MVV) in STF (default).

This parameter must be set to 'N' if the Alternate Merchant Token is being used for other purposes. A setting of "Y" will cause the interface to bypass current processing in the interface that uses the token. If using the token for the MVV, a valid MVV must be entered on screen 3 or 4 of the PRDF for services reserved for Visa cards.

NCD-DFLT-HOPR-CONTENTS

Parameter used by the VisaNet ISO Interface process to add default hopper contents to Non Currency Dispense transactions. The value of this param should match a value in the NCD-CONTENTS table in COBNAMES. If the NCD-DFLT-HOPR-CONTENTS param is not present, it will default to "10".

NETWORK-ID

A value indicating the network to be used for transmission of the message.

0002 = VisaNet (Default)

0003 = Interlink

0004 = Plus

POS-DISCR-DATA-PSTM-SUPPRS

A value indicating whether discretionary data from track 1 and/or track 2 will be suppressed in the 0210 response messages to BASE24. Valid values are:

Y = Suppress discretionary data in the PSTM

N = Do not suppress discretionary data (default)

POS-LN-CUTOVER

The time (HH:MM) all BASE24-pos processes in the logical network are cut over. All institutions must be cut over by this time. Valid values, in military time, are from 00:00 to 23:59 (no default value).

PROCESS-FAILED-CAVV

A value indicating whether the customer wishes to process external request messages which have the CAVV result code field (Field 44.13) set to a value indicating that the transaction did not fully pass CAVV validation. Valid values are:

- Y - Format and process internal request and send it to the authorization process
- N - Format an external denial from the request. Do not send the transaction to the authorization process (default)

Note: If CAVV validation was attempted, but did not complete, even if this was due to one side (issuer or acquirer) not participating in VerifiedByVisa, this is treated by the interface as a fail. Please refer to Visa documentation regarding CAVV result code (44.13).

PS2000-ACQ-DATA-LOC

A value indicating the offset into the PSTM User Data which the VisaNet ISO Interface will use to store the CPS Data for acquirer traffic (i.e., outbound transactions to VisaNet). Valid values are 0 - 150. BASE I acquirers will use 24 bytes of the PSTM User Data. Debit acquirers will use 50 bytes of the PSTM User Data. Default value is 0. Required for Release 4.0.

PS2000-ISS-DATA-LOC

A value indicating the offset into the PSTM User Data which the VisaNet ISO Interface will use to store the CPS Data for issuer traffic (i.e., inbound transactions from VisaNet). Valid values are 0 - 117. BASE I issuers will use 24 bytes of the PSTM User Data. Debit issuers will use 83 bytes of the PSTM User Data. Default value is 0. Required for Release 4.0.

RESUB-CNFG

A flag indicating whether resubmissions are to be processed in the BASE24 environment. Valid values are:

N = Resubmissions will not be processed (default)

Y = Resubmissions will be processed

RESUB-LOG-PTLF

A flag indicating whether resubmissions are to be logged to the PTLF. The initial submittal is always logged to the PTLF. Valid values are:

N = Never send a log only resubmittal to the PTLF

Y = Log only the final submittal to the PTLF

A = Send a log message with every response (default)

RESUB-MAX-DAYS-LIMIT

The maximum number of days a transaction can be resubmitted before it is deleted from the Resubmittal Store-and-Forward file (RSAF). Valid values are 1 through 30 (default 9).

The RESUB-MAX-DAYS-LIMIT should be set to the maximum number of days that Visa will allow a transaction to be resubmitted. Currently, Visa allows a transaction to be resubmitted for a maximum of 9 days.

RESUB-TIME

The time (HH:MM) at which the VISA Interface process is to start sending resubmittal transactions to the interchange. Valid values, in military time, are from 00:00 to 23:59 (no default value). This param is required if BASE24 is configured to process resubmissions.

RSAF-ISS-UNAVAIL-WAIT-TIMER

A value, in hundredths of seconds, indicating the amount of time the VisaNet ISO Interface process will check the RSAF File for transactions that were undeliverable to the issuer. Valid values are:

0 - 8640000 (default 720000 - 2 hours)

NOTE: When the RSAF-ISS-UNAVAIL-WAIT-TIMER goes off, the interface will check to see if there are any transactions in the RSAF file that had a last response code which indicates that the issuer was unavailable. A counter in the PCT structure that was added for RSAF processing will be incremented/decremented to keep track of any records that can be sent again. If the counter indicates that there are transactions eligible for resubmission, the RSAF file will be opened and the eligible records sent.

SAF-NOTIFY-INTERVAL

The number of writes made to the Store-and-Forward File (SAF) between calculating the percentage of file full. Valid values are 10 through 32766 (default 50).

SAF-NOTIFY-PERCENTAGE

The percentage of available file space at which the VisaNet ISO Interface process logs a message indicating the SAF is becoming full. The VisaNet ISO Interface process continues to send event messages at the interval indicated in the SAF-NOTIFY-INTERVAL param until more file space is made available. Valid values are 10 through 99 (default 80).

SDF-WAIT-TIMER

A value, in hundredths of seconds, indicating the amount of time the VisaNet ISO Interface process will reinitialize the Switch Dispute File (SDF). Valid values are:

0 - 8640000 (default 360000)

SECURE-DEV-CONF-CMD100

The command text the interface process is to send to an Atalla Network Security Processor (NSP), model A5000 or A6000, in a 100 command during initialization or warmboot. The 100 command text re-enables optional features of the security device. The text contained in the 100 command must be obtained directly from Atalla. This param is only required if the user wants BASE24 to issue these commands to the Atalla NSP. (NOTE: features enabled for a security device via 100 commands are not process-specific; they affect all processes interacting with the device.)

SECURE-DEV-CONF-TXT

The configuration text the interface is to send to an Atalla Network Security Processor (NSP), model A5000 or A6000, in a 101 command during initialization or warmboot. The configuration text can consist of one or more of the four-character option words described below. If more than one option word is defined in the configuration text, the words must be separated by commas. Each option word contains a three-digit option ID followed by a one-character action flag. An option ID (i.e., 023, 024, 040) can be used only once in each SECURE-DEV-CONF-TXT param.

- 023E - Enables the NSP's function to remove carriage return and line feed characters from all response messages returned to BASE24.
- 024E - Enables the NSP's function to identify PIN length errors by returning a unique code in response messages to BASE24. This causes the NSP to return L error responses for PIN length errors and S error responses for sanity check errors.
- 024D - Disables the NSP's function to identify PIN length errors by returning a unique code in response messages to BASE24. This causes the NSP to return S error responses for both PIN length and sanity check errors.
- 040x - Specifies that the NSP should check PIN lengths and also sets the minimum valid PIN length for performing the check. The "x" must be a value of 0-9 or A-C to indicate the minimum valid PIN length (A = 10; B = 11; C = 12). A value of 0 effectively disables this check because any PIN would pass.

This param is only required if the user wants BASE24 to issue these 101 commands to the Atalla NSP. (NOTE: features enabled or disabled for a security device via 101 commands are not process-specific; they affect all processes interacting with the device.)

SECURE-DEV-FAIL-NOTIFY

The interval at which messages are logged for denied transactions due to security device failures. For example, when the SECURE-DEV-FAIL-NOTIFY param is set to 20, every twentieth transaction denied because of a security device failure causes a message to be logged. The SEC-DEV-FAIL-NOTIFY param sets the interval after the first security device failure. A message is always logged immediately following the first security device failure. Valid values are 10 through 1000 (default 20).

SECURE-DEV-MONITOR-THRESHOLD

The interval, in number of transactions performed by the security device or Transaction Security Services (TSS) process defined in the SECURE-DEV1 assign, at which the security device or TSS process defined in the SECURE-DEV2 assign is checked. The security device is checked by sending it a transaction. Valid values are 0 through 32000 (default 0). A value of 0 indicates the security device defined in the SECURE-DEV2 assign is not checked.

SECURE-DEV-TIM-LMT

The maximum amount of time, in hundredths of a second, that BASE24 waits for a response from the security device before timing out the message. Valid values are 1 through 6000 (default 500). Example: 6000 equals 60 seconds.

SECURE-DEV-TYP

A code identifying the type of security module specified in the SECURE-DEV1 and SECURE-DEV2 assigns. Valid values are:

ASM = Atalla Security Module or Atalla Network Security Processor

RSM = Racal-Guardata Host Security Module (same as VSM)

VSM = Racal-Guardata Host Security Module (same as RSM)

TSS = Transaction Security Services

N/A = A security module is not required (default)

SEND-ETX

This param will let the interface know whether or not to send the end_of_text (ETX) character. Valid values are as follows:

Y = Send the ETX. (default)

N = Do not send the ETX.

SEND-FWD-INST-IN-DKE-MSG

This parameter will let the interface know whether or not to send data element 33 outbound in 0800 dynamic key exchange messages. Value values are:

Y = Send data element 33 outbound in 0800 dynamic key exchange messages (default)

N = Do not send data element 33 outbound in 0800 dynamic key exchange messages

SEND-B1-COMPL-AS-PRTL-RVSL

A value indicating whether the interface will format and send an external 0400 partial reversal when an internal completion is received with an 0220 message type and the interface is configured for BASE 1 acquiring.

- Y = Send an external 0400 partial reversal when an internal completion is received with an 0220 message type and the interface is configured for BASE 1 acquiring.
- N = Do not send an external 0400 partial reversal when an internal completion is received with an 0220 message type and the interface is configured for BASE 1 acquiring. An ILF record will be logged and processing will continue. (default)

SPAN-FLAG

A value indicating whether totals are written to the Span Clearings File. Valid values are:

- Y = Yes, write totals to the Span Clearings File.
- N = No, do not write totals to the Span Clearings File (default).

SPPT-ACQ-INSTL-TXN

This LCONF param is used by the VisaNet ISO Interface to indicate whether or not the interface is to support processing installment transactions acquired by BASE24-pos or a Host (transactions sent outbound from the interface to the network). Valid values are:

- Y = Process installment transactions acquired by BASE24-pos or a Host.
- N = Deny installment transactions acquired by BASE24-pos or a Host. (default)

SPPT-ISS-INSTL-TXN

This LCONF param is used by the VisaNet ISO Interface to indicate whether or not the interface is to support processing installment transactions received inbound from the network. Valid values are:

- Y = Process installment transactions received from the network.
- N = Deny installment transactions received from the network. (default)

SPPT-SUP-DATA-DE55

This LCONF param is used by the VisaNet ISO Interface to indicate whether or not the interface is to support supplemental data in DE55 acquired by BASE24. Valid values are as follows:

Y = Support Field 55 supplemental data

N = Do not support Field 55 supplemental data

STATION-TYP

This LCONF param is used by the VisaNet ISO Interface to determine whether to use the station names from the ICFE or the SNF. Valid values are as follows:

- 0 = Normal Processing; The interface uses the stations from the ICFE screens 1 and 12.
- 1 = Send/Receive Processing; The interface uses the station pairs as listed in the SNF.

The VisaNet ISO Interface will default this param to 0 if it is missing or has an incorrect value.

SW-ILF-FILE-RETENTION

The number of days the ILF is to remain on the system. After the specified number of days, the ILF is purged from the system by the VisaNet ISO Interface process. Valid values are 3 through 99 (default 7).

SW-RPT-STARTUP **

The time (HH:MM) the VisaNet ISO Interface process runs its report obey file. Valid values, in military time, are from 00:00 to 23:59 (no default value).

SWI-ACQ-AVS-DATA-SUPPRS

A value indicating whether Address Verification (AVS) data will be suppressed before logging to the ILF in acquired transactions. Valid values are:

- Y = Suppress AVS data before logging
- N = Do not suppress AVS data (default)

SWI-ACQ-CVD2-DATA-SUPPRS

A value indicating whether Card Verification (CVD2) data will be suppressed before logging to the ILF in acquired transactions. Valid values are:

- Y = Suppress CVD2 data before logging
- N = Do not suppress CVD2 data (default)

SWI-ACQ-DISC-DATA-SUPPRS

A value indicating whether discretionary data from track 1 and/or track 2 will be suppressed before logging to the ILF in acquired transactions. Valid values are:

- Y = Suppress discretionary data before logging
- N = Do not suppress discretionary data (default)

SWI-ISS-AVS-DATA-SUPPRS

A value indicating whether Address Verification (AVS) data will be suppressed before logging to the ILF in issuer transactions. Valid values are:

Y = Suppress AVS data before logging
N = Do not suppress AVS data (default)

SWI-ISS-CVD2-DATA-SUPPRS

A value indicating whether Card Verification (CVD2) data will be suppressed before logging to the ILF in issuer transactions. Valid values are:

Y = Suppress CVD2 data before logging
N = Do not suppress CVD2 data (default)

SWI-ISS-DISC-DATA-SUPPRS

A value indicating whether discretionary data from track 1 and/or track 2 will be suppressed before logging to the ILF in issuer transactions. Valid values are:

Y = Suppress discretionary data before logging
N = Do not suppress discretionary data (default)

TIME-ZONE-DIFF

The number of minutes between the time zone of VisaNet and the VisaNet ISO Interface process. Valid values are:

0 - 1440 (default 0)

VISA-CAVV-APPRV-RSLT-CDES

This parameter should contain all the values from DE 44.13 that the VisaNet ISO Interface should continue processing. When the interface receives a request from Visa with a value in DE 44.13, if the value in the external message does not match one of the values in this parameter, the interface will format a denial response and return the response to Visa without further processing. A 9900 log only message will be sent to RTAU to indicate that the transaction has been denied, the denial will then be accessible from the PTLF. The following list is the current values for DE 44.13:

- 0 CAVV Authentication results invalid
- 1 CAVV Failed validation - authentication
- 2 CAVV passed validation - authentication
- 3 CAVV passed validation - attempt (authentication was attempted at the issuer's ACS but did not complete successfully)
- 4 CAVV failed validation - attempt (issuer's ACS)
- 5 (reserved for future use) not used
- 6 CAVV not validated, issuer not participating in CAVV validation (for Visa use only)
- 7 CAVV Failed validation - attempt (U.S. Issued cards only)(Visa's ACS)
- 8 CAVV passed validation -attempt (U.S. issued cards only)(authentication was attempted at Visa's ACS but did not complete successfully)
- 9 CAVV failed validation - attempt (U.S issued cards only)(at Visa during stand-in)
- A CAVV passed validation - attempt (U.S. issued cards only)(at Visa during stand-in)
- B CAVV passed validation - information only, no liability shift (the ECI will not be equal to "5" or "6" but the CAVV will be present.
- C CAVV was not validated - attempt (Visa use only) The issuer did not return a CAVV results code in the authorization response. V.I.P. will set the value to C in Field 44.13.
- D CAVV was not validated - authentication (Visa use only). If the issuer did not return a CAVV results codes in the authorization response. V.I.P will set the value to D in Field 44.13.

All values for the CAVV result code field that should be sent to RTAU for further processing should be included in the parameter. They may be in any order and up to 20 values may be entered. This parameter is used when **PROCESS-FAILED-CAVV** is set to "N". Default value: "2B".

VISA-REGION

A value indicating the Visa Region that a customer is processing in. Used to support regional enhancements and programs. Valid values are:

- 1 - United States (default)
- 2 - Asia Pacific
- 3 - Canada
- 4 - Central Europe/Middle East/Africa
- 5 - European Union
- 6 - Latin America/Caribbean

VISA-CURRENCY-PRECISION-SERVICE

A value that indicates if the interface supports the Visa Currency Precision Service. When this field is set to "Y", the VisaNet Interface will format DE 63.13 and send it in the external request message. Valid values are:

- Y – participating in the Visa Currency Precision Service.
- N – not participating in the Visa Currency Precision Service (default).

USE-FIELD-55-FOR-EMV-DATA

Parameter used by the VisaNet ISO Interface process to distinguish between using field 55 in the external message for EMV cards instead of the tertiary fields. Only customers that acquire EMV or VSDC cards need to set this parameter. If the USE-FIELD-55-FOR-EMV-DATA param is not present, it will default to "N". Valid values are:

- Y – field 55 will be used for EMV data in the external message
- N – tertiary fields will be used for EMV data in the external message

ICFE Settings

The Enhanced Interchange Configuration File (ICFE) contains parameters relevant to interchange transaction processing. It is used by the financial institution to define institution and terminal interchange sharing, settlement handling, timer limits, and processing options. The options controlled via the ICFE are described below and on the following pages. For more information and screen formats, refer to the "BASE24 Base Files Maintenance Manual". The ICFE fields are described in the order they appear on the screens.

ICFE Screen 1 Settings

The following fields must be set on ICFE screen 1 as indicated:

INTERCHANGE FIID

The FIID uniquely identifying the VisaNet Interchange. This field must match the logical network ID given to the VisaNet Interchange in the BASE24 system. This field and the PROCESS field combine to form the primary key to the ICFE.

FIELD LENGTH: 1-4 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

PROCESS

The name of the VisaNet ISO Interface process as defined in your network environment. This is the process that receives and sends transaction messages from and to VisaNet. This field and the INTERCHANGE FIID field combine to form the primary key to the ICFE.

FIELD LENGTH: 1-16 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

SWITCH TYPE

A code identifying the interchange. This code must match the last four characters of the subvolume name containing the proper interface. For the VisaNet ISO Interface process, this value must be "VISA".

FIELD LENGTH: 1-4 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

INTERCHANGE LOGICAL NET

The logical network identifier given to the interchange. This value must match the value in the INTERCHANGE FIID field.

FIELD LENGTH: 1-4 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

REPORTING NAME

The name of the interchange as it appears in the headings of BASE24 reports.

FIELD LENGTH: 1-20 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

INSTITUTION ID

The institution identifier assigned by the interchange. Used by the VISA Interface process to fill the forwarding institution ID in the external message if the value in this field does not match that of the acquiring institution ID. The acquiring institution ID is filled in via the VIIF.

FIELD LENGTH: 1-15 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

SWITCH ID

The interchange-assigned switch identifier. Not used by the VisaNet ISO Interface process.

FIELD LENGTH: 1-15 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

STATION 1

The symbolic name of a VisaNet station that sends acquired transaction requests to and receives responses from the switch. This name must match the name of a station defined in your network environment for the VisaNet ISO Interface process.

FIELD LENGTH: 1-16 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

STATION 2

The symbolic name of a second VisaNet station that sends acquired transaction requests to and receives responses from the switch. This name must match the name of a station defined in the Network Environment File for the VisaNet ISO Interface process. If only one station is defined, this field must either be blank or must match the station name in the STATION 1 field.

FIELD LENGTH: 1-16 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

SIC CODE

The Standard Industrial Classification (SIC) code applicable to the institution operating the BASE24-atm or BASE24-pos network. This field is the default SIC code if an incoming POS message does not contain a SIC code.

FIELD LENGTH: 1-4 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: 0

CURRENCY CODE

The acquirer's currency code for transactions sent to VisaNet. Valid values are listed in the following publication: "Codes for the Representation of Currencies and Funds," ISO 4217-1981.

FIELD LENGTH: 3 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 840 (US dollars)

DEFAULT TERM NUM

A default terminal number used to fill the STM/PSTM terminal number field if an incoming transaction from the interchange does not contain a terminal number. Not used by the VisaNet ISO Interface process.

FIELD LENGTH: 1-16 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

DEFAULT ACQUIRER ID NUM

A default acquirer ID number used if an incoming transaction from the interchange does not contain an acquirer's institution identification number. Not used by the VisaNet ISO Interface process.

FIELD LENGTH: 1-11 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: 00000000000

CUSTOMER BALANCE DISPLAY

A value indicating the method in which VisaNet card issuers wish balances to be presented at BASE24 terminals. Valid values are:

0 = Do not display or print
1 = Display only
2 = Print only
3 = Display and print

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: Yes
DEFAULT VALUE: 0 (Do not display or print)

ICFE Screen 2 Settings

The following fields must be set on ICFE screen 2 as indicated:

SETTLEMENT INFORMATION

The following fields contain interchange settlement information.

SETTLEMENT HOUR

The current hour of settlement (local time) for this interchange. Valid entries include 00 through 23. For example, if the VisaNet Interchange settles at 6:00 a.m., GMT, this field should contain the value 06.

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 00

SETTLEMENT MINUTE

The current minute of settlement (local time) for this interchange. Valid entries include 00 through 59. For example, if the VisaNet Interchange settles at 6:00 a.m., GMT, this field should contain the value 00.

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 00

SETTLEMENT DAYS

A value indicating the processing schedule for the interchange. VisaNet processes 7 days a week.

Valid values are:

0 = Processes 5 days a week

1 = Processes 7 days a week

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes

DEFAULT VALUE: 1 (PROCESS 7 DAYS). If this field is replaced with blanks, the default value is 0 (PROCESS 5 DAYS).

REPORT PRIORITY

The priority at which the VisaNet ISO Interface process runs its reports. The value entered in this field must be equal to or less than 255.

FIELD LENGTH: 1-3 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 100

REPORT CPU

The Central Processing Unit (CPU) in which the report programs are started.

FIELD LENGTH: 1-2 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0

SWITCH POSTING DATE (YYMMDD)

The current posting date (YYMMDD) for VisaNet. The Interchange Interface process updates this date at daily settlement time and upon initialization.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

HOLIDAY DATES (YYMMDD)

The interchange's defined holiday dates (YYMMDD). The interchange does not settle on these holidays and the interface process does not create an Interchange Log File (ILF) for these dates. Not used by the VisaNet ISO Interface process, since this field is valid only when 5-day settlement is used.

FIELD LENGTH: 16 fields of 6 numeric characters each

REQUIRED FIELD: No

DEFAULT VALUE: None

ICFE Screen 3 Settings

The following fields must be set on ICFE screen 3 as indicated:

TIMER LIMITS

The following timer value fields are used to control specific transaction message activity between the BASE24 network and VisaNet. The values entered in these fields must be checked against VisaNet timer values to ensure the integrity of message traffic.

NETWORK MANAGEMENT

The number of seconds BASE24 waits for a response to a network management message (sign on, sign off, etc.).

FIELD LENGTH: 1-4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 30 (SEC)

EXTENDED NETWORK

The number of seconds BASE24 waits before attempting to retry a network management message during periods when the line to the interchange is down.

FIELD LENGTH: 1-4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 60 (SEC)

WAIT FOR TRAFFIC

The number of seconds BASE24 waits for traffic on the line from VisaNet before initiating a network management message.

FIELD LENGTH: 1-4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 60 (SEC)

PERFORMANCE PERIOD

The number of minutes the VisaNet ISO Interface process uses as interval for tracking performance of the DPC.

FIELD LENGTH: 1-4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 20 (MIN)

MAXIMUM OUTSTANDING TRANSACTIONS

The following fields specify the maximum number of outstanding inbound and outbound transactions. The combined value is used to determine the number of extended memory pages required for the transactions in process queue.

OUTBOUND

The maximum number of outstanding outbound transactions.

FIELD LENGTH: 1-4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 15

INBOUND

The maximum number of outstanding inbound transactions.

FIELD LENGTH: 1-4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 15

PROCESSING OPTIONS

The following fields define the processing options for VisaNet.

ACQUIRER

A value indicating whether the institution acts as an acquirer of VisaNet transactions. Valid values are:

Y = Yes, send transactions to VisaNet.

N = No, do not send transactions to VisaNet.

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: Yes

DEFAULT VALUE: None

ISSUER

A value indicating whether the stations declared in the ICFE are to be used in the send/receive logic.

Y = Yes, stations are to be used for normal processing with no send/receive logic.

N = Stations are to be used for send/receive logic.

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: Yes

DEFAULT VALUE: None

PROCESSING MODE

The processing mode. The VisaNet ISO Interface process uses this field to determine what message format it should use in sending transactions to the switch. Valid values are:

0 = NON VIP format

1 = VIP format

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: No

DEFAULT VALUE: None

AUTO SIGNON START

A value indicating whether the VisaNet ISO Interface process is set to programmatically logon to the interchange at startup without operator intervention. Valid values are:

Y = Yes, programmatically logon to VisaNet at startup.

N = No, do not programmatically logon to VisaNet at startup.

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: Yes

DEFAULT VALUE: None

MAXIMUM TIMEOUTS

The maximum number of consecutive timeouts allowed before network management measures are taken to determine the status of the link. Valid values are 1 - 9999.

FIELD LENGTH: 1-4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 2

MAX SAF RETRY

The maximum number of times a transaction from the Store-and-Forward File (SAF) is transmitted to VisaNet before the record is dumped to the hard-copy log and deleted from the file. Valid values are 0 - 9999. A value of zero indicates that the SAF will be retransmitted indefinitely or until the message completes satisfactorily. A value other than zero indicates the number of retries.

FIELD LENGTH: 1-4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0

ACK TO SWITCH

A value indicating whether an acknowledgement is required to the switch. Not used by the VisaNet ISO Interface process.

Valid values are:

Y = Yes

N = No

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: No

DEFAULT VALUE: None

ACK FROM SWITCH

A value indicating whether an acknowledgement is required from the switch. Not used by the VisaNet ISO Interface process.

Valid values are:

Y = Yes

N = No

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: No

DEFAULT VALUE: None

NETWORK MANAGEMENT MESSAGE ENABLED

A value indicating whether network management messages are enabled or disabled. Not used by the VisaNet ISO Interface process.

Valid values are:

Y = Yes, send network management messages to the switch.

N = No, do not send network management messages to the switch.

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: No

DEFAULT VALUE: None

TYPE OF INTERCHANGE REPORTS

The type of reports this interchange requires. Not used by the VisaNet ISO Interface.

ILF EXTRACT NUMBER

The number of ILF files to be extracted for host reporting. This field is used in conjunction with the RPT-EXTRACT field in the Extract Configuration File (ECF). For a description of the ECF, refer to the "BASE24 Base Files Maintenance Manual". Valid values are 3 through 9.

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: No

DEFAULT VALUE: 3

ICFE Screen 8 Settings

The following fields must be set on ICFE screen 8 as indicated:

ATM ICFE DATA

The following fields contain information relevant to BASE24-atm.

AUTH PROCESS

The authorization process the VisaNet ISO Interface process routes ATM transaction requests to if it is servicing only one BASE24 node. If VisaNet is servicing more than one logical net-work (through SPAN90), this field must contain the word "GATEWAY", so the VisaNet ISO Interface process knows to route the transaction through and to use prefix routing.

FIELD LENGTH: 1-17 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

DEFAULT ROUTING GROUP

The terminal routing group used as a default for transactions from VisaNet.

FIELD LENGTH: 11 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: 00000000000

ACQUIRER TXN PROFILE

A code identifying a group of BASE24-atm transaction processing codes allowed from VisaNet. The value of this field is part of the key used to read the Acquirer Processing Code File (APCF).

FIELD LENGTH: 16 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: ATM

ISSUER TXN PROFILE

A code identifying a group of BASE24-atm transaction processing codes allowed to be sent to VisaNet. The value of this field is part of the key used to read the Issuer Processing Code File (IPCF).

FIELD LENGTH: 16 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: ATM

DEFAULT MERCHANT TYPE

The default merchant type that is sent in a purchase transaction.

FIELD LENGTH: 4 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

TIMER LIMITS

The following fields set the time limits, in seconds, for BASE24-atm transactions.

STORE AND FORWARD

The time limit associated with the store-and-forward response from VisaNet for an ATM transaction. Valid values are 0 - 9999.

FIELD LENGTH: 1-4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 30 (SEC)

OUTBOUND

The time limit associated with transaction responses from VisaNet for a BASE24-atm transaction. Valid values are 0 - 9999.

FIELD LENGTH: 1-4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 15 (SEC)

INBOUND

The time limit associated with a transaction response from BASE24-atm. Valid values are 0 - 9999.

FIELD LENGTH: 1-4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 15 (SEC)

COMPLETION

The time limit associated with completion messages in either direction for BASE24-atm transactions. Used by VISA as timer for repeat requests. Valid values are 0 - 9999.

FIELD LENGTH: 1-4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 60 (SEC)

COMPLETION ACK

The time limit associated with completion acknowledgement messages from VisaNet. BASE24 does not require completions nor does it provide completion acknowledgements. Valid values are 0 - 9999.

FIELD LENGTH: 1-4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 30 (SEC)

SHARING GROUPS

A maximum of 24 1-character codes assigned to identify VisaNet sharing groups for both incoming and outgoing transactions.

Valid values are 1 - 9 and A - Z. Codes cannot be separated by blank spaces, but unused portions to the right can remain blank.

FIELD LENGTH: 24 fields of 1 alphanumeric character each
REQUIRED FIELD: No
DEFAULT VALUE: None

ICFE Screen 10 Settings

The following fields must be set on ICFE screen 10 as indicated:

POS ICFE DATA

The following fields contain information relevant to BASE24-pos.

AUTH PROCESS

The Authorization process the VisaNet ISO Interface process routes POS transaction requests to if it is servicing only one BASE24 node. If VisaNet is servicing more than one logical network (through SPAN90), this field must contain the word "GATEWAY", so the VisaNet ISO Interface process knows to route the transaction through and to use prefix routing.

FIELD LENGTH: 1-16 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

REFERRAL PHONE NUMBER

The phone number that the VisaNet ISO Interface process places in all internal responses. This phone number can be called for an authorization.

FIELD LENGTH: 1-18 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

RETAILER ID DEFAULT

The default retailer ID that the VisaNet ISO Interface process places in all internal requests when the interchange does not send a value.

FIELD LENGTH: 1-19 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

TIMEOUT ACTION

A value indicating the action the VisaNet ISO Interface process takes when an outgoing request times out at the interchange. Valid values are:

- 0 = Return a decline response
- 1 = Default action
- 2 = Alternate route

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes

DEFAULT VALUE: 0 (Return a decline response)

SETTLEMENT ENTITY

Used to determine the value of the draft capture field in the PSTM. Not used by the VisaNet ISO Interface. Valid values are:

- 0 = No draft capture
- 1 = Draft capture

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: Yes

DEFAULT VALUE: 0

ACQUIRER TXN PROFILE

A code identifying a group of BASE24-pos transaction processing codes allowed from VisaNet. The value of this field is part of the key used to read the Acquirer Processing Code File (APCF).

FIELD LENGTH: 16 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: ATM

ISSUER TXN PROFILE

A code identifying a group of BASE24-pos transaction processing codes allowed to be sent to VisaNet. The value of this field is part of the key used to read the Issuer Processing Code File (IPCF).

FIELD LENGTH: 16 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: ATM

ADJUSTMENT FLAG

A flag indicating whether the interchange allows an adjustment transaction when the new transaction amount (amount 2) is greater than the original transaction amount (amount 1). The VisaNet ISO Interface process checks the value in this field to determine whether processing of an adjustment transaction can continue when the new transaction amount (amount 2) is greater than the original transaction amount (amount 1). Valid values are as follows:

- Y = Yes, allow adjustments where the new amount is greater than the original amount.
- N = No, do not allow adjustments where the new amount is greater than the original amount.

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: Yes

DEFAULT VALUE: N

CHARGEBACK FLAG

A flag indicating whether the interchange allows chargeback transactions. The VisaNet ISO Interface process checks the value in this field to determine whether processing of a chargeback transaction can continue. Valid values are as follows:

- Y = Yes, allow chargeback transactions.
- N = No, do not allow chargeback transactions.

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: Yes

DEFAULT VALUE: N

TIMER LIMITS

The following fields set the time limits, in seconds, for BASE24-pos transactions.

STORE AND FORWARD

The time limit associated with the store-and-forward response from VisaNet for a BASE24-pos transaction. Valid values are 0 - 9999.

FIELD LENGTH: 1-4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 30 (SEC)

OUTBOUND

The time limit associated with transaction responses from VisaNet for a BASE24-pos transaction. Valid values are 0 - 9999.

FIELD LENGTH: 1-4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 15 (SEC)

INBOUND

The time limit associated with a transaction response from BASE24-pos. Valid values are 0 - 9999.

FIELD LENGTH: 1-4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 15 (SEC)

COMPLETION

The time limit associated with completion messages in either direction for BASE24-pos transactions. Used by VISA as timer for repeat requests. Valid values are 0 - 9999.

FIELD LENGTH: 1-4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 60 (SEC)

COMPLETION ACK

The time limit associated with completion acknowledgement messages from VisaNet. BASE24 does not require completions nor does it provide completion acknowledgements. Valid values are 0 - 9999.

FIELD LENGTH: 1-4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 30 (SEC)

ICFE Screen 11 Settings

The following fields must be set on ICFE screen 11 as indicated:

POS PRODUCT DATA

The following fields contain information relevant to BASE24-pos.

DEFAULT PRE-AUTH AMOUNT

The default preauthorization amount used in an internal request when the external message does not contain an amount. Not used by the VisaNet ISO Interface process.

FIELD LENGTH: 1-5 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0

APPROVAL CODE LENGTH

The number of digits that VisaNet requires in an approval code. Valid values are 2 through 6.

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes

DEFAULT VALUE: 6

PRE-AUTH HOLD INCREMENT

A value indicating the time increment to hold preauthorized funds. This field is used in conjunction with the PRE-AUTH HOLD TIME field. Valid values are:

0 = Minutes

1 = Hours

2 = Days

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes

DEFAULT VALUE: 0 (Minutes)

PRE-AUTH HOLD TIME

The length of time to hold the preauthorized funds. This field is used in conjunction with the PRE-AUTH HOLD INCREMENT field. Valid values are 0 through 99.

FIELD LENGTH: 1-2 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0

ALLOWED SERVICES

Codes that identify the types of cards the VisaNet Interchange allows. This field is used for both inbound and outbound BASE24-pos messages. The BASE24-defined codes are:

AD = Administrative	AX = American Express
BD = Business deposit-only	C = Private label credit
CB = Carte Blanche	D = Demonstration
DC = Diners Club	M = MasterCard credit
MD = MasterCard debit	MM = MasterCard dual
P = Proprietary debit	V = VISA credit
VD = VISA debit	VV = VISA dual
** = all	

Institutions can also enter additional codes not listed above, as long as the first position of the code is an alphabetic character other than M or V (M and V are reserved for MasterCard and Visa).

ICFE Screen 12 Settings

ICFE screen 12 is specific to particular interchanges. The screen for VisaNet is shown below, followed by descriptions of its fields. The fields must be set as indicated in the field descriptions.

```
-----
BASE24-ATM   ICFE FILE MAINTENANCE   LNET   YY/MM/DD  HH:MM  12 OF 13
INTERCHANGE FIID: VISA                PROCESS: <process name>

      VisaNet

ISS STATIONS:  _____

ISS STATION IDS:  _____  GMT OFFSET:  _____

ISS STATION SYSTEMS:  __  __  __  AUTO ADVICE SIGNON:  __  (Y/N)

ACQ STATION IDS:  _____  RETRY ENABLED:  __  (0,1,2,3)

CONVERSION RATE:  _____  PROTOCOL:  __  ISO COUNTRY CODE:  _____

ATM PROCESSING:  __  (Y/N)  POS PROCESSING:  __  (Y/N)  AUTH ONLY:  __  (Y/N)

VBBF:  $<volume>.<subvol>.VBBF
      BASE24 SHARING IDS FOR:
VIIF:  $<volume>.<subvol>.VIIF  VISANET:  __  ENTREE:  __  PLUS:  __

RECORD LAST CHANGED: YY/MM/DD HH:MM BY USER: 0255 , 00000255  CHANGE
***** BASE24 *****
NEW PAGE:  FILE DESTINATION:  NEW LOGICAL NETWORK ID:
F8 - GO TO VISA MENU  F12-HELP
-----
```

ISS STATIONS

The symbolic names of up to three stations that receive incoming requests from VisaNet. If an institution is an issuer of both BASE I and SMS cards, at least two unique names must be listed since VisaNet requires separate links to each system. A third station can be an extra link to either one of the systems. A station name can be the same as any station on ICFE screen 1 if the institution wants to use that line for both acquirer and issuer traffic. Otherwise the station names in this field must be unique so VisaNet can send issuer traffic to only one of these stations.

FIELD LENGTH: 16 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: Blanks

ISS STATION IDS

The VisaNet-assigned station identification numbers used in the header of VisaNet format messages. These correspond, in order, with the three issuer stations listed in the ISS STATIONS field.

FIELD LENGTH: 6 alphanumeric characters

REQUIRED FIELD: Yes, if ISS STATIONS field is used.

DEFAULT VALUE: Blanks

GMT OFFSET

The number of minutes that local time varies from Greenwich Mean Time. The characters '-' and '+' are used in the first byte to indicate whether local time is later than or earlier than GMT.

FIELD LENGTH: 3 numeric characters (values 0-9), and one sign character ('-' or '+')

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

ISS STATION SYSTEMS

A value indicating which of the VisaNet systems each of the three stations defined in the ISS STATIONS field will communicate with. Valid values are:

01 = BASE I

02 = SMS

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: Yes, if the ISS STATIONS field is used.

DEFAULT VALUE: 02 (SMS)

AUTO ADVICE SIGNON

A value indicating whether the VisaNet ISO Interface process is set to programmatically send advice logon to the interchange at startup without operator intervention. Valid values are:

Y = Yes, programmatically send advice logon to VisaNet at startup.

N = No, do not programmatically logon to VisaNet at startup.

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: Yes

DEFAULT VALUE: None

ACQ STATION IDS

The VisaNet-assigned station identification numbers used in the header of VisaNet format messages. These correspond, in order, with the two acquirer stations listed on ICFE screen 1.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes, if the STATION 1 and/or STATION 2 fields are used on ICFE screen 1.

DEFAULT VALUE: Blanks

RETRY ENABLED

A value indicating if the VisaNet ISO Interface process should resend a timed-out transaction request to VisaNet. A transaction will be retried only once. Valid values are:

0 = No retries.

1 = Retries on timeouts only.

2 = Retries on reject only.

3 = Retries on both timeouts and rejects.

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes

DEFAULT VALUE: 0 (No retries)

CONVERSION RATE

The value used by the VisaNet ISO Interface process to convert a local monetary amount to U.S. dollars if the local currency is not U.S. dollars. The currency in all VisaNet transactions must be U.S. dollars. The rate value consists of two parts. The first digit represents the placement of the decimal point within the next seven digits. The next seven digits represent the conversion rate. The decimal point will have the same number of digits to its right as the number in the first digit. The value must not have all zeros.

FIELD LENGTH: 8 numeric characters

REQUIRED FIELD: Yes, when local currency is not U.S. dollars.

DEFAULT VALUE: 61000000

PROTOCOL

A value indicating whether protocol characters are added to outgoing messages and stripped from incoming messages. Setting this field to a zero adds and strips protocol characters. Setting this field to a 1 assumes no protocol characters are used. This field should be set to a zero if BASE24 is using 3270 supervisor to communicate with a MIP or a MIP PC. Valid values are:

0 = MTPT-S
1 = MTPT-T,PTP,TCP/IP,X25,SNA LU-0
2 = SNA LU-2

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: Yes
DEFAULT VALUE: 0

ISO COUNTRY CODE

The ISO country code of the acquiring institution for use in the VisaNet external request message.

FIELD LENGTH: 3 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 840 (U.S.)

ATM PROCESSING

A flag set to indicate if this process is processing ATM transactions. Valid values are:

Y = Yes
N = No

FIELD LENGTH: 1 alphabetic character
REQUIRED FIELD: Yes
DEFAULT VALUE: N

POS PROCESSING

A flag set to indicate if this process is processing POS transactions. Valid values are:

Y = Yes

N = No

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: Yes

DEFAULT VALUE: N

AUTH ONLY

A code indicating whether or not the interface should send only authorization requests, or send both authorization requests and financial requests. Only financial requests are settled by VisaNet online. Valid values are:

Y = Yes, send only authorization requests.

N = No, do not send only authorization requests.

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: Yes

DEFAULT VALUE: N (No, do not send only authorization requests)

VBBF

The Tandem file name of the VisaNet Blocked Bin File (VBBF). Used by the VisaNet ISO Interface process to locate the file to use which list BINs blocked at each terminal.

FIELD LENGTH: 34 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: Blanks

VIIF

The Tandem file name of the VisaNet Institution Identification File (VIIF). Used by the VisaNet ISO Interface process to locate the file containing information about each FIID on the BASE24 network that can send transactions to VisaNet.

FIELD LENGTH: 34 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: Blanks

BASE24 SHARING IDS

VISANET

A value identifying the VisaNet sharing group used to check against the Terminal Definition File (TDF) sharing group values. If a match exists, VisaNet is considered a network participant (currently all transactions are considered a VisaNet network participant and this field is not used).

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: No

DEFAULT VALUE: Blanks

ENTREE

A value identifying the Entree sharing group used to check against the Terminal Definition File (TDF) sharing group values. If a match exists, ENTREE is considered a network participant (not currently supported).

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: No

DEFAULT VALUE: Blanks

PLUS

A value identifying the PLUS sharing group used to check against the Terminal Definition File (TDF) sharing group values. If a match exists, PLUS is considered a network participant (only used if the PLUS Gateway module has been purchased).

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: No

DEFAULT VALUE: Blanks

KEYF Settings

Each interface process must have its own Key File (KEYF) record. However, if LCONF parameter DES-TRIPLE-SINGLE has the value 'Y', the Key6 File (KEY6) is used instead of the KEYF. The following describes how the KEYF must be configured for the VisaNet ISO Interface.

The KEYF screens are not depicted. However, the fields are described as they actually appear on the Release 5.0 and above KEYF screens. Note that the VisaNet ISO Interface only requires settings on screens 1 and 2.

KEYF Screen 1 Settings

The following fields on KEYF screen 1 must be set as indicated.

DPC/FIID

The FIID of the interchange using this KEYF record. The value in this field must match the value in the INTERCHANGE FIID field on ICFE screen 1.

FIELD LENGTH: 1-4 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

INTERFACE PROCESS

The name of the interface process associated with the interchange identified in the DPC/FIID field. The value in this field must match the value in the PROCESS field on ICFE screen 1.

FIELD LENGTH: 1-16 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

ENCRYPT TYPE

Specifies the type of PIN management used by the interchange. Valid values are:

- 0 = Clear PINs
- 1 = Security module PIN management
- 2 = Software DES PIN management

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: Yes
DEFAULT VALUE: 0

BASE24 ENCRYPT TYPE

Specifies the type of PIN management used by BASE24. Valid values are:

- 0 = Clear PINs
- 1 = Security module PIN management

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: Yes
DEFAULT VALUE: 0

PIN BLOCK FORMAT

Specifies the PIN block format of the PIN in the inbound and outbound external messages. Valid values are:

- 0 = Clear PINs
- 1 = ANSI (PIN/PAN) PIN block
- 3 = PIN/PAD PIN block

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: Yes
DEFAULT VALUE: 0

ANSI PAN FORMAT

If the value in the PIN BLOCK FORMAT field is 1 (ANSI), the value in this field specifies which PAN digits are used in the formation of the external message's PIN/PAN PIN block. Valid values are:

- 0 = 12 right-most digits of the PAN, excluding the check digit (ANSI standard)
- 1 = 12 right-most digits of the PAN, including the check digit
- 2 = 12 left-most digits of the PAN

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes, this field is required regardless of the value in the PIN BLOCK FORMAT field.

DEFAULT VALUE: 0

MAC ENCRYPT TYPE

A code specifying how message authentication will be performed for messages between the interchange and the interface. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: No

DEFAULT VALUE: 0

PIN PAD CHARACTER

If the value in the PIN BLOCK FORMAT field is 3 (PIN/PAD), the value in this field specifies the PAD character used in the formation of the external message's PIN block. Valid values are A through F.

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: Yes, this field is required regardless of the value in the PIN BLOCK FORMAT field.

DEFAULT VALUE: F

MAC DATA TYPE

A code specifying the character set being used for the data being authenticated. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes

DEFAULT VALUE: 0

NUMBER OF KEYS

A code identifying whether the inbound and outbound keys are combined or separate. The value in this field applies to the PIN and MAC keys defined on KEYF screen 2. Not used by the VisaNet ISO Interface. Valid values are:

- 1 = Combined--The inbound and outbound PIN keys are the same and the inbound and outbound MAC keys are the same.
- 2 = Separate--The inbound and outbound PIN keys are different and the inbound and outbound MAC keys are different.

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: Yes
DEFAULT VALUE: 1

KEY LENGTH

A code identifying whether single- or double-length Key Exchange Keys (KEKs) are being used with this interface. Valid values are:

- 1 = Single-length KEKs
- 2 = Double-length KEKs

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: Yes
DEFAULT VALUE: 1

FULL MESSAGE MAC

A code specifying whether selected data elements or the entire message will be considered when computing the MAC. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 1 alphabetic character
REQUIRED FIELD: Yes
DEFAULT VALUE: N

INTERMEDIATE KEYS

Intermediate keys are used whenever a PIN which is encrypted under a secure key (security module PIN management) must be decrypted into the clear.

CLEAR

The clear version of the intermediate key. A PIN that is encrypted under the intermediate key at the security module will be decrypted in software using the value in this field. Valid values for each character in this field are 0 through 9 and A through F. This field must contain 16 valid characters.

FIELD LENGTH: 16 hexadecimal characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000000000000000

CHECK DIGITS

The check digits corresponding to the value in the ENCRYPTED INTERMEDIATE KEY field. Valid values for each character in this field are 0 through 9 and A through F. This field must contain four valid characters.

FIELD LENGTH: 4 hexadecimal characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

ENCRYPTED

Security module encrypted intermediate key. A PIN which has been encrypted under a secure key will be translated to be encrypted under the intermediate key at the security module. Valid values for each character in this field are 0 through 9 and A through F. This field must contain 16 valid characters.

FIELD LENGTH: 1-16 hexadecimal characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000000000000000

EXCHANGE KEYS

When PIN or MAC keys are automatically exchanged between the Interchange Interface and the interchange, they are to be encrypted under this key for the interchange. The exchange key must be manually exchanged between the two entities.

PIN KEY

The security module encrypted form of the key used to exchange PIN keys. There are two sets of 16 hexadecimal characters. The first set is used for single-length keys and both sets are used for double-length keys. Valid values for each character in these fields are 0 through 9 and A through F. Both fields must contain 16 valid characters. If the value in the KEY LENGTH field is 1, the second set of characters must be zeros.

FIELD LENGTH: 2 sets of 16 hexadecimal characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000000000000000

CHECK DIGITS

The check digits corresponding to the value in the PIN KEY field. Valid values for each character in this field are 0 through 9 and A through F. This field must contain four valid characters.

FIELD LENGTH: 4 hexadecimal characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

MAC KEY

The security module encrypted form of the key used to exchange MAC keys. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 2 sets of 16 hexadecimal characters

REQUIRED FIELD: No

DEFAULT VALUE: 0000000000000000

CHECK DIGITS

The check digits corresponding to the value in the MAC KEY field. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 4 hexadecimal characters

REQUIRED FIELD: No

DEFAULT VALUE: 0000

KEYF Screen 2 Settings

The following fields on KEYF screen 2 must be set as indicated.

PIN KEY INFORMATION

OUTBOUND KEYS

The following fields contain the PIN keys used for transactions sent from the interface to the interchange. If the external PIN management is security module PIN management, the keys should be security module encrypted.

PIN KEY1

Used for the encryption or translation of PINs in transactions sent to the interchange. The interface process uses the key in this field when the CURRENT INDEX field contains a value of 1. Valid values for each character in this field are 0 through 9 and A through F. This field must contain 16 valid characters.

FIELD LENGTH: 16 hexadecimal characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000000000000000

CHECK DIGITS1

The check digits corresponding to the value in the PIN KEY1 field. Valid values for each character in this field are 0 through 9 and A through F. This field must contain four valid characters.

FIELD LENGTH: 4 hexadecimal characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

CURRENT INDEX

Indicates which outbound PIN encryption key is currently being used by the interface. Valid values are:

1 = Value in the PIN KEY1 field

2 = Value in the PIN KEY2 field

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes

DEFAULT VALUE: 1

PIN KEY2

Used for the encryption or translation of PINs in transactions sent to the interchange. The interface process uses the key in this field when the CURRENT INDEX field contains a value of 2. Valid values for each character in this field are 0 through 9 and A through F. This field must contain 16 valid characters.

FIELD LENGTH: 16 hexadecimal characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000000000000000

CHECK DIGITS2

The check digits corresponding to the value in the PIN KEY2 field. Valid values for each character in this field are 0 through 9 and A through F. This field must contain four valid characters.

FIELD LENGTH: 4 hexadecimal characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

KEY COUNTER

The number of times the outbound PIN key has been changed by dynamic key management processing.

This counter is incremented whenever the outbound PIN key is changed by BASE24 or the co-processor. This value should require adjustment via file maintenance only if the co-processor expects a value other than zero when dynamic key management is established. Otherwise, the BASE24 Interchange (BIC) Interface process increments it automatically. Valid values for each character in this field are 0 through 9 and A through F. This field must contain 6 valid characters. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 6 hexadecimal characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000000

INBOUND KEYS

The following fields contain the PIN keys used in the transactions sent by the interchange to the interface. If the external PIN management is security module PIN management, the keys should be security module encrypted.

PIN KEY1

Key used by the interchange to encrypt PINs in the transactions sent to BASE24. The interface process uses the key in this field when the CURRENT INDEX field contains a value of 1. Valid values for each character in this field are 0 through 9 and A through F. This field must contain 16 valid characters.

FIELD LENGTH: 16 hexadecimal characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000000000000000

CHECK DIGITS1

The check digits corresponding to the value in the PIN KEY1 field. Valid values for each character in this field are 0 through 9 and A through F. This field must contain four valid characters.

FIELD LENGTH: 4 hexadecimal characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0000

CURRENT INDEX

Indicates which inbound PIN encryption key is currently being used by the interface. Valid values are:

1 = Value in the PIN KEY1 field
2 = Value in the PIN KEY2 field

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: Yes
DEFAULT VALUE: 1

PIN KEY2

Key used by the interchange to encrypt PINs in the transactions sent to BASE24. The interface process uses the key in this field when the CURRENT INDEX field contains a value of 2. Valid values for each character in this field are 0 through 9 and A through F. This field must contain 16 valid characters.

FIELD LENGTH: 16 hexadecimal characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0000000000000000

CHECK DIGITS2

The check digits corresponding to the value in the PIN KEY2 field. Valid values for each character in this field are 0 through 9 and A through F. This field must contain four valid characters.

FIELD LENGTH: 4 hexadecimal characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0000

KEY COUNTER

The number of times the inbound PIN key has been changed by dynamic key management processing.

This counter is incremented whenever the inbound PIN key is changed by BASE24 or the co-processor. This value should require adjustment via file maintenance only if the co-processor expects a value other than zero when dynamic key management is established. Otherwise, the BASE24 Interchange (BIC) Interface process increments it automatically. Valid values for each character in this field are 0 through 9 and A through F. This field must contain six valid characters. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 6 hexadecimal characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 000000

MAC KEY INFORMATION

OUTBOUND KEYS

The following fields contain the MAC keys utilized for transactions sent from the interface to the co-network. These fields are not used by the VisaNet ISO Interface.

MAC KEY1

Key used by the BASE24 interface to generate MACs in messages from BASE24 to the co-processor. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 16 hexadecimal characters
REQUIRED FIELD: No
DEFAULT VALUE: 0000000000000000

CHECK DIGITS1

The check digits corresponding to the value in the MAC KEY1 field. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 4 hexadecimal characters
REQUIRED FIELD: No
DEFAULT VALUE: 0000

CURRENT INDEX

Indicates which outbound MAC key is currently being used by the interface. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: No
DEFAULT VALUE: 1

MAC KEY2

Key used by the BASE24 interface to generate MACs in messages from BASE24 to the co-processor. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 16 hexadecimal characters
REQUIRED FIELD: No
DEFAULT VALUE: 0000000000000000

CHECK DIGITS2

The check digits corresponding to the value in the MAC KEY2 field. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 4 hexadecimal characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0000

KEY COUNTER

The number of times the outbound MAC key has been changed by dynamic key management processing. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 6 hexadecimal characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 000000

INBOUND KEYS

The following fields contain the MAC keys used in the transactions sent by the co-processor to the interface. These fields are not used by the VisaNet ISO Interface.

MAC KEY1

Key used by the BASE24 interface to verify MACs generated by the interchange. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 16 hexadecimal characters
REQUIRED FIELD: No
DEFAULT VALUE: 0000000000000000

CHECK DIGITS1

The check digits corresponding to the value in the MAC KEY1 field. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 4 hexadecimal characters
REQUIRED FIELD: No
DEFAULT VALUE: 0000

CURRENT INDEX

Indicates which inbound MAC key is currently being used by the interface. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: No
DEFAULT VALUE: 1

MAC KEY2

Key used by the BASE24 interface to verify MACs generated by the interchange. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 16 hexadecimal characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0000000000000000

CHECK DIGITS2

The check digits corresponding to the value in the MAC KEY2 field. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 4 hexadecimal characters
REQUIRED FIELD: No
DEFAULT VALUE: 0000

KEY COUNTER

The number of times the inbound MAC key has been changed by dynamic key management processing. Not used by the VisaNet ISO Interface.

FIELD LENGTH: 6 hexadecimal characters

REQUIRED FIELD: No

DEFAULT VALUE: 000000

KEYF Screen 3 Settings

KEYF screen 3 contains dynamic key management parameters. The following fields on KEYF screen 3 must contain the values indicated below.

```
*****
BASE24-BASE  KEY FILE      LLLL      YY/MM/DD  HH:MM  03 OF 03
DPC/FIID:    INTERFACE PROCESS:

  PIN KEY VARIANT: 0      MAC KEY VARIANT: 0
    LIMITS
  PIN KEY TIMER VALUE:    0  MAC KEY TIMER VALUE:    0
PIN KEY TIMER INTERVAL: M (MINS)  MAC KEY TIMER INTERVAL: M (MINS)
  PIN KEY TRAN:  0  MAC KEY TRAN:  0
  PIN KEY ERROR:  0  MAC KEY ERROR:  0
CONSECUTIVE PIN KEY ERROR:    0  CONSECUTIVE MAC KEY ERROR:    0
  KMAC SYNCHRONIZATION ERROR:    0

CLEAR OLD KEY TIMER VALUE:    0 (SECONDS)

  ORIGINATING ID:
  RECEIVING ID:

  KEY PROCESSING TYPE: N (NONE)
NOTARIZATION SUPPORTED: 0 (NOT SUPPORTED)

***** BASE24 *****
NEW PAGE:      FILE DESTINATION:    NEW LOGICAL NETWORK ID:
  F12-HELP

*****
```

PIN KEY VARIANT

A code that specifies the key variant to be applied to the PIN key exchange key (KEK) when translating PIN keys. Valid values are:

- 0 = Variant 0--Translate the PIN key directly from the PIN KEK parts.
- 1 = Variant 1--Include the variant 1 constant with the PIN KEK parts when translating the PIN key. The Atalla variant 1 constant is hexadecimal 0800 0000 0000 0000.

Field Length: 1 numeric character
Required Field: Yes
Default Value: 0

MAC KEY VARIANT

A code that specifies the key variant to be applied to the MAC key exchange key (KEK) when translating MAC keys. Valid values are: Not used by the VisaNet ISO Interface.

0 = Variant 0--Translate the MAC key directly from the MAC KEK parts.

3 = Variant 3--Include the variant 3 constant with the MAC KEK parts when translating the MAC key. The Atalla variant 3 constant is hexadecimal 1800 0000 0000 0000.

Field Length: 1 numeric character

Required Field: No

Default Value: 0

LIMITS

The following fields are used to set the parameters for dynamic key management. They are not used by the VisaNet ISO Interface. One set of parameters determines when the key used for PIN encryption and translation should be changed and a second set determines when the key used for message authentication should be changed. Both types of keys can be changed based on time intervals, transaction activity, the number of errors since the last key change, or the number of consecutive errors. The MAC key can also be changed based on the number of key synchronization errors since the last key change. These limits can be used individually or in any combination. The counters and timers for the key are reset when the key is changed. If multiple limits are used, the interface will initiate a key exchange message and reset all of the counters and timers whenever any limit is exceeded. The value in the KEY PROCESSING TYPE field determines the type of key exchange message the interface will initiate.

The PIN key parameters on screen 3 must be set to 0 unless the ENCRYPT TYPE field on KEYF screen 1 is set to 1 (hardware PIN encryption). The MAC key parameters on screen 3 must be set to 0 unless the MAC ENCRYPT TYPE field on KEYF screen 1 is set to 1 (hardware message authentication).

PIN KEY TIMER VALUE

The maximum length of time that a PIN key should be used.

The time period can be expressed in minutes, hours, or days, depending on the value in the PIN KEY TIMER INTERVAL field. The shortest length of time is five minutes. Valid values are:

0, 5-1500 if PIN KEY TIMER INTERVAL is M (minutes)

0-1000 if PIN KEY TIMER INTERVAL is H (hours)

0-180 if PIN KEY TIMER INTERVAL is D (days)

BASE24 checks the values in the PIN KEY TIMER VALUE and PIN KEY TIMER INTERVAL fields when the KEYF record is added or updated. If the time is evenly divisible by a longer interval, BASE24 changes the value in the PIN KEY TIMER INTERVAL field to the longer interval and redisplay the value in the PIN KEY TIMER VALUE field expressed in the longer interval. For example, an entry of 60 minutes is automatically changed to an entry of 1 hour and an entry of 48 hours is automatically changed to an entry of 2 days. However, an entry of 61 minutes, even though it is greater than one hour, is not changed because it is not evenly divisible by 60.

This parameter is not used if the value in this field is set to 0. This parameter must be set to 0 unless the ENCRYPT TYPE field on KEYF screen 1 is set to 1 (hardware PIN encryption).

Field Length: 1-4 numeric characters

Required Field: No

Default Value: 0

MAC KEY TIMER VALUE

The maximum length of time that a MAC key should be used.

The time period can be expressed in minutes, hours, or days, depending on the value in the MAC KEY TIMER INTERVAL field. The shortest length of time is five minutes. Valid values are:

0, 5-1500 if MAC KEY TIMER INTERVAL is M (minutes)

0-1000 if MAC KEY TIMER INTERVAL is H (hours)

0-180 if MAC KEY TIMER INTERVAL is D (days)

BASE24 checks the values in the MAC KEY TIMER VALUE and MAC KEY TIMER INTERVAL fields when the KEYF record is added or updated. If the time is evenly divisible by a longer interval, BASE24 changes the value in the MAC KEY TIMER INTERVAL field to the longer interval and redisplay the value in the MAC KEY TIMER VALUE field expressed in the longer interval.

For example, an entry of 60 minutes is automatically changed to an entry of 1 hour and an entry of 48 hours is automatically changed to an entry of 2 days. However, an entry of 61 minutes, even though it is greater than one hour, is not changed because it is not evenly divisible by 60.

This parameter is not used if the value in this field is set to 0.

This parameter must be set to 0 unless the MAC ENCRYPT TYPE field on KEYF screen 1 is set to 1 (hardware message authentication).

Field Length: 1-4 numeric characters

Required Field: No

Default Value: 0

PIN KEY TIMER INTERVAL

A code specifying the unit of time used with the value in the PIN KEY TIMER VALUE field to set the maximum length of time that a PIN key should be used. BASE24 changes the value in the PIN KEY TIMER INTERVAL field to the largest possible unit of time when the KEYF record is added or updated. Refer to the PIN KEY TIMER VALUE field for additional information. Valid values are:

D = Days
H = Hours
M = Minutes

Field Length: 1 alphabetic character
Required Field: No
Default Value: M

MAC KEY TIMER INTERVAL

A code specifying the unit of time used with the value in the MAC KEY TIMER VALUE field to set the maximum length of time that a MAC key should be used. BASE24 changes the value in the MAC KEY TIMER INTERVAL field to the largest possible unit of time when the KEYF record is added or updated. Refer to the MAC KEY TIMER VALUE field for additional information. Valid values are:

D = Days
H = Hours
M = Minutes

Field Length: 1 alphabetic character
Required Field: No
Default Value: M

PIN KEY TRAN

The maximum number of transactions that can be performed before changing the PIN key. Valid values are:

- 0 = This parameter is not used.
- 50-100000 = The maximum number of transactions.

This parameter must be set to 0 unless the ENCRYPT TYPE field on KEYF screen 1 is set to 1 (hardware PIN encryption).

Field Length: 1-6 numeric characters
Required Field: No
Default Value: 0

MAC KEY TRAN

The maximum number of transactions that can be performed before changing the MAC key. Valid values are:

- 0 = This parameter is not used.
- 50-100000 = The maximum number of transactions.

This parameter must be set to 0 unless the MAC ENCRYPT TYPE field on KEYF screen 1 is set to 1 (hardware message authentication).

Field Length: 1-6 numeric characters
Required Field: No
Default Value: 0

PIN KEY ERROR

The maximum number of PIN translation errors that can occur with the present PIN key before changing the key. Valid values are:

- 0 = This parameter is not used.
- 5-9999 = The maximum number of errors.

This parameter must be set to 0 unless the ENCRYPT TYPE field on KEYF screen 1 is set to 1 (hardware PIN encryption).

Field Length: 1-4 numeric characters
Required Field: No
Default Value: 0

MAC KEY ERROR

The maximum number of MAC verification errors that can occur with the present MAC key before changing the key. Valid values are:

- 0 = This parameter is not used.
- 5-9999 = The maximum number of errors.

This parameter must be set to 0 unless the MAC ENCRYPT TYPE field on KEYF screen 1 is set to 1 (hardware message authentication).

Field Length: 1-4 numeric characters
Required Field: No
Default Value: 0

CONSECUTIVE PIN KEY ERROR

The maximum number of consecutive PIN translation errors that can occur with the present PIN key before changing the key. A successful PIN translation, as well as a change in the PIN key, resets the counter associated with this limit. Valid values are:

- 0 = This parameter is not used.
- 5-9999 = The maximum number of errors.

This parameter must be set to 0 unless the ENCRYPT TYPE field on KEYF screen 1 is set to 1 (hardware PIN encryption).

Field Length: 1-4 numeric characters
Required Field: No
Default Value: 0

CONSECUTIVE MAC KEY ERROR

The maximum number of consecutive MAC verification errors that can occur with the present MAC key before changing the key. A successful MAC verification, as well as a change in the MAC key, resets the counter associated with this limit.

Valid values are:

- 0 = This parameter is not used.
- 5-9999 = The maximum number of errors.

This parameter must be set to 0 unless the MAC ENCRYPT TYPE field on KEYF screen 1 is set to 1 (hardware message authentication).

Field Length: 1-4 numeric characters

Required Field: No

Default Value: 0

KMAC SYNCHRONIZATION ERROR

The maximum number of key synchronization errors that can occur with the present MAC key before changing the key.

Key synchronization is comparing the check digits returned from a security module for the present MAC key with the check digits stored in the KEYF record for the present MAC key. These KEYF MAC key check digit values appear in the CHECK DIGITS1 and CHECK DIGITS2 fields on KEYF screen 2. Valid values are:

- 0 = This parameter is not used.
- 3-9999 = The maximum number of errors.

This parameter must be set to 0 unless the MAC ENCRYPT TYPE field on KEYF screen 1 is set to 1 (hardware message authentication).

Field Length: 1-4 numeric characters

Required Field: No

Default Value: 0

CLEAR OLD KEY TIMER VALUE

The maximum length of time, in seconds, that an old key can be used before it is automatically cleared by the interface process.

The INBOUND PIN KEY, OUTBOUND PIN KEY, INBOUND MAC KEY, and OUTBOUND MAC KEY fields on KEYF screen 2 can contain information for two keys, identified as KEY1 and KEY2. The value in the CURRENT INDEX field for each type of key identifies which key (1 or 2) is currently in use. At the time a new key is placed in service, the other key becomes the old key. For example, if Inbound PIN Key number 1 is currently in use when BASE24 receives a new key, the new key is stored as Inbound PIN Key number 2. Inbound PIN Key number 2 becomes the current key and Inbound PIN Key number 1 becomes the old key. (If Inbound PIN Key number 2 is the current key, it becomes the old key and the new key is stored as Inbound PIN Key number 1.)

When processing a transaction, BASE24 uses the new key for PIN processing or message authentication. If the security device used by BASE24 for PIN processing or message authentication detects an error because the interchange is still using the old key, it can repeat the PIN processing or message authentication using the old key before BASE24 declines the transaction. The value in this field controls how long the old key is available. Valid values are:

- 0 = The old key is not cleared.
- 1-9999 = The maximum length of time, in seconds, that an old key can be used before being cleared.

This parameter must be set to 0 unless the ENCRYPT TYPE field on KEYF screen 1 is set to 1 (hardware PIN encryption) or the MAC ENCRYPT TYPE field on KEYF screen 1 is set to 1 (hardware message authentication).

Field Length: 1-4 numeric characters
Required Field: No
Default Value: 0

ORIGINATING ID

The value in this field is used to determine the sender of dynamic key management messages. The values in the RECEIVING ID and ORIGINATING ID fields need to be agreed upon by the sender and receiver. They do not need to match any specific values in the BASE24 database.

Field Length: 4-16 alphanumeric characters

Required Field: Yes, if the KEY PROCESSING TYPE field contains a value other than N.

Default Value: No default value

RECEIVING ID

The value in this field is used to determine the receiver of dynamic key management messages. The values in the RECEIVING ID and ORIGINATING ID fields need to be agreed upon by the sender and receiver. They do not need to match any specific values in the BASE24 database.

Field Length: 4-16 alphanumeric characters

Required Field: Yes, if the KEY PROCESSING TYPE field contains a value other than N.

Default Value: No default value

KEY PROCESSING TYPE

A code identifying the type of dynamic key management processing this interface can perform. Valid values are:

C = Co-network--Each interface is only responsible for exchanging its outbound key.

M = Master--This interface is responsible for all key generation.

N = None--This interface does not generate or receive keys.

S = Slave--This interface receives keys, but does not generate them.

Dynamic key management requires hardware security devices for PIN management and message authentication. If the ENCRYPT TYPE and MAC ENCRYPT TYPE fields on KEYF screen 1 both are set to values other than 1, meaning security devices are not being used, the value in this field must be set to N (none).

Dynamic key management in a co-network configuration requires the use of separate keys for inbound and outbound messages. This is because each co-network process must generate the key used for its outbound messages and two processes cannot share the responsibility for generating one key. If the NUMBER OF KEYS field on KEYF screen 1 is set to 1, the value in this field cannot be set to C (co-network).

Field Length: 1 alphabetic character

Required Field: No

Default Value: N

NOTARIZATION SUPPORTED

A code identifying whether this interface supports Key Notarization.

BASE24 does not currently support Key Notarization, so the only valid value is 0.

Field Length: 1 numeric character

Required Field: No

Default Value: 0

KEY6 Settings

Each interface process must have its own Key6 File (KEY6) record if Triple to Single DES encryption is required. Otherwise, the Key File (KEYF) used. The following describes how the KEY6 must be configured for the VisaNet ISO Interface.

The fields on the screens of the KEY6 are almost identical to those on the KEYF. Therefore, only the screen fields on the KEY6 that differ from those on the KEYF are described below.

KEY6 Screen 1 Settings

MAC KEY LENGTH

A code identifying whether single- or double-length Key MAC keys are being used with this interface. Not used by the VisaNet ISO Interface. Valid values are:

- 1 = Single-length MAC keys
- 2 = Double-length MAC keys

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: Yes
DEFAULT VALUE: 1

KEY6 Screen 2 Settings

OUTBOUND KEYS

The following fields contain the PIN keys used for outbound transactions (that is, transactions sent by the interface from BASE24 transaction processing system to the DPC or the interchange).

PIN KEY1

A double-length key used for the translation of PINs in transactions sent to the DPC or interchange. The interface process uses the key in these fields when the CURRENT INDEX field contains a value of 1. Valid values for each position in these fields are 0 through 9 and A through F. These fields must contain 32 valid characters, with 16 characters per field.

OCCURS: 2 times

FIELD LENGTH: 16 hexadecimal characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000000000000000

PIN KEY2

A double-length key used for the translation of PINs in transactions sent to the DPC or interchange. The interface process uses the key in these fields when the CURRENT INDEX field contains a value of 2. Valid values for each position in these fields are 0 through 9 and A through F. These fields must contain 32 valid characters, with 16 characters per field.

OCCURS: 2 times

FIELD LENGTH: 16 hexadecimal characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000000000000000

INBOUND KEYS

The following fields contain the PIN keys used for inbound transactions (that is, transactions sent by the DPS or interchange to the BASE24 processing system interface).

PIN KEY1

A double-length key used by the DPC or interchange to translate PINs in the transactions sent to the BASE24 transaction processing system. The interface process uses the key in these fields when the CURRENT INDEX field contains a value of 1. Valid values for each position in these fields are 0 through 9 and A through F. These fields must contain 32 valid characters, with 16 characters per field.

OCCURS: 2 times

FIELD LENGTH: 16 hexadecimal characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000000000000000

PIN KEY2

A double-length key used by the DPC or interchange to translate PINs in the transactions sent to the BASE24 transaction processing system. The interface process uses the key in these fields when the CURRENT INDEX field contains a value of 2. Valid values for each position in these fields are 0 through 9 and A through F. These fields must contain 32 valid characters, with 16 characters per field.

OCCURS: 2 times

FIELD LENGTH: 16 hexadecimal characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000000000000000

KEY6 Screen 3 Settings

MAC KEY INFORMATION

OUTBOUND KEYS

The following fields contain the MAC keys used for outbound transactions (that is, transactions sent by the interface from BASE24 transaction processing system to the DPC or co-network).

MAC KEY1

A key used by the BASE24 interface to generate MACs in messages from the BASE24 transaction processing system to the DPC or co-network. The interface process uses the key in these fields when the CURRENT INDEX field contains a value of 1. Valid values for each position in these fields are 0 through 9 and A through F. These fields must contain 32 valid characters, with 16 characters per field. Not used by the VisaNet ISO Interface.

OCCURS: 2 times

FIELD LENGTH: 16 hexadecimal characters

REQUIRED FIELD: No

DEFAULT VALUE: 0000000000000000

MAC KEY2

A key used by the BASE24 interface to generate MACs in messages from the BASE24 transaction processing system to the DPC or co-network. The interface process uses the key in these fields when the CURRENT INDEX field contains a value of 2. Valid values for each position in these fields are 0 through 9 and A through F. These fields must contain 32 valid characters, with 16 characters per field. Not used by the VisaNet ISO Interface.

OCCURS: 2 times

FIELD LENGTH: 16 hexadecimal characters

REQUIRED FIELD: No

DEFAULT VALUE: 0000000000000000

INBOUND KEYS

The following fields contain the MAC keys used in inbound transactions (that is, transactions sent by the DPC or co- network to the BASE24 interface).

MAC KEY1

A key used by the BASE24 interface to verify MACs generated by the DPC or interchange. The interface process uses the key in these fields when the CURRENT INDEX field contains a value of 1. Valid values for each position in these fields are 0 through 9 and A through F. These fields must contain 32 valid characters, with 16 characters per field. Not used by the VisaNet ISO Interface.

OCCURS: 2 times
FIELD LENGTH: 16 hexadecimal characters
REQUIRED FIELD: No
DEFAULT VALUE: 0000000000000000

MAC KEY2

A key used by the BASE24 interface to verify MACs generated by the DPC or interchange. The interface process uses the key in these fields when the CURRENT INDEX field contains a value of 2. Valid values for each position in these fields are 0 through 9 and A through F. These fields must contain 32 valid characters, with 16 characters per field. Not used by the VisaNet ISO Interface.

OCCURS: 2 times
FIELD LENGTH: 16 hexadecimal characters
REQUIRED FIELD: No
DEFAULT VALUE: 0000000000000000

Acquirer Information File (AIF)

The Acquirer Information File (AIF) contains network assigned acquirer data. One record must be placed in the AIF each switch FIID, terminal logical network, terminal FIID and/or acquirer institution identification number that can be sent by an acquirer host in PLUS transactions to BASE24.

The AIF allows BASE24 to associate external institutions forwarding transactions to BASE24 through acquirer hosts with their VisaNet-assigned Acquirer Identifications. When a VisaNet-bound transaction is received by BASE24 from an acquirer host, the VisaNet ISO Interface process uses the switch FIID, terminal logical network, terminal FIID and acquirer institution identification number provided in the transaction to locate a corresponding record in the AIF. Data from the AIF is mapped to data element 32 to be sent in the message to VisaNet.

File maintenance operations on the AIF are performed using the standard BASE24 function keys for files maintenance.

Accessing the AIF Screen

To access the AIF screen, an operator must move to screen 12 of the ICFE for the VisaNet ISO Interface. From there, the operator must press the F8 function key. This moves the operator to screen 1 of the VISA Menu screen. From there, the operator must place the cursor on the Acquirer Information File entry and press the F1 function key.

AIF Screen Settings

AIF screen 1 contains the switch FIID, terminal logical network, the terminal FIID, acquirer institution identification number, acquirer identification, proprietary member center identification code and sponsor identification.

If the interface is configured to utilize the AIF and an AIF record is retrieved with a non-blank ACQUIRER IDENTIFICATION, the ACQUIRER IDENTIFICATION of the AIF record will be mapped to data element 32 for ATM transactions sent outbound from the interface to the network. If the interface is not configured to utilize the AIF, or an AIF record is not found or an AIF record is found with a blank ACQUIRER ID, the value in the VISA ACQUIRER BIN field on the VIIF screen will be mapped to data element 32.

The screen is shown below, followed by a description of its fields.

```
-----
BASE24-SWI  ACQ INFORMATION FILE      LGNT  YY/MM/DD HH:MM  01 OF 01

                SWITCH FIID: _____
            TERMINAL LOGICAL NETWORK: _____
                TERMINAL FIID: _____
ACQUIRER INSTITUTION IDENTIFICATION NUMBER: _____

ACQUIRER IDENTIFICATION: _____
PROPRIETARY MEMBER CENTER IDENTIFICATION CODE: _____
SPONSOR IDENTIFICATION: _____
```

```
***** BASE24 *****
                FILE DESTINATION:          NEW LOGICAL NETWORK ID:
                                           F12-HELP
```

SWITCH FIID

The FIID uniquely identifying the VisaNet interchange as specified in the INTERCHANGE FIID field on screen 1 of the ICFE.

FIELD LENGTH: 4 alphanumeric characters or all '*'
 REQUIRED FIELD: Yes
 DEFAULT VALUE: None

TERMINAL LOGICAL NETWORK

The logical network of the originating terminal.

FIELD LENGTH: 4 alphanumeric characters or all '*'
 REQUIRED FIELD: Yes
 DEFAULT VALUE: None

TERMINAL FIID

The originating terminal's owner FIID.

FIELD LENGTH: 4 alphanumeric characters or all '*'
REQUIRED FIELD: Yes
DEFAULT VALUE: None

ACQUIRER INSTITUTION IDENTIFICATION

The terminal owner's routing/identification number.

FIELD LENGTH: 11 numeric characters or all '*'
REQUIRED FIELD: Yes
DEFAULT VALUE: None

ACQUIRER IDENTIFICATION

A unique acquirer identification value (Acquirer BIN) that is assigned by the network.

FIELD LENGTH: 11 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

PROPRIETARY MEMBER CENTER IDENTIFICATION CODE

The PLUS-assigned Proprietary Member Center (PMC) ID with which this terminal owner FIID is associated.

FIELD LENGTH: 3 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

SPONSOR IDENTIFICATION

An identification number that uniquely identifies the financial institution that sponsors an acquirer terminal.

FIELD LENGTH: 11 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

Station Name File (SNF)

The Station Name File contains one record for each VisaNet ISO Interface process. Each process contains up to 16 station pairs on which messages are sent to and from the VISA Interchange.

The SNF is read at initialization and on warmboots to obtain the station names to which the VisaNet ISO Interface is connected to.

Accessing the SNF Screen

To access the SNF screen, an operator must move to screen 12 of the ICFE for the VisaNet ISO Interface. From there, the operator must press the F8 function key. This moves the operator to screen 1 of the VISA Menu screen. From there, the operator must place the cursor on the Station Name File entry and press the F1 function key.

PROCESS

The name of the VisaNet ISO Interface as defined in the Network Environment File.

FIELD LENGTH: system protected

REQUIRED FIELD: Yes

DEFAULT VALUE: PROCESS from ICFE Screen 1

SEND STATION

The symbolic name of the station on which messages will be sent to the interchange. This name must match the name of a station defined in the Network Environment File for the VisaNet ISO Interface process and must be paired with a receive station.

FIELD LENGTH: 16 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

RECEIVE STATION

The symbolic name of the station on which messages will be received from the interchange. This name must match the name of a station defined in the Network Environment File for the VisaNet ISO Interface process and must be paired with a send station. The name may be identical to the send station on the same line but must be unique between lines.

FIELD LENGTH: 16 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

TYPE

This value indicates the type of station pair. Valid values are:

A = Acquirer

I = Issuer

B = Both (Acquirer and Issuer)

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: Yes

DEFAULT VALUE: B

SWITCH DATA

The first six characters are the acquirer station ID. If position 7 is "A" the station will be logged on/off in advice mode as a group. The field will be formatted as follows.

xxxxxxabbbbbbbbbb

where x's = issuer station ID

a = AVLOGON flag

b's = blanks

FIELD LENGTH: 16 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: Spaces

SWITCH INFO

The first six characters are the issuer station ID, the seventh character is the system indicator. If position 8 contains an "A" the station will be logged on/off in advice mode as a group. The field is formatted as follows:

xxxxxsabbbbbbbbbb

where x's = issuer station ID

s = system indicator (B = Base, D = Debit)

a = AVLOGON flag

b's = blanks

FIELD LENGTH: 16 alphanumeric characters

DEFAULT VALUE: Spaces

Switch Terminal File (STF)

The Switch Terminal File (STF) contains one record for each merchant that is required to provide the Merchant Verification Value in acquired transactions.

The STF is read at initialization and during warmboots. The records are stored in extended memory.

The Switch Terminal File (STF) is used only if the BASE24 VisaNet Acquirer system has merchants that are required to send a Merchant Verification Value (MVV) to Visa and the Alternate Merchant ID Token is not available to carry the MVV. The VisaNet Interface uses the STF to match the MVV to a merchant, so every merchant that is required to send an MVV needs an entry in the STF. One of the keys into the STF is the retailer ID, which is found in the POS internal message's `retl^id` field. For an acquirer transaction, this field is filled from the PTDF RETAILER ID field on screen 1.

ATM acquirers in the United Kingdom can also use the STF to differentiate between on and off premise ATMs. When the VisaNet Interface is processing an ATM request transaction to be sent to Visa, if the interface is operating in the United Kingdom the STF file is read and if a record is found, the service development subfield position 4 in DE 126 is set to a "1". This will indicate that the ATM is an off premise or remote ATM. The primary key for reading the STF record for an off premise ATM are: the FIID from the Process Control Table (PCT), the terminal owner FIID from the ATM internal message and the terminal ID from the internal message.

The STF screen is shown on the following pages, followed by a description of the fields that are used by the VisaNet Interface.

NOTE

Only acquirers that are not able to use the Alternate Merchant ID token will need to use the STF.

ACCESSING THE STF SCREEN

There are three ways to access the STF screen.

1. During the initial logon into the BASE24 AFT system, after the user id, password, In have been filled in, type STF in the FILE DESTINATION field on the bottom of the BASE24 LOGON Screen, then hit F1.
2. Logon to the BASE24 AFT system, entering the VIRTUAL MENU screen. Choose SWITCH FUNCTIONS and hit F1. Choose STF and hit F1.

3. While logged into the BASE24 AFT system, type STF in the FILE DESTINATION field and hit F16.

As with any other BASE24 AFT screen, the operator must have the appropriate security access to read/write/update/delete from the STF.

STF SCREEN SETTINGS

```

-----
BASE24-SWI   STF FILE MAINTENANCE   yy/mm/dd  hh:mm  01 OF 01

SWITCH FIID:           MERCHANT ID:
TERMINAL FIID:         TERMINAL ID:           PROD ID:

SWITCH MERCHANT INFORMATION           SWITCH TERMINAL INFORMATION

ID: _____                ID: _____
OFFSET: _____            OFFSET: _____
LENGTH: _____            LENGTH: _____
ALT ID: _____

                ON PREMISE FLAG:  _ (Y/N)
                EMV CERTIFIED FLAG: _ (Y/N)
                CARDHOLDER ACTIVATED TERMINAL: _
                TERMINAL INPUT CAPABILITIES: _
MERCHANT CUSTOMER SERVICE PHONE NUM: _____

*****
NEW PAGE:      FILE DESTINATION:  NEW LOGICAL NETWORK ID:
F12-HELP
-----

```

The following fields on STF screen 1 must be set as indicated.

SWITCH FIID

An identifier for the VisaNet financial institution. The value entered in this field must be identical to the value entered in the INTERCHANGE FIID field on ICF screen 1.

FIELD LENGTH: 1-4 alphanumeric characters
 REQUIRED FIELD: Yes
 DEFAULT VALUE: None

MERCHANT ID

An identifier for the merchant. The value must match the value in pstm.retI^id, which is obtained from the PTDF screen 1RETAILER ID field. The RETAILER ID field from the PTDF is also the key into the PRDF, which contains one record for each retailer. An entry for each retailer that is required to send the Merchant Verification Value (MVV) to Visa will be needed in the STF.

An exception to this would be if multiple PRDF records represent the same merchant. For instance, assume an acquirer is processing for a large merchant named Savings R US. In this instance, the acquirer has decided to use separate PRDF records for each store. The acquirer has PRDF records for each store as STORE1, STORE2, STORE3, etc. Since all of these stores represent a single merchant, Savings R US, then the MERCHANT ID field should be set to STORE*****. This way, all the stores will match on the correct MVV value, without the need for an entry in the STF for each record in the PRDF that represents the merchant Savings R US.

For ATM acquirers in the United Kingdom that support remote ATM terminals, this field should be set to asterisks.

FIELD LENGTH: 1-20 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

TERMINAL FIID

The FIID associated with the terminal. This field must match the terminal FIID in the ATM internal message for ATM off premise support (United Kingdom only). For POS messages, this field should match the terminal FIID field from the POS internal message, which is contained in the terminal FIID field in the PTDF.

FIELD LENGTH: 1-4 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

TERMINAL ID

The BASE24 terminal identifier. The value entered in this field must be left-justified and blank-filled. This field must match the terminal ID field in the ATM internal message for ATM off premise support (United Kingdom only). For POS records, this field should match the terminal id field of the POS internal message terminal ID field from the PTDF.

FIELD LENGTH: 1-16 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

NOTE

During transaction processing there will be three searches, one for each subelement of the primary key (TERMINAL FIID, MERCHANT ID and TERMINAL ID). Matches in all three subelements will be considered a full match. A failure to match on any one subelement will be considered a failure to match on the entire key.

Each of these three searches will end once the wild card character is found. In this case a "*", which is a reserved character used to indicate a wild card, will force the code to assume that the rest of the characters within the subelement, which includes spaces, are a match: MERCH* will therefore be viewed the same as MERCH*NT or MERCH*****. Additional examples are described in the table below.

Terminal FIID	Merchant ID	Terminal ID	Results
SW34	43311111111111111111	S1A^POSDEVICE1	Exact match on all fields
SW34	43311111111111111111	S1A^POSDEVICE***	Terminal ID which is a partial match
SW34	43311111111111111111	*****	Terminal ID is full wildcard
SW34	433*****	S1A^POSDEVICE1	Partial wildcard on Merchant ID
SW34	433*****	*****	Partial wildcard on Merchant ID; exact match on Terminal FIID and full wildcard on Terminal ID
SW34	*****	S1A^POSDEVICE1	Exact match only on Terminal FIID & ID
SW34	*****	*****	Must exact match on just Terminal FIID
SW**	433*****	*****	Partial wildcard on Merchant ID & Terminal FIID
TGT3	126*****	*****	Partial wildcard on Merchant ID; exact match on Terminal FIID and full wildcard on Terminal ID
TGT*	126*****	*****	Partial wildcard on Merchant ID and Terminal FIID; full wildcard on Terminal ID
TGT*	901*****	*****	Partial wildcard on Merchant ID and Terminal FIID; full wildcard on Terminal ID
****	43311111111111111111	S1A^POSDEVICE1	Exact match on all except Terminal FIID

Terminal FIID	Merchant ID	Terminal ID	Results
****	43311111111111111111	*****	Exact match only on Merchant ID
****	433*****	*****	Partial wildcard on Merchant ID; full wildcard on the rest
****	*****	S1A^POSDEVICE1	Must exact match on just Terminal ID
****	*****	*****	Full wildcard match on all fields

Although "*" will be entered on the STF screen for sake of the user, the interface will convert a "*" to a "~" in the TERMINAL FIID, MERCHANT ID and TERMINAL ID fields prior to loading the STF records into the internal table. The internal table will then be sorted. When the interface searches the internal table later, the wildcard entries will be given a lower priority over an exact match during transaction processing. As a result, a "~" will not be allowed in the TERMINAL FIID, MERCHANT ID and TERMINAL ID fields on STF screen 1.

PROD ID

An identifier for the product with which the terminal is associated. Valid values are:

01 = ATM (only ATM is valid for UK ATM off premise support)
 02 = POS (only POS is valid for the Merchant Verification Value)

FIELD LENGTH: 2 alphanumeric characters
 REQUIRED FIELD: Yes
 DEFAULT VALUE: None

SWITCH MERCHANT INFORMATION

The following fields contain information on the interchange merchant.

ID

The interchange merchant identifier to which the BASE24 merchant identifier should be translated. The value entered in this field should be left-justified and blank-filled. The value is the Merchant Verification Value (MVV) and is in the following format:

VVVVVVaaaa

Where:

VVVVVV - 6 character value assigned by Visa to the merchant

aaaa - 4 character value defined by Visa in conjunction with the acquirer.

FIELD LENGTH: 1-19 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

This field is not used for ATM records.

OFFSET

This field is not used by the VisaNet Interface.

FIELD LENGTH: 1-2 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0

LENGTH

This field is not used by the VisaNet Interface.

FIELD LENGTH: 1-2 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0

SWITCH TERMINAL INFORMATION

The following fields contain information about the interchange's terminal.

ID

This field is not used by the VisaNet Interface.

FIELD LENGTH: 1-19 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

OFFSET

This field is not used by the VisaNet Interface.

FIELD LENGTH: 1-2 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0

LENGTH

This field is not used by the VisaNet Interface.

FIELD LENGTH: 1-2 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0

ALT ID

The VisaNet ISO Interface uses the value in this field for the MasterCard Assigned ID. This value will be used to format field 62.20 Merchant Verification Value in Healthcare Auto-Substantiation transactions initiated with a MasterCard card. Visa will use the value received in field 62.20 to format the MasterCard Assigned ID in DE 48, SE 32 before forwarding the message to MasterCard.

FIELD LENGTH: 15 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

ON PREMISE FLAG

This field should be set to "Y" for ATM terminals that are used in the United Kingdom and are remote locations.

FIELD LENGTH: 1 alphanumeric character
REQUIRED FIELD: No
DEFAULT VALUE: None

EMV CERTIFIED FLAG

This field is not used by the VisaNet Interface

FIELD LENGTH: 1 alphanumeric character
REQUIRED FIELD: No
DEFAULT VALUE: None

CARDHOLDER ACTIVATED TERMINAL

This field is not used by the VisaNet Interface

FIELD LENGTH: 1 alphanumeric character
REQUIRED FIELD: No
DEFAULT VALUE: None

TERMINAL INPUT CAPABILITIES 1 (N)

This field is not used by the VisaNet Interface

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: No
DEFAULT VALUE: None

MERCHANT CUSTOMER SERVICE PHONE NUM

FIELD LENGTH: Up to 13 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: Blanks

Token File (TKN)

The Release 5.0 or above VisaNet Interface user may wish to update the token records in the Token File for the following reasons:

- a. Log the chosen tokens to the Interchange Log File (ILF), Transaction Log File (TLF), and/or the POS Transaction Log File (PTLF).
- b. Extract the chosen tokens from the Interchange Log File (ILF), Transaction Log File (TLF), and/or the POS Transaction Log File (PTLF).
- c. Send the chosen tokens to the Host.

An explanation of the Token File screens and screen fields can be found in the "BASE24 Tokens Manual".

VisaNet Blocked Bin File (VBBF)

The VisaNet Blocked Bin File (VBBF) contains one record for each BASE24 terminal affiliated with Visa transactions at which the user can block cards belonging to certain BINs (Bank Institution Numbers) from accessing the VisaNet system.

The key to VBBF records is the BASE24-assigned terminal identifier.

The VisaNet ISO Interface process accesses data maintained in the VBBF to build an internal memory table. When a transaction is received from a BASE24 terminal whose terminal identifier is in the internal table, the card number is checked against BINs for that terminal. If a match is found, the transaction is denied or referred.

Accessing the VBBF Screen

Operator access to the VBBF is either allowed or restricted based on the security access to ICFE screen 12. To access the VBBF screen, an operator must move to screen 12 of the ICFE for the VisaNet ISO Interface. From there, the operator must press the F8 function key. This moves the operator to screen 1 of the VISA Menu screen. From there, the operator must place the cursor on the VisaNet BLOCKED BIN FILE entry and press the F1 function key.

VBBF Screen Settings

VBBF screen 1 allows users to identify the record to be accessed and add, update, or delete that record.

VBBF screen 1 is displayed below followed by descriptions of its fields.

```

-----
BASE24-VISA VISANET BIN BLOCK FILE LNET YY/MM/DD HH:MM 01 OF 01

TERM-ID: _____

BIN TO BLOCK:
  PREFIX SUB  PREFIX RANGE  PREFIX SUB  PREFIX RANGE
    LOW HIGH    LOW HIGH
-----
_____
_____
_____
_____
_____
_____
_____
_____
_____
_____

RECORD LAST CHANGED: YY/MM/DD HH:MM BY USER: 0255 , 00000255 CHANGE
***** BASE24 *****
NEW PAGE:      FILE DESTINATION:      NEW LOGICAL NETWORK ID:
F12-HELP
-----

```

TERM-ID

The BASE24 terminal ID for a terminal that will restrict BINs access to the VisaNet Interchange.

FIELD LENGTH: 16 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

BIN TO BLOCK

PREFIX

The first four digits of a range of restricted card prefixes. For example, if a range of restricted card prefixes is 444400 - 444450, this field would contain 4444.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 0

SUB PREFIX RANGE LOW

The last two digits of the low end of the range of restricted card prefixes. For example, if a range of restricted card prefixes is 444400 - 444450, this field would contain 00.

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 0

SUB PREFIX RANGE HIGH

The last two digits of the high end of the range of restricted card prefixes. For example, if a range of restricted card prefixes is 444400 - 444450, this field would contain 50.

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 0

VisaNet Institution Identification File (VIIF)

The VisaNet Institution Identification File (VIIF) contains one record for each FIID in the BASE24 system that is able to send transactions to VisaNet or receive transactions from VisaNet. Each record contains processing information specific to the FIID.

The key to VIIF records is the BASE24-assigned FIID.

The VisaNet ISO Interface process accesses data maintained in the VIIF to build an internal memory table. When a transaction is received from BASE24 with a terminal FIID matching one found in the internal table, the acquiring institution ID is moved into the external message. When a response from BASE24 is received the record is retrieved by the card FIID. The issuer institution ID is moved into the external message. In VisaNet requests, the BIN is matched against the VIIF record to find appropriate default account and the pin verify option. The record is found by prefix on a request from VISA.

Accessing the VIIF Screen

Operator access to the VIIF is either allowed or restricted based on the security access to ICFE screen 12. To access the VIIF screen, an operator must move to screen 12 of the ICFE for the VisaNet ISO Interface. From there, the operator must press the F8 function key. This moves the operator to screen 1 of the VISA Menu screen. From there, the operator must place the cursor on the VisaNet INSTITUTION IDENTIFICATION FILE entry and press the F1 function key.

VIIF Screen Settings

VIIF screen 1 allows users to identify the record to be accessed and add, update, or delete that record. Additional VisaNet Issuer data may be displayed by pressing the F9 function key for the next 10 prefixes, or the F11 function key for the previous 10 prefixes.

VISANET SYSTEM

A code indicating the VisaNet system to which this VIIF record corresponds. An institution has a BIN for its SMS connection and a BIN for its BASE I connection if it issues both types of cards or if it issues one type and sends acquirer messages to the other VisaNet system. Valid values are:

B = BASE I

D = SMS

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: Yes

DEFAULT VALUE: None

RETAIN CARDS

A value indicating whether the terminals for this FIID will capture cards. Valid values are:

0 = No, do not capture cards.

1 = Yes, capture cards.

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: No

DEFAULT VALUE: 1 (Yes, capture cards)

ACQ

The VisaNet-assigned bank identification number for this financial institution as an acquirer. This number is used in all transactions acquired by this institution and sent to VisaNet. VisaNet keeps acquirer totals under this BIN.

FIELD LENGTH: 11 numeric characters

REQUIRED FIELD: Yes, if FIID acting as an acquirer.

DEFAULT VALUE: 00000000000

ISS

The VisaNet-assigned bank identification number for this financial institution as an issuer. This number is used in all transactions sent to this institution by VisaNet. VisaNet keeps issuer totals under this BIN.

FIELD LENGTH: 11 numeric characters
REQUIRED FIELD: Yes, if FIID acting as an issuer.
DEFAULT VALUE: 00000000000

VISANET BUSINESS ID

The VISA-assigned Business ID of the acquirer that signed the merchant. This field is used in outbound message that is sent by a U. S. acquirer except ATM transactions.

FIELD LENGTH: 8 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: 00000000

ACQ CNTRY CDE

The 3 byte alpha country code for the institution to which this VIIF record corresponds. Used to fill the Acquiring Institution Country Code (Field 19) in outbound requests for acquirers that process for multiple institutions in different countries.

FIELD LENGTH: 3 alphabetic characters
REQUIRED FIELD: No
DEFAULT VALUE: None

VISANET ISSUER

PREFIX

The first four digits of a range of card prefixes that this institution authorizes. For example, if the range of card prefixes is 444400 - 444450, this field would contain 4444.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes, if FIID acting as an issuer.

DEFAULT VALUE: 0

SUB PREFIX RANGE LOW

The last two digits of the low end of the range of institution card prefixes. For example, if the range of card prefixes is 444400 - 444450, this field would contain 00.

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: Yes, if FIID acting as an issuer.

DEFAULT VALUE: 0

SUB PREFIX RANGE HIGH

The last two digits of the high end of the range of institution card prefixes. For example, if the range of card prefixes is 444400 - 444450, this field would contain 50.

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: Yes, if FIID acting as an issuer.

DEFAULT VALUE: 0

PIN VERIFY OPTION

A value indicating where the PIN in a transaction will be verified. Valid values are:

- 0 = Verify at issuer
- 1 = Verify at VisaNet
- 2 = Authorize without PIN

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: No
DEFAULT VALUE: 0 (Verify at issuer)

FROM ACCT TYPE

The account from which funds are debited if a VisaNet request does not specify the account type. Valid values are:

- 01 = DDA
- 11 = Savings
- 31 = Credit card

FIELD LENGTH: 2 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

TO ACCT TYPE

The account type to which funds are credited if a VisaNet request does not specify an account type. Valid values are:

- 01 = DDA
- 11 = Savings
- 31 = Credit card

FIELD LENGTH: 2 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

VisaNet ISO Services File (VISF)

The VisaNet ISO Services File (VISF) contains four records associated with four card types; VISA, PLUS, Interlink, and Check Card II.

The VisaNet ISO Interface process accesses data maintained in the VISF to build an internal memory table. When a transaction is received from BASE24, the service, determined by router, is compared to the services defined for the corresponding card type in the internal table. If a match is found, the external message is formatted based on the system (BASE I or SMS) and the network (VISA, PLUS, Interlink, or CHECK CARD II).

Accessing the VISF Screen

Operator access to the VISF screens is either allowed or restricted based on the security access to ICFE Screen 12. To access the VISF screens, an operator must move to Screen 12 of the ICFE for the VisaNet ISO Interface. From there, the operator must press the F8 function key. This moves the operator to Screen 1 of the VISA Menu Screen. From there, the operator must place the cursor on the VisaNet/ISO SERVICE FILE entry and press the F1 function key.

VISF Screen 1 Settings

VISF Screen 1 allows users to identify the record to be accessed and add, update, or delete that record. Screen 1 determines the services available for VISA.

VISF Screen 1 is displayed below followed by descriptions of its fields.

VISF Screen 1

```
-----
BASE24-VISA VISANET  <ln>  <date>  <time>  01 OF 03

      VISA SERVICES

INTERCHANGE FIID:_____ PROCESS:_____

SYSTEM:   ATM:  __  POS:  __

  __ (description)  __  __
  __  __  __
  __  __  __
  __  __  __
  __  __  __
  __  __  __
  __  __  __
  __  __  __
  __  __  __
  __  __  __

RECORD LAST CHANGED: YY/MM/DD HH:MM  BY USER: 0255,00000255 CHANGE
***** BASE24 *****
NEW PAGE:   FILE DESTINATION:   NEW LOGICAL NETWORK ID:
F12-HELP
-----
```

INTERCHANGE FIID

The Interchange FIID.

FIELD LENGTH: 4 alphabetic characters

REQUIRED FIELD: Yes

DEFAULT VALUE: Value from the ICFE.

PROCESS

The Process name.

FIELD LENGTH: 16 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: Value from the ICFE.

ATM

The system (BASE I or SMS) to be used to process ATM transactions. Valid values are:

1 - BASE I

2 - SMS

POS

The system (BASE I or SMS) to be used to process POS transactions. Valid values are:

- 1 - BASE I
- 2 - SMS

CARD TYPES

The services that are eligible for Visa. This field occurs up to thirty times and consists of two parts. Part one is a 2-character service field; part two is a 16-character description field containing a text description of the service. For valid service codes, refer to the CARD TYPE field in the Cardholder Authorization File (CAF) Screen 1 of "BASE24 Base Files Maintenance Manual". A value of ** in the 2-character service portion of this field indicates that all services are eligible for Visa.

Part 1

FIELD LENGTH: 2 alphanumeric characters
REQUIRED FIELD: Yes, if processing for Visa
DEFAULT VALUE: None

Part 2

FIELD LENGTH: 16 alphabetic characters
REQUIRED FIELD: System-generated
DEFAULT VALUE: None

CARD TYPES

The services that are eligible for Interlink. This field occurs up to thirty times and consists of two parts. Part one is a 2-character service field; part two is a 16-character description field containing a text description of the service. For valid service codes, refer to the CARD TYPE field in the Cardholder Authorization File (CAF) Screen 1 of "BASE24 Base Files Maintenance Manual". A value of ** in the 2-character service portion of this field indicates that all services are eligible for Interlink.

Part 1

FIELD LENGTH: 2 alphanumeric characters
REQUIRED FIELD: Yes, if processing for Interlink
DEFAULT VALUE: None

Part 2

FIELD LENGTH: 16 alphabetic characters
REQUIRED FIELD: System-generated
DEFAULT VALUE: None

VISF Screen 3 Settings

VISF Screen 3 allows users to identify the record to be accessed and add, update, or delete that record. Screen 3 determines the services available for PLUS.

VISF Screen 3 is displayed below followed by descriptions of its fields.

VISF SCREEN 3

```
-----
BASE24-VISA VISANET                <ln>   <date>   <time>   03 OF 03

                                PLUS SERVICES

INTERCHANGE FIID:_____          PROCESS:_____

SYSTEM:      ATM:  __

    __ (description)      __      __
    __                   __      __
    __                   __      __
    __                   __      __
    __                   __      __
    __                   __      __
    __                   __      __
    __                   __      __
    __                   __      __
    __                   __      __

RECORD LAST CHANGED: YY/MM/DD HH:MM BY USER: 0255,00000255 CHANGE
***** BASE24 *****
NEW PAGE:      FILE DESTINATION:      NEW LOGICAL NETWORK ID:
                   F12-HELP
-----
```

INTERCHANGE FIID

The Interchange FIID.

FIELD LENGTH: 4 alphabetic characters

REQUIRED FIELD: Yes

DEFAULT VALUE: Value from Screen 1 of the VISF.

PROCESS

The Process name.

FIELD LENGTH: 16 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: Value from Screen 1 of the VISF.

ATM

The system (BASE I or SMS) to be used to process ATM transactions. Valid values are:

- 1 - BASE I
- 2 - SMS

CARD TYPES

The services that are eligible for PLUS. This field occurs up to thirty times and consists of two parts. Part one is a 2-character service field; part two is a 16-character description field containing a text description of the service. For valid service codes, refer to the CARD TYPE field in the Cardholder Authorization File (CAF) Screen 1 of "BASE24 Base Files Maintenance Manual". A value of ** in the 2-character service portion of this field indicates that all services are eligible for PLUS.

Part 1

FIELD LENGTH: 2 alphanumeric characters
REQUIRED FIELD: Yes, if processing for PLUS
DEFAULT VALUE: None

Part 2

FIELD LENGTH: 16 alphabetic characters
REQUIRED FIELD: System-generated
DEFAULT VALUE: None

VISF Screen 4 Settings

VISF Screen 4 allows users to identify the record to be accessed and to add, update, or delete that record. Screen 4 determines the services available for CHECK CARD II.

VISF Screen 4 is displayed below followed by descriptions of its fields.

VISF SCREEN 4

```
-----
BASE24-VISA VISANET                               <ln>   <date>   <time>   01 OF 03

                                CHECK CARD II SERVICES

INTERCHANGE FIID:_____ PROCESS:_____

SYSTEM:   ATM:  __  POS:  __

      __ (description)      __      __
      __                   __      __
      __                   __      __
      __                   __      __
      __                   __      __
      __                   __      __
      __                   __      __
      __                   __      __
      __                   __      __
      __                   __      __

RECORD LAST CHANGED: YY/MM/DD HH:MM  BY USER: 0255,00000255 CHANGE
***** BASE24 *****
NEW PAGE:           FILE DESTINATION:           NEW LOGICAL NETWORK ID:
                   F12-HELP
-----
```

INTERCHANGE FIID

The Interchange FIID.

FIELD LENGTH: 4 alphabetic characters

REQUIRED FIELD: Yes

DEFAULT VALUE: Value from Screen 1 of the VISF.

PROCESS

The Process name.

FIELD LENGTH: 16 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: Value from Screen 1 of the VISF.

ATM

The system (BASE I or SMS) to be used to process ATM transactions. Valid values are:

- 1 - BASE I
- 2 - SMS

POS

The system (BASE I or SMS) to be used to process POS transactions. Valid values are:

- 1 - BASE I
- 2 - SMS

CARD TYPES

The services that are eligible for Check Card II. This field occurs up to thirty times and consists of two parts. Part one is a 2-character service field; part two is a 16-character description field containing a text description of the service. For valid service codes, refer to the CARD TYPE field in the Cardholder Authorization File (CAF) Screen 1 of "BASE24 Base Files Maintenance Manual". A value of ** in the 2-character service portion of this field indicates that all services are eligible for Check Card II.

Part 1

FIELD LENGTH: 2 alphanumeric characters
REQUIRED FIELD: Yes, if processing for Check Card II
DEFAULT VALUE: None

Part 2

FIELD LENGTH: 16 alphabetic characters
REQUIRED FIELD: System-generated
DEFAULT VALUE: None

Section 3

Startup and Control

This section provides information on the configuration of the VisaNet ISO Interface process. It also describes process initialization, network control commands, and timers.

Process Configuration

The following paragraphs explain how the VisaNet ISO Interface process is configured. They provide information about the startup logic of the VisaNet ISO Interface process and the method in which the VisaNet ISO Interface process logs messages.

Startup

Because of the length of time required for initialization, the VisaNet ISO Interface process should be assigned a startup logic of AUTOMATIC in the network environment. Automatic means the VisaNet ISO Interface process is started automatically when the XPNET node is initiated. This ensures that the VisaNet ISO Interface process is ready when it receives its first transaction.

Event Messages

The VisaNet ISO Interface process sends all of its event messages to the logging facility using a standard routing code of zero.

Initialization

The following steps are taken by the VisaNet ISO Interface process when it is started. To initialize, the VisaNet ISO Interface process:

1. Initializes interprocess communication with the network.
2. Reads the name of its Logical Network Configuration File (LCONF). The startup message from XPNET contains the name of the LCONF. This name allows the VisaNet ISO Interface process to access the LCONF for the assigns and params it requires for processing.

3. Opens the LCONF, reads the required assigns and params, and closes the LCONF. The process will abend if there is a problem reading the LCONF assigns or params or if a required assign or param is missing. For a list of the required LCONF assigns and params and their descriptions, refer to section 2.
4. Reads the Log Message Configuration File (LMCF) for its modified event messages. The LMCF contains a record for each modified event message in the system. The VisaNet ISO Interface process opens the LMCF, retrieves its modified event messages, and closes the LMCF. Whenever the VisaNet ISO Interface process generates an event message, it checks the LMCF records in memory to determine whether the message requires modifications.
5. Opens the Enhanced Interchange Configuration File (ICFE). If an error occurs, the VisaNet ISO Interface process logs an error message and abends.
6. Reads its own ICFE record using its process name.
7. Opens the Key File (KEYF) if Triple DES encryption is not required. Opens the Key6 File (KEY6) if Triple DES encryption is required. If an error occurs, the VisaNet ISO Interface process logs an error message and abends.
8. Using its process name, reads its own KEYF or KEY6 record, assigns Process Control Table (PCT) values, and closes the KEYF or KEY6.
9. Finishes building the Process Control Table (PCT) with information from the ICFE. The PCT contains configuration and control information for the process. This information includes all of the controls required to process transactions.
10. Determines the posting dates for BASE24-atm, BASE24-pos, and VisaNet by comparing the current time to the BASE24-atm and BASE24-pos time taken from the LCONF.
11. Initializes the extended memory required for this process.
12. Opens the Resubmittal Store-and-Forward File (RSAF).
13. Opens the Store-and-Forward File (SAF).
14. Opens the Acquirer Information File (AIF) and loads it into memory.
15. Opens the Switch Dispute File (SDF).

16. Opens the Switch Name File (SNF).
17. Opens the VisaNet/ISO Services File (VISF) and loads it into memory.
18. Opens the current and previous day's Interchange Log File (ILF). If an error occurs in opening the current ILF, the VisaNet ISO Interface process logs an error message and abends.
19. Initializes the security devices.
20. Reads the VisaNet Blocked Bin File (VBBF) into memory if the VBBF exists.
21. Reads the VisaNet Institution Identification File (VIIF) into memory if the VIIF exists.
22. Opens the File Request Log File (FRLF).
23. Sends a logon message to VisaNet if the automatic logon option was selected or an advice logon message if the advice logon option was selected.
24. Closes the ICFE.
25. Reads the Token file into extended memory if tokens from the STM or PSTM are not to be logged to the ILF.
26. If reports are required, starts a timer set to expire when the reports are to be run.
27. Waits for a message from VisaNet or from a BASE24 process.

Network Control Commands

Network control commands can be issued from the Network Control Supervisor's (NCS) screen or from the NCPcom prompt.

The commands are entered using the following syntax:

DELIVER PROCESS <process name>, "<Message Format>"

AVLOGOFF

Originator: Network Control Supervisor screen

Message Format: AVLOGOFF
AVLOGOFF ACQ
AVLOGOFF ISS
AVLOGOFF <station>

Description: Initiates an advice logoff sequence for one or more stations. This command causes the VisaNet ISO Interface process to send an advice logoff message to the station specified in the message. As a result of this command, the station stops processing advice messages stored at VisaNet.

If ACQ or ISS is specified in the message rather than a station, the above actions are taken for the first acquirer or issuer station in the Interchange Configuration File (ICFE) logged on in the advice mode. If the Station Name File (SNF) is being used, all stations indicated by the SWITCH DATA param as available for advice logon will be logged off if currently logged on in advice mode.

If ACQ or ISS is specified in the message rather than a station, the above actions are taken for all the acquirer or issuer stations defined to the process in the Enhanced Interchange Configuration File (ICFE).

If blanks are specified in the message rather than a station, the above actions are taken for all the stations defined to the process in the Interchange Configuration File (ICFE) or Station Name File (SNF).

AVLOGON

Originator: Network Control Supervisor screen

Message Format: AVLOGON
AVLOGON ACQ
AVLOGON ISS
AVLOGON <station>

Description: Initiates an advice logon sequence for one or more stations. This command causes the VisaNet ISO Interface process to send an advice logon message to the station specified in the message. As a result of this command, the station begins processing advice messages stored at VisaNet.

If ACQ or ISS is specified in the message rather than a station, the above actions are taken for the first acquirer or issuer station in the Interchange Configuration File (ICFE) not currently logged on in the advice mode. If the Station Name File (SNF) is being used, all stations indicated by the SWITCH DATA param as available for advice logon will be logged on if not currently logged on in advice mode.

If blanks are specified in the message rather than a station, the above actions are taken for all the stations defined to the process in the Interchange Configuration File (ICFE) or Station Name File (SNF).

BITTRACE ON/OFF

Originator: Network Control Supervisor screen

Message Format: BITTRACE ON
BITTRACE OFF

Description: Starts or stops a trace function within the VisaNet ISO Interface process. This trace function generates an event message each time the VisaNet ISO Interface process expands or collapses an external message. The event message displays the name of the external message's field as well as the contents that are being expanded or collapsed.

When the bittrace function is started, event messages are sent to the current logging device. Due to the negative impact on performance, the bittrace function should only be used in a TEST environment.

DEBUG

Originator: Network Control Supervisor screen
Message Format: DEBUG
Description: Places the VisaNet ISO Interface process in DEBUG. The debug message places the VisaNet ISO Interface process into INSPECT and brings up an INSPECT prompt on the home terminal (the terminal on which the network was brought up). INSPECT is a Tandem programming tool.

This command should only be used to interactively debug a running process when in a TEST environment.

DUMP

Originator: Network Control Supervisor screen
Message Format: DUMP
Description: Directs the VisaNet ISO Interface process to request a programmatic dump. A snapshot dump is taken that can then be read using RDEBUG.

WARNING - Transactions may be lost while the interface is down.

DYNAMIC KEY MANAGEMENT

Originator: Network Control Supervisor screen
Message Format: NEWKEY [TYPE]
NEWKEY ACQ
NEWKEY ISS
Description: Initiates a Newkey request for one or more Types.

The [TYPE] is the type of key being requested. Valid values are:

ACQ - One of the outbound keys as defined on the KEYF or KEY6.

ISS - One of the inbound keys as defined on the KEYF or KEY6.

When the interface receives this NCS command it will format and send a newkey request to VisaNet with the requested type. If no type is specified the request will be formatted and send separately for each type.

ENTERSI

Originator: Network Control Supervisor screen

Message Format: ENTERSI
ENTERSI <station>

Description: Enters suppress inquiry mode for one or more stations. This command informs VisaNet not to send requests to the VisaNet ISO Interface process for authorization until further notice.

If blanks are specified in the message rather than a station, all the stations defined to the process in the Enhanced Interchange Configuration File (ICFE) enter suppress inquiry mode.

This command should only be used in the Europe region. Suppress inquiry mode is only supported in the Europe region. The network management message generated by the ENTERSI command from other regions will be rejected by Visa.

EXITSI

Originator: Network Control Supervisor screen

Message Format: EXITSI
EXITSI <station>

Description: Exits suppress inquiry mode for one or more stations. VisaNet is able to send requests to the VisaNet ISO Interface process for authorization.

If blanks are specified in the message rather than a station, all the stations defined to the process in the Enhanced Interchange Configuration File (ICFE) exit suppress inquiry mode.

This command should only be used in the Europe region. Suppress inquiry mode is only supported in the Europe region. The network management message generated by the EXITSI command from other regions will be rejected by Visa.

LOGOFF

Originator: Network Control Supervisor screen

Message Format: LOGOFF
LOGOFF ACQ
LOGOFF ISS
LOGOFF <station>

Description: Initiates a logoff sequence for one or more stations. This command causes the VisaNet ISO Interface process to send a logoff message to the station specified in the message.

If ACQ or ISS is specified in the message rather than a station, the above actions are taken for all the acquirer or issuer stations defined to the process in the Enhanced Interchange Configuration File (ICFE) or Station Name File (SNF).

If blanks are specified in the message rather than a station, the above actions are taken for all the stations defined to the process in the Interchange Configuration File (ICFE) or Station Name File (SNF).

LOGON

Originator: Network Control Supervisor screen

Message Format: LOGON
LOGON ACQ
LOGON ISS
LOGON <station>

Description: Initiates a logon sequence for one or more stations. This command causes the VisaNet ISO Interface process to send a logon message to the station specified in the message.

If ACQ or ISS is specified in the message rather than a station, the above actions are taken for all the acquirer or issuer stations defined to the process in the Enhanced Interchange Configuration File (ICFE) or Station Name File (SNF).

If blanks are specified in the message rather than a station, the above actions are taken for all the stations defined to the process in the Interchange Configuration File (ICFE) or Station Name File (SNF).

PERFORMANCE

Originator: Network Control Supervisor screen
Message Format: PERFORMANCE
Description: Requests that the performance statistics stored in memory by the VisaNet ISO Interface process be sent to the logging facility. The VisaNet ISO Interface process tracks performance statistics for each station assigned to it. These statistics are gathered on an interval basis. The interval length is established on ICFE screen 3. Statistics are available for the last five intervals.

RESUBMITS

Originator: Network Control Supervisor screen
Message Format: RESUBMITS OFF
RESUBMITS ON

Description: Requests resubmittal processing to begin or end for the current date.

If "OFF" is specified in the message, the VisaNet Interface process stops the resubmittal processing for the current date.

If "ON" is specified in the message, the VisaNet Interface process starts the resubmittal processing for the current date.

STATUS

Originator: Network Control Supervisor screen
Message Format: STATUS
Description: Requests the status of the VisaNet ISO Interface process. The requested information is displayed on the current logging device.

The status command generates a series of event messages.

TRACE OFF

Originator: Network Control Supervisor screen
Message Format: TRACE OFF
Description: Stops the trace function within the VisaNet ISO Interface process. For a description of the trace function, please refer to the above TRACE ON command description.

TRACE ON

Originator: Network Control Supervisor screen
Message Format: TRACE ON
Description: Starts a trace function within the VisaNet ISO Interface process. This trace function generates an event message each time the VisaNet ISO Interface process enters a new procedure. The event message displays the name of the procedure from which it was written.

When the trace function is started, event messages are sent to the current logging device. Due to the negative impact on performance, the trace function should only be used in a TEST environment.

WARMBOOT OR "9501"

Originator: Device Control Terminal screen
Network Control Supervisor screen
Message Format: 9501
WARMBOOT
Description: Warmboots the VisaNet ISO Interface process. Warmboot processing is similar to initialization, except the VisaNet ISO Interface process closes all open files prior to initializing.

CUTOVER OR "9502"

Originator: BASE24-atm/pos Settlement Initiator process
Message Format: 9502YYMMDD
Description: Informs the VisaNet ISO Interface process that BASE24 has cut over to a new processing day. YYMMDD is the date that BASE24 just completed processing for.

REFRESH OR "9509"

Originator: Network Control Supervisor screen
Message Format: REFRESH
9509
Description: Processes the refresh command that notifies the VisaNet ISO Interface process of records in the SDF.

STATION CHANGE

Originator: XPNET

Message Format: 9510

9511

9512

9513

9516

9517

9518

9519

Description: Causes the VisaNet ISO Interface process to change the station status as follows:

9510 - the station is marked down.

9511 - the station is marked up.

9512 - the station is suspended.

9513 - the station is reinstated.

9516 - the station is not being polled.

9517 - the station is being polled again.

9518 - the station is marked up.

9519 - the station is marked down.

The station involved is specified in the message header created by XPNET.

Timers

This section describes each timer used by the VisaNet ISO Interface process. Each timer description includes the timer's function and how and when the timer is set.

Outbound Request Timer

An outbound request timer is set each time a 0100, 0101, 0200, or 0201 message is sent to VisaNet. The number of seconds used for this timer is taken from the OUTBOUND field on ICFE screen 8 for BASE24-atm transactions or ICFE screen 10 for BASE24-pos transactions. The outbound request timer indicates whether a transaction sent to VisaNet has timed out.

If the timer expires before a response is received from VisaNet for the 0100, 0101, 0200, or 0201 message, the request is denied and the appropriate performance and timeout counters are incremented. If the expiration of this timer causes the maximum allowed timeouts to be reached, the link to VisaNet is marked down.

Inbound Request Timer

An inbound request timer is set each time a 0200 message is sent to a BASE24 process for authorization. The number of seconds used for this timer is taken from the INBOUND field on ICFE screen 8 for BASE24-atm transactions or ICFE screen 10 for BASE24-pos transactions. The inbound request timer determines whether an external transaction has timed out.

If the timer expires before a response is received from the authorizing process, the request is denied. The appropriate performance and timeout counters are incremented.

Store-and-Forward Timer

A store-and-forward timer is set each time a store-and-forward message is sent to VisaNet. The number of seconds used for this timer is taken from the STORE AND FORWARD field on ICFE screen 8 for BASE24-atm transactions or ICFE screen 10 for BASE24-pos transactions. The store-and-forward timer determines whether a Store-and-Forward File (SAF) record sent to VisaNet has timed out.

If the timer expires before an acknowledgement is received from VisaNet, the SAF timeout counter is incremented. If the SAF timeout counter is equal to the maximum number of retries set in the MAX SAF RETRY field on ICFE screen 3, the record is written to the log and deleted from the SAF. If the MAX SAF RETRY field is set to 0, the SAF message is sent indefinitely until it is successfully processed.

Repeat Timer

The interface can send a repeat request to VISA if the maximum number of timeouts have not occurred. The amount of time the interface waits before it sends a repeat request is based on the completion acknowledgement timer on the ATM and POS screens of the ICFE.

Network Management Timer

A network management timer is set each time an 0800 message is sent to a station. The number of seconds used for this timer is taken from the TIMER LIMITS NETWORK MANAGEMENT field on ICFE screen 3. The network management timer is used to monitor the communications between BASE24 and VisaNet.

If the network management timer expires before a response is received from VisaNet, an extended network management timer is set.

Extended Network Management Timer

An extended network management timer is set each time a network management timer expires without a response being received from VisaNet. The number of seconds used for this timer is taken from the TIMER LIMITS EXTENDED NETWORK field on ICFE screen 3.

The network management message is repeated at the interval specified by the extended network management timer until an acknowledgement is received from VisaNet or the communications line is marked up.

Wait For Traffic Timer

A wait for traffic timer is set each time a station is marked up and each time a previously set wait for traffic timer expires. The number of seconds used for this timer is taken from the TIMER LIMITS WAIT FOR TRAFFIC field on ICFE screen 3.

If the timer expires and message traffic has occurred on the line, a new wait for traffic timer is started.

If the timer expires and no message traffic has occurred on the line, a network management logon message is sent. The line is marked up or down, depending on the results of the logon message.

Report Startup Timer

The report startup timer is used to start the SETL01 and STAT09 report programs. It is set at initialization and at interchange cutover. The value for this timer is taken from the SW-RPT-STARTUP param in the LCONF.

When the report startup timer expires, the obey file containing the commands to run the report programs are executed.

Performance Timer

A performance timer is set at the start of each new performance interval. The number of minutes for this timer is taken from the TIMER LIMITS PERFORMANCE PERIOD field on ICFE screen 3. The performance timer triggers the end of one performance period and the beginning of the next.

When the performance timer expires, the VisaNet ISO Interface process:

1. Moves the performance statistics for interval four to interval five.
2. Moves the performance statistics for interval three to interval four.
3. Moves the performance statistics for interval two to interval three.
4. Moves the performance statistics for interval one to interval two.
5. Initializes the performance statistics for interval one to zero.
6. Starts a new performance timer.

ACI Worldwide, Inc.

Section 4

Transaction Handling

This section describes how the VisaNet ISO Interface process handles various types of transactions. It describes the basic flow of transaction processing and provides transaction flow diagrams illustrating how messages sent to and received from VisaNet are handled.

The following transaction flows are described in this section. In most cases, these flows are described twice: once when the message flow is initiated by BASE24 and once when the message flow is initiated by VisaNet.

- Requests
- Full and Partial Reversals
- Timeouts
- Administrative Messages
- Store-and-Forward Messages
- Logon Messages
- Logoff Messages
- Echo Test Messages

NOTE: References in this section to transactions sent to VisaNet for authorization implies that VisaNet is sending the transaction to the appropriate authorizing entity (i.e., VisaNet does not perform authorization).

Logging To The ILF

Responses and reversals handled by the VisaNet ISO Interface process are logged to the Interchange Log File (ILF).

Trace Numbers

When the VisaNet ISO Interface process receives an outbound transaction request, it assigns a trace number to the transaction. The trace number is sent to VisaNet in field 11 of the Standard External Message (SEM). Trace numbers are used to uniquely identify a transaction, and a new trace number is assigned to each new request or advice. Reversal transactions contain the trace number of the original transaction in field 90 (Original Data Elements) of the SEM. Trace numbers begin at 000001 and are incremented by 1 until 999999 is reached. At this point, the trace number begins again at 000001.

Trace numbers must be unique, so the VisaNet ISO Interface process must keep track of trace numbers it is assigning. The VisaNet ISO Interface process determines the current trace number during initialization by reading the trace record from the current or previous day's ILF. This trace record is updated after a set number of transactions have been processed. The number of transactions processed before updating the trace record is set by a parameter in the Logical Network Configuration File (LCONF). Using this technique, the VisaNet ISO Interface process can avoid creating duplicate trace numbers even in situations where the process is stopped and restarted.

Message Flows From BASE24 To VisaNet

This subsection describes the message flows for the following transactions outbound from BASE24 to VisaNet.

- Requests

- Full and Partial Reversals

- Timeouts

- Force Posts

- File Maintenance Requests


- Copy/Original Request or Confirmation Messages

- Store-and-Forward Messages

- Switch Dispute Messages

Request Message To VisaNet


The diagram below illustrates general financial transaction processing, starting with a transaction originating at a BASE24 network. The message is formatted into a SMS or BASE inquiry message by the VisaNet ISO Interface and sent to VisaNet for authorization. The diagram steps are described below.

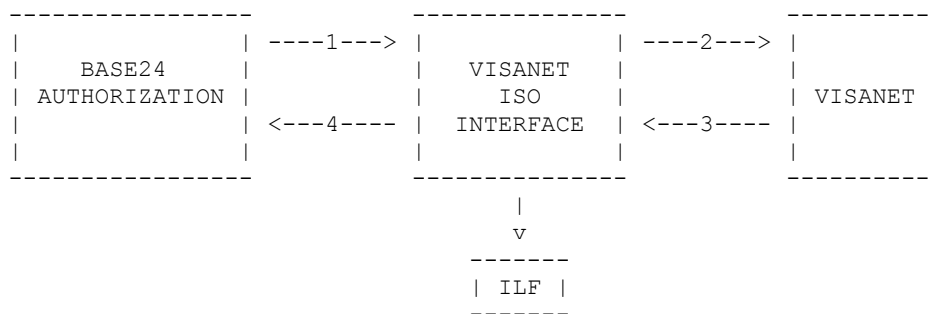

1. A BASE24 Authorization process sends the request to the VisaNet ISO Interface process in the 0200 internal request message format.
2. The VisaNet ISO Interface process reformats the message into the SMS (0100/0200) or BASE (0100) external message format and sends the external message to VisaNet for authorization. An outbound request timer is set to wait for a response from VisaNet.
3. VisaNet routes the transaction to the appropriate authorizer and receives the subsequent response. The response is formatted into the SMS (0110/0210) or BASE (0110) external message format and sent to the VisaNet ISO Interface process.
4. The VisaNet ISO Interface process deletes the outbound request timer and formats a 0210 internal response message. The response is returned to the original BASE24 Authorization process. The transaction is logged to the Interchange Log File (ILF).

Partial Reversal Of A SMS Transaction To VisaNet

The diagram below illustrates transaction processing for a transaction that originated at BASE24 and then is partially reversed. The message is formatted into a SMS request message by the VisaNet ISO Interface process, sent to VisaNet to be authorized, approved, and completed at BASE24 for an amount other than the approved amount. The diagram steps are also described below.

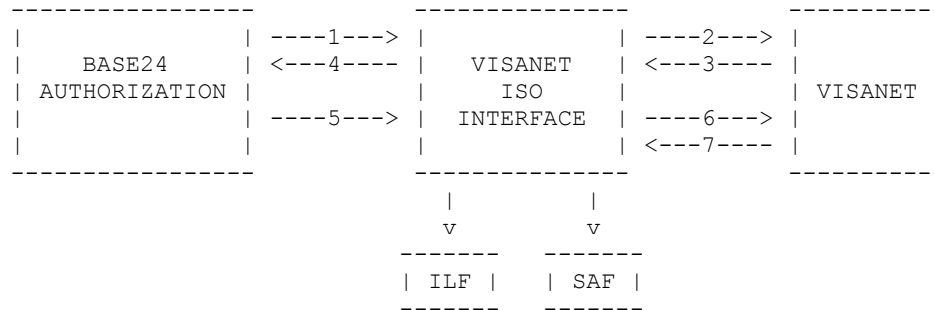


1. A BASE24 Authorization process sends the request to the VisaNet ISO Interface process in the 0200 internal request message format.
2. The VisaNet ISO Interface process reformats the message into the 0100/0200 external message format and sends the external message to VisaNet for authorization. An outbound request timer is set to wait for a response from VisaNet.
3. VisaNet routes the transaction to the appropriate authorizer and receives the subsequent response. The response is formatted into the 0210 external message format and sent to the VisaNet ISO Interface process.
4. The VisaNet ISO Interface process deletes the outbound request timer and formats a 0210 internal response message. The response is returned to the original BASE24 Authorization process. The transaction is logged to the Interchange Log File (ILF).
5. A partial reversal occurs at a BASE24 network device for the transaction. The BASE24 0420 reversal message is sent to the VisaNet ISO Interface process.
6. The ILF record for the transaction is retrieved from disk. A 0220 adjustment message is formatted and added to the Store-and-Forward File (SAF). The ILF record is updated with the reversal fields and rewritten to disk. During SAF processing, the reversal is sent to VisaNet and a timer is started to wait for the acknowledgement.
7. The VisaNet ISO Interface process receives the 0230 adjustment response from VisaNet. The timer waiting for this response is cancelled and the record

in extended memory is retrieved. The ILF record for the original transaction is retrieved from disk and updated with the BASE24 reversal and external adjustment response. The ILF is then written back to disk.

Full Reversal Of A SMS Transaction To VisaNet


The diagram below illustrates transaction processing for a SMS transaction that originated at BASE24 and then is reversed. The message is formatted into a SMS request message by the VisaNet ISO Interface process, sent to VisaNet to be authorized, approved, and either cancelled by the customer or reversed because of an error. The diagram steps are also described below.

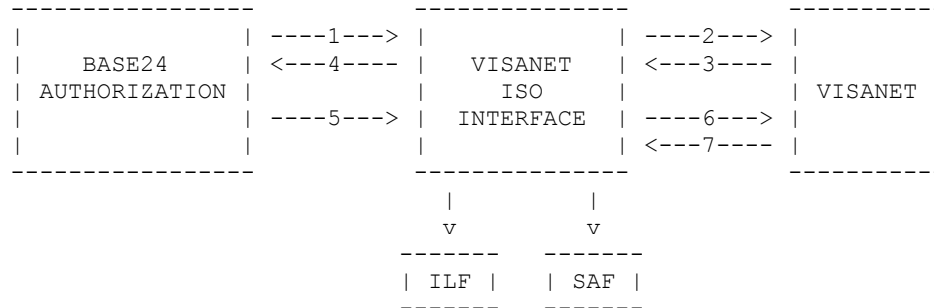

1. A BASE24 Authorization process sends the request to the VisaNet ISO Interface process in the 0200 internal message format.
2. The VisaNet ISO Interface process reformats the message into the 0100/0200 external message format and sends the external message to VisaNet for authorization. An outbound request timer is set to wait for a response from VisaNet.
3. VisaNet routes the transaction to the appropriate authorizer and receives the subsequent response. The response is formatted into the 0210 external message format and sent to the VisaNet ISO Interface process.
4. The VisaNet ISO Interface process deletes the outbound request timer and formats a 0210 internal response message. The response is returned to BASE24. The transaction is logged to the Interchange Log File (ILF).
5. A full reversal occurs at BASE24 for the SMS transaction. The BASE24 0420 reversal message is sent to the VisaNet ISO Interface process.
6. The ILF record for the transaction is retrieved from disk. A 0400 SMS reversal message is formatted and added to the Store-and- Forward File (SAF). The ILF record is updated with the reversal fields and rewritten to disk. During SAF processing, the reversal is sent to VisaNet and a timer is started to wait for the acknowledgement.
7. The VisaNet ISO Interface process receives the 0410 reversal acknowledgement from VisaNet. The timer waiting for this reversal acknowledgement is cancelled and the record is deleted from the SAF.

Reversal Of A Base Transaction To VisaNet

The diagram below illustrates transaction processing for a BASE transaction that originated at BASE24 and then was reversed. The message is formatted into a BASE request message by the VisaNet ISO Interface process, sent to VisaNet to be authorized, approved, and either cancelled by the customer, failed at BASE24, or completed for an amount other than what was approved. The diagram steps are also described below.

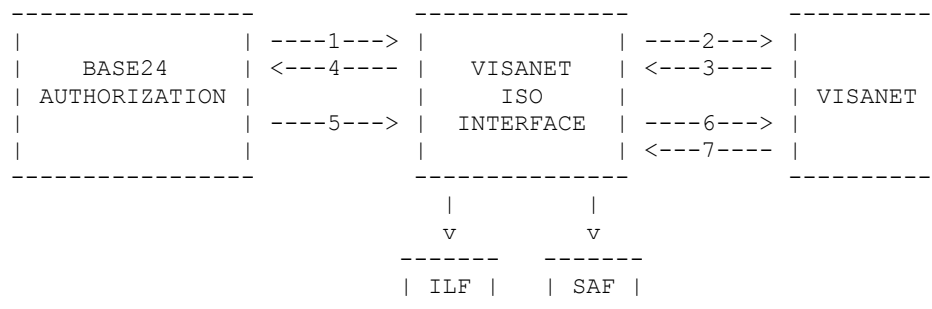


1. A BASE24 Authorization process sends the request to the VisaNet ISO Interface process in the 0200 internal message format.
2. The VisaNet ISO Interface process reformats the message into the 0100 external message format and sends the external message to VisaNet for authorization. An outbound request timer is set to wait for a response from VisaNet.
3. VisaNet routes the transaction to the appropriate authorizer and receives the subsequent response. The response is formatted into the 0110 external message format and sent to the VisaNet ISO Interface process.
4. The VisaNet ISO Interface process deletes the outbound request timer and formats a 0210 internal response message. The response is returned to BASE24. The transaction is logged to the Interchange Log File (ILF).
5. A full or partial reversal occurs at BASE24 for the BASE transaction and the BASE24 0420 reversal message is sent to the VisaNet ISO Interface process.
6. The ILF record for the transaction is retrieved from disk. A 0420 BASE reversal message is formatted. A reversal message is added to the Store-and-Forward File (SAF) and a confirmation message is sent to VisaNet. The ILF record is updated with the reversal fields and rewritten to disk. During SAF processing, the reversal is sent to VisaNet and a timer is started to wait for the BASE reversal acknowledgement.
7. The VisaNet ISO Interface process receives the 0430 reversal

acknowledgement from VisaNet. The timer waiting for this reversal acknowledgement is cancelled and the SAF record is deleted from the file.

Timeout Of A Request To VisaNet

The diagram below illustrates transaction processing for a transaction originating at a BASE24 network. The message is formatted into either a SMS or BASE external request by the VisaNet ISO Interface process and sent to VisaNet to be authorized. However, the response message is not received because the timer waiting on the response expired. The steps in the diagram are also described below.

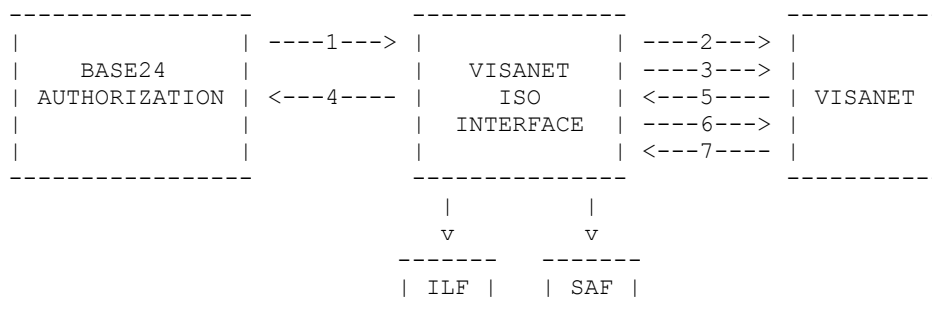

1. A BASE24 Authorization process sends the request to the VisaNet ISO Interface process in the 0200 internal message format.
2. The VisaNet ISO Interface process reformats the message into the SMS (0100/0200) or BASE (0100) external message format and sends the external message to VisaNet for authorization. An outbound request timer is set to wait for a response from VisaNet.


When the timer waiting for the response from VisaNet expires, the record containing the original SMS/BASE request and BASE24 request message is retrieved from the extended memory queue.

3. If this is the first time that the request has timed out and the acquirer specifies the use of repeats, a SMS (0101/0201) or BASE (0101) repeat request message is formatted and sent to VisaNet. The original timer is restarted to wait for a response to the original or repeat request.
4. If this is the second time that the request has timed out or if this is the first time and the acquirer does not use repeats, a BASE24 0210 denial/referral response message is formatted and sent back to the BASE24 Authorization process. The transaction is logged to the Interchange Log File (ILF). A SMS 0420 or BASE 0400 cancellation message is formatted and added to the Store-and-Forward File (SAF). During normal SAF processing the cancellation is sent to VisaNet and a timer is started to wait for the acknowledgement.
5. The SMS 0430 or BASE 0410 cancellation acknowledgement is received

- from VisaNet. The timer waiting on the cancellation acknowledgement is cancelled and the record is deleted from the SAF.
6. The VisaNet ISO Interface process receives the late SMS (0110/ 0210) or BASE (0110) approval response message. These messages are dropped as the cancellation message was sent at timeout.

Force Post To VisaNet


The diagram below illustrates transaction processing for a transaction that was authorized by BASE24 because the link to VisaNet was down or because VisaNet could not respond in time. The steps in the diagram are also described below.

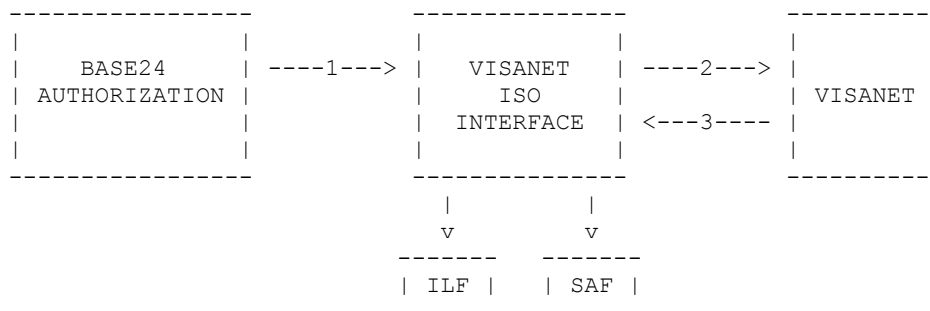

1. A 0220 financial transaction force post arrives at the VisaNet ISO Interface process from BASE24.
2. If the force post was approved and the BASE24 user is a SMS type VisaNet acquirer, a 0200 external request is formatted and added to the Store-and-Forward File (SAF). The request will be sent to VisaNet in normal SAF processing and a timer will be started to wait for the acknowledgement.
3. The VisaNet ISO Interface process receives the 0210 response message and the timer waiting on the response is cancelled. The Interchange Log File (ILF) record is retrieved from disk and updated with the external response. The SAF record is deleted from disk.

File Maintenance Request To VisaNet


The diagram below illustrates a file maintenance request sent to VisaNet from the VisaNet File Request Log File (FRLF) screen. More information on this screen can be found in section 6. The steps in the diagram are also described below.

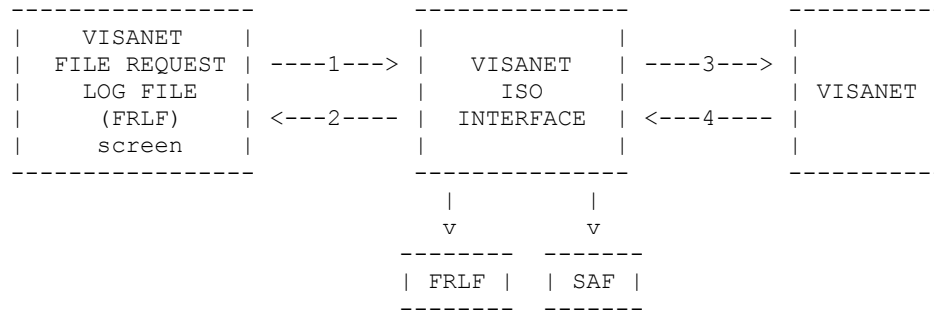

1. A file maintenance request arrives at the VisaNet ISO Interface process from the Pathway system (FRLF screen). A 0302 external file maintenance request is formatted and added to the Store- and-Forward File (SAF).
2. A response indicating the status of the request is sent to the FRLF requester.
3. During normal SAF processing, the external request will be sent to VisaNet and a timer will be started to wait on the response.
4. When the 0312 response is received from VisaNet, the timer is found and deleted and the request is deleted from the SAF. The response is logged to the File Request Log File (FRLF) where it can be perused via the VisaNet File Request Log File requester.

Copy/Original Request, Confirmation, Or Free Text


The diagram below illustrates an admin message sent to VisaNet from the VisaNet Copy Request Confirmation (VCRC) screen. More information on this screen can be found in section 6. The steps in the diagram are also described below.

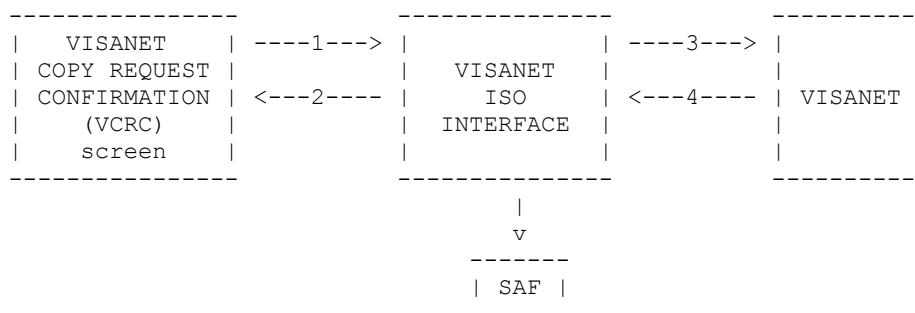

1. An admin message arrives at the VisaNet ISO Interface process from the Pathway system (VCRC screen). A 0600 admin message is formatted and added to the Store-and-Forward File (SAF).
2. A response indicating the status of the request is sent to the VCRC requester.
3. During normal SAF processing, the external request will be sent to VisaNet and a timer will be started to wait on the response.
4. When the 0610 response is received from VisaNet, the timer is deleted and the request is deleted from the SAF.

Collection-Only Transactions

The diagram below illustrates a collection-only transaction sent to VisaNet from the VisaNet Collection-Only Transaction (VCOT) screen. More information on this screen can be found in section 6. The steps in the diagram are also described below.

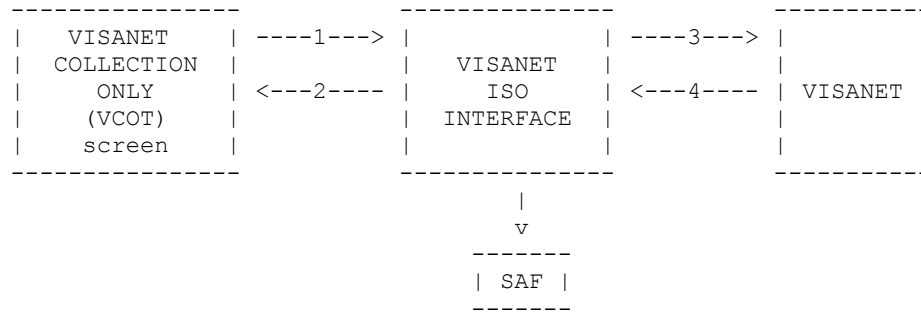

5. An collection-only message arrives at the VisaNet ISO Interface process from the Pathway system (VCOT screen). A 9240 SEM message is formatted and added to the Store-and-Forward File (SAF).
6. A response indicating the status of the request is sent to the VCOT requester.
7. During normal SAF processing, the external request will be sent to VisaNet and a timer will be started to wait on the response.
8. When the 9250 response is received from VisaNet, the timer is deleted and the request is deleted from the SAF.

Store-And-Forward Message To VisaNet

Non-interactive messages intended for VisaNet are stored in the Store- and-Forward File (SAF) and sent to VisaNet during the SAF processing cycle. After the processing of a message is completed, the VisaNet ISO Interface process checks to determine whether a SAF record should be sent. If the link to VisaNet is up, the SAF contains records, and a SAF record is not in the process of being sent to VisaNet, the VisaNet ISO Interface process retrieves the first record from the SAF and sends it to VisaNet. Only one message from the SAF is sent at a time. The general processing flow for SAF messages is the same as for normal messages. To the VisaNet Interchange, the messages appear to be happening as they are sent. Therefore, VisaNet cannot distinguish them from normal messages. The VisaNet ISO Interface process uses different timers that identify the messages as SAF records. The following message types can be logged to the SAF:

0400/0401/0420 Reversal Messages

0302 Exception and Verification File Requests

0600/0601 Original/Copy Requests and Confirmation Messages

0220/0221 Advices


0200 Adjustment Messages

9240 Collection-Only Transactions

VisaNet sends acknowledgements of these messages to the VisaNet ISO Interface process. When the VisaNet ISO Interface process receives the acknowledgement, the SAF timer is deleted and the SAF record is deleted from the SAF. The acknowledgement message from VisaNet is dropped. If more SAF records exist, the next record will be sent.

RSAF Processing

Visa SMS allows merchants to store original transactions when the transaction is undeliverable to the issuer. Delivery of the transaction can fail because: a) the link from the merchant to the acquirer is down; b) the link from the acquirer to the Visa interchange is down; or c) the Visa Interchange is unable to deliver the transaction to the issuer. If any of these scenarios occur, the merchant or the acquirer may approve the transaction and store the original transaction in a file for delivery once the connection has been restored. The VisaNet Interface supports Original Store-and- Forward (SAF) transactions from the merchant or acquirer, and in certain scenarios resubmitting declined SAF'd transactions via RSAF Processing. The diagram and steps below illustrate Original SAF and RSAF processing.

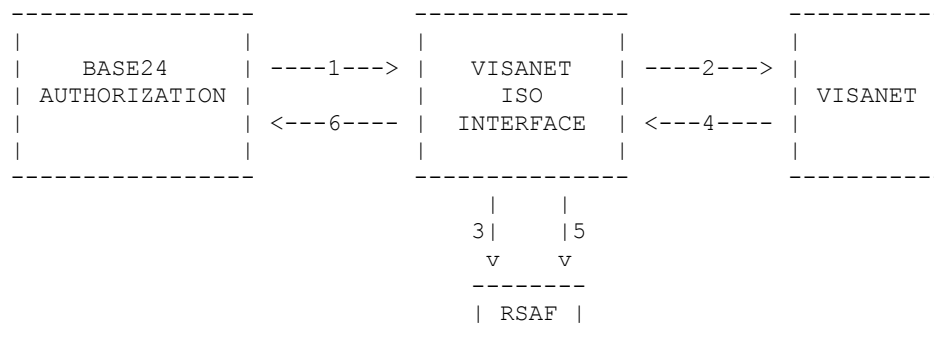

1. The VisaNet Interface receives an Original SAF transaction from a merchant or acquirer. The transaction is recognized by looking for a POS 0220 transaction with PIN data and the resub[^]stat field in the PS51 token set to "S".
2. If these conditions are met, the interface creates an external request message and sends this message for approval.
3. The message, along with the 0220 POS message, is used to create a Resubmission Store and Forward (RSAF) record and logged in the RSAF file.
4. The response to the external request message is received from Visa.

5. If the transaction is approved, the RSAF record will be deleted. If the issuer is still unavailable, the transaction will remain an Original SAF Transaction and will be sent again later. If the transaction is denied due to insufficient funds, over the daily usage limit or over the daily amount limit, the Original SAF Transaction will be converted to a Resubmittal Transaction, stored in the RSAF file and resubmitted at a later time. A Resubmittal


Transaction that is denied one of these reasons may be resubmitted once a day for 9 days. If the transaction is declined for any other reason, the RSAF record will be deleted.

6. In order to track the progress of the Original SAF and Resubmittal Transactions, the Visa Interface supports a POS Log Only message. This message is sent to the Router/Auth Process that sent the Original SAF transaction to the Visa Interface. A Log only message type is "9900", which BASE24-pos Router/Auth converts to an 0210 before logging to the PTLF. How often the log only message is sent to RTAU is configurable by a new LCONF parameter.

Switch Dispute File Transaction To VisaNet

The transactions in the Switch Dispute File (SDF) are sent to VisaNet single-threaded, with the first record in the file being sent first. Upon receipt of the approved transaction response from VisaNet, the record is deleted from the file and the next record retrieved and sent. Any response from VisaNet other than an approval indicates that the receiver of the message is down and the message must be re-sent at a later time. If the response is not received from VisaNet before the timer waiting on the response expires or the response from VisaNet indicates a denial, the next record in the SDF is retrieved and sent instead of resending the transaction that was timed out or not responded to correctly. Once the interface has attempted to send each SDF transaction to VisaNet and there are still records left on the file due to no response, the interface sets an extended SDF timer to expire in one hour. Upon the expiration of the timer, the interface begins retransmitting the transactions from the beginning of the file.

The diagram below illustrates transaction processing for a switch dispute transaction originating at a BASE24-atm or BASE24-pos network. The transaction is formatted into an external message by the VisaNet ISO Interface process and sent to VisaNet. The steps in the diagram are also described below.

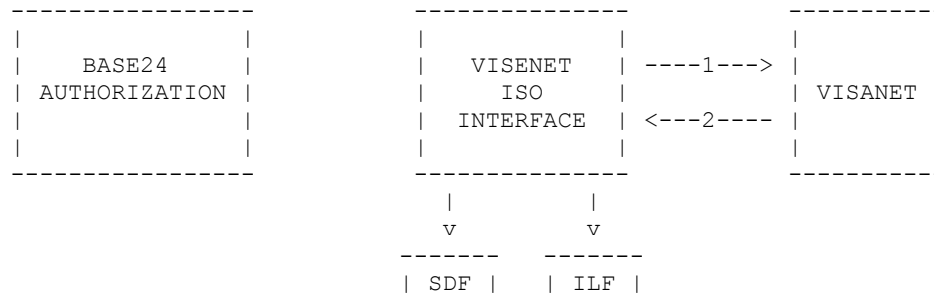

1. A VisaNet 0220/0422 SMS representation, chargeback, funds disbursement, or fee collection message is formatted and sent to VisaNet to be authorized. A copy of the SMS message is stored in the suspense record format in the extended memory queue of the VisaNet ISO Interface process. A timer is started to wait for the acknowledgement.
2. When the VisaNet ISO Interface process receives the 0230/0432 acknowledgement message, the suspense record containing the original SMS message is retrieved from extended memory. The timer waiting on the acknowledgement is cancelled and the record is deleted from the SDF. An Interchange Log File (ILF) record is formatted from the SMS acknowledgement message and written to disk.

Message Flows From VisaNet to BASE24

This subsection describes the message flows for the following transactions inbound from VisaNet to BASE24.

Requests

Full and Partial Reversals


Timeouts

Force posts

Disputed Transactions

Request Message From VisaNet


The diagram below illustrates normal transaction processing for a VisaNet transaction that has been received by the VisaNet ISO Interface process to be routed to a BASE24 network to be authorized. The steps in the diagram are also described below.

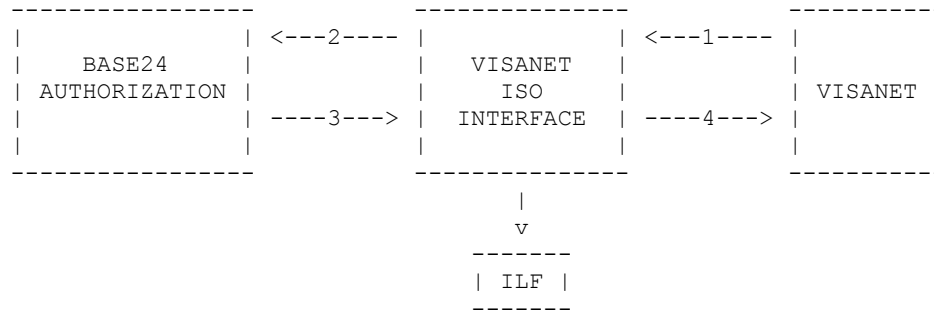

1. VisaNet sends the request to the VisaNet ISO Interface process in the SMS (0100/0200) or BASE (0100) external message format.
2. The VisaNet ISO Interface process reformats the message into the 0200 internal message format and sends the internal message to a BASE24 Authorization process for authorization. An inbound request timer is started to wait for the response.
3. The BASE24 Authorization process sends the response to the VisaNet ISO Interface process in the 0210 internal message format.
4. The VisaNet ISO Interface process deletes the inbound request timer and formats a SMS (0110/0210) or BASE (0110) external response message. The response is returned to VisaNet for completion. The transaction is logged to the Interchange Log File (ILF).

Partial Reversal Of A SMS Transaction From VisaNet


The diagram below illustrates transaction processing for a transaction that was sent to the VisaNet ISO Interface process by VisaNet in the SMS format, authorized by BASE24, and completed for an amount other than the original amount at VisaNet or acquiring member's device. The steps in the diagram are also described below.

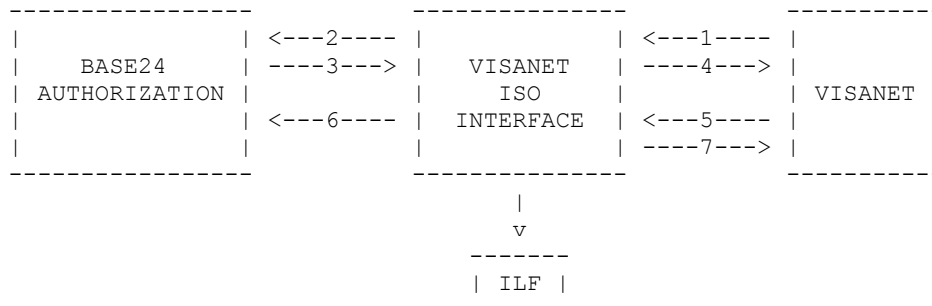

1. VisaNet sends the request to the VisaNet ISO Interface process in the SMS (0100/0200) external message format.
2. The VisaNet ISO Interface process reformats the message into the 0200 internal message format and sends the internal message to a BASE24 Authorization process for authorization. An inbound request timer is started to wait for the response.
3. The BASE24 Authorization process sends the response to the VisaNet ISO Interface process in the 0210 internal message format.
4. The VisaNet ISO Interface process deletes the inbound request timer and formats a 0210 external response message. The response is returned to VisaNet for completion. The transaction is logged to the Interchange Log File (ILF).
5. A SMS 0220 adjustment message arrives at the VisaNet ISO Interface process due to a partial dispense at the acquiring member's device.
6. The ILF record for the transaction is retrieved from disk and a BASE24 0420 reversal message is formatted and sent to BASE24. The ILF record is updated to disk with the BASE24 reversal and the SMS adjustment.
7. A 0230 adjustment response is formatted and sent to VisaNet.

Full Reversal Of A SMS Transaction From VisaNet


The diagram below illustrates transaction processing for a transaction that was sent to the VisaNet ISO Interface process by VisaNet in the SMS format, authorized by a BASE24 authorization process, and either cancelled by the customer or failed at VisaNet or the acquiring member's device. The steps in the diagram are also described below.

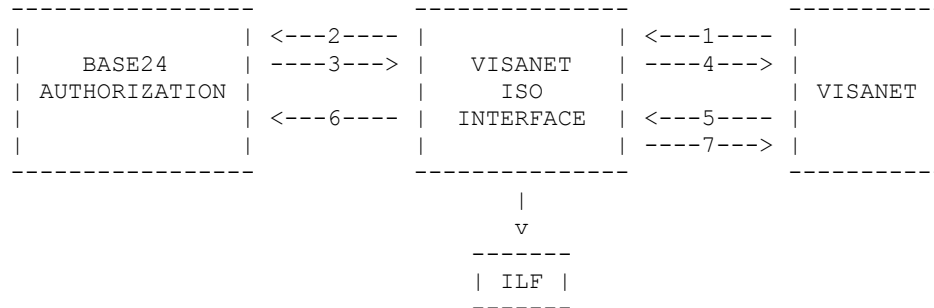

1. VisaNet sends the request to the VisaNet ISO Interface process in the SMS (0100/0200) external message format.
2. The VisaNet ISO Interface process reformats the message into the 0200 internal message format and sends the internal message to a BASE24 Authorization process for authorization. An inbound request timer is started to wait for the response.
3. The BASE24 Authorization process sends the response to the VisaNet ISO Interface process in the 0210 internal message format.
4. The VisaNet ISO Interface process deletes the inbound request timer and formats a 0210 external response message. The response is returned to VisaNet for completion. The transaction is logged to the Interchange Log File (ILF).
5. A SMS 0400 reversal message arrives at the VisaNet ISO Interface process to reverse the transaction in full.
6. The ILF record for the transaction is retrieved from disk and a BASE24 0420 reversal message is formatted and sent to the BASE24 process that authorized the transaction. The ILF record is updated at this time and rewritten to disk.
7. A 0410 reversal acknowledgement is formatted and sent to VisaNet.

Reversal Of A BASE Transaction From VisaNet


The diagram below illustrates transaction processing for a BASE transaction that was sent to the VisaNet ISO Interface process by VisaNet, authorized by a BASE24 authorization process, and cancelled by the customer, failed at VisaNet or the acquiring member's device, or completed for an amount other than what was approved. The steps in the diagram are also described below.

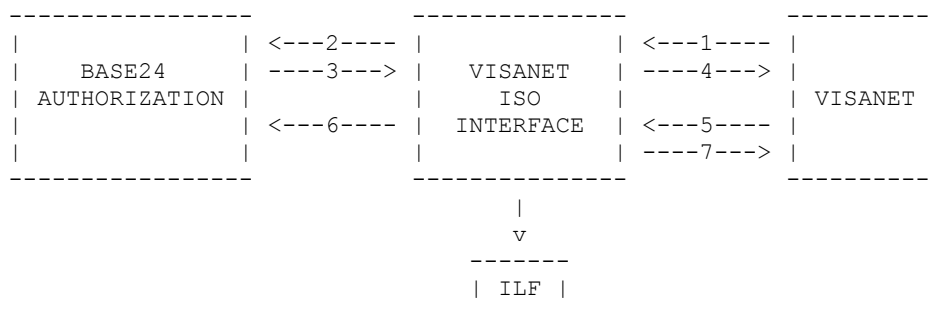

1. VisaNet sends the request to the VisaNet ISO Interface process in the BASE 0100 external message format.
2. The VisaNet ISO Interface process reformats the message into the 0200 internal message format and sends the internal message to a BASE24 Authorization process for authorization. An inbound request timer is started to wait for the response.
3. The BASE24 Authorization process sends the response to the VisaNet ISO Interface process in the 0210 internal message format.
4. The VisaNet ISO Interface process deletes the inbound request timer and formats a 0110 external response message. The response is returned to VisaNet for completion. The transaction is logged to the Interchange Log File (ILF).
5. A BASE 0400 reversal message arrives at the VisaNet ISO Interface process to completely or partially reverse the transaction.
6. The ILF record for the transaction is retrieved from disk and a BASE24 0420 reversal message is formatted and sent to the BASE24 process that authorized the transaction. The ILF record is updated at this time and rewritten to disk.
7. If a reversal was received, a 0410 reversal acknowledgement is formatted and sent to VisaNet.

Timeout Of A Request Message From VisaNet


The diagram below illustrates transaction processing for a SMS/BASE transaction that was received by the VisaNet ISO Interface process to be routed to a BASE24 network to be authorized. However, the timer waiting on the BASE24 response message expires before the response is received at the VisaNet ISO Interface process. The steps in the diagram are also described below.

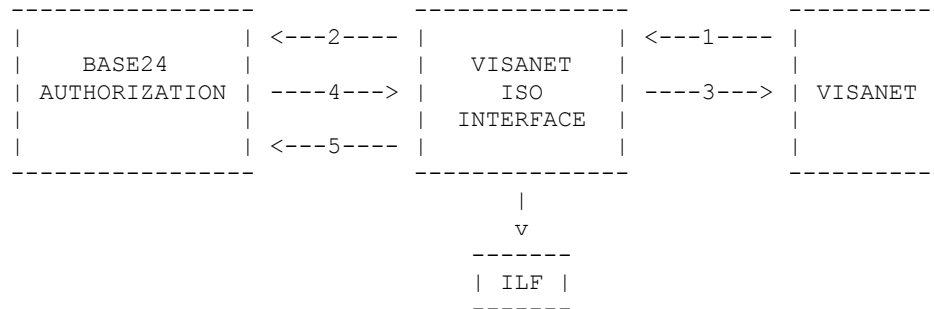

1. VisaNet sends the request to the VisaNet ISO Interface process in the SMS (0100/0200) or BASE (0100) external message format.
2. The VisaNet ISO Interface process reformats the message into the 0200 internal message format and sends the internal message to a BASE24 Authorization process for authorization. An inbound request timer is set to wait for a response from the BASE24 Authorization process.
3. The timer waiting on the response from the BASE24 Authorization process expires. A SMS (0110/0210) or BASE (0110) response message to deny the transaction is formatted and sent to VisaNet. The transaction is logged to the ILF.
4. The BASE24 0210 response message for the transaction is received at the VisaNet ISO Interface process after the denial response was sent to VisaNet.
5. If the transaction has been approved by BASE24, the ILF record for the transaction is retrieved from disk. A 0420 BASE24 reversal message is formatted and sent back to the BASE24 Authorization process. The ILF record is updated with the reversal. If the transaction has not been approved by BASE24, VisaNet has already received the denial message in step 3.

Force Post From VisaNet


The diagram below illustrates transaction processing for a VisaNet advice transaction that has been authorized by VisaNet because the link between the BASE24 network and VisaNet was down or because the VisaNet ISO Interface process did not respond in time. The steps in the diagram are also described below.

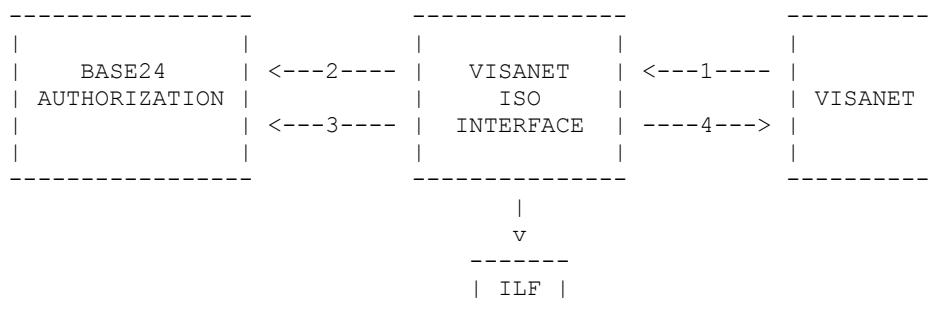

1. A 0220 SMS financial advice transaction arrives at the VisaNet ISO Interface process from VisaNet.
2. If a record can be found on the ILF the interface sends a reversal of the original transaction to the BASE24 Auth.
3. If approved, a BASE24 0220 force post message is formatted and sent to BASE24. An Interchange Log File (ILF) record is formatted from the external advice and the BASE24 force post (if formatted) and added to disk.
4. The VisaNet ISO Interface process formats a 0230 external acknowledgement to the advice and sends it to VisaNet.

Disputed Transaction From VisaNet

The diagram below illustrates transaction processing for a switch dispute originating at VisaNet and sent to the VisaNet ISO Interface process. The steps in the diagram are also described below.

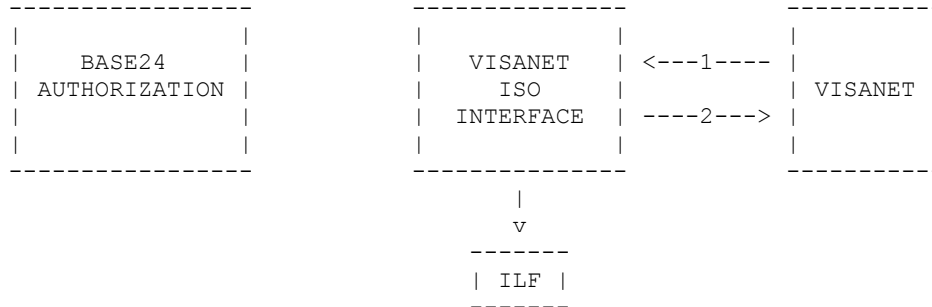

1. A VisaNet 0220/0422 SMS representation, chargeback, funds disbursement, or fee collection message is sent to the VisaNet ISO Interface process.
2. The VisaNet ISO Interface process sends the 0230/0432 acknowledgement message. An Interchange Log File (ILF) record is formatted and written to disk.

Network Management Message Flows

Network management messages are used to manage the operational status of the communications lines between BASE24 and VisaNet. The VisaNet ISO Interface process supports the following types of network management messages.

Logon messages


Echo test messages

Logoff messages

These messages are sent as 0800 messages and require 0810 messages in response. This section describes the message flows that occur when network management messages are sent.

Logon/Echo Test Initiated By BASE24

The diagram below illustrates the message flow between the VisaNet ISO Interface process and VisaNet when BASE24 initiates a logon or echo test message. The steps in the diagram are also described below.

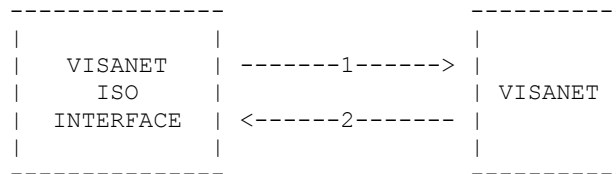

1. To initiate a logon, the VisaNet ISO Interface process sends an 0800 logon request with a network management code of 001 to VisaNet. This message establishes communications between BASE24 and VisaNet.


In case of Debit message format, when a wait-for-traffic timer expires two consecutive times with no line traffic in between, the VisaNet ISO Interface process sends an 0800 echo test message with a network management code of 301 to VisaNet. This message ensures the link is still up between the VisaNet ISO Interface process and VisaNet.

After a number of timeouts the VisaNet ISO Interface will send a logon to ensure that the link is still up between the interface process and VisaNet.

2. VisaNet responds with an 0810 message. If the response code is set to 00, the logon has been accepted. If the response code is not set to 00, the logon was rejected.

Echo Test Initiated By VisaNet


The diagram below illustrates the message flow between the VisaNet ISO Interface process and VisaNet when VisaNet initiates an echo test message. In order for VisaNet to log on to BASE24, VisaNet must first send an echo test, and then BASE24 must send a logon request. The steps in the diagram are also described below.

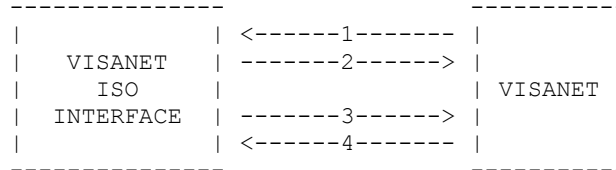

1. VisaNet sends an 0800 echo test message with a network management code of 301 to the VisaNet ISO Interface process. This message ensures the link is still up between the VisaNet ISO Interface process and VisaNet.
2. The VisaNet ISO Interface process sends an 0810 echo test response to VisaNet.
3. The VisaNet ISO Interface process sends an 0800 logon request with a network management code of 001 to VisaNet. This message establishes communications between BASE24 and VisaNet.
4. VisaNet responds with an 0810 message. If the response code is set to 00, the logon was accepted. If the response code is not set to 00, the logon was rejected.

Logoff Initiated By BASE24

The diagram below illustrates the message flow between the VisaNet ISO Interface process and VisaNet when BASE24 initiates a logoff message. The steps in the diagram are also described below.

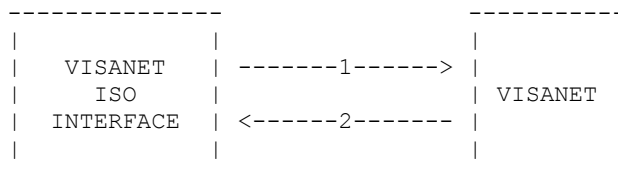

1. To initiate a logoff, the VisaNet ISO Interface process sends an 0800 logoff request with a network management code of 002 to VisaNet. This message terminates communications between BASE24 and VisaNet.
2. VisaNet responds with an 0810 message. If the response code is set to 00, the logoff was accepted. If the response code is not set to 00, the logoff was rejected.

ACI Worldwide, Inc.

Section 5

Cutover and Reporting

This section describes the VisaNet ISO Interface process's cutover processing and report generation.

Cutover Processing

Within the BASE24 system, interchange cutover processing is a transaction management and reporting function that produces reports for each business day. These reports are provided to aid in reconciling the BASE24 network with VisaNet. VisaNet initiates cutover seven days a week.

VisaNet keeps a number of running totals that reflect transactions processed between BASE24 and VisaNet. VisaNet maintains acquirer and issuer totals separately. For example, if BASE24 is processing as both an acquirer and an issuer, VisaNet sends two settlement advices for each supported network (i.e., PLUS, Interlink, VISA) to the VisaNet ISO Interface process at cutover.

VisaNet can act as a gateway to the PLUS, Interlink, and VISA networks. VisaNet maintains separate acquirer and issuer totals for each network.

The totals maintained by VisaNet include:

- Gross debit amount
- Gross debit count
- Gross credit amount
- Gross credit count
- Gross Adjustment debit amount
- Gross Adjustment debit count
- Gross Adjustment credit amount
- Gross Adjustment credit count
- Number of transfers
- Number of inquiries
- Number of authorizations
- Fee amounts

These totals are sent to the VisaNet ISO Interface process at VisaNet cutover and are used by the interchange report programs.

Settlement Advice Messages

The following steps are taken by the VisaNet ISO Interface process when a settlement advice message is received from VisaNet.

1. If the settlement date in the settlement advice is equal to the date of the current day's ILF, the ILF is cut over. The current day's ILF becomes the previous ILF and a new ILF is opened for the current day. The settlement advice is then logged to the previous day's ILF.
2. If the settlement date in the settlement advice is not equal to either the previous ILF date or the current ILF date, the settlement advice is logged to the current ILF.
3. Any ILF file or report obey file exceeding the retention period set in the Logical Network Configuration File (LCONF) is purged.

Starting Reports

The VisaNet ISO Interface process is responsible for starting the interchange reports. It does so by creating an obey file to start the report programs and then running the obey file at the appropriate time. If the report related assigns and params are not set in the LCONF, the reports will not be generated.

Using the time specified in the LCONF param SW-RPT-STARTUP, the VisaNet ISO Interface process sets a timer to expire when the reports are to be run. When the timer expires, the VisaNet ISO Interface process creates and runs an obey file containing the commands necessary to run the report programs from Tandem's TACL.

Under normal circumstances, the report programs start and stop without operator intervention. However, if the VisaNet ISO Interface process does not start the programs, they can be started manually from a TACL prompt by running the report obey file created by the VisaNet ISO Interface process. If the report programsabend or fail, they can be restarted in the same way.

Report Overview

The VisaNet ISO Interface process produces two reports of interchange transaction activity. These reports are the SETL01-VisaNet Clearings Statement Report and the STAT09-VisaNet Transaction Detail Report. These reports can be used in conjunction with BASE24-atm or BASE24-pos reports to reconcile the differences between the BASE24 processing day and the VisaNet processing day.

This section provides an overview of the information contained in the interchange reports. For more detailed information and sample report formats, see the "BASE24-atm Settlement and Reporting Manual" or the "BASE24-pos Settlement and Reporting Manual".

SETL01-VisaNet Clearings Statement Report

The SETL01-VisaNet Clearings Statement Report reflects the debit, credit, and net position of VisaNet to BASE24 in U.S. currency. This report contains the totals of all approved transactions logged to the Interchange Log File (ILF). The first section of the report gives transaction totals for the BASE24 processing day.

Following the BASE24 totals, a section exists for transactions that occurred during the BASE24 processing day but not during the VisaNet processing day. These transactions are subtracted from the transaction totals for the BASE24 processing day. This section of the report provides the net amount of transactions and the dollar difference between transactions occurring during the BASE24 processing day but not during the VisaNet processing day.

Finally, a section exists showing transactions that occurred during the VisaNet processing day but not during the BASE24 processing day. These transactions are added to the transaction totals for the BASE24 processing day. This section of the report provides the net amount of transactions and the dollar difference between transactions occurring during the VisaNet processing day but not during the BASE24 processing day.

STAT09-VisaNet Transaction Detail Report

The STAT09-VisaNet Transaction Detail Report provides a complete listing of all VisaNet activity. The report is based on the transactions logged to the current day's ILF.

This report contains one detail item for each transaction processed by the VisaNet ISO Interface process during its processing day. The information provided includes the cardholder number, transaction type, transaction time, posting date, and transaction amount.

Section 6

BASE24 CRT Operations

BASE24 supports several VisaNet-specific operations that are performed from BASE24 CRT screens. These operations include:

- Sending maintenance control instructions

- Sending file add, update, delete, or inquiry commands

- Reviewing the results of file add, update, delete, or inquiry commands

- Sending a copy request or a confirmation of a copy request, mail fulfillment, nonfulfillment and dispute messages.

- Sending adjustments, chargebacks, representments, sales drafts, fee collections and funds disbursements

- Sending fraud advices

- Sending collection-only transactions

VisaNet Operations Screens

The following BASE24 screens are used to perform VisaNet-specific operations. They are:

VisaNet Maintenance Control (VNMC) screen - The VNMC screen allows operators to send sign on, sign off, advice sign on, advice sign off, suppress inquiry sign on, suppress inquiry sign off, and total request commands to the interface which forwards them to VisaNet. The interface returns a response to the screen indicating the result of the command.

VisaNet File Request Log File (FRLF) screens - The FRLF screens allow operators to send file inquiries, adds, updates, and delete requests to VisaNet for both SMS and BASE exception and verification files. An operator can also review the results of these commands from the FRLF using the second page of these screens and delete records from the FRLF.

VisaNet Copy Request Confirmation (VCRC) screens - The VCRC screens allows an operator to send a copy request or a confirmation of a copy request, mail fulfillment, nonfulfillment or dispute message to the acquiring or requesting institution through the VisaNet ISO Interface process.

Switch Dispute File (SDF) screens - The SDF screens allow an operator to send disputed transactions to VisaNet through the VisaNet ISO Interface process. The information is stored in the SDF. The SDF is processed similar to the SAF with one exception. Each record in the SDF is processed before resending any records that did not receive a response in the specified time. Also, if a response is received after the specified time, the specific SDF record will be retrieved and deleted.

VisaNet Collection-Only Transaction (VCOT) screen - The VCOT screen allows an operator to send a collection-only request to Visa through the VisaNet ISO Interface process.

Section 6 describes how to use the VisaNet Operations screens. The information provided is intended for persons familiar with BASE24 CRT access and other BASE24 operations (e.g., files maintenance, network control, device control). Additional information on BASE24 CRT access is available in the "BASE24 CRT Access Manual".

Accessing The VisaNet Operation Screens

The VisaNet Menu screen is accessed from screen 12 of the Interchange Configuration File (ICFE). From this screen, the VBBF, VIIF, VNMC, FRLF, VCRC, VCOT, VISF, SDF and SNF screens can be accessed. From ICFE screen 12, press the F8 key to access the VisaNet Menu screen. The VNMC,

FRLF, VCRC, VCOT, SDF and SNF are items included on this menu. The VNMC, FRLF, VCRC, VCOT and SDF are described in detail in this section. The Station Name File (SNF), VisaNet Blocked Bin File (VBBF) screen and the VisaNet Institution Identification File (VIIF) screen are file maintenance screens for VisaNet and are described in section 2. To access the screen or screens for a specific file, place the cursor to the left of the entry and press the F1 key.

VisaNet Maintenance Control (VNMC) Screen

The VisaNet Maintenance Control (VNMC) screen is shown below followed by descriptions of its fields.

```
-----
BASE24-VISA  VISANET MAINT CONTROL  LNET  YY/MM/DD  HH:MM  01 OF 01

PROCESS NUMBER:  _____

TRAN CODE:  _____

VISA STATION ID:  _____

FI ID:  _____

SETL INST ID:  _____

***** BASE24 *****
NEW PAGE:          FILE DESTINATION:          NEW LOGICAL NETWORK ID:
F1 - SEND REQUEST          F12 - HELP
-----
```

PROCESS NUMBER

The process number must match the last 3 numbers of the server name. It is used only when more than one copy of the VisaNet ISO Interface process has been configured and separate requesters are desired for each interface.

FIELD LENGTH: 3 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: Blanks

TRAN CODE

The command the VisaNet ISO Interface process should send to VisaNet. Valid values are:

SN = Signon
SF = Signoff
AN = Advice signon
AF = Advice signoff
SI = Suppress inquiry mode enter
BI = Suppress inquiry mode exit

FIELD LENGTH: 2 alphabetic characters
REQUIRED FIELD: Yes
DEFAULT VALUE: Blanks

VISANET STATION ID

The VisaNet station ID of the station for which the command should be sent to VisaNet. Not applicable when sending a totals command. Each BASE24 station can have two VisaNet station IDs, one for a MIS (acquirer) ID and one for a CAS (issuer) ID.

FIELD LENGTH: 6 alphanumeric characters
REQUIRED FIELD: Yes, if TRAN CODE field is not GA or GI.
DEFAULT VALUE: Blanks

FI ID

The FIID of the institution for which the current totals are being requested in either of the two totals commands.

FIELD LENGTH: 4 alphanumeric characters
REQUIRED FIELD: Yes, if TRAN CODE field is GA or GI.
DEFAULT VALUE: Blanks

SETL INST ID

The ID of the settlement institution as known to VisaNet.

FIELD LENGTH: 4 alphanumeric characters
REQUIRED FIELD: Yes, if TRAN CODE field is GA or GI.
DEFAULT VALUE: Blanks

VisaNet File Request Log File (FRLF) Screens

The VisaNet File Request Log File (FRLF) Screens are used to send File Maintenance requests to VisaNet and peruse the FRLF. Screen 1 is used to send the request to VisaNet. Screen 2 is used to peruse the FRLF.

VisaNet File Request Log File (FRLF) Screen 1

The VisaNet File Request Log File (FRLF) screen 1 is shown below followed by descriptions of its fields.

```

-----
BASE24-VISA VISANET ACTIVITY MNT  <ln>   <date>   <time>   01 OF 02

PROCESS NUMBER: _____
VISA SYSTEM: 02          NETWORK ID: 0002          FILE TYPE: E
ACCT NUMBER: _____  COUNTRY CODE: 000
OPERATOR ID: _____  PURGE DATE: 000000 (YYMMDD) ACT CODE: 05
REGION CODE: _____  SPENDING COUNT LIMIT: 00
SPENDING AMOUNT LIMIT: 000000 CVA CODE: 01          PVK INDEX: 0
PVV: _____ ADDRESS: _____ ZIP CODE: _____
TRAN AMT: 000000000000 ACQ COUNTRN CODE: 840 PAN COUNTRY CODE: 000
ACCT ID1: _____ TRAN ID: 0000000000000000
ACCT ID2: _____ STOP ORDER TYPE: _____
CARDHOLDER NAME: _____ MERCHANT TYPE: _____

CARD ACCEPTOR INFORMATION:
MRCH ACCT NUM: _____
NAME: _____ CARD ACCEPTOR ID: _____
CITY: _____ COUNTRY: _____ MVV: 0000000000

***** BASE24 *****
NEW PAGE: _____ FILE DESTINATION: _____ NEW LOGICAL NETWORK ID: _____
F12-HELP                                0000

```

PROCESS NUMBER

The process number must match the last 3 numbers of the server name. It is used only when more than one copy of the VisaNet ISO Interface process has been configured and separate requesters are desired for each interface.

FIELD LENGTH: 3 numeric characters
 REQUIRED FIELD: Yes, if SYMBOLIC NAME is blanks.
 DEFAULT VALUE: Blanks

VISA SYSTEM

A value indicating the VisaNet system on which the file being accessed is located. Valid values are:

01 = BASE I
02 = SMS
03 = BASE -DEBIT

FIELD LENGTH: 2 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 02 (SMS)

NETWORK ID

A code that specifies the network to be used. Valid values are:

0000 = Non-Visa, non-Plus ATM Networks for which Visa is used as a gateway.
This value results in ATM priority routing of File Maintenance Requests.
0002 = Visa
0003 = Interlink. This value should be used for all Non-Visa POS Networks for
which Visa is used as a gateway.
0004 = PLUS

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0002

FILE TYPE

A value indicating the file type to which the request is being directed. Valid values are:

E = Exception file
V = PIN verification file
S = Stop Recurring/Installment Payment
A = Address verification file

FIELD LENGTH: 1 alphabetic character
REQUIRED FIELD: Yes
DEFAULT VALUE: E (Exception file)

ACCOUNT NUMBER

The account number involved in the file request.

FIELD LENGTH: 1-28 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: Blanks

COUNTRY CODE

The ISO country code of the account number. This field is used if the account begins with a 59 or has more than 19 digits.

FIELD LENGTH: 3 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: 000

OPERATOR ID

The user-assigned identification number of the operator who entered this file request.

FIELD LENGTH: 2 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: Blanks

PURGE DATE

The date (YYMMDD) that this record should be purged from the file.

FIELD LENGTH: 6 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 000000

ACT CODE

A value indicating the action the STIP (Stand-In Processor) should take when doing stand in processing for this card. Valid values are:

04 = Pick up card (no fraud)
05 = Do not honor
07 = Pick up card (fraud)
11 = Approval for VIP
41 = Lost card, pick up (fraud)
43 = Stolen card, pick up (fraud)
XA = Forward to issuer, default to 00

XD = Forward to issuer, default to 05

FIELD LENGTH: 2 alphanumeric characters
REQUIRED FIELD: Yes, if an add or update is being requested.
DEFAULT VALUE: 05 (Do not honor)

REGION CODE

Up to nine regions in which the account number will be distributed, in CRB files and bulletins. This field is used in adds and updates to BASE I exception file records.

FIELD LENGTH: 9 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: Blanks

SPENDING COUNT LIMIT

The number of transactions this account number can have approved in one day. Only used in SMS exception file requests.

FIELD LENGTH: 2 numeric characters
REQUIRED FIELD: Yes, if ACTION CODE is blanks or 11 and this is not a deletion request.
DEFAULT VALUE: 00

SPENDING AMOUNT LIMIT

The number of dollars this account number can have approved in one day. Only used in SMS exception file requests.

FIELD LENGTH: 6 numeric characters
REQUIRED FIELD: Yes, if ACTION CODE is blanks or 11 and this is not a deletion request.
DEFAULT VALUE: 000000

CVA CODE

The customer verification algorithm used by the issuer. Valid value is 01.

FIELD LENGTH: 2 numeric characters
REQUIRED FIELD: Yes, if this is a verification file request.
DEFAULT VALUE: 01

PVK INDEX

A value indicating which of six possible pairs of PIN verification keys was used by the issuer to generate the PVV. Valid values are:

0 = PVV is not verified by the VisaNet STIP

1 = First pair

2 = Second pair

3 = Third pair

4 = Fourth pair

5 = Fifth pair

6 = Sixth pair

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes, if this is a SMS verification file request or BASE I verification file request and addr/ZIP is not present.

DEFAULT VALUE: 0 (PVV is not verified by the VisaNet STIP)

PVV

The PIN Verification Value for this account number.

FIELD LENGTH: 4 alphanumeric characters

REQUIRED FIELD: Yes, if this is a SMS verification file request or BASE I verification file request and addr/ZIP is not present.

DEFAULT VALUE: Blanks

ADDRESS

The verification address.

FIELD LENGTH: 1-20 alphanumeric characters

REQUIRED FIELD: Yes, if this is a BASE I verification file request and PVKI/PVV is not present.

DEFAULT VALUE: Blanks

ZIP CODE

The verification ZIP code.

FIELD LENGTH: 1-9 alphanumeric characters

REQUIRED FIELD: Yes, if this is a BASE I verification file request and PVKI/PVV is not present.

DEFAULT VALUE: Blanks

The following fields are used when the FILE TYPE field is set to "S".

TRAN AMOUNT

The amount of the recurring or installment payment.

FIELD LENGTH: 12 numeric characters, right justified, zero filled.
REQUIRED FIELD: No
DEFAULT VALUE: zeroes

ACQ COUNTRY CODE

The acquiring institutions country code.

FIELD LENGTH: 3 numeric characters.
REQUIRED FIELD: Yes
DEFAULT VALUE: 840

PAN COUNTRY CODE

The country code that the card was issued in.

FIELD LENGTH: 3 numeric characters.
REQUIRED FIELD: no
DEFAULT VALUE: 000

ACCT ID1

A number that identifies an account relationship.

FIELD LENGTH: 28 alphanumeric characters.
REQUIRED FIELD: yes, if ACCOUNT NUM field is blank and record is being added, deleted or updated.
DEFAULT VALUE: blanks

TRAN ID

A number assigned by Visa when a record is added to the Customer DATABASE (CDB). Any subsequent messages must have the TRAN ID from the original message.

FIELD LENGTH: 15 numeric characters.
REQUIRED FIELD: yes, if a record is being read, updated or deleted.
DEFAULT VALUE: zeroes

ACCT ID2

A number that identifies an account relationship.

FIELD LENGTH: 28 alphanumeric characters.
REQUIRED FIELD: yes, if ACCOUNT NUM field is blank and record
is being added, deleted or updated.
DEFAULT VALUE: blanks

STOP ORDER TYPE

Used to distinguish between stopping one payment or recurring payments.

FIELD LENGTH: 2 alphanumeric characters.
REQUIRED FIELD: yes, if record is being added or updated.
DEFAULT VALUE: blanks
VALID VALUES: R0 - stop specific payment
R1 - revoke authorization for further payments
R3 – revocation of all authorizations order

CARDHOLDER NAME

Cardholder name.

FIELD LENGTH: 23 alphanumeric characters.
REQUIRED FIELD: no
DEFAULT VALUE: blanks

MERCHANT TYPE

The SIC code for the original transaction.

FIELD LENGTH: 4 numeric characters.
REQUIRED FIELD: no
DEFAULT VALUE: 0000

MRCH ACCT NUM

Merchant that submits the transaction that needs to be stopped

FIELD LENGTH: 30 alphanumeric characters.
REQUIRED FIELD: no
DEFAULT VALUE: blanks

NAME

Merchant name.

FIELD LENGTH: 25 alphanumeric characters.
REQUIRED FIELD: no
DEFAULT VALUE: blanks

CARD ACCEPTOR ID

Card acceptor ID code.

FIELD LENGTH: 15 alphanumeric characters.
REQUIRED FIELD: yes, if MVV is zeroes and the record is being added or updated.
DEFAULT VALUE: blanks

CITY

City where merchant is located.

FIELD LENGTH: 13 alphanumeric characters.
REQUIRED FIELD: no
DEFAULT VALUE: blanks

COUNTRY

Country where merchant is located.

FIELD LENGTH: 2 alphanumeric characters.
REQUIRED FIELD: no
DEFAULT VALUE: blanks

MVV

Merchant Verification Value.

FIELD LENGTH: 10 alphanumeric characters.
REQUIRED FIELD: yes, if CARD ACCEPTOR ID is blank and the record is being added or updated.
DEFAULT VALUE: blanks

VisaNet File Request Log File (FRLF) Screen 2

The VisaNet File Request Log File (FRLF) screen 2 is shown below followed by descriptions of its fields.

```

-----
BASE24-VISA  VISANET ACTIVITY MNT      LNET  YY/MM/DD  HH:MM  02 OF 02

  PERUSAL DATE (YYMMDD) :      OR PAN:

NETWORK-ID  ( )

DATE:      TIME:      OPER ID:  TRAN CODE:

PAN:      RESP CODE:  ERROR CODE:

PURGE DATE:  ACTION CODE:  REGION CODE:  PCC:
or
PURGE DATE:  ACTION CODE:  SPENDING:  CNT  AMT
or
PURGE DATE:  PVKI:  PVV:

ADDRESS:  ZIP CODE:

***** BASE24 *****
NEW PAGE:      FILE DESTINATION:      NEW LOGICAL NETWORK ID:
F1-REQUEST DATA  F4-DELETE  F6-NEXT PAGE  F12-HELP
-----

```

PERUSAL DATE

The date (YYMMDD) for the file request responses to be perused. The records from the FRLF for that date will be shown on the screen with appropriate headings. If this field and the PERUSAL PAN field are spaces, records will be displayed beginning with the first one in the file.

FIELD LENGTH: 6 numeric characters
 REQUIRED FIELD: No
 DEFAULT VALUE: 000000

PERUSAL PAN

The PAN for the file request responses to be perused. The records from the FRLF for this PAN will be shown on the screen with appropriate headings.

FIELD LENGTH: 28 numeric characters
 REQUIRED FIELD: No
 DEFAULT VALUE: Blanks

The following fields are display only.

NETWORK-ID

The Network ID and description from the FRLF record being read.

FIELD LENGTH: System-protected

DATE

The date from the FRLF record being read.

FIELD LENGTH: System-protected

TIME

The time the record being read was logged to the FRLF.

FIELD LENGTH: System-protected

OPER ID

The operator ID from the FRLF record being read.

FIELD LENGTH: System-protected

TRAN CODE

The file update code from the FRLF record being read followed by a description.
Valid values are:

- 1 = Add
- 2 = Change
- 3 = Delete
- 4 = Inquiry

FIELD LENGTH: System-protected

PAN

The PAN from the FRLF record being read.

FIELD LENGTH: System-protected

RESP CODE

The response code from the FRLF record being read.

FIELD LENGTH: System-protected

ERROR CODE

The error code from the FRLF record being read.

FIELD LENGTH: System-protected

PURGE DATE

The purge date from the FRLF record being read.

FIELD LENGTH: System-protected

ACTION CODE

The action code from the FRLF for exception file request records (the type in the FRLF record is 1 or 2). If the record being read is not an exception file request record, this field is not displayed.

FIELD LENGTH: System-protected

REGION CODE

The region code from the FRLF for BASE exception file request records (the type in the FRLF record is 1). If the record being read is not a BASE exception file request record, this field is not displayed.

FIELD LENGTH: System-protected

PCC

The processing control code from the FRLF for BASE exception file request records (the type in the FRLF record is 1). If the record being read is not a BASE exception file request record, this field is not displayed.

FIELD LENGTH: System-protected

SPENDING CNT

The spending limit count from the FRLF for SMS exception file request records (the type in the FRLF record is 2). If the record being read is not a SMS exception file request record, this field is not displayed.

FIELD LENGTH: System-protected

SPENDING AMT

The spending limit amount from the FRLF for SMS exception file request records (the type in the FRLF record is 2). If the record being read is not a SMS exception file request record, this field is not displayed.

FIELD LENGTH: System-protected

PVKI

The PIN Verification Key Index from the FRLF for a verification file request record (the type in the FRLF record is 3). If the record being read is not a verification file request record, this field is not displayed.

FIELD LENGTH: System-protected

PVV

The PIN Verification Value from the FRLF for a verification file request record (the type in the FRLF record is 3). If the record being read is not a verification file request record, this field is not displayed.

FIELD LENGTH: System-protected

ADDRESS

The address value from the FRLF for a verification file request record (the type in the FRLF record is 3). If the record being read is not a verification file request record, this field is not displayed.

FIELD LENGTH: System-protected

ZIP CODE

The ZIP code value from the FRLF for a verification file request record (the type in the FRLF record is 3). If the record being read is not a verification file request record, this field is not displayed.

FIELD LENGTH: System-protected

VisaNet Collection-Only Transaction (VCOT) Screen

The Visa Collection-Only Transaction (VCOT) screen enables operators to enter collection-only messages and send them to VisaNet. To select these screens, the VCOT function must be selected from the VisaNet Menu screen. The VCOT screen is shown below followed by a description of its fields.

BASE24-VISA VISANET VCOT SCREEN TES4 08/08/12 15:51 01 OF 01

```
PROCESS NUMBER:                ORIG MSG TYP: 0000
PAN:                          PROC CDE: 000000
TRAN AMOUNT:                    0
TRAN DAT/TIM: 0000000000      TRACE NUM: 000000
LOCAL TIM: 000000             LOCAL DAT: 0000
MERCH TYP: 0000               ACQ CNTRY CDE: 000
PAN ENTRY MDE: 00             PIN ENTRY CAP: 0
POS COND CDE: 00
ACQ INST ID:                  FWD INST ID:
REF NUM: 000000000000         RESP CDE:
CARD ACCEPTOR NAME/LOC
NAME:                          CITY:                CNTRY:

CRNCY CDE: 000                NETWORK ID: 0002
REASON CDE: 0000              ACQ BUS ID:
MAIL/PHONE/ECOMM IND:        SPCL COND IND (RIS):    SPCL COND IND (MERCH):
```

```
***** BASE24 *****
NEW PAGE:      FILE DESTINATION:      NEW LOGICAL NETWORK ID:
F1-VALIDATE DATA  F3-SEND REQUEST  F12-HELP
```

The values in the fields entered on the Visa Collection-Only Transaction (VCOT) screen are used to format the associated fields in the external 9240 collection-only message sent to Visa.

PROCESS NUMBER

The process number must match the last 3 numbers of the server name. It is used only when more than one copy of the VisaNet ISO Interface process has been configured and separate requesters are desired for each interface.

Field Length:	3 Numeric Characters
Range of Values:	3 Numeric Characters
Default Value:	Blanks
Required:	No

ORIG MSG TYP

Field Length:	4 Numeric Characters
Range of Values:	4 Numeric Characters

Default Value: Zeroes
Required: Yes

PAN

Field Length: Up to 19 Numeric Characters
Range of Values: Up to 19 Numeric Characters
Default Value: None
Required: Yes

PROC CDE

Field Length: 6 Numeric Characters
Range of Values: Valid processing code from original transaction
Default Value: Zeroes
Required: No, as zeroes are a valid value

TRAN AMOUNT

Field Length: 12 Numeric Characters
Range of Values: 12 Numeric Characters
Default Value: Zeroes
Required: Yes

TRAN DAT/TIM

Field Length: 10 Numeric Characters
Range of Values: 10 Numeric Characters
Default Value: Zeroes
Required: Yes

TRACE NUM

Field Length: 6 Numeric Characters
Range of Values: 6 Numeric Characters
Default Value: Zeroes
Required: Yes

LOCAL TIM

Field Length: 6 Numeric Characters
Range of Values: 6 Numeric Characters
Default Value: Zeroes
Required: Yes

LOCAL DAT

Field Length:	4 Numeric Characters
Range of Values:	4 Numeric Characters
Default Value:	Zeroes
Required:	Yes

MERCH TYPE

Field Length:	4 Numeric Characters
Range of Values:	4 Numeric Characters
Default Value:	Zeroes
Required:	Yes

ACQ CNTRY CDE

Field Length:	3 Numeric Characters
Range of Values:	3 Numeric Characters
Default Value:	Zeroes
Required:	Yes

PAN ENTRY MDE

Field Length:	2 Numeric Characters
Range of Values:	2 Numeric Characters
Default Value:	Zeroes
Required:	No, as zeroes are a valid value

PIN ENTRY CAP

Field Length:	1 Numeric Character
Range of Values:	1 Numeric Character
Default Value:	Zero
Required:	No, as zero is a valid value

POS COND CDE

Field Length:	2 Numeric Characters
Range of Values:	2 Numeric Characters
Default Value:	Zeroes
Required:	No, as zeroes are a valid value

ACQ INST ID

Field Length:	Up to 11 Numeric Characters
Range of Values:	Up to 11 Numeric Characters
Default Value:	Blanks
Required:	Yes

FWD INST ID

Field Length:	11 Numeric Characters
Range of Values:	11 Numeric Characters
Default Value:	Blanks
Required:	No

REF NUM

Field Length:	12 Numeric Characters
Range of Values:	12 Numeric Characters
Default Value:	Zeroes
Required:	Yes

RESP CDE

Field Length:	2 Numeric Characters
Range of Values:	2 Numeric Characters
Default Value:	Blanks
Required:	Yes

CARD ACCEPTOR NAME/LOC (next 3 fields)**NAME**

Field Length:	25 Alphanumeric Characters
Range of Values:	25 Alphanumeric Characters
Default Value:	Blanks
Required:	Yes

CITY

Field Length:	13 Alphanumeric Characters
Range of Values:	13 Alphanumeric Characters
Default Value:	Blanks
Required:	Yes

CNTRY

Field Length:	2 Alphanumeric Characters
Range of Values:	2 Alphanumeric Characters
Default Value:	Blanks
Required:	Yes

CRNCY CDE

Field Length:	3 Numeric Characters
Range of Values:	3 Numeric Characters
Default Value:	Zeroes
Required:	Yes

NETWORK ID

Field Length:	4 Numeric Characters
Range of Values:	4 Numeric Characters
Default Value:	0002
Required:	Yes

REASON CDE

Field Length:	4 Numeric Characters
Range of Values:	4 Numeric Characters
Default Value:	Zeroes
Required:	No

ACQ BUS ID

Field Length:	8 Numeric Characters
Range of Values:	8 Numeric Characters
Default Value:	Blanks
Required:	No

MAIL/PHONE/ECOMM IND

Field Length:	1 Alphanumeric Character
Range of Values:	" " and 0-9
Default Value:	Blank
Required:	No

SPCL COND IND (RIS)

Field Length:	1 Alphanumeric Character
Range of Values:	" ", 1, 2 and 3
Default Value:	Blank
Required:	No

SPCL COND IND (MERCH)

Field Length:	1 Alphanumeric Characters
Range of Values:	" ", B, D, F, H, L, S, 8 and 9
Default Value:	Blank
Required:	No

VisaNet Copy Request Confirmation (VCRC) Screens

The VisaNet Copy Request Confirmation (VCRC) screens enable operators to enter fraud notifications, copy requests, confirmations, nonfulfillments, mail fulfillments, disputes, and free text administrative messages and send them to VisaNet. To select these screens, the VCRC function must be selected from the VisaNet Menu screen. The following function keys have been defined for the VCRC screens.

<u>KEY</u>	<u>DESCRIPTION</u>
F1	FRAUD NOTIFY - Sends a fraud notification message.
F3	COPY REQUEST - Sends a request for a copy of the documents from the acquirer.
F4	CONFIRMATION - Sends a confirmation that the documents have been sent by the acquirer.
	NONFULFILL - Sends a message indicating that the institution will not send a fulfillment
	DISPUTES - Sends a dispute message
F6	FREE TEXT - Sends a free-text administrative message.

VisaNet Copy Request Confirmation (VCRC) Screen 1

VCRC screen 1 is shown below, followed by descriptions of its fields.

```
-----
BASE24-VISA VISANET CRC SCREEN      <ln>      <date>      <time>      01 OF 04

PROCESS NUM: _____
VCRFS PARTICIPATION: _ (Y/N)  VCRFS TYPE: _      FRAUD TYPE: _
VCRFS PARTICIPATION: _ (Y/N)  VCRFS TYPE: _      FRAUD TYPE: _
REGION CODE: _ _____
PAN: _____      CNTRY CDE: _____ CRD SEQ NUM: _____
ORIGINAL AMOUNT: _____      LOCAL DATE: _____ NETWORK ID: _____
ORIGINAL ACQUIRING BIN: _____      ETIR: _____ MERCHANT TYPE: _____
ORIGINAL REFERENCE NUM: _____      ISS CONTROL NUM: _____
ORIGINAL CURRENCY CODE: _____ REASON CODE: _____ DEST INST: _____
TERM STATE: _____      TERM COUNTY: _____ TERM POSTAL CODE: _____
INST NAME: _____      INST CITY: _____ INST CNTRY: _____
ACQ BUSINESS ID: _____      PAYMENT SERVICE IND: _ TRAN ID: _____
REIMB ATTR: _ REQ'D PAYMENT SERVICE: _ MULT SEQ NUM: _ PROC CDE _____
MICR RTTN: _____      CHECK NUM: _____
FREE FORMAT TEXT: _____
_____
_____
_____
_____

***** BASE24 *****
NEW PAGE: _____ FILE DESTINATION: _____ NEW LOGICAL NETWORK ID: _____
F1-FRAUD F3-CPY RQT F4-CNFRM/DSPT/NFLFMNT F6-TXT F12HLP
0000
_____
```

VCRFS PARTICIPATION

Indicates whether the customer participates in the electronic VisaNet Copy Request and Fulfillment Service. Valid values are:

Y = does participate in the VCRF Service

N = does not participate in the VCRF Service

FIELD LENGTH: 1 alpha character

REQUIRED FIELD: Yes, if the operation being performed is an F3-CPY AND F4-CONFIRM/DSPT/NFLFMNT.

DEFAULT VALUE: Blank

VCRFS TYPE

Indicates the type of message being formatted for the VisaNet Copy Request and Fulfillment Service. Valid values are:

C = confirmation
D = dispute
N = nonfulfillment

FIELD LENGTH: 1 alpha character

REQUIRED FIELD: Yes, if the operation being performed is an F4-
CONFIRM/DSPT/NFLFMNT and VCRFS
PARTICIPATION is Y.

DEFAULT VALUE: Blank

FRAUD TYPE

Identifies the type fraud being reported. Valid values are as follows:

0 = Lost
1 = Card reported stolen
2 = Not Received as Issued (NRI)
3 = Card issued on basis of fraudulent application
4 = Issuer reported counterfeit
5 = Miscellaneous
6 = Fraudulent use of account number
7 = Fraudulent Application detected (customer denies application) (ICS)
8 = Suspicion Application detected (unable to verify) (ICS)
9 = Acquirer reported counterfeit

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: No

DEFAULT VALUE: 0

REGION CODE

This field is used to edit data entered for region specific requirements. Valid values are as follows:

- 1 = US (United States)
- 2 = Canada
- 3 = EU (European Union)
- 4 = AP (Asia Pacific)
- 5 = LAC (Latin America/Caribbean)
- 6 = CEMEA (Central Europe/Middle East/Africa)

FIELD LENGTH: 1 numeric characters
REQUIRED FIELD: Yes, if the SYMBOLIC NAME field contains blanks.
DEFAULT VALUE: 1

PROCESS NUM

The process number must match the last 3 numbers of the server name. It is used only when more than one copy of the VisaNet ISO Interface process has been configured and separate requesters are desired for each interface.

FIELD LENGTH: 3 numeric characters
REQUIRED FIELD: Yes, if the SYMBOLIC NAME field contains blanks.
DEFAULT VALUE: None

PAN

The account number associated with the original transaction for this copy request. If this is a confirmation request, nonfulfillment, mail fulfillment or dispute, this field contains the account number from the copy request. For check authorization transactions this field will be used to populate the Account Number within Bit-125 and is the Account Number from the Magnetic Ink Character Recognition line.

FIELD LENGTH: 28 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

CNTRY CDE

The ISO country code of the account number. This field is used if the account number begins with 59 or has more than 19 digits.

FIELD LENGTH: 3 numeric characters
REQUIRED FIELD: Yes, if the account number begins with a 59 or has more than 19 digits.
DEFAULT VALUE: 000

CRD SEQ NUM

The card sequence number (member number).

FIELD LENGTH: 3 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: " " (Spaces)

ORIGINAL AMOUNT

The amount of the original transaction if known or if this is a copy request. If the amount is not known, this field contains zeros. If this is a confirmation request, this field contains the amount from the copy request.

FIELD LENGTH: 12 numeric characters
REQUIRED FIELD: Yes, for a copy request or confirmation request.
DEFAULT VALUE: 000000000000

LOCAL DATE

The date, (MMDD), on which the original transaction took place expressed in the local date of the card acceptor location.

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: Yes, for a copy request or confirmation request.
DEFAULT VALUE: 0000

NETWORK ID

The network ID from the original transaction if this is a copy request. If this is a confirmation request, this field contains the network ID from the copy request. Valid values are:

0002 = Visa
0003 = Interlink
0004 = PLUS

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: 0002

ORIGINAL ACQUIRING BIN

The VisaNet-assigned BIN of the acquiring institution from the original transaction if this is a copy request. If this is a confirmation request, nonfulfillment, mail fulfillment or dispute, this field contains the VisaNet-assigned BIN from the copy request.

FIELD LENGTH: 11 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

ETIR

Excluded Transaction Identifier Reason: This field can be any alphanumeric character.

FIELD LENGTH: 1 alphanumeric character
REQUIRED FIELD: No
DEFAULT VALUE: None

MERCHANT TYPE

The merchant type code from the original transaction if this is a copy request. If this is a confirmation request, nonfulfillment, mail fulfillment or dispute, this field contains the merchant type code from the copy request.

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 6011

ORIGINAL REFERENCE NUM

The retrieval reference number from the original transaction if this is a copy request. If this is a confirmation request, nonfulfillment, mail fulfillment or dispute, this field contains the retrieval reference number from the copy request.

FIELD LENGTH: 12 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000000000000

ISS CONTROL NUM

The issuer control number if this is a BASE II copy request. If this is a confirmation request, nonfulfillment, mail fulfillment or dispute, this field contains the issuer control number from the copy request.

FIELD LENGTH: 9 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 000000000

ORIGINAL CURRENCY CODE

The transaction currency code from the original transaction if this is a copy request. If this is a confirmation request, nonfulfillment, mail fulfillment or dispute, this field contains the transaction currency code from the copy request.

FIELD LENGTH: 3 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000

REASON CODE

The reason for the copy request. If this is a confirmation request, this field contains the reason code from the copy request.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

DEST INST

The VisaNet-assigned BIN of the institution for which the message is destined if this is a free-text administrative message.

FIELD LENGTH: 11 numeric characters

REQUIRED FIELD: Yes, for free-text administrative messages.

DEFAULT VALUE: None

TERM STATE

The two-digit state code, defined by VISA, of the state where the customer transaction took place.

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: Yes, if included in the original request.

DEFAULT VALUE: 00

TERM COUNTY

The three-digit county code, defined by VISA, of the county where the customer transaction took place.

FIELD LENGTH: 3 numeric characters

REQUIRED FIELD: Yes, if included in the original request.

DEFAULT VALUE: 000

TERM POSTAL CODE

The five- or nine-digit ZIP code of the area where the customer transaction took place. If the card acceptor is not in the United States, this field can contain any alphanumeric postal code.

FIELD LENGTH: 9 alphanumeric characters

REQUIRED FIELD: Yes, if included in the original request.

DEFAULT VALUE: None

INST NAME

The name of the card acceptor and location of the ATM, with a "/" separating the institution and location. For example:

YOUR BANK/BRANCH 0001
or
YOUR BANK/500 BROADWAY

FIELD LENGTH: 25 alphanumeric characters
REQUIRED FIELD: Yes, for copy requests, confirmation requests,
nonfulfillments, mail fulfillments or disputes.
DEFAULT VALUE: None

INST CITY

The name of the city where the customer transaction took place.

FIELD LENGTH: 13 alphabetic characters
REQUIRED FIELD: Yes, for copy requests, confirmation requests,
nonfulfillments, mail fulfillments or disputes.
DEFAULT VALUE: None

INST CNTRY

The country where the customer transaction took place.

FIELD LENGTH: 2 alphabetic characters
REQUIRED FIELD: Yes, for copy requests, confirmation requests,
nonfulfillments, mail fulfillments or disputes.
DEFAULT VALUE: None

ACQ BUSINESS ID

The VISA-assigned Business ID of the acquirer that sign the merchant from the original request.

FIELD LENGTH: 8 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

PAYMENT SERVICE IND

Specifies the authorization characteristic that is assigned by Visa. Valid values are:

- A = Meets custom payment service
- C = Meets custom payment service from cardholder activated terminal
- E = Meets custom payment service with merchant name and location
- I = Incremental authorization qualified
- K = Card present with key entry
- M = Meets national payment service requirements with no address verification, card not present
- N = Did not meet a custom payment service
- P = Meets requirements for preferred customer
- R = Meets card-not-present recurring payment qualification without address verification request; also meets CPS/card-not-present with SET requirement
- S = E-commerce, 3-D secure attempt.
- U = E-commerce, 3-D secure
- V = Meets custom payment service with address data
- W = E-commerce, non-3-D secure
- X = Disqualified for CPS

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: No

DEFAULT VALUE: None

TRAN ID

An identifier, assigned by VISA, to uniquely identify and link together all related messages and records used to authorize and clear the transaction through VisaNet.

FIELD LENGTH: 15 numeric characters

REQUIRED FIELD: Yes, for functions F2, F3, F4 and when Network ID equals "0002".

DEFAULT VALUE: None

REIMB ATTR

The reimbursement attribute indicating which reimbursement program a specific merchant is qualified to receive. Valid values are:

- 0 = Standard Issuer's/Interchange Reimbursement Fee or Cash Disbursement Reimbursement Fee.
- 1 = n/a
- 2 = n/a
- 3 = EPS - U.S. only.
- 4 = Supermarket Incentive Program - U.S. only
- 5 = Transition Incentive Interchange Fee
- 6 = Electron Visa Interchange Reimbursement Fee/Electron Card Transaction - U.S. only
- 7 = Specific reduces reimbursement fees for intraregional transactions only (i.e., EIRF, TIRF)
- 8 = JC Penny (US only)
- 9 = Member-operated data capture (Asia-Pacific only)
- A = Payment Service Interchange Reimbursement Fee (PSIRF) - U.S. only
- B = Interregional Pre-CPS
CEMEA Itraregional Pre-CPS
Asia-Pacific Electronic Issuer's Reimbursement Fee (EIRF)
Latin America Caribbean Region Electronic Issuer's Reimbursement Fee (EIRF)
U.K. Electronic Issuer's Reimbursement Fee (EIRF) '94
U.K. Card Not Present '94
U.K. Electronic Hot Card File '94
International Visa Electron Card
U.K. Airline Interim Interchange Reimbursement Fee
- C = CEMEA Airline Transition Rate
- D = Reserved: Delta-only merchant standard Interchange Reimbursement Fee - U.K. only
- F = Delta-only merchant Electronic Interchange Reimbursement Fee (EIRF) - U.K. only
- I = Visa Direct
- J = non-CPS transactions
- K = CPS transactions if Merchant type, POS Entry Mode, Condition Code, and Terminal Entry Capability conditions are met
- M = Visa check card II Interchange Reimbursement Fee - U.S. only

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: Yes, for functions F2, F3, F4 and when Network ID equals "0002" or "0003".

DEFAULT VALUE: None

REQ'D PAYMENT SERVICE

The specific custom payment service that the acquirer requested in the clearing transaction. Valid values are:

A	=	Retail
1	=	Passenger Transport 1
2	=	Passenger Transport 2
3	=	Hotel 1
4	=	Hotel 2
5	=	Auto Rental 1
6	=	Auto Rental 2
7	=	Direct Marketing
8	=	Automated Fuel Dispenser
K	=	CPS/E-commerce preferred - passenger transport
L	=	CPS/E-commerce preferred – hotel
M	=	CPS/E-commerce preferred – car rental

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: No

DEFAULT VALUE: None

MULT SEQ NUM

Identifies the specific BASE II clearing transaction record when multiple clearing records were submitted for a single authorization. Valid values are 00 - 99.

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 00

PROC CDE

The Processing Code of a transaction for which a Custom Payment Service (CPS) copy request is made. Using this field allows members to submit a copy request without using the TRAN ID field.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: Spaces (unused)

Valid values are as follows:

Positions 1-2 Transaction Code

00	=	Goods or service purchase
01	=	Withdrawal/Cash advance
02	=	Adjustment (debit)
03	=	Check guarantee
19	=	Fee collection
20	=	Return
22	=	Adjustment (credit)
29	=	Funds disbursement
30	=	Available funds inquiry
40	=	Cardholder funds transfer

Positions 3-4 "From" account affected in transaction

00	=	Not applicable or not specified
10	=	Savings account
20	=	Checking account
30	=	Credit card account
40	=	"Universal" account

Positions 5-6 "To" account affected in transaction

00	=	Not applicable if not specified
10	=	Savings account
20	=	Checking account
30	=	Credit card account
40	=	"Universal" account

MICR RTTN

This field is used for check authorization transactions. It is used to populate the Transit Routing Number within Bit-125 and is the Route and Transit Number from the Magnetic Ink Character Recognition line.

FIELD LENGTH: 9 numeric characters

REQUIRED FIELD: Yes, for check authorization.

DEFAULT VALUE: None

CHECK NUM

This field is used for check authorization transactions. It is used to populate the Check Number within Bit-125 and is the Check Number from the Magnetic Ink Character Recognition line.

FIELD LENGTH: 9 numeric characters

REQUIRED FIELD: Yes, for check authorization.

DEFAULT VALUE: None

FREE FORMAT TEXT

In a free-text administrative message, the user input message. The first byte must contain the start sentinel (#). The text in this field is also used as the supporting information for Interlink copy requests, confirmations, nonfulfillments, mail fulfillments or disputes. The # can be written over for Interlink copy requests and confirmations, nonfulfillments, mail fulfillments or disputes.

FIELD LENGTH: 255 alphanumeric characters

REQUIRED FIELD: Yes, for free-text administrative messages.

DEFAULT VALUE: The first byte defaults to #.

VisaNet Copy Request Confirmation (VCRC) Screen2

VCRC screen 2 is shown below, followed by descriptions of its fields.

```

-----
BASE24-VISA  VISANET CRC SCREEN      <ln>      <date>  <time>  02 OF 04

                        PLUS INFORMATION
CAPT STAT:  ____      CAPT DATE:  ____  EXP DATE:  ____
CARD NAME:  ____      INST:  ____
CONTACT FOR INFORMATION:  ____

                        INTERLINK INFORMATION
ACPT ID CDE:  ____      ORIG MSG TYP:  ____
TRACE NUM:  ____      DATE/TIME:  ____      FWD INST ID:  ____
CONTACT NAM:  ____      CONTACT PHONE NUM:  ____
DATE DOCUMENT SENT:  ____ (YYMMDD)      DELIVERY METHOD:  ____
ORIGINAL DATA ELEMENTS ( IF TWO DISPUTED TRANSACTIONS REFERENCED ):
MSG TYPE:  ____      TRACE NUMBER:  ____      TRAN DATE/TIME:  ____

***** BASE24 *****
NEW PAGE:      FILE DESTINATION:      NEW LOGICAL NETWORK ID:
F1-FRAUD F2-ORG RQT F3-CPY RQT F4-CNFRM/DSPT/NFLFMNT F6-TXT F12HLP
                                           0000
-----

```

PLUS INFORMATION

The fields described below contain information intended for PLUS transactions.

CAPT STAT

The status of the card for a PLUS card capture notification. Valid values are:

00 = Card captured.
01 = Card not captured.

FIELD LENGTH: 2 numeric characters
REQUIRED FIELD: Yes, for PLUS card capture notifications.
DEFAULT VALUE: 00

CAPT DATE

The date (YYMMDD) the card was captured for a PLUS card capture notification.

FIELD LENGTH: 6 numeric characters
REQUIRED FIELD: Yes, for PLUS card capture notifications.
DEFAULT VALUE: None

EXP DATE

The expiration date (YYMM) on the card for a PLUS card capture notification.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 0000

CARD NAME

The name of the cardholder for this PLUS card capture notification.

FIELD LENGTH: 19 alphanumeric characters

REQUIRED FIELD: Yes, for PLUS card capture notifications.

DEFAULT VALUE: None

INST

The name of the institution that issued the card for this PLUS card capture notification.

FIELD LENGTH: 40 alphanumeric characters

REQUIRED FIELD: Yes, for PLUS card capture notifications.

DEFAULT VALUE: None

CONTACT FOR INFORMATION

The name and telephone number of someone an operator can contact for more information.

FIELD LENGTH: 25 alphanumeric characters

REQUIRED FIELD: Yes, if present in response to original transaction.

DEFAULT VALUE: None

INTERLINK INFORMATION

The fields described below contain information intended for Interlink transactions.

ACPT ID CDE

A code that identifies the card acceptor or terminal.

FIELD LENGTH: 15 alphanumeric characters

REQUIRED FIELD: Yes, if NETWORK ID equals 0003.

DEFAULT VALUE: None

ORIG MSG TYP

The original message type.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes, if NETWORK ID equals 0003.

DEFAULT VALUE: 0000

TRACE NUM

The original trace number.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes, if NETWORK ID equals 0003.

DEFAULT VALUE: 000000

DATE/TIME

The original transmission date and time in GMT.

FIELD LENGTH: 10 numeric characters

REQUIRED FIELD: Yes, if NETWORK ID equals 0003.

DEFAULT VALUE: 0000000000

FWD INST ID

The forwarding institution from the original transaction.

FIELD LENGTH: 11 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 00000000000

CONTACT NAM

The name of someone for the other institution can contact for more information.

FIELD LENGTH: 15 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

CONTACT PHONE NUM

The number the other institution can to call to obtain more information.

FIELD LENGTH: 10 numeric characters

REQUIRED VALUE: No

DEFAULT VALUE: 0000000000

DATE DOCUMENT SENT

The date (YYMMDD) the document was sent.

FIELD LENGTH: 6 numeric characters

REQUIRED VALUE: No

DEFAULT VALUE: 000000

DELIVERY METHOD

The method used to deliver the requested documentation. Valid values are:

00	=	Not applicable
01	=	Fax
02	=	U.S. mail
03	=	Certified mail
04	=	Registered mail
05	=	Courier
06	=	Federal Express, Emery, etc.

FIELD LENGTH: 2 numeric characters

REQUIRED VALUE: No

DEFAULT VALUE: 00

ORIGINAL DATA ELEMENTS

If two disputed transactions are referenced, the following fields refer to the second transaction.

MSG TYPE

The message type of the second transaction.

FIELD LENGTH: 4 numeric characters

REQUIRED VALUE: No

DEFAULT VALUE: 0000

TRACE NUMBER

The trace number of the second transaction.

FIELD LENGTH: 6 numeric characters

REQUIRED VALUE: No

DEFAULT VALUE: 000000

TRAN DATE/TIME

The transmission date and time, in YYMMDDHHMMSS format, of the second transaction.

FIELD LENGTH: 10 numeric characters

REQUIRED VALUE: No

DEFAULT VALUE: 0000000000

VisaNet Copy Request Confirmation (VCRC) Screen 3

VCRC screen 3 is shown below, followed by descriptions of its fields.

```
-----
BASE24-VISA  VISANET CRC SCREEN      <ln>      <date>  <time>  03 OF 04

                                FRAUD INFORMATION
ACQ/ISS:  _      ORIGINAL ISSUING BIN:  _      EXP DATE:  _
TRACE AUDIT NUMBER:  _      AUTH ID RESPONSE:  _      TERM TYPE:  _      TERM CAP:  _
CA TERM ID:  _      CA ID CODE:  _      ACT SEQ NUM:  _
NOTIFICATION CODE:  _      POS ENTRY MODE  _      PIN ENTRY CAP:  _      ISS-GEN AUTH:  _
INVESTIGATIVE STATUS:  _      CASHBACK:  _      CARD CAPABILITY:  _
CASHBACK-AMT:  _      MAIL/PHONE/ECOM IND:  _      SPCL COND IND (MERCH):  _
TRAVEL AGENCY ID:  _      ADDITIONAL TRACE DATA:  _
                                NRI/ICS FRAUD CARDHOLDER DATA
LAST NAME:  _      FIRST NAME:  _      M.I.:  _
HOME ADDRESS:  _      SECONDARY ADDRESS:  _
CITY:  _      STATE:  _      POSTAL CODE:  _      PHONE:  _
SOCIAL SECURITY NUMBER:  _      ID METHOD:  _
                                CARD DATA
MAILED FROM POSTAL CODE:  _      VALID FROM:  _      MAILING DATA:  _
MAILING CITY:  _      MAILING STATE:  _      MARKET SEGMENT:  _
LOCATOR NUMBER :  _      CASE NUMBER:  _      ARREST CODE:  _
***** BASE24 *****
NEW PAGE:  _      FILE DESTINATION:  _      NEW LOGICAL NETWORK ID:  _
F1-FRAUD F2-ORG RQT F3-CPY RQT F4-CNFRM/DSPT/NFLEMNT F6-TXT F12HLP  _
                                0000
-----
```

ACQ/ISS

Signifies whether this is an acquirer or issuer terminal. For Fraud types of 2, 7, and 8, should only be "I". Valid values are as follows:

A = Acquirer.
I = Issuer

FIELD LENGTH: 1 alphanumeric character
REQUIRED FIELD: Yes, for a fraud request.
DEFAULT VALUE: None

ORIGINAL ISSUING BIN

Forwarding institution identification code.

FIELD LENGTH: 11 alphanumeric characters
REQUIRED FIELD: Yes, (for a fraud request types: 1, 3, 4, 5, 9)
DEFAULT VALUE: None

EXP DATE

The expiration date (YYMM) of the card from the original transaction.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 0000

TRACE AUDIT NUMBER

Systems Trace Audit Number from the original transaction.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes, for a fraud request.

DEFAULT VALUE: 000000

AUTH ID RESPONSE

The authorization code provided by the issuer when a transaction is approved.
This value must match the authorization code on the draft transaction if present.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 000000

TERM TYPE

A 1-digit terminal type code (Field 60.1) that identifies the basic POS electronic terminal category (if any). This subfield is also used for identifying ATM transactions.

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: No

DEFAULT VALUE: 0

TERM CAP

A 1-digit terminal capability code (Field 60.2) that identifies the capability of the terminal to electronically read account numbers (and expiration dates) from cards.

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: NO

DEFAULT VALUE: 0

CA TERM ID

Card acceptor terminal identification from the original transaction.

FIELD LENGTH: 8 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

CA ID CODE

An alphanumeric code that identifies the card acceptor for defining the point of service in both local and interchange environments. This value must match the card acceptor identification from the original transaction if present.

FIELD LENGTH: 15 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

ACT SEQ NUM

Account sequence number: This must be numeric and not zeros. This field is required if the Fraud Type on screen 1 is 3, 4, or 5. If the Fraud Type is 1 or 2, this field should be set to 9999 to allow Visa to assign a sequence number. A maximum of 1000 transactions is allowed per account.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

NOTIFICATION CODE

Notification code: Designates whether the transaction is being added, modified, or deleted in the Fraud Transaction File. This field must contain a valid entry. Valid values are as follows:

- | | | |
|---|---|--|
| 1 | = | Addition |
| 2 | = | Addition of subsequent identical (duplicate) |
| 3 | = | Change |
| 4 | = | Delete |
| 5 | = | Reactivate |

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes

DEFAULT VALUE: 0

POS ENTRY MODE

Pos entry mode. This value must match original transaction if present.

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 00

PIN ENTRY CAP

Pin entry capability identifies the capabilities of the point of service terminal.

Valid values are as follows:

0	=	Unknown
1	=	Terminal can accept PINs
2	=	Terminal cannot accept PINs
8	=	Terminal PIN pad not operating

FIELD LENGTH: 1 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 0

ISS-GEN AUTH

Issuer-Generated Authorization: This field can be space-filled or contain the following values:

Y	=	Issuer authorized transaction.
X	=	Transaction authorized but not by issuer.
N	=	Transaction not authorized.

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: Yes, if included in the fraud request.

DEFAULT VALUE: None

INVESTIGATIVE STATUS

Fraud investigative status. This field can be spaces or member-assigned: 00 through 99 or AA through ZZ.

FIELD LENGTH: 2 alphanumeric characters

REQUIRED FIELD: Yes, if included in the fraud request.

DEFAULT VALUE: None

CASHBACK

Cashback: This field can be blank or Y if cashback is indicated in the original transaction.

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: No

DEFAULT VALUE: None

CARD CAPABILITY

Card Capability: This field can be space or one of the following values:

C	=	Chip card (a value of C must be used for all chip cards, whether or not there is a magnetic stripe or CVV present)
M	=	Magnetic stripe only
V	=	Magnetic stripe with Card Verification Value (CVV)

FIELD LENGTH: 1 alphabetic characters

REQUIRED FIELD: No

DEFAULT VALUE: None

CASHBACK-AMT

Cashback amount on the original transaction

FIELD LENGTH: 12 numeric characters or spaces

REQUIRED FIELD: No

DEFAULT VALUE: None

MAIL/PHONE/ECOM IND

Mail, Telephone, Electronic Commerce indicator. Distinguishes a Mail/Phone transaction from an Electronic Commerce Transaction, and supplies additional information. Valid values are:

0	=	Not a Mail/Phone or Electronic Commerce transaction
---	---	---

Mail/Phone order uses:

1	=	Single Mail/Phone transaction
2	=	Recurring Mail/Phone transaction
3	=	Installment billing
4	=	Unknown classification

Electronic Commerce uses:

- | | | |
|---|---|--|
| 5 | = | Secure electronic transaction with cardholder certificate |
| 6 | = | Secure electronic transaction without cardholder certificate |
| 7 | = | Channel-encrypted Electronic Commerce transaction |
| 8 | = | Non-secure Electronic Commerce transaction |

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: No

DEFAULT VALUE: 0

SPCL COND IND (MERCHANT)

Describes selected special conditions at the point of sale. Valid values are:

- | | | |
|-------|---|-----------------------------|
| Space | = | Not used |
| 9 | = | Payment on an existing debt |

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: No

DEFAULT VALUE: Blank

TRAVEL AGENCY ID

Travel agency identifier on the original transaction

FIELD LENGTH: Up to 8 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: Blanks

ADDITIONAL TRACE DATA

Additional trace data may be used to track transactions that the issuer or acquirer submits to the FRS (fraud reporting system). This field will be returned unaltered by the FRS in the response.

FIELD LENGTH: Up to 24 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: Blanks

LAST NAME

The last name of the person who applied for the card.

FIELD LENGTH: Up to 25 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: Blanks

FIRST NAME

The first name of the person who applied for the card.

FIELD LENGTH: Up to 15 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: Blanks

M.I.

The middle initial of the person who applied for the card.

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: No

DEFAULT VALUE: Blank

HOME ADDRESS

The primary address of the person who applied for the card.

FIELD LENGTH: Up to 21 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: Blanks

SECONDARY ADDRESS

Any other address supplied by the person who applied for the card.

FIELD LENGTH: Up to 23 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: Blanks

CITY

The city that corresponds to the primary address of the person who applied for the card.

FIELD LENGTH: Up to 14 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: Blanks

STATE

The state that corresponds to the primary address of the person who applied for the card.

FIELD LENGTH: 2 alpha characters

REQUIRED FIELD: Yes, should be "XX" if cardholder address is not in U.S.

DEFAULT VALUE: Blanks

POSTAL CODE

The zip code that corresponds to the primary address of the person who applied for the card.

FIELD LENGTH: Up to 10 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: Blanks

PHONE

The telephone number of the person who applied for the card.

FIELD LENGTH: Up to 10 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: Blanks

SOCIAL SECURITY NUMBER

The social security number of the person who applied for the card.

FIELD LENGTH: 9 numeric characters

REQUIRED FIELD: Only for ICS fraud (type 7 or 8 on screen 1)

DEFAULT VALUE: Blanks

ID METHOD

The card holder id method on the original transaction. Valid values are as follows:

- 0 = Unknown
- 1 = Signature
- 2 = PIN
- 3 = Unattended terminal, no PIN pad
- 4 = Mail/phone order

FIELD LENGTH: 1 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: 0

MAILED FROM POSTAL CODE

The zip code that the card was mailed from.

FIELD LENGTH: Up to 9 alphanumeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: Blanks

VALID FROM

The date that the card is valid from. Valid value: 0101 - 1231 (mmyy)

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: Blanks

MAILING DATE

The date the card was mailed.

FIELD LENGTH: Up to 6 numeric characters (mmddyy)
REQUIRED FIELD: No
DEFAULT VALUE: Blanks

MAILING CITY

The city the card was mailed from.

FIELD LENGTH: Up to 28 alphanumeric characters

REQUIRED FIELD: Yes, if mailing date is supplied.

DEFAULT VALUE: Blanks

MAILING STATE

The state that the card was mailed from.

FIELD LENGTH: 2 alpha characters

REQUIRED FIELD: Yes, if mailing city is supplied

DEFAULT VALUE: Blanks

MARKET SEGMENT

The market segment of the card.

FIELD LENGTH: 1 alpha character(A-Z),0

REQUIRED FIELD: Yes, ICS only (type 7 or 8 on screen 1)

DEFAULT VALUE: Blank

LOCATOR NUMBER

The locator number of the card.

FIELD LENGTH: 11 numeric characters, may not be all zeros

REQUIRED FIELD: Yes, ICS only (type 7 or 8 on screen 1)

DEFAULT VALUE: Blanks

CASE NUMBER

The case number associated with the fraud report.

FIELD LENGTH: 7 numeric characters

REQUIRED FIELD: No (if included, ICS only) (type 7 or 8 on screen 1)

DEFAULT VALUE: Blanks

ARREST CODE

The code to indicate whether an arrest in this case has been made. Valid values are as follows:

0 - no arrest was made

1 - arrest was made

FIELD LENGTH: 1 numeric character (0 or 1)

REQUIRED FIELD: ICS only

DEFAULT VALUE: Blank

VisaNet Copy Request Confirmation (VCRC) Screen 4

VCRC screen 4 is shown below, followed by descriptions of its fields.

```

-----
BASE24-VISA VISANET CRC SCREEN      <ln>      <date>      <time>      04 OF 04

                                VCRF SERVICE DATA
                                FAX NUMBER: _____ FULFILLMENT METHOD: 1
WORKSTATION ADDRESS: 000000          SUB ADDRESS: 000000

                                NONFULFILLMENT/MAIL FULFILLMENT/DISPUTE
DEST SUB ADDR: _____ SOURCE SUB ADDR: _____ REASON CODE: _____
ORIGINAL RQST REASON CODE: _____ PURCHASE DATE: 0000
CONTACT NAME: _____ PHONE: _____

                                DISPUTE DATA ITEMS IN ERROR
ACCT NUM: _____ PURCHASE DATE: _____ TRAN AMT: _____
EXP DATE: _____ MERCHANT NAME/LOCATION: _____ SIGNATURE: _____ OTHER ERROR: _____

***** BASE24 *****
NEW PAGE: _____ FILE DESTINATION: _____ NEW LOGICAL NETWORK ID: _____
F1-FRAUD F2-ORG RQT F3-CPY RQT F4-CNFRM/DSPT/NFLFMNT F6-TXT F12HLP
                                0000
  
```

FAX NUMBER

Telephone number of the FAX machine to send the copy to.

FIELD LENGTH: 16 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: Blanks

FULFILLMENT METHOD

Indicates the type of fulfillment desired, if VCRFS is "Y", this field must contain 1.

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes, if VCRFS is Y, and operation being performed is an F3

DEFAULT VALUE: 1

WORKSTATION ADDRESS

The ImagExpress workstation that the issuer would like the copy sent to (address supplied by VISA). If this field contains all zeros, the copy will be sent to the default address as supplied by VISA. This field is included for customers who have more than one workstation, and want the copy sent to a specific station.

FIELD LENGTH: 6 numeric characters (000000-999999)

REQUIRED FIELD: No

DEFAULT VALUE: Zeroes

SUB ADDRESS

The issuer RFC sub address, used when the workstation address is the Public Network Gateway.

FIELD LENGTH: 6 numeric characters (000000-999999)

REQUIRED FIELD: No

DEFAULT VALUE: Zeroes

DEST SUB ADDR

The sub address that the transaction is being sent as found in the original request.

FIELD LENGTH: 7 numeric characters

REQUIRED FIELD: Yes, if VCRFS is Y, operation being performed is F4, and
VCRFS TYPE is D, M, or N.

DEFAULT VALUE: Zeroes

SOURCE SUB ADDR

The sub address of the sender.

FIELD LENGTH: 7 numeric characters

REQUIRED FIELD: Yes, if VCRFS is Y, operation being performed is F4, and
VCRFS TYPE is D, M, or N.

DEFAULT VALUE: Zeroes

REASON CODE

The reason for the nonfulfillment/mail fulfillment or dispute. Valid values are as follows:

- 01 Invalid request, reference number not in acquirers range
- 02 Invalid request, reference number in range, but not valid
- 03 Item could not be located
- 04 Acquirer will not fulfill, Issuer may chargeback
- 05 Draft not required
- 06 Fulfillment by mail notification

FIELD LENGTH: 2 numeric characters.

REQUIRED FIELD: Yes, if VCRFS is Y, operation being performed is F4, and
VCRFS TYPE is D, M, or N.

DEFAULT VALUE: Blanks

ORIGINAL RQST REASON CODE

The reason code given for the original copy request.

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: Yes, if VCRFS PARTICIPATION is Y, VCRFS TYPE is M
or N, the function being performed is an F4.

DEFAULT VALUE: Zeroes

PURCHASE DATE

The purchase date from the original request, if provided, otherwise should be zeroes.

FIELD LENGTH: 4 numeric characters (mmdd) or all zeroes.

REQUIRED FIELD: Yes, if VCRFS is Y, operation being performed is F4, and
VCRFS TYPE is M or N.

DEFAULT VALUE: Zeroes

CONTACT NAME

The name of the person to contact at the issuer site regarding the dispute.

FIELD LENGTH: 30 alpha/numeric characters.

REQUIRED FIELD: No

DEFAULT VALUE: Blanks

CONTACT PHONE

The phone number of the person to contact at the issuer site regarding this dispute.

FIELD LENGTH: 16 numeric characters.

REQUIRED FIELD: No

DEFAULT VALUE: Blanks

DISPUTE DATA ITEMS IN ERROR

For a dispute, any of the data items listed below that are in error must have a "Y" in them, otherwise the field should be blank. In error refers to incorrect, ineligible or missing from the dispute fulfillment.

ACCT NUM
PURCHASE DATE
TRAN AMT
EXP DATE
MERCHANT NAME/LOCATION
SIGNATURE
OTHER ERROR

If the field OTHER ERROR contains a "Y", then a free text message (up to 156 bytes) describing the errors must be included on screen 1 and sent in the dispute message.

FIELD LENGTH: 1 alpha character ("Y" or blank) for each field in error.

REQUIRED FIELD: Yes, (at least one) if VCRFS is Y, operation being performed is F4, and VCRFS TYPE is D.

DEFAULT VALUE: Blank

Switch Dispute File (SDF) Screens

The Switch Dispute File (SDF) screens enable operators to enter disputed transactions and sales drafts records to the SDF. To select these screens, the SDF function must be selected from the VisaNet Menu screen.

Switch Dispute File (SDF) Menu

The following screen is displayed when the Switch Dispute File (SDF) function is selected on the VisaNet Menu.

```
-----  
BASE24-VISA  VISANET/INTERLINK          <ln>  <date>  <time> 01 OF 01  
  
                SWITCH DISPUTE FILE  
  
                _ ADJUSTMENTS  
                _ CHARGEBACKS  
                _ REPRESENTATIONS  
                _ SALES DRAFTS  
                _ FEE COLLECTIONS/FUNDS DISBURSEMENTS  
                _ POS CHECK CHARGEBACKS  
                _ POS CHECK REPRESENTATIONS  
  
***** BASE24 *****  
                FILE DESTINATION:          NEW LOGICAL NETWORK ID:  
                PLACE CURSOR IN FRONT OF DESIRED FUNCTION AND PRESS F1 KEY  
-----
```

Switch Dispute File (SDF) Adjustment Screen 1

The Adjustments screen 1 is displayed when ADJUSTMENTS is chosen from the Switch Dispute File menu. This screen enables operators to read, add, update, and delete adjustment records.

The Adjustment screen 1 is shown below, followed by the description of its fields.

```
-----
BASE24-VISA  ADJUSTMENTS                <ln>  <date>  <time> 01 OF 02

MESSAGE TYPE: _____ PAN: _____ PAN CNTRY CDE: _____
PROCESSING CODE: 000000 _____ TERM CAP: _____ TRAN AMOUNT: 000000000000
ORIG TRAN AMOUNT: _____ MERCHANT TYPE: 6011
ACQ COUNTRY CODE: 840 ACQ INST CODE: _____ EXP DAT: 0000 (YYMM)
REASON CODE: 0000 CURRENCY CODE: 840 NETWORK ID: 0002
REF NUM: 000000000000 AUTH ID: _____ REIMB ATTR: _____
CARD ACCEPTOR INFORMATION: _____ ACQ BUS ID: _____
NAME: _____ CITY: _____ STATE: _____
COUNTY: _____ COUNTRY: _____ ZIP CODE: _____
TERM ID: _____ CARD ACCEPTOR ID: _____
ORIGINAL INFORMATION: _____ MSG TYP: _____ TRACE NUM: _____
TRAN DAT/TIM: _____ ACQ ID: _____ FWD ID: _____
PAYMENT SERVICE IND: _____ TRAN ID: 0000000000000000 MAIL/PHONE/ECOM IND: _____
TRANSPONDER IND: 0 RELN PARTICIPANT IND: _____ SPCL COND IND (MERCHANT): _____
FPI:000 MVV:0000000000 ATC: 0000 RTI: 0 BUS APPL ID: _____
TRAN FEE IND: _____ TRAN FEE: _____ MKT SPCF DATA ID: _____
MICR RTTN: _____ CHECK NUM: _____ CARD SEQ NUM: _____

***** BASE24 *****
FILE DESTINATION: _____ NEW LOGICAL NETWORK ID: _____
F12-HELP
-----
```

MESSAGE TYPE

The message type for this record. Adjustments can be sent as requests or advices (0200 or 0220). If the network ID equals 0003, the message type must be 0220.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0220

PAN

The primary account number. If the network ID is 0003, the PAN cannot be longer than 19 characters. For check authorization transactions this field will be used to populate the Account Number within Bit-125 and is the Account Number from the Magnetic Ink Character Recognition line.

FIELD LENGTH: 28 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

PAN CNTRY CDE

The country code associated with the card if the PAN starts with 59.

FIELD LENGTH: 3 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

PROCESSING CODE

The processing code for the adjustment. The first two positions must be 02 (debit adjustment) or 22 (credit adjustment). If the network ID is 0003, the next two positions must be 10, 20 or 40.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000000

TERM CAP

The entry capability of the terminal.

Position 1: Type of terminal

0 = Unspecified

2 = Unattended Terminal

4 = Electronic Cash Register

7 = Telephone Device

8 = Reserved

Position 2: Capability of terminal

0 = Unknown

1 = Terminal not used

2 = Magnetic stripe read capability

3 = Bar Code read capability

4 = OCR read capability

5 = Integrated circuit card read capability

9 = Terminal does not read card data

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

TRAN AMOUNT

The amount to be debited or credited to the cardholder.

FIELD LENGTH: 12 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000000000000

ORIG TRAN AMOUNT

The original transaction amount.

FIELD LENGTH: 12 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000000000000

MERCHANT TYPE

The SIC code.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

ACQ COUNTRY CODE

The country code of the country in which the acquirer is located.

FIELD LENGTH: 3 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 840

ACQ INST CODE

The acquirer's institution code.

FIELD LENGTH: 11 numeric characters

REQUIRED FIELD: Yes, left justified, zero filled

DEFAULT VALUE: None

EXP DAT

The expiration date (YYMM) of the card.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 0000

REASON CODE

The reason for the adjustment. The valid values for this field depend on the network ID associated with this adjustment.

<u>NETWORK ID</u>	<u>VALID VALUES</u>
0002	2004, 2009
0003	2004
0004	2004, 2006, 2008
0002	2130 - Conversion only transaction.
0002	2131 - Conversion with Verification.
0002	2132 - Conversion with Guarantee.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

CURRENCY CODE

The currency code for the transaction.

FIELD LENGTH: 3 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 840

NETWORK ID

A code that specifies the network to be used. Valid values are:

0002 = Visa

0003 = Interlink

0004 = PLUS

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0002

REF NUM

The retrieval reference number from the original transaction.

FIELD LENGTH: 12 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000000000000

AUTH ID

The authorization ID code from the original transaction.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

REIMB ATTR

The reimbursement attribute indicating which reimbursement program a specific merchant is qualified to receive. Valid values are:

- 0 = Standard Issuer's/Interchange Reimbursement Fee or Cash Disbursement Reimbursement Fee.
- 1 = n/a
- 2 = n/a
- 3 = EPS - U.S. only.
- 4 = Supermarket Incentive Program - U.S. only
- 5 = Transition Incentive Interchange Fee
- 6 = Electron Visa Interchange Reimbursement Fee/Electron Card Transaction - U.S. only
- 7 = Specific reduces reimbursement fees for intraregional transactions only (i.e., EIRF, TIRF)
- 8 = JC Penny (US only)
- 9 = Member-operated data capture (Asia-Pacific only)
- A = Payment Service Interchange Reimbursement Fee (PSIRF) - U.S. only
- B = Interregional Pre-CPS
 - CEMEA Itraregional Pre-CPS
 - Asia-Pacific Electronic Issuer's Reimbursement Fee (EIRF)
 - Latin America Caribbean Region Electronic Issuer's Reimbursement Fee (EIRF)
 - U.K. Electronic Issuer's Reimbursement Fee (EIRF) '94
 - U.K. Card Not Present '94
 - U.K. Electronic Hot Card File '94
 - International Visa Electron Card
 - U.K. Airline Interim Interchange Reimbursement Fee
- C = CEMEA Airline Transition Rate
- D = Reserved: Delta-only merchant standard Interchange Reimbursement Fee - U.K. only
- F = Delta-only merchant Electronic Interchange Reimbursement Fee (EIRF) - U.K. only
- J = non-CPS transactions
- K = CPS transactions if Merchant type, POS Entry Mode, Condition Code, and Terminal Entry Capability conditions are met
- M = Visa check card II Interchange Reimbursement Fee - U.S. only

FIELD LENGTH: 1 alphabetic character
REQUIRED FIELD: Yes, if network ID equals 0003.
DEFAULT VALUE: None

ACQ BUSINESS ID

The VISA-assigned Business ID of the acquirer that signed the merchant.

FIELD LENGTH: 8 numeric character
REQUIRED FIELD: No
DEFAULT VALUE: None

NAME

The name of the transaction acquirer.

FIELD LENGTH: 25 alphanumeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

CITY

The name of the city in which the card acceptor is located. For CPS Card Not Present transactions, this field may contain the merchant customer service phone number if that was what was used in the original transaction.

FIELD LENGTH: 13 alphanumeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

STATE

A code indicating the state in which the card acceptor is located.

FIELD LENGTH: 2 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

COUNTY

A code indicating the county in which the card acceptor is located.

FIELD LENGTH: 3 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

COUNTRY

A code indicating the country in which the card acceptor is located.

FIELD LENGTH: 2 alphabetic characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

ZIP CODE

The five- or nine-digit ZIP code of the card acceptor.

FIELD LENGTH: 9 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

TERM ID

The identifier for the terminal associated with this transaction.

FIELD LENGTH: 8 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

CARD ACCEPTOR ID

The identifier for the card acceptor or terminal associated with this transaction.

FIELD LENGTH: 15 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

MSG TYP

The original message type.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes, if network ID is 0003.

DEFAULT VALUE: None

TRACE NUM

The original trace number.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes, if network ID is 0003.

DEFAULT VALUE: Blanks

TRAN DAT/TIM

The original transmission date and time (MMDDHHMMSS) (GMT).

FIELD LENGTH: 10 numeric characters

REQUIRED FIELD: Yes, if network ID is 0003.

DEFAULT VALUE: None

ACQ ID

The acquiring institution ID of the original transaction acquirer.

FIELD LENGTH: 11 numeric characters

REQUIRED FIELD: Yes, if network ID is 0003.

DEFAULT VALUE: Blanks

FWD ID

The forwarding institution ID from the original transaction.

FIELD LENGTH: 11 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

PAYMENT SERVICE IND

Specifies the authorization characteristic that is assigned by Visa. Valid values are:

A = Meets custom payment service

E = Meets custom payment service with merchant name and location

V = Meets custom payment service with address data

C = Meets custom payment service from cardholder activated terminal

I = Incremental authorization qualified

P = Meets requirements for preferred customer

N = Did not meet a custom payment service

X = Disqualified for Payment Service 2000

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: No

DEFAULT VALUE: None

TRAN ID

A Visa assigned identifier to uniquely identify and link together all related

messages and records used to authorize and clear the transaction through VisaNet.

FIELD LENGTH: 15 numeric characters

REQUIRED FIELD: Yes, for functions F2, F3, F4 and when Network ID equals "0002".

DEFAULT VALUE: None

MAIL/PHONE/ECOM IND

Mail, Telephone, Electronic Commerce indicator. Distinguishes a Mail/Phone transaction from an Electronic Commerce transaction, and supplies additional information. Valid Values are:

0 = Not a Mail/Phone or Electronic Commerce transaction

Mail/Phone order uses:

1 = Single Mail/Phone transaction

2 = Recurring Mail/Phone transaction

3 = Installment billing

4 = Unknown classification

Electronic Commerce uses:

5 = Secure electronic transaction with cardholder certificate

6 = Secure electronic transaction without cardholder certificate

7 = Channel-encrypted Electronic Commerce transaction

8 = Non-secure Electronic Commerce transaction

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: No

DEFAULT VALUE: 0

TRANSPONDER IND

Transponder indicator. Identifies transactions that use a radio frequency device to exchange information. Valid values:

0 = A radio frequency device was not used

1 = A radio frequency device was used

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: No

DEFAULT VALUE: 0

RELN PARTICIPANT IND

Relationship Participant indicator. Identifies transactions originating from

merchants that are registered participants in the Visa U.S.A. Relationship Manager Service. Valid values:

0 = Merchant is not a participant

1 = Merchant is a participant

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: No

DEFAULT VALUE: 0

SPCL COND IND (MERCHANT)

Describes selected special conditions at the point of sale. Valid values are:

Space = Not used

9 = Payment on an existing debt

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: No

DEFAULT VALUE: Blank

FPI

This field is used to indicate the Fee Program Indicator (FPI) for the submitted transaction.

FIELD LENGTH: 3 numeric characters

REQUIRED FIELD: Yes, for transactions that contained an FPI

DEFAULT VALUE: None

MVV

This field is used for the Merchant Verification Value (MVV).

FIELD LENGTH: 10 alphanumeric characters

REQUIRED FIELD: Yes, for transactions that contained an MVV.

DEFAULT VALUE: None

ATC

This field is used for the Application Transaction Counter (ATC).

FIELD LENGTH: 4 Hexadecimal digits.

REQUIRED FIELD: Yes, for transactions that contained an ATC.

DEFAULT VALUE: None

RTI

Remote Terminal Indicator. This field is used to indicate if an ATM is on or off premise.

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: No
DEFAULT VALUE: Zero

BUS APPL ID

Business Application Identifier. This field is used for the Business Application Identifier associated with Original Credit transactions.

FIELD LENGTH: 2 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: Blanks

TRAN FEE IND

This field is used to indicate is a surcharge is a credit or a debit.

FIELD LENGTH: 1 alphabetic character
REQUIRED FIELD: No
DEFAULT VALUE: Blank

TRAN FEE

This field is used to indicate the surcharge amount.

FIELD LENGTH: 8 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: Zeroes

MKT SPFC DATA ID

Identifies the industry for which market-specific data has been provided. Valid values are:

A = Auto Rental
B = Bill Payment
H = Hotel
M = Healthcare (medical)
N = Failed Market-Specific Data edit
T = Transit

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: No
DEFAULT VALUE: Blank

MICR RTTN

This field is used for check authorization transactions. It is used to populate the Transit Routing Number within Bit-125 and is the Route and Transit Number from the Magnetic Ink Character Recognition line.

FIELD LENGTH: 9 numeric characters
REQUIRED FIELD: Yes, for check authorization.
DEFAULT VALUE: None

CHECK NUM

This field is used for check authorization transactions. It is used to populate the Check Number within Bit-125 and is the Check Number from the Magnetic Ink Character Recognition line.

FIELD LENGTH: 9 numeric characters
REQUIRED FIELD: Yes, for check authorization.
DEFAULT VALUE: None

CARD SEQ NUM

This field is used to populate the last 2 positions of the 3 byte Card Sequence Number within Bit-23. Note: the first position of the Card Sequence Number is always zero.

FIELD LENGTH: 2 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

Switch Dispute File (SDF) Adjustment Screen 2

An operator can go to screen 2 by pressing F9 from screen 1. The Switch Dispute File (SDF) Adjustment screen 2 is shown below, followed by a description of its fields.

```
-----
BASE24-SWI   ADJUSTMENTS           <ln>  <date>  <time>  02 OF 02

ADDITIONAL DATA: ID: _  USAGE: _  DOC IND: _  REF NUM: _____
CONTACT NAME:  _____  CONTACT PHONE:  _____
MESSAGE TEXT:  _____
TIMESTAMP:  _____  DATE: _____

                                INTERLINK INFORMATION

GOOD FAITH COLLECTION INFO:  ORIG DATE:
FREE TEXT:
_____
_____

***** BASE24 *****
                                FILE DESTINATION:      NEW LOGICAL NETWORK ID:
                                F12-HELP
-----
```

ID

The field identifier for the Additional Data field. Used for VISA or PLUS Adjustments. Valid value is:

V = Usage 7 of the Additional Data field.

FIELD LENGTH: 1 alphanumeric characters

REQUIRED FIELD: Yes, if network ID is 0002 or 0004.

DEFAULT VALUE: None

USAGE

The field contains a one-digit code that identifies the message as an Adjustment. Used for VISA or PLUS Adjustment. Valid value is:

0 = Adjustment

FIELD LENGTH: 1 alphanumeric characters
REQUIRED FIELD: Yes, if network ID is 0002 or 0004.
DEFAULT VALUE: None

DOC IND

The Code that indicates the status of mailed documentation. Used for VISA or PLUS Adjustment. Valid values are:

- 0 = No supporting documentation provided
- 1 = Supporting documentation to follow
- 2 = Invalid Acquirer Reference Number and no supporting documentation required or received
- 3 = Invalid Acquirer Reference Number and supporting documentation was received
- 4 = No supporting documentation received.

FIELD LENGTH: 1 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

REF NUM

This is a six-digit code assigned by Issuers to chargebacks in compliance with Operating Regulations. Acquirers that submit representments must include the number in the representment messages. The subfield is not applicable to adjustments and must be zero-filled.

FIELD LENGTH: 6 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

CONTACT FOR INFO

The contact that can provide more information about PLUS adjustments.

FIELD LENGTH: 25 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

MESSAGE TEXT

The message text associated with the ATM Adjustment. Used for VISA or PLUS Adjustments.

FIELD LENGTH: 25 alphanumeric characters
REQUIRED FIELD: Yes, if network ID is 0002 or 0004
DEFAULT VALUE: None

TIMESTAMP

The PLUS timestamp (HHMMSSNNN).

FIELD LENGTH: 9 numeric characters
REQUIRED FIELD: Yes, if network ID is 0004.
DEFAULT VALUE: 000000000

DATE

The PLUS date (MMDD).

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: Yes, if network ID is 0004.
DEFAULT VALUE: 0000

GOOD FAITH COLLECTION INFO: ORIG DATE

Date of original transaction in YYMMDD format.

FIELD LENGTH: 6 numeric characters
REQUIRED FIELD: Required for Good Faith Collection.
DEFAULT VALUE: None.

FREE TEXT

Additional information pertaining to this adjustment.

FIELD LENGTH: 255 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

Switch Dispute File (SDF) Chargebacks Screen 1

The Chargeback screen 1 is displayed when CHARGEBACKS is chosen from the Switch Dispute File menu. This screen enables operators to read, add, update, and delete chargeback records. The chargeback screen 1 is shown below, followed by the description of its fields.

```

-----
BASE24-VISA  CHARGEBACKS                <ln>  <date>  <time> 01 OF 02

PAN: _____ PAN CNTRY CDE: _____ PROCESSING CODE: _____
TRAN AMOUNT: _____ TRACE NUM: _____ TRAN DAT: _____ MERCH TYPE: _____
TERM CAP: _____ POS COND CODE: _____ ACQ CNTRY CDE: _____ ACQ INST CDE: _____
REASON CODE: _____ CRNCY CDE: _____
NETWORK ID: _____ REF NUM: _____ AUTH ID: _____ REIMB ATTR: _____
ACQ BUS ID: _____
CARD ACCEPTOR INFO: _____ NAME: _____ CITY: _____
ST: _____ CNTRY: _____ TERM ID: _____ CRD ACPTR ID: _____
ORIGINAL INFORMATION: MSG TYP: _____ TRACE NUM: _____
TRAN DAT/TIM: _____ ACQ ID: _____ FWD ID: _____
PAYMENT SERVICE IND: _____ TRAN ID: _____ MVV: _____
REQ'D PAYMENT SERVICE: _____ MULT SEQ NUM: _____ ETIR: _____ FPI: _____
MAIL/PHONE/ECOM IND: _____ SPCL CHGBK IND: _____ SPCL COND IND (RIS): _____
SPCL COND IND (MERCHANT): _____
ADDITIONAL DATA: ID: _____ USAGE: _____ DOC IND: _____ REF NUM: _____
BUS APPL ID: _____ MKT SPCF DATA ID: _____
TRAN FEE IND: _____ TRAN FEE: _____
MESSAGE TEXT: _____

***** BASE24 *****
FILE DESTINATION: _____ NEW LOGICAL NETWORK ID: _____
F12-HELP
-----

```

PAN

The primary account number of the card used to initiate the original transaction. If the network ID is 0003, the PAN cannot be longer than 19 characters. For check authorization transactions this field will be used to populate the Account Number within Bit-125 and is the Account Number from the Magnetic Ink Character Recognition line.

FIELD LENGTH: 28 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

PAN CNTRY CDE

The country code associated with the card if the PAN starts with 59.

FIELD LENGTH: 3 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

PROCESSING CODE

The processing code for the chargeback.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000000

TRAN AMOUNT

The amount to be credited to the cardholder's account.

FIELD LENGTH: 12 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000000000000

TRACE NUM

The trace number from the original transaction.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000000

TRAN DAT

The date (MMDD) that the original transaction was initiated.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

MERCH TYPE

The SIC code for the original transaction.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

TERM CAP

The entry capability of the terminal.

Position 1: Type of terminal

0 = Unspecified

2 = Unattended Terminal

4 = Electronic Cash Register

7 = Telephone Device

8 = Reserved

Position 2: Capability of terminal

0 = Unknown

1 = Terminal not used

2 = Magnetic stripe read capability

3 = Bar Code read capability

4 = OCR read capability

5 = Integrated circuit card read capability

9 = Terminal does not read card data

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

POS COND CODE

A code indicating the transaction conditions at the point of sale. Valid values are:

17 = Chargeback

54 = Reversal of chargeback

FIELD LENGTH: 2

REQUIRED FIELD: Yes

DEFAULT VALUE: 17

ACQ CNTRY CDE

The code of the country in which the original transaction acquirer is located.

FIELD LENGTH: 3 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 840

ACQ INST CDE

The code of the institution that acquired the original transaction.

FIELD LENGTH: 11 numeric characters

REQUIRED FIELD: Yes, left justified, zero filled

DEFAULT VALUE: None

REASON CODE

A code indicating the reason for the chargeback. Valid values for this field depend on the network ID as shown below. Values may be further restricted based on other fields. Refer to VisaNet documentation.

<u>NETWORK ID</u>	<u>VALID VALUES</u>
0002	2301, 2302, 0020 - 0032, 0036, 0041, 0047, 0050 - 0057, 0059 - 0063, 0067, 0070 - 0074, 0076 -0078, 0080- 0092, and 0094 - 0097
0003	2483, 2484, 2490 - 2498
0004	2602, 2604, 2606, 2608, 2620, 2622, and 2624
0002	0001 - Fraudulent transaction - Signature.
0002	0002 - Fraudulent transaction - No signature.
0002	0003 - Duplicate transaction.
0002	0004 - Requested copy not received.
0002	0005 - Not sufficient funds.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

CRNCY CDE

The transaction currency code.

FIELD LENGTH: 3 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 840

NETWORK ID

A code that specifies the network to be used. Valid values are:

0002 = Visa
0003 = Interlink
0004 = PLUS

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0002

REF NUM

The retrieval reference number from the original transaction.

FIELD LENGTH: 12 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 000000000000

AUTH ID

The authorization ID code from the original transaction.

FIELD LENGTH: 6 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

REIMB ATTR

The reimbursement attribute indicating which reimbursement program a specific merchant is qualified to receive. Valid values are:

0 = Standard Issuer's/Interchange Reimbursement Fee or Cash Disbursement Reimbursement Fee.
1 = n/a
2 = n/a
3 = EPS - U.S. only.
4 = Supermarket Incentive Program - U.S. only
5 = Transition Incentive Interchange Fee
6 = Electron Visa Interchange Reimbursement Fee/Electron Card Transaction - U.S. only

7 = Specific reduces reimbursement fees for intraregional transactions only (i.e., EIRF, TIRF)
8 = JC Penny (US only)
9 = Member-operated data capture (Asia-Pacific only)
A = Payment Service Interchange Reimbursement Fee (PSIRF) - U.S. only
B = Interregional Pre-CPS
 CEMEA Itraregional Pre-CPS
 Asia-Pacific Electronic Issuer's Reimbursement Fee (EIRF)
 Latin America Caribbean Region Electronic Issuer's Reimbursement Fee (EIRF)
 U.K. Electronic Issuer's Reimbursement Fee (EIRF) '94
 U.K. Card Not Present '94
 U.K. Electronic Hot Card File '94
 International Visa Electron Card
 U.K. Airline Interim Interchange Reimbursement Fee
C = CEMEA Airline Transition Rate
D = Reserved: Delta-only merchant standard Interchange Reimbursement Fee - U.K. only
F = Delta-only merchant Electronic Interchange Reimbursement Fee (EIRF) - U.K. only
J = non-CPS transactions
K = CPS transactions if Merchant type, POS Entry Mode, Condition Code, and Terminal Entry Capability conditions are met
M = Visa check card II Interchange Reimbursement Fee - U.S. only

FIELD LENGTH: 1 alphabetic character
REQUIRED FIELD: Yes, if network ID is 0002 or 0003.
DEFAULT VALUE: None

ACQ BUS ID

The VISA-assigned Business ID of the acquirer that signed the merchant.

FIELD LENGTH: 8 numeric character
REQUIRED FIELD: No
DEFAULT VALUE: None

NAME

The name of the retailer or institution that installed the terminal.

FIELD LENGTH: 25 alphanumeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

CITY

The name of the city in which the retailer is located. For CPS Card Not Present transactions, this field may contain the merchant customer service phone number if that was what was used in the original transaction.

FIELD LENGTH: 13 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

ST

A code for the state in which the retailer is located.

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

CNTRY

A code for the country in which the retailer is located.

FIELD LENGTH: 2 alphabetic characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

TERM ID

The identifier for the terminal associated with this transaction.

FIELD LENGTH: 8 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

CRD ACPTR ID

The identifier for the card acceptor or terminal associated with this transaction.

FIELD LENGTH: 15 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

MSG TYP

The message type of the original transaction under dispute.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

TRACE NUM

The trace number of the original transaction under dispute.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes, if network ID is 0003.

DEFAULT VALUE: None

TRAN DAT/TIM

The transmission date and time (MMDDHHMMSS) (GMT), of the original transaction under dispute.

FIELD LENGTH: 10 numeric characters

REQUIRED FIELD: Yes, if network ID is 0003.

DEFAULT VALUE: None

ACQ ID

The ID of the institution that acquired the original transaction.

FIELD LENGTH: 11 numeric characters

REQUIRED FIELD: Yes, if network ID is 0003.

DEFAULT VALUE: None

FWD ID

The ID of the institution that forwarded the original transaction.

FIELD LENGTH: 11 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

PAYMENT SERVICE IND

Specifies the authorization characteristic that is assigned by Visa. Valid values are:

A = Meets custom payment service
E = Meets custom payment service with merchant name and location
V = Meets custom payment service with address data
C = Meets custom payment service from cardholder activated terminal
I = Incremental authorization qualified
P = Meets requirements for preferred customer
N = Did not meet a custom payment service
X = Disqualified for CPS

FIELD LENGTH: 1 alphabetic character
REQUIRED FIELD: No
DEFAULT VALUE: None

TRAN ID

An identifier, assigned by VISA, to uniquely identify and link together all related messages and records used to authorize and clear the transaction through VisaNet.

FIELD LENGTH: 15 numeric characters
REQUIRED FIELD: Yes, if Network I.D. is "0002".
DEFAULT VALUE: None

MVV

This field is used for the Merchant Verification Value (MVV).

FIELD LENGTH: 10 alphanumeric characters
REQUIRED FIELD: Yes, for transactions that contained an MVV.
DEFAULT VALUE: None

REQ'D PAYMENT SERVICE

The specific custom payment service that the acquirer requested in the clearing transaction. Valid values are:

A = Retail
H = CPS/Account Funding
1 = Passenger Transport 1
2 = Passenger Transport 2
3 = Hotel 1
4 = Hotel 2
5 = Auto Rental 1
6 = Auto Rental 2
7 = Direct Marketing
8 = Automated Fuel Dispenser

FIELD LENGTH: 1 alphabetic character
REQUIRED FIELD: No
DEFAULT VALUE: None

MULT SEQ NUM

Identifies the specific BASE II clearing transaction record when multiple clearing records were submitted for a single authorization. Valid values are 00 - 99.

FIELD LENGTH: 2 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: 00

ETIR

Excluded Transaction Identifier Reason: This field can be any alphanumeric character.

FIELD LENGTH: 1 alphanumeric character
REQUIRED FIELD: No
DEFAULT VALUE: None

FPI

This field is used to indicate the Fee Program Indicator (FPI) for the submitted transaction.

FIELD LENGTH: 3 numeric characters
REQUIRED FIELD: Yes, for transactions that contained an FPI
DEFAULT VALUE: None

MAIL/PHONE/ECOM IND

Mail, Telephone, Electronic Commerce indicator. Distinguishes a Mail/Phone transaction from an Electronic Commerce transaction, and supplies additional information. Valid values are:

0 = Not a Mail/Phone or Electronic Commerce transaction

Mail/Phone order uses:

- 1 = Single Mail/Phone transaction
- 2 = Recurring Mail/Phone transaction
- 3 = Installment billing
- 4 = Unknown classification

Electronic Commerce uses:

- 5 = Secure electronic transaction with cardholder certificate

6 = Secure electronic transaction without cardholder certificate
7 = Channel-encrypted Electronic Commerce transaction
8 = Non-secure Electronic Commerce transaction

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: No
DEFAULT VALUE: 0

SPCL CHGBK IND

A field which provides extra information regarding chargebacks. Valid values are:

Blank = not applicable
P = Amount of chargeback is less than original

FIELD LENGTH: 1 character
REQUIRED FIELD: No
DEFAULT VALUE: " " (Space)

SPCL COND IND (RIS)

Supports Visa's Risk Identification Service (RIS) and must be placed in transactions when a merchant has been identified as "highly suspect". Valid values are:

Blank = RIS indicator not required for this merchant.
1 = Zero floor limit required for this merchant.
2 = Terminal required that is capable of displaying account number encoded on magnetic strip.
3 = Both zero floor limit and terminal capable of account number display required.
8 = Quasi-cash merchant.

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: No
DEFAULT VALUE: " " (Space)

SPCL COND IND (MERCHANT)

Describes selected special conditions at the point of sale. Valid values are:

Blank = None of the conditions below applies.
L = Visa Lodging Services Merchant.
F = Facsimile draft provided.
S = Hotel or restaurant merchant.
H = Visa Lodging Services merchant.
9 = Payment on an existing debt.

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: No

DEFAULT VALUE: " " (Space)

ID

The field identifier for the additional data field. Used for VISA or PLUS chargebacks. Valid values are:

V = Usage 7 of the additional data field

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: Yes, if network ID is 0002 or 0004.

DEFAULT VALUE: None

USAGE

A code that distinguishes multiple chargebacks. Used for VISA or PLUS chargebacks. Valid values are:

1 = Chargeback

2 = Representment

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes, if network ID is 0002 or 0004.

DEFAULT VALUE: None

DOC IND

A code that indicates the status of mailed documentation. Used for VISA or PLUS chargebacks. Valid values are:

Space = No supporting documentation required

1 = Mailed documentation to follow

2 = Invalid acquirer's reference number used in prior chargeback record, no supporting documentation was required or received

3 = Invalid acquirer's reference number used in prior chargeback record and supporting documentation was received

4 = No supporting documentation received for prior chargeback

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: No

DEFAULT VALUE: None

REF NUM

Issuers assign this number to chargebacks for control purposes. If present, the Acquirer must include the number in a representment message. Used for VISA or PLUS representations.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

BUS APPL ID

Business Application Identifier. This field is used for the Business Application Identifier associated with Original Credit transactions.

FIELD LENGTH: 2 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: Blanks

MKT SPFC DATA ID

Identifies the industry for which market-specific data has been provided. Valid values are:

A = Auto Rental

B = Bill Payment

H = Hotel

M = Healthcare (medical)

N = Failed Market-Specific Data edit

T = Transit

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: No

DEFAULT VALUE: Blank

TRAN FEE IND

This field is used to indicate is a surcharge is a credit or a debit.

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: No

DEFAULT VALUE: Blank

TRAN FEE

This field is used to indicate the surcharge amount.

FIELD LENGTH: 8 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: Zeroes

MESSAGE TEXT

The message text associated with the chargeback. Used for VISA or PLUS chargebacks.

FIELD LENGTH: 50 alphanumeric characters

REQUIRED FIELD: Yes, if network I.D. is 0002 or 0004

DEFAULT VALUE: None

Switch Dispute File (SDF) Chargebacks Screen 2

An operator can go to screen 2 by pressing F9 from screen 1. The chargeback screen 4 is shown below, followed by the description of its fields.

```
-----
BASE24-VISA  CHARGEBACKS                <ln>  <date>  <time> 02 OF 02

                                PLUS INFORMATION

CONTACT FOR INFO: _____
                   DATE:  _____

                                INTERLINK INFORMATION

ORIGINAL PURCHASE INFO:
      AMOUNT:  _____

ORIGINAL MERCHANT CREDIT OR ADJUSTMENT INFO:
      TRACE NUM:  _____  DATE:  _____  TIME:  _____

FREE TEXT:  _____
_____  
_____  
_____

***** BASE24 *****
      FILE DESTINATION:  NEW LOGICAL NETWORK ID:
                        F12-HELP
-----
```

CONTACT FOR INFO

The contact that can provide more information about PLUS chargebacks.

FIELD LENGTH: 25 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

DATE

The PLUS date (MMDD).

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes, if network ID is 0004.

DEFAULT VALUE: 0000

ORIGINAL PURCHASE INFO

AMOUNT

The original amount of purchase if it differs from merchandise credit amount.

FIELD LENGTH: 12 numeric characters

REQUIRED FIELD: No.

DEFAULT VALUE: None.

ORIGINAL MERCHANT CREDIT OR ADJUSTMENT INFO

The trace information identifying the merchandise credit.

TRACE NUM

The trace number from the merchandise credit transaction

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None.

DATE

The transaction date from the merchandise credit transaction (YYMMDD).

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None.

TIME

The transaction time from the merchandise credit transaction (hhmmss).

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None.

FREE TEXT

The free text associated with the chargeback for Interlink.

FIELD LENGTH: 254 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

Switch Dispute File (SDF) Representations Screen 1

The Representation screen 1 is displayed when REPRESENTATIONS is chosen from the Switch Dispute File menu. This screen enables operators to read, add, update, and delete representation records. The representations screen 1 is shown below, followed by the description of fields.

```

-----
BASE24-VISA  REPRESENTATIONS          <ln>  <date>  <time> 01 OF 02

PAN: _____ PAN CNTRY CDE: _____ PROCESSING CODE: _____
TRAN AMT: _____ TRACE NUM: _____ TRAN DATE: _____ MERCH TYPE: _____
TERM CAP: _____ ACQ CNTRY CDE: _____ ACQ INST CDE: _____
REASON CODE: _____ CRNCY CODE: _____ NETWORK ID: _____
REF NUM: _____ AUTH ID: _____ REIMB ATTR: _____
CARD ACCEPTOR INFORMATION: _____ ACQ BUS ID: _____
NAME: _____ CITY: _____ STATE: _____
COUNTRY: _____ TERM ID: _____ CARD ACCEPTOR ID: _____
ORIGINAL INFORMATION: _____ MSG TYP: _____ TRACE NUM: _____
TRAN DAT/TIM: _____ ACQ ID: _____ FWD ID: _____
PAYMENT SERVICE IND: _____ TRAN ID: _____ MVV: _____
REQ'D PAYMENT SERVICE: _____ MULT SEQ NUM: _____ ETIR: _____ FPI: _____
MAIL/PHONE/ECOM IND: _____ SPCL CHGBK IND: _____ SPCL COND IND (RIS): _____ RTI: _____
SPCL COND IND (MERCHANT): _____ BUS APPL ID: _____ MKT SPFC DATA ID: _____
ADDITIONAL DATA: ID: _____ USAGE: _____ DOC IND: _____ REF NUM: _____
FWD INST ID: _____
TRAN FEE IND: _____ TRAN FEE: _____
MESSAGE TEXT: _____

***** BASE24 *****
FILE DESTINATION: _____ NEW LOGICAL NETWORK ID: _____
F12-HELP
-----

```

PAN

The primary account number of the card used to initiate the original transaction. If the network ID is 0003, the PAN cannot be longer than 19 characters. For check authorization transactions this field will be used to populate the Account Number within Bit-125 and is the Account Number from the Magnetic Ink Character Recognition line.

FIELD LENGTH: 28 numeric characters
 REQUIRED FIELD: Yes
 DEFAULT VALUE: None

PAN CNTRY CDE

The country code associated with the card if the PAN starts with 59.

FIELD LENGTH: 3 numeric characters
 REQUIRED FIELD: No
 DEFAULT VALUE: None

PROCESSING CODE

The processing code for the representation.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000000

TRAN AMT

The amount to be debited from the cardholder's account.

FIELD LENGTH: 12 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000000000000

TRACE NUM

The trace number from the original transaction.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000000

TRAN DATE

The date (MMDD) that the original transaction was initiated.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

MERCH TYPE

The SIC code for the original transaction.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

TERM CAP

The entry capability of the terminal.

Position 1: Type of terminal

0 = Unspecified

2 = Unattended Terminal

4 = Electronic Cash Register

7 = Telephone Device

8 = Reserved

Position 2: Capability of terminal

0 = Unknown

1 = Terminal not used

2 = Magnetic stripe read capability

3 = Bar Code read capability

4 = OCR read capability

5 = Integrated circuit card read capability

9 = Terminal does not read card data

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 00

ACQ CNTRY CDE

The code of the country in which the original transaction acquirer is located.

FIELD LENGTH: 3 numeric characters.

REQUIRED FIELD: Yes

DEFAULT VALUE: 840

ACQ INST CDE

The code of the institution that acquired the original transaction.

FIELD LENGTH: 11 numeric characters

REQUIRED FIELD: Yes, left justified, zero filled

DEFAULT VALUE: None

REASON CODE

A code indicating the reason for the representation. Valid values for this field depend on the network ID as shown below.

<u>NETWORK ID</u>	<u>VALID VALUES</u>
0002	0097 - 0099
0003	2485, 2486, 2490 - 2498
0004	2020, 2022

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

CRNCY CODE

The transaction currency code.

FIELD LENGTH: 3 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 840

NETWORK ID

A code that specifies the network to be used. Valid values are:

0002 = Visa

0003 = Interlink

0004 = PLUS

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0002

REF NUM

The retrieval reference number from the original transaction.

FIELD LENGTH: 12 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000000000000

AUTH ID

The authorization ID code from the original transaction.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

REIMB ATTR

The reimbursement attribute indicating which reimbursement program a specific merchant is qualified to receive. Valid values are:

0 = Standard Issuer's/Interchange Reimbursement Fee or Cash Disbursement
Reimbursement Fee.

1 = n/a

2 = n/a

3 = EPS - U.S. only.

4 = Supermarket Incentive Program - U.S. only

- 5 = Transition Incentive Interchange Fee
- 6 = Electron Visa Interchange Reimbursement Fee/Electron Card Transaction - U.S. only
- 7 = Specific reduces reimbursement fees for intraregional transactions only (i.e., EIRF, TIRF)
- 8 = JC Penny (US only)
- 9 = Member-operated data capture (Asia-Pacific only)
- A = Payment Service Interchange Reimbursement Fee (PSIRF) - U.S. only
- B = Interregional Pre-CPS
 - CEMEA Itraregional Pre-CPS
 - Asia-Pacific Electronic Issuer's Reimbursement Fee (EIRF)
 - Latin America Caribbean Region Electronic Issuer's Reimbursement Fee (EIRF)
 - U.K. Electronic Issuer's Reimbursement Fee (EIRF) '94
 - U.K. Card Not Present '94
 - U.K. Electronic Hot Card File '94
 - International Visa Electron Card
 - U.K. Airline Interim Interchange Reimbursement Fee
- C = CEMEA Airline Transition Rate
- D = Reserved: Delta-only merchant standard Interchange Reimbursement Fee - U.K. only
- F = Delta-only merchant Electronic Interchange Reimbursement Fee (EIRF) - U.K. only
- J = non-CPS transactions
- K = CPS transactions if Merchant type, POS Entry Mode, Condition Code, and Terminal Entry Capability conditions are met
- M = Visa check card II Interchange Reimbursement Fee - U.S. only

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: Yes, if network ID is 0002 or 0003.

DEFAULT VALUE: None

ACQ BUS ID

The VISA-assigned Business ID of the acquirer that signed the merchant.

FIELD LENGTH: 8 numeric character

REQUIRED FIELD: No

DEFAULT VALUE: None

NAME

The name of the retailer or the institution that installed the terminal.

FIELD LENGTH: 25 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

CITY

The name of the city in which the retailer is located. For CPS Card Not Present transactions, this field may contain the merchant customer service phone number if that was what was used in the original transaction.

FIELD LENGTH: 13 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

STATE

The code for the state in which the retailer is located.

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

COUNTRY

The code for the country in which the retailer is located.

FIELD LENGTH: 2 alphabetic characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

TERM ID

The identifier for the terminal associated with this transaction.

FIELD LENGTH: 8 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

CARD ACCEPTOR ID

The identifier for the card acceptor or terminal associated with this transaction.

FIELD LENGTH: 15 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

MSG TYP

The message type of the original transaction under dispute.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: No
DEFAULT VALUE: None

TRACE NUM

The original trace number of the original transaction under dispute.

FIELD LENGTH: 6 numeric characters
REQUIRED FIELD: Yes, if network ID is 0003.
DEFAULT VALUE: None

TRAN DAT/TIM

The date and time (MMDDHHMMSS) that the original transaction was transmitted.

FIELD LENGTH: 10 numeric characters
REQUIRED FIELD: Yes, if network ID is 0003.
DEFAULT VALUE: None

ACQ ID

The ID of the institution that acquired the original transaction.

FIELD LENGTH: 11 numeric characters
REQUIRED FIELD: Yes, if network ID is 0003.
DEFAULT VALUE: None

FWD ID

The ID of the institution that forwarded the original transaction.

FIELD LENGTH: 11 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

PAYMENT SERVICE IND

Specifies the authorization characteristic that is assigned by Visa. Valid values are:

A = Meets custom payment service
E = Meets custom payment service with merchant name and location
V = Meets custom payment service with address data
C = Meets custom payment service from cardholder activated terminal
I = Incremental authorization qualified
P = Meets requirements for preferred customer

N = Did not meet a custom payment service
X = Disqualified for CPS

FIELD LENGTH: 1 alphabetic character
REQUIRED FIELD: No
DEFAULT VALUE: None

TRAN ID

An identifier, assigned by VISA, to uniquely identify and link together all related messages and records used to authorize and clear the transaction through VisaNet.

FIELD LENGTH: 15 numeric characters
REQUIRED FIELD: Yes, if Network I.D. is "0002".
DEFAULT VALUE: None

MVV

This field is used for the Merchant Verification Value (MVV).

FIELD LENGTH: 10 alphanumeric characters
REQUIRED FIELD: Yes, for transactions that contained an MVV.
DEFAULT VALUE: None

REQ'D PAYMENT SERVICE

The specific custom payment service that the acquirer requested in the clearing transaction. Valid values are:

A = Retail
H = CPS/Account Funding
1 = Passenger Transport 1
2 = Passenger Transport 2
3 = Hotel 1
4 = Hotel 2
5 = Auto Rental 1
6 = Auto Rental 2
7 = Direct Marketing
8 = Automated Fuel Dispenser

FIELD LENGTH: 1 alphabetic character
REQUIRED FIELD: No
DEFAULT VALUE: None

MULT SEQ NUM

Identifies the specific BASE II clearing transaction record when multiple clearing records were submitted for a single authorization. Valid values are 00 - 99.

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 00

ETIR

Excluded Transaction Identifier Reason: This field can be any alphanumeric character.

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: No

DEFAULT VALUE: None

FPI

This field is used to indicate the Fee Program Indicator (FPI) for the submitted transaction.

FIELD LENGTH: 3 numeric characters

REQUIRED FIELD: Yes, for transactions that contained an FPI

DEFAULT VALUE: None

MAIL/PHONE/ECOM IND

Mail, Telephone, Electronic Commerce indicator. Distinguishes a Mail/Phone transaction from an Electronic Commerce transaction, and supplies additional information. Valid values are:

0 = Not a Mail/Phone or Electronic Commerce transaction

Mail/Phone uses:

1 = Single Mail/Phone transaction

2 = Recurring Mail/Phone transaction

3 = Installment billing

4 = Unknown classification

Electronic Commerce uses:

5 = Secure electronic transaction with cardholder certificate

6 = Secure electronic transaction without cardholder certificate

7 = Channel-encrypted Electronic Commerce transaction

8 = Non-secure Electronic Commerce transaction

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: No
DEFAULT VALUE: 0

SPCL CHGBK IND

A field which provides extra information regarding chargebacks. Valid values are:

Blank = Not applicable
P = Amount of chargeback is less than original

FIELD LENGTH: 1 character
REQUIRED FIELD: No
DEFAULT VALUE: " " (Space)

SPCL COND IND (RIS)

Supports Visa's Risk Identification Service (RIS) and must be placed in transactions when a merchant has been identified as "highly suspect". Valid values are:

Blank = RIS indicator not required for this merchant.
1 = Zero floor limit required for this merchant.
2 = Terminal required that is capable of displaying account number encoded on magnetic strip.
3 = Both zero floor limit and terminal capable of account number display required.
8 = Quasi-cash merchant.

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: No
DEFAULT VALUE: " " (Space)

RTI

Remote Terminal Indicator. This field is used to indicate if an ATM is on or off premise.

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: No
DEFAULT VALUE: Zero

SPCL COND IND (MERCHANT)

Describes selected special conditions at the point of sale. Valid values are:

Blank = None of the conditions below applies.

L = Visa Lodging Services Merchant.

F = Facsimile draft provided.

S = Hotel or restaurant merchant.

H = Visa Lodging Services merchant.

9 = Payment on an existing debt.

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: No

DEFAULT VALUE: " " (Space)

BUS APPL ID

Business Application Identifier. This field is used for the Business Application Identifier associated with Original Credit transactions.

FIELD LENGTH: 2 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: Blanks

MKT SPFC DATA ID

Identifies the industry for which market-specific data has been provided. Valid values are:

A = Auto Rental

B = Bill Payment

H = Hotel

M = Healthcare (medical)

N = Failed Market-Specific Data edit

T = Transit

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: No

DEFAULT VALUE: Blank

ADDITIONAL DATA**ID**

The field identifier for the additional data field. Used for VISA or PLUS representations. Valid values are:

V = Usage 7 of the additional data field

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: Yes, if network ID is 0002 or 0004.

DEFAULT VALUE: None

USAGE

A code that distinguishes multiple representations. Used for VISA or PLUS representations. Valid values are:

1 = Chargeback

2 = Representment

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes, if network ID is 0002 or 0004.

DEFAULT VALUE: None

DOC IND

A code that indicates the status of mailed documentation. Used for VISA or PLUS representations. Valid values are:

Space = No supporting documentation required

1 = Mailed documentation to follow

2 = Invalid acquirer's reference number used in prior chargeback record, no supporting documentation was required or received

3 = Invalid acquirer's reference number used in prior chargeback record and supporting documentation was received

4 = No supporting documentation received for prior chargeback

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: No

DEFAULT VALUE: None

REF NUM

Issuers assign this number to chargebacks for control purposes. If present, the Acquirer must include the number in a representment message. Used for VISA or PLUS representations.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 000000

FWD INST ID

The forwarding institution ID code associated with the original transaction. Valid values are:

Numeric/Spaces (Left-justified and space filled, no embedded spaces)

FIELD LENGTH: 11 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

TRAN FEE IND

This field is used to indicate is a surcharge is a credit or a debit.

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: No

DEFAULT VALUE: Blank

TRAN FEE

This field is used to indicate the surcharge amount.

FIELD LENGTH: 8 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: Zeroes

MESSAGE TEXT

The message text associated with the representation. Used in VISA or PLUS representations.

FIELD LENGTH: 50 alphanumeric characters

REQUIRED FIELD: Yes, if network I.D. is 0002 or 0004

DEFAULT VALUE: None

Switch Dispute File (SDF) Representations Screen 2

An operator can go to screen 2 by pressing F9 from screen 1. The representations screen 2 is shown below, followed by the description of its fields.

```
-----
BASE24-VISA  REPRESENTATIONS          <ln>  <date>  <time> 02 OF 02

                                PLUS INFORMATION

CONTACT FOR INFO: _____
                                DATE:  _____

                                INTERLINK INFORMATION

ORIGINAL PURCHASE INFO:
TRACE NUM:  _____  TRAN DATE/TIME:  _____

ORIGINAL MERCHANT CREDIT OR ADJUSTMENT INFO:
TRACE NUM:  _____  TRAN DATE/TIME:  _____

FREE TEXT:  _____
_____  
_____  
_____

***** BASE24 *****
FILE DESTINATION:      NEW LOGICAL NETWORK ID:
                        F12-HELP
-----
```

CONTACT FOR INFO

The contact that can provide more information about PLUS representations.

FIELD LENGTH: 25 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

DATE

The PLUS date (MMDD).

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes, if network ID is 0004.

DEFAULT VALUE: 0000

ORIGINAL PURCHASE INFO

The trace information identifying the original purchase.

TRACE NUM

The trace number of the original purchase.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None.

TRAN DATE/TIME

The transaction date and time of the original purchase in MMDDhhmmss format.

FIELD LENGTH: 10 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None.

ORIGINAL MERCHANT CREDIT OR ADJUSTMENT INFO

The trace information identifying the merchandise credit.

TRACE NUM

The trace number of the merchandise credit.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None.

TRAN DATE/TIME

The transmission date and time of the merchandise credit in GMT and MMDDhhmmss format.

FIELD LENGTH: 10 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None.

FREE TEXT

The free text associated with the representation for Interlink.

FIELD LENGTH: 254 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

Switch Dispute File (SDF) Sales Drafts

The Sales Drafts screen is displayed when SALES DRAFTS is chosen from the Switch Dispute File menu. This screen enables operators to read, add, update, and delete sales draft records. The Sales Drafts screen is shown below, followed by descriptions of its fields.

```
-----
BASE24-VISA  SALES DRAFTS                <ln>  <date>  <time> 01 OF 01

PAN: _____ PROCESSING CODE: _____
TRAN AMOUNT: _____ TRAN DATE: _____ TRAN TIME: _____
MERCHANT TYPE: _____ TERM LN: _____ POS COND CODE: _____
EXP DAT: _____ TERM FIID: _____ CURRENCY CODE: _____
NETWORK ID: _____ REF NUM: _____
PAN COUNTRY CODE: _____ REASON CODE: _____ REIMB ATTR: _____

CARD ACCEPTOR INFORMATION:
TERM NAME LOC: _____ CITY: _____
STATE: _____ COUNTRY: _____
TERM ID: _____ RETAILER ID: _____

ORIGINAL SUBMISSION INFORMATION:      MSG TYP: _____
TRACE NUM: _____ TRAN DAT/TIM: _____

***** BASE24 *****
          FILE DESTINATION:      NEW LOGICAL NETWORK ID:
                      F12-HELP
-----
```

PAN

The primary account number of the card used to initiate the transaction. If the network ID is 0003, the PAN cannot be longer than 19 characters.

FIELD LENGTH: 28 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

PROCESSING CODE

The processing code for the sales draft.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000000

TRAN AMOUNT

The amount of the sales draft transaction.

FIELD LENGTH: 12 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 000000000000

TRAN DATE

The date (MMDD) that this transaction was initiated.

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0000

TRAN TIME

The time (HHMMSS) that this transaction was initiated.

FIELD LENGTH: 6 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 000000

MERCHANT TYPE

The SIC code for this transaction.

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0000

TERM LN

The logical network of the terminal at which this transaction was initiated.

FIELD LENGTH: 4 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

POS COND CODE

A code indicating the transaction conditions at the point of sale. Valid values are:

00 = Normal presentment.
01 = Customer not present.
05 = Customer present but card not present.
10 = Customer identity verified.

FIELD LENGTH: 2

REQUIRED FIELD: Yes
DEFAULT VALUE: 00

EXP DAT

The expiration date (YYMM) of the card.

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: 0000

TERM FIID

The FIID of the institution that owns the terminal at which this transaction was initiated.

FIELD LENGTH: 4 alphanumeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

CURRENCY CODE

The transaction currency code.

FIELD LENGTH: 3 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 840

NETWORK ID

A code that specifies the network to be used. Valid values are:

0002 = Visa
0003 = Interlink
0004 = PLUS

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0002

REF NUM

The retrieval reference number from the original transaction.

FIELD LENGTH: 12 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 000000000000

PAN COUNTRY CODE

The country code associated with the card if the PAN starts with 59.

FIELD LENGTH: 3 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

REASON CODE

The following reason codes will be allowed in addition to the previously supported reason codes, if the network ID is 0003.

5201 = Paper Sales Draft Submission

5205 = Paper Sales Draft Resubmission

REIMB ATTR

The reimbursement attribute indicating which reimbursement program a specific merchant is qualified to receive. Valid values are:

0 = Standard Issuer's/Interchange Reimbursement Fee or Cash Disbursement Reimbursement Fee.

1 = n/a

2 = n/a

3 = EPS - U.S. only.

4 = Supermarket Incentive Program - U.S. only

5 = Transition Incentive Interchange Fee

6 = Electron Visa Interchange Reimbursement Fee/Electron Card Transaction - U.S. only

7 = Specific reduces reimbursement fees for intraregional transactions only (i.e., EIRF, TIRF)

8 = JC Penny (US only)

9 = Member-operated data capture (Asia-Pacific only)

A = Payment Service Interchange Reimbursement Fee (PSIRF) - U.S. only

B = Interregional Pre-CPS

CEMEA Itraregional Pre-CPS

Asia-Pacific Electronic Issuer's Reimbursement Fee (EIRF)

Latin America Caribbean Region Electronic Issuer's Reimbursement Fee (EIRF)

U.K. Electronic Issuer's Reimbursement Fee (EIRF) '94

U.K. Card Not Present '94

U.K. Electronic Hot Card File '94

International Visa Electron Card

U.K. Airline Interim Interchange Reimbursement Fee

C = CEMEA Airline Transition Rate

D = Reserved: Delta-only merchant standard Interchange Reimbursement Fee -

U.K. only
F = Delta-only merchant Electronic Interchange Reimbursement Fee (EIRF) -
U.K. only
J = non-CPS transactions
K = CPS transactions if Merchant type, POS Entry Mode, Condition Code, and
Terminal Entry Capability conditions are met
M = Visa check card II Interchange Reimbursement Fee - U.S. only

FIELD LENGTH: 1 alphabetic character
REQUIRED FIELD: Yes, if network ID is 0003.
DEFAULT VALUE: None

TERM NAME LOC

The location of the retailer or the institution that installed the terminal.

FIELD LENGTH: 25 alphanumeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

CITY

The name of the city in which the retailer is located.

FIELD LENGTH: 13 alphanumeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

STATE

A code indicating the state in which the retailer is located.

FIELD LENGTH: 2 alphabetic characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

COUNTRY

A code indicating the country in which the retailer is located.

FIELD LENGTH: 2 alphabetic characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

TERM ID

The identifier for the terminal associated with this transaction.

FIELD LENGTH: 15 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

RETAILER ID

The identifier of the retailer.

FIELD LENGTH: 19 alphanumeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

ORIGINAL SUBMISSION INFORMATION

MSG TYPE

The original message type from the paper sales draft submission.

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: No.
DEFAULT VALUE: None.

TRACE NUM

The original trace number from the paper sales draft submission.

FIELD LENGTH: 6 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None.

TRAN DAT/TIME

The original transmission date and time, in GMT (MMDDhhmmss) from the paper sales draft submission.

FIELD LENGTH: 10 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None.

Switch Dispute File (SDF) Fee Collections/Funds Disbursements

The Fee Collections/Funds Disbursements screen is displayed when FEE COLLECTIONS/FUNDS DISBURSEMENTS is chosen from the Switch Dispute File menu. This screen enables operators to read, add, update, and delete fee collections and funds disbursements records. The Fee Collections/Funds Disbursements screen is shown below, followed by descriptions of its fields.

```
-----
BASE24-SWI    FEE/FUNDS                <ln>  <date>  <time> 01 OF 01

MESSAGE TYPE: _____ PAN: _____

PAN CNTRY CDE: _____ PROCESSING CODE: _____ NETWORK ID: _____
TRAN AMOUNT: _____ LOCAL DATE: _____ MERCH TYPE: _____
ACQ COUNTRY CODE: _____ ACQ INST CODE: _____
FWD/ISS INST CODE: _____ REASON CODE: _____ MICR RTTN: _____
CURRENCY CODE: _____ TRAN ID: _____ CHECK NUM: _____
TRAN FEE IND: _ TRAN FEE: _____

SUPP INFO: _____
-----

REGULATION E DATA FOR LOYALTY, SWEEPSTAKES, AND VISA EXTRAS:
CRD ACPT: NAME/DESC: _____
          CITY/MRCH PHN NUM: _____
ST CDE: __ ZIP CDE: _____

***** BASE24 *****
          FILE DESTINATION:      NEW LOGICAL NETWORK ID:
          F12-HELP
-----
```

MESSAGE TYPE

The message type for this record. Valid values are:

0220 = Acquirer Fee Collections / Funds Disbursements

0422 = Issuer Fee Collections / Funds Disbursements

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0220

PAN

The primary account number of the card, if any, associated with the transaction.

FIELD LENGTH: 28 numeric characters
REQUIRED FIELD: No

PAN CNTRY CDE

The country code associated with the card if the PAN starts with 59.

FIELD LENGTH: 3 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

PROCESSING CODE

The processing code for the fee collection or funds disbursement. Valid values are:

Must start with 19 for Fee Collections
Must start with 29 for Funds Disbursements

FIELD LENGTH: 6 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 000000

NETWORK ID

A code that specifies the network to be used. Valid values are:

0002 = VISA
0004 = PLUS

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0002

TRAN AMOUNT

The amount of the fee collection or funds disbursement.

FIELD LENGTH: 12 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 000000000000

LOCAL DATE

The date (MMDD) on which the transaction took place.

FIELD LENGTH: 12 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 000000000000

MERCHANT TYPE

The SIC code for this transaction.

FIELD LENGTH: 4 characters
REQUIRED FIELD: No However, for ATM transactions, this field must be value
"6011".
DEFAULT VALUE: spaces

ACQ COUNTRY CODE

The code of the country in which the original transaction acquirer is located.

FIELD LENGTH: 3 numeric characters.
REQUIRED FIELD: Yes
DEFAULT VALUE: 840

ACQ INST CODE

The code of the institution that acquired the original transaction.

FIELD LENGTH: 11 numeric characters
REQUIRED FIELD: Yes, left justified, zero filled
DEFAULT VALUE: None

FWD/ISS INST CODE

The code of the institution that authorized the original transaction for Acquirer Fee Collections and Funds Disbursements. The code of the institution that forwarded the original transaction for Issuer Fee Collections and Funds Disbursements.

FIELD LENGTH: 11 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

REASON CODE

A code indicating the reason for the message.

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0000

RTTN

Route and Transit information.

FIELD LENGTH: 9 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: Spaces

CURRENCY CODE

The transaction currency code.

FIELD LENGTH: 3 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 840

TRAN ID

The transaction Identifier

FIELD LENGTH: 9 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 000000000

CHECK NUM

The check number

FIELD LENGTH: 9 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: 000000000

TRAN FEE IND

This field is used to indicate is a surcharge is a credit or a debit.

FIELD LENGTH: 1 alphabetic character

REQUIRED FIELD: No

DEFAULT VALUE: Blank

TRAN FEE

This field is used to indicate the surcharge amount.

FIELD LENGTH: 8 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: Zeroes

SUPP INFO

Additional information pertaining to this message.

FIELD LENGTH: 255 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

REGULATION E DATA FOR LOYALTY, SWEEPSTAKES AND VISA EXTRAS:

NAME/DESC

The merchant or originator name, or a description of the purpose of the statement credit..

FIELD LENGTH: 25 alphanumeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

CITY/MRCH PHN NUM

The merchant or originator city, or the merchant telephone number.

FIELD LENGTH: 13 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

ST

A merchant or originator state code.

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

ZIP CDE

A merchant or originator ZIP code.

FIELD LENGTH: 5 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

Switch Dispute File (SDF) Pos Check Chargeback Screen

The Chargeback screen 1 is displayed when POS CHECK CHARGEBACK is chosen from the Switch Dispute File menu. This screen enables operators to read, add, update, and delete chargeback records. The Pos Check chargeback screen is shown below, followed by the description of its fields.

```

-----
BASE24-VISA  CHARGEBACKS                <ln>  <date>  <time>  01 OF 02

PAN: _____ PROCESSING CODE: _____
TRAN AMOUNT: _____ TRACE NUM: _____ TRAN DATE: _____
MERCH TYPE: _____ POS COND CODE: _____ ACQ CNTRY CDE: _____
ACQ INST CDE: _____ REASON CODE: _____ CRNCY CDE: _____
ACQ BUS ID: _____ NETWORK ID: _____ REF NUM: _____
AUTH ID: _____ REIMB ATTR: _____

CARD ACCEPTOR INFO:  NAME: _____ CITY: _____
ST: _____ COUNTY: _____ CNTRY: _____ ZIP CODE: _____
TERM ID: _____ CRD ACPTR ID: _____

TRAN ID: _____ FPI: _____
MAIL/PHONE/ECOM IND: _____ SPCL CHGBK IND: _____ SPCL COND IND (RIS): _____
SPCL COND IND (MERCHANT): _____
ADDITIONAL DATA: _____ ID: _____ USAGE: _____ DOC IND: _____ REF NUM: _____

MICR RTTN: _____ CHECK NUM: _____

***** BASE24 *****
FILE DESTINATION: _____ NEW LOGICAL NETWORK ID: _____
F12-HELP
-----

```

PAN

The primary account number of the card used to initiate the original transaction. . For check authorization transactions this field will be used to populate the Account Number within Bit-125 and is the Account Number from the Magnetic Ink Character Recognition line.

FIELD LENGTH: 19 numeric characters
 REQUIRED FIELD: no
 DEFAULT VALUE: None

PROCESSING CODE

The processing code for the chargeback.

FIELD LENGTH: 6 numeric characters
 REQUIRED FIELD: Yes
 DEFAULT VALUE: 000000

TRAN AMOUNT

The amount to be credited to the cardholder's account.

FIELD LENGTH: 12 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000000000000

TRACE NUM

The trace number from the original transaction.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 000000

TRAN DAT

The date (MMDD) that the original transaction was initiated.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

MERCH TYPE

The SIC code for the original transaction.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 6011

POS COND CODE

A code indicating the transaction conditions at the point of sale. Valid values are:

17 = Chargeback

54 = Reversal of chargeback

FIELD LENGTH: 2

REQUIRED FIELD: Yes

DEFAULT VALUE: 17

ACQ CNTRY CDE

The code of the country in which the original transaction acquirer is located.

FIELD LENGTH: 3 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 840

ACQ INST CDE

The code of the institution that acquired the original transaction.

FIELD LENGTH: 11 numeric characters

REQUIRED FIELD: Yes, left justified, zero filled

DEFAULT VALUE: None

REASON CODE

A code indicating the reason for the chargeback. Valid values for this field depend on the network ID as shown below. Values may be further restricted based on other fields. Refer to VisaNet documentation.

<u>NETWORK ID</u>	<u>VALID VALUES</u>
0002	0001-0007, 0008,2301, 2302, 0020 - 0032, 0036, 0041, 0047, 0050 - 0057, 0059 - 0063, 0067, 0070 - 0074, 0076 - 0092, and 0094 - 0097
0002	0001 - Fraudulent transaction - Signature.
0002	0002 - Fraudulent transaction - No signature.
0002	0003 - Duplicate transaction.
0002	0004 - Requested copy not received.
0002	0005 - Not sufficient funds.

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

CRNCY CDE

The transaction currency code.

FIELD LENGTH: 3 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 840

ACQ BUS ID

The VISA-assigned Business ID of the acquirer that signed the merchant.

FIELD LENGTH: 8 numeric character
REQUIRED FIELD: Yes
DEFAULT VALUE: None

NETWORK ID

A code that specifies the network to be used. Valid values are:

0002 = Visa
0003 = Interlink
0004 = PLUS

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0002

REF NUM

The retrieval reference number from the original transaction.

FIELD LENGTH: 12 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 000000000000

AUTH ID

The authorization ID code from the original transaction.

FIELD LENGTH: 6 alphanumeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

REIMB ATTR

The reimbursement attribute indicating which reimbursement program a specific merchant is qualified to receive. Valid values are:

0 = Standard Issuer's/Interchange Reimbursement Fee or Cash Disbursement
Reimbursement Fee.
1 = n/a
2 = n/a
3 = EPS - U.S. only.
4 = Supermarket Incentive Program - U.S. only

FIELD LENGTH: 1 alphabetic character
REQUIRED FIELD: Yes,
DEFAULT VALUE: None

NAME

The name of the retailer or institution that installed the terminal.

FIELD LENGTH: 25 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

CITY

The name of the city in which the retailer is located.

FIELD LENGTH: 13 alphanumeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

ST

A code for the state in which the retailer is located.

FIELD LENGTH: 2 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

COUNTY

A code indicating the county in which the card acceptor is located.

FIELD LENGTH: 3 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

CNTRY

A code for the country in which the retailer is located.

FIELD LENGTH: 2 alphabetic characters

REQUIRED FIELD: Yes

DEFAULT VALUE: None

ZIP CDE

A merchant or originator ZIP code.

FIELD LENGTH: 9 numeric characters

REQUIRED FIELD: No
DEFAULT VALUE: None

TERM ID

The identifier for the terminal associated with this transaction.

FIELD LENGTH: 8 alphanumeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

CRD ACPTR ID

The identifier for the card acceptor or terminal associated with this transaction.

FIELD LENGTH: 15 alphanumeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

TRAN ID

An identifier, assigned by VISA, to uniquely identify and link together all related messages and records used to authorize and clear the transaction through VisaNet.

FIELD LENGTH: 15 numeric characters
REQUIRED FIELD: Yes, if Network I.D. is "0002".
DEFAULT VALUE: None

FPI

This field is used to indicate the Fee Program Indicator (FPI) for the submitted transaction.

FIELD LENGTH: 3 numeric characters
REQUIRED FIELD: Yes, for transactions that contained an FPI
DEFAULT VALUE: None

MAIL/PHONE/ECOM IND

Mail, Telephone, Electronic Commerce indicator. Distinguishes a Mail/Phone transaction from an Electronic Commerce transaction, and supplies additional information. Valid values are:

0 = Not a Mail/Phone or Electronic Commerce transaction

Mail/Phone order uses:

- 1 = Single Mail/Phone transaction
- 2 = Recurring Mail/Phone transaction
- 3 = Installment billing
- 4 = Unknown classification

Electronic Commerce uses:

- 5 = Secure electronic transaction with cardholder certificate
- 6 = Secure electronic transaction without cardholder certificate
- 7 = Channel-encrypted Electronic Commerce transaction
- 8 = Non-secure Electronic Commerce transaction

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes, if network ID is 0002.

DEFAULT VALUE: 0

SPCL CHGBK IND

A field which provides extra information regarding chargebacks. Valid values are:

Blank = not applicable

P = Amount of chargeback is less than original

FIELD LENGTH: 1 character

REQUIRED FIELD: Yes, if network ID is 0002.

DEFAULT VALUE: " " (Space)

SPCL COND IND (RIS)

Supports Visa's Risk Identification Service (RIS) and must be placed in transactions when a merchant has been identified as "highly suspect". Valid values are:

Blank = RIS indicator not required for this merchant.

1 = Zero floor limit required for this merchant.

2 = Terminal required that is capable of displaying account number encoded on magnetic strip.

3 = Both zero floor limit and terminal capable of account number display required.

8 = Quasi-cash merchant.

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes, if network ID is 0002.

DEFAULT VALUE: " " (Space)

SPCL COND IND (MERCHANT)

Describes selected special conditions at the point of sale. Valid values are:

Blank = None of the conditions below applies.

L = Visa Lodging Services Merchant.

F = Facsimile draft provided.

S = Hotel or restaurant merchant.

H = Visa Lodging Services merchant.

9 = Payment on an existing debt.

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes, if network ID is 0002.

DEFAULT VALUE: " " (Space)

ID

The field identifier for the additional data field. Used for VISA or PLUS chargebacks. Valid values are:

V = Usage 7 of the additional data field

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: Yes, if network ID is 0002.

DEFAULT VALUE: None

USAGE

A code that distinguishes multiple chargebacks. Used for VISA or PLUS chargebacks. Valid values are:

1 = Chargeback

2 = Representment

3

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes, if network ID is 0002.

DEFAULT VALUE: None

DOC IND

A code that indicates the status of mailed documentation. Used for VISA or PLUS chargebacks. Valid values are:

Space = No supporting documentation required

1 = Mailed documentation to follow

- 2 = Invalid acquirer's reference number used in prior chargeback record, no supporting documentation was required or received
- 3 = Invalid acquirer's reference number used in prior chargeback record and supporting documentation was received
- 4 = No supporting documentation received for prior chargeback

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: Yes, if network ID is 0002
DEFAULT VALUE: None

REF NUM

Issuers assign this number to chargebacks for control purposes. If present, the Acquirer must include the number in a representment message. Used for VISA or PLUS representations.

FIELD LENGTH: 6 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

MICR RTTN

This field is used for check authorization transactions. It is used to populate the Transit Routing Number within Bit-125 and is the Route and Transit Number from the Magnetic Ink Character Recognition line.

FIELD LENGTH: 9 numeric characters
REQUIRED FIELD: Yes, for check authorization.
DEFAULT VALUE: None

CHECK NUM

This field is used for check authorization transactions. It is used to populate the Check Number within Bit-125 and is the Check Number from the Magnetic Ink Character Recognition line.

FIELD LENGTH: 9 numeric characters
REQUIRED FIELD: Yes, for check authorization.
DEFAULT VALUE: None

Switch Dispute File (SDF) Pos Check Representations Screen

The POS CHECK REPRESENTATIONS screen is displayed when POS CHECK REPRESENTATIONS is chosen from the Switch Dispute File menu. This screen enables operators to read, add, update, and delete representation records. The POS CHECK REPRESENTATIONS screen is shown below, followed by the description of fields.

```
-----
BASE24-VISA REPRESENTATIONS          <ln> <date> <time> 01 OF 02

PAN: _____ PROCESSING CODE: _____ TRAN AMT: _____
TRACE NUM: _____ TRAN DATE: _____ MERCH TYPE: _____
ACQ CNTRY CDE: _____ ACQ INST CDE: _____ RSN CODE: _____
CRNCY CODE: _____ NETWORK ID: _____ REF NUM: _____
ACQ BUS ID: _____ TERM CAP: _____ POS COND CDE: _____

CARD ACCEPTOR INFORMATION:
NAME: _____ CITY: _____ ST: _____ COUNTY: _____
COUNTRY: _____ TERM ID: _____ CARD ACCEPTOR ID: _____

TRAN ID: _____
MAIL/PHONE/ECOM IND: _____ SPCL CHGBK IND: _____ SPCL COND IND (RIS): _____
SPCL COND IND (MERCHANT): _____

ADDITIONAL DATA:
ID: _____ USAGE: _____ DOC IND: _____ REF NUM: _____

MICR RTTN: _____ CHECK NUM: _____

***** BASE24 *****
FILE DESTINATION: NEW LOGICAL NETWORK ID:
F12-HELP
-----
```

PAN

The primary account number of the card used to initiate the original transaction. If the network ID is 0003, the PAN cannot be longer than 19 characters. For check authorization transactions this field will be used to populate the Account Number within Bit-125 and is the Account Number from the Magnetic Ink Character Recognition line.

FIELD LENGTH: 19 numeric characters

REQUIRED FIELD: No

DEFAULT VALUE: None

PROCESSING CODE

The processing code for the representation.

FIELD LENGTH: 6 numeric characters

REQUIRED FIELD: Yes
DEFAULT VALUE: 000000

TRAN AMT

The amount to be debited from the cardholder's account.

FIELD LENGTH: 12 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 000000000000

TRACE NUM

The trace number from the original transaction.

FIELD LENGTH: 6 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 000000

TRAN DATE

The date (MMDD) that the original transaction was initiated.

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0000

MERCH TYPE

The SIC code for the original transaction.

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 6011

ACQ CNTRY CDE

The code of the country in which the original transaction acquirer is located.

FIELD LENGTH: 3 numeric characters.
REQUIRED FIELD: Yes
DEFAULT VALUE: 840

ACQ INST CDE

The code of the institution that acquired the original transaction.

FIELD LENGTH: 11 numeric characters

REQUIRED FIELD: Yes, left justified, zero filled

DEFAULT VALUE: None

REASON CODE

A code indicating the reason for the representation. Valid values for this field depend on the network ID as shown below.

<u>NETWORK ID</u>	<u>VALID VALUES</u>
0002	"2301" AND "2302" AND "0020" AND "0021" AND "0022" AND "0023" AND "0024" AND "0025" AND "0026" AND "0027" AND "0028" AND "0029" AND "0030" AND "0031" AND "0032" AND "0036" AND "0041" AND "0047" AND "0050" AND "0051" AND "0052" AND "0053" AND "0054" AND "0055" AND "0056" AND "0057" AND "0059" AND "0060" AND "0061" AND "0062" AND "0063" AND "0067" AND "0070" AND "0071" AND "0072" AND "0073" AND "0074" AND "0076" AND "0077" AND "0078" AND "0079" AND "0080" AND "0081" AND "0082" AND "0083" AND "0084" AND "0085" AND "0086" AND "0087" AND "0089" AND "0090" AND "0091" AND "0092" AND "0094" AND "0095" AND "0096" AND "0097" AND "0098" AND "0099" AND "0075" AND "2662" AND "2690"
0003	"2481" AND "2482" AND "2485" AND "2486" AND "2491" AND "2495" AND "2497"

FIELD LENGTH: 4 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 0000

CRNCY CODE

The transaction currency code.

FIELD LENGTH: 3 numeric characters

REQUIRED FIELD: Yes

DEFAULT VALUE: 840

NETWORK ID

A code that specifies the network to be used. Valid values are:

0002 = Visa
0003 = Interlink
0004 = PLUS

FIELD LENGTH: 4 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 0002

REF NUM

The retrieval reference number from the original transaction.

FIELD LENGTH: 12 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: 000000000000

ACQ BUS ID

The VISA-assigned Business ID of the acquirer that signed the merchant.

FIELD LENGTH: 8 numeric character
REQUIRED FIELD: No
DEFAULT VALUE: None

TERM CAP

The entry capability of the terminal.

Position 1: Type of terminal

0 = Unspecified
2 = Unattended Terminal
4 = Electronic Cash Register
7 = Telephone Device
8 = Reserved

Position 2: Capability of terminal

0 = Unknown
1 = Terminal not used
2 = Magnetic stripe read capability
3 = Bar Code read capability
4 = OCR read capability

5 = Integrated circuit card read capability
9 = Terminal does not read card data

FIELD LENGTH: 2 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: 00

POS COND CODE

A code indicating the transaction conditions at the point of sale. Valid values are:

17 = Chargeback
54 = Reversal of chargeback

FIELD LENGTH: 2
REQUIRED FIELD: Yes
DEFAULT VALUE: 17

NAME

The name of the retailer or the institution that installed the terminal.

FIELD LENGTH: 25 alphanumeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

CITY

The name of the city in which the retailer is located.

FIELD LENGTH: 13 alphanumeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

STATE

The code for the state in which the retailer is located.

FIELD LENGTH: 2 numeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

COUNTY

A code indicating the county in which the card acceptor is located.

FIELD LENGTH: 3 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: None

COUNTRY

The code for the country in which the retailer is located.

FIELD LENGTH: 2 alphabetic characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

TERM ID

The identifier for the terminal associated with this transaction.

FIELD LENGTH: 8 alphanumeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

CARD ACCEPTOR ID

The identifier for the card acceptor or terminal associated with this transaction.

FIELD LENGTH: 15 alphanumeric characters
REQUIRED FIELD: Yes
DEFAULT VALUE: None

TRAN ID

An identifier, assigned by VISA, to uniquely identify and link together all related messages and records used to authorize and clear the transaction through VisaNet.

FIELD LENGTH: 15 numeric characters
REQUIRED FIELD: Yes, if Network I.D. is "0002".
DEFAULT VALUE: None

MAIL/PHONE/ECOM IND

Mail, Telephone, Electronic Commerce indicator. Distinguishes a Mail/Phone transaction from an Electronic Commerce transaction, and supplies additional information. Valid values are:

0 = Not a Mail/Phone or Electronic Commerce transaction

Mail/Phone uses:

- 1 = Single Mail/Phone transaction
- 2 = Recurring Mail/Phone transaction
- 3 = Installment billing
- 4 = Unknown classification

Electronic Commerce uses:

- 5 = Secure electronic transaction with cardholder certificate
- 6 = Secure electronic transaction without cardholder certificate
- 7 = Channel-encrypted Electronic Commerce transaction
- 8 = Non-secure Electronic Commerce transaction

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes, if network ID is 0002.

DEFAULT VALUE: Space

SPCL CHGBK IND

A field which provides extra information regarding chargebacks. Valid values are:

Blank = Not applicable

P = Amount of chargeback is less than original

FIELD LENGTH: 1 character

REQUIRED FIELD: Yes, if network ID is 0002.

DEFAULT VALUE: " " (Space)

SPCL COND IND (RIS)

Supports Visa's Risk Identification Service (RIS) and must be placed in transactions when a merchant has been identified as "highly suspect". Valid values are:

Blank = RIS indicator not required for this merchant.

1 = Zero floor limit required for this merchant.

2 = Terminal required that is capable of displaying account number encoded on magnetic strip.

3 = Both zero floor limit and terminal capable of account number display required.

8 = Quasi-cash merchant.

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes, if network ID is 0002.

DEFAULT VALUE: " " (Space)

SPCL COND IND (MERCHANT)

Describes selected special conditions at the point of sale. Valid values are:

Blank = None of the conditions below applies.

L = Visa Lodging Services Merchant.

F = Facsimile draft provided.

S = Hotel or restaurant merchant.

H = Visa Lodging Services merchant.

9 = Payment on an existing debt.

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes, if network ID is 0002.

DEFAULT VALUE: " " (Space)

ID

The field identifier for the additional data field. Used for VISA or PLUS representations. Valid values are:

V = Usage 7 of the additional data field

FIELD LENGTH: 1 alphanumeric character

REQUIRED FIELD: Yes, if network ID is 0002.

DEFAULT VALUE: None

USAGE

A code that distinguishes multiple representations. Used for VISA or PLUS representations. Valid values are:

1 = Chargeback

2 = Representment

3 =

FIELD LENGTH: 1 numeric character

REQUIRED FIELD: Yes, if network ID is 0002.

DEFAULT VALUE: None

DOC IND

A code that indicates the status of mailed documentation. Used for VISA or PLUS representations. Valid values are:

Space = No supporting documentation required

1 = Mailed documentation to follow

- 2 = Invalid acquirer's reference number used in prior chargeback record, no supporting documentation was required or received
- 3 = Invalid acquirer's reference number used in prior chargeback record and supporting documentation was received
- 4 = No supporting documentation received for prior chargeback

FIELD LENGTH: 1 numeric character
REQUIRED FIELD: Yes, if network ID is 0002.
DEFAULT VALUE: None

REF NUM

Issuers assign this number to chargebacks for control purposes. If present, the Acquirer must include the number in a representment message. Used for VISA or PLUS representations.

FIELD LENGTH: 6 numeric characters
REQUIRED FIELD: No
DEFAULT VALUE: 000000

MICR RTTN

This field is used for check authorization transactions. It is used to populate the Transit Routing Number within Bit-125 and is the Route and Transit Number from the Magnetic Ink Character Recognition line.

FIELD LENGTH: 9 numeric characters
REQUIRED FIELD: Yes, for check authorization.
DEFAULT VALUE: None

CHECK NUM

This field is used for check authorization transactions. It is used to populate the Check Number within Bit-125 and is the Check Number from the Magnetic Ink Character Recognition line.

FIELD LENGTH: 9 numeric characters
REQUIRED FIELD: Yes, for check authorization.
DEFAULT VALUE: None

Section 7

Interchange Log File (ILF)

The Interchange Log File (ILF) contains one record for each transaction processed by the VisaNet ISO Interface process. The ILF is used as input to the settlement report programs for the VisaNet ISO Interface process. A new ILF is created each business day when cutover occurs. The business day reflected by the ILF is that of the VisaNet Interchange rather than BASE24.

The VisaNet ISO Interface process creates and writes a log record once for each transaction when the transaction response is received. If a reversal occurs, the original transaction record is updated.

The VisaNet ISO Interface process logs the STM/PSTM, the external message and tokens for financial transactions. The VisaNet ISO Interface uses the EXTRN-MSG.SAVEAREA field in the ILF record for external messages.

This section provides the basic record structure for the VisaNet ILF. It does not provide detailed information on the fields logged in the BASE24-atm Standard Internal Message (STM), the BASE24-pos Internal Message (PSTM), or the VisaNet External Message. For more information on the fields in the STM or PSTM, refer to the appropriate BASE24 manual. For more information on the VisaNet External Message, refer to the appropriate VisaNet Manual.

VisaNet ILF Record Structure

The fields included in an Interchange Log File (ILF) record for the VisaNet ISO Interface process are described below.

1-55 02 PRIKEY KEYTAG PR

The alternate key to this ILF record. For the VisaNet ISO Interface process, PRIKEY consists of the following fields: TRAN-TIM, PAN, REF-NUM, TRAN-DAT, and TERM-ID or ACQ-IST-CDE.

56 04 BYTE TYPE CHARACTER 55
57-58 02 USER-FLDB PIC X
59-60 02 SUBSTATE TYPE BINARY 16

The exception indicator for an authorization record. The VisaNet ISO Interface process uses this field to determine what error messages should be printed on reports with the transaction detail information if the transaction did not complete as intended.

Valid values are:

- 0 = OK, no error
- 1 = System error (occurs when no other substate fits)
- 2 = Format error in message from the interchange
- 3 = Transaction failed preauthorization by the Interchange Interface process
- 4 = Denied because the interchange was down
- 5 = Request timed out, denied
- 6 = Interchange down at time of response
- 7 = Could not find original transaction for this reversal
- 8 = Transaction not supported
- 10 = Representments are not allowed
- 11 = Force post not sent
- 12 = Transaction not settled
- 13 = Message rejected
- 15 = Exception status advice
- 16 = Crisis alert

61-76 02 REC-TYP TYPE BINARY 16

Describes the type of record. The VisaNet ISO Interface process uses this field to determine the type of record it is processing. Values are:

01 = BASE24-atm
02 = BASE24-pos
03 = BASE24-afs
90 = Representation
92 = Fee collection
93 = Funds disbursement
94 = Gross interchange value
95 = Funds transfer totals

77-82 02 ORIG-NET-PRO PIC X(16)

The name of the process to which the reply is to be sent if the request is from BASE24. Reversals initiated by the interchange are also sent to this process.

83-90 02 CUR-DAT-ADD PIC X(6)

The date (YYMMDD) the record was added to the ILF.

91-98 02 CUR-TIM-ADD PIC X(8)

The time (HHMMSSSTT) at which the record was added to the ILF.

02 LAST-UPDATE TYPE BINARY 64

A Julian timestamp indicating the time the record was last updated. This information is printed on reports for reversal transactions.

99-102 02 SEM

The following fields are standard for all external messages and are placed here in order to allow for standard access to the information.

103-110	04	TRAN-TYP	PIC X(4)	The transaction type from the Processing Code data element (P-3) in the external message.
111-114	04	RESP-CDE	PIC X(8)	The response code from the Response Code data element (P-39) in the external message.
115-120	04	RVSL-CDE	PIC X(4)	The reversal code from the Response Code data element (P-39) in the external message if the transaction is a reversal.
121-128	04	SWI-DAT	PIC X(6)	The transaction date (YYMMDD) from the Local Transaction Date data element (P-13) in the external message.
129-134	04	SWI-TIM	PIC X(8)	The transaction time (HHMMSSSTT) from the Local Transaction Time data element (P-12) in the external message.
135-150	04	TRACE-NUM	PIC X(6)	The trace number from the Systems Trace Audit Number data element (P-11) in the external message.
151-152	04	USER-FLD (Not Used)	PIC X(16)	

153-814 02 INTRN-MSG-SAVEAREA-LGTH TYPE BINARY 16

The length of the standard internal message that follows.

153-814 02 ATM TYPE ATM

Values of selected fields from the BASE24-atm Standard Internal Message (STM) for a transaction processed by BASE24-atm. For a complete description of the STM format, please refer to the appropriate BASE24 Manual.

815-818 02 POS REDEFINES ATM
TYPE POS

Values of selected fields from the BASE24-pos Standard Internal Message (PSTM) for a transaction processed by BASE24-pos. For a complete description of the PSTM format, please refer to the appropriate BASE24 Manual.

02 EXTRN-MSG-LGTH PIC 9(4)

The length of the message stored in the EXTRN-MSG.SAVEAREA field.

819-2000 02 EXTRN-MSG

04 SAVEAREA PIC X
OCCURS 0 TO 1182 TIMES
DEPENDING ON EXTRN-MSG-LGTH

The external message for the transaction. The VisaNet ISO Interface process uses this field for storing transaction information.

ACI Worldwide, Inc.

Section 8

Switch Dispute File (SDF)

This section provides the basic record structure for a Switch Dispute File (SDF) record for the VisaNet ISO Interface process.

VisaNet SDF Record Structure

The fields included in a Switch Dispute File (SDF) record for the VisaNet ISO Interface process are described below. The bit map positions for VisaNet that these fields map into are also given, if applicable.

<u>BIT MAP</u>	<u>DDL STRUCTURE</u>	
	02 SWI-TYP	PIC X(4)
	The switch type of the interface process to determine whether or not this SDF record belongs to the interface. Valid switch types for the VisaNet ISO Interface process is "VISA".	
	02 KEY-DATA	
	05 BYTE	PIC X(34)
	02 K-DAT	REDEFINES KEY-DATA
	05 TYP	PIC X(4)
	The message type. Valid values are:	
	0200 = regular debit request	
	0220 = representation, funds disbursements, fee collections	
	0422 = charge back	
2 or	05 PAN	
34	10 LGTH	PIC X(2)
	10 NUM	PIC X(28)
	The primary account number.	

3	02	PROC-CDE	PIC X(6)
---	----	----------	----------

The processing code.

Valid values for debit requests are:

0000FF = Debit, goods and services - where
FF = 00 no account
10 savings
20 checking
30 credit card
40 universal

Valid values for fee collections are:

1900FF = Debit, fee collections - where
FF = 00 no account
10 savings
20 checking
30 credit card
40 universal

Valid values for debit request returns are:

20TT00 = Credit, return/cancellation - where
TT = 00 no account
10 savings
20 checking
30 credit card
40 universal

Valid values for funds disbursements are:

29TT00 = Credit, funds disbursements - where
TT = 00 no account
10 savings
20 checking
30 credit card
40 universal

Valid values for chargebacks and representations are:

AATTF Where AA = original 0200 action code
Where TT = original 0210 to account
Where FF = original 0210 from account

4	02	TRAN-AMT	PIC X(12)	The transaction amount in dollars and cents.
12	02	TERM-TIM	PIC X(6)	
11	02	TRACE-NUM	redefines TERM-TIM PIC X(6)	The terminal transaction time (HHMMSS) for Sales Drafts and Adjustments. The original trace number for Chargebacks and Representations.
13	02	TERM-DAT	PIC X(4)	The terminal transaction date (MMDD). This field is used for debit requests, representations, and chargebacks. It is from the original transaction for representations and chargebacks.
	02	CONV-RATE-CDE-ISS	PIC X(8)	
	02	MISC-VISA-INFO	REDEFINES CONV-RATE-CDE-ISS	
63.5	04	USER-FLD-ACI	PIC X(3)	The first 3 bytes are reserved by ACI for future use.
59	04	CNTY-CDE	PIC X(3)	The county code for US Debit transactions.
21	04	FWD-CNTRY-CDE	REDEFINES CNTY-CDE PIC X(3)	The forwarding institution's country code for issuer fee collections and funds disbursements
	04	FILLER1	PIC X(2)	
14	02	EXP-DAT	PIC X(4)	The expiration date (YYMM). This field is used for debit requests, chargebacks, and representations.

19	02	ACQ-CNTRY-CDE	PIC X(3)
		The acquiring institution country code. This field is used only in debit requests to BASE I.	
20	02	PAN-CNTRY-CDE	PIC X(3)
		The PAN extended country code. This field is REQUIRED for a "59" card.	
22	02	POS-ENTRY-MDE.	
	04	PAN-MDE	PIC X(2)
	04	PIN-MDE	PIC X(1)
		The point of service entry mode. The point of service entry mode contains the following two sub-element identification codes :	
		The PAN entry code identifies the entry method of the PAN and card expiration date.	
		00 Unknown	
		01 Manual	
		03 Bar code read	
		04 OCR code read	
		The PIN entry code identifies the capabilities of the point of service terminal.	
		0 unknown	
		1 terminal can accept entry of PINs	
		2 terminal cannot accept entry of PINs	
		8 terminal PIN/PAD is down.	
18	02	SIC-CDE	PIC X(4)
		The SIC code.	
63.1	02	NETWORK-ID	PIC X(3)
		The network identifier. Valid values are:	
		002 = VisaNet	
		003 = Interlink	
		004 = PLUS	

25	02	POINT-TRAN-SPEC	PIC X(2)
		The point of transaction special condition code. Valid values are:	
		00 = Normal presentment	
		01 = Customer not present/sales draft manual entry	
		02 = Unattended terminal (i.e., ATM)	
		03 = Merchant Suspicious of tran	
		04 = Electronic cash register	
		05 = Customer present, card not present	
		06 = Pre-authorized financial request	
		07 = Telephone device	
		08 = Mail or telephone order	
		09 = Security alert	
		10 = Customer identity verified	
		11 = Suspected fraud	
		12 = Security reasons	
		13 = Representation of a purchase request	
		17 = Returned item (charge back)	
	02	ENTRY-MODE	PIC X(4)
		The point of transaction entry mode.	
23	02	MEMBER-NUM	PIC X(2)
		The member number. This field is used if the member number is present in the original transaction.	
28	02	TRAN-FEE	
	04	IND	PIC X.
	04	AMT	PIC 9(8).
		The transaction fee indicator and transaction fee amount. The transaction fee indicator is "C" for credit or "D" for debit.	
32	02	ACQ-INST	
	04	LGTH	PIC X(2)
	04	NUM	PIC X(12)
		The acquiring institution identifier. This is the BIN of the institution that originally acquired the transaction.	

37	02	REF-NUM	PIC X(12)
		The retrieval reference number.	
		The format of YDDDnnnnnnnn is used for SMS transactions.	
48	02	MERCH-ID	PIC X(15)
		Used for the PLUS timestamp, in HHMMSSNNN format.	
43	02	MERCH-REG-E	PIC X(40)
		The merchant name, location, city, and state. For debit requests and representations, the following format is used:	
		reg-e-loc	pic x(25)
		city	pic x(13)
		country	pic x(2)
41	02	CRD-ACPT-TERM-ID	PIC X(8)
		The card acceptor terminal identification.	
42	02	CRD-ACPT-ID-CDE	PIC X(15)
		The card acceptor identification code.	
	02	RESP-CDE	PIC X(2)
		The response code. Not used by the VisaNet ISO Interface.	
49	02	CRNCY-CDE-TRAN	PIC X(3)
		The currency code for the transaction.	
	02	PRIVATE1	
	04	LGTH	PIC X(2)
	04	AMOUNT	PIC X(8)
		The private field number one. Not used by the VisaNet ISO Interface.	
	02	VISA-PRIVATE1	REDEFINES PRIVATE1

Switch Dispute File (SDF)

59	04	ZIP-CDE	PIC X(9)	
		The postal code from the original transaction.		
	04	FILLER1	PIC X	
63.3	02	TIM-REASON	PIC X(4)	
	02	MIS-CAS-CDE redefines TIM-REASON	PIC X(4)	
		The reason code.		
61	02	REPL-AMT		
	04	TRAN	PIC X(12)	
		The replacement amount. This field is used as the Other amount in debit requests.		
	02	VISA-ACQ	REDEFINES REPL-AMT	
63.8	04	BUS-ID	PIC X(8)	
		The Visa-assigned business ID of the member that signed the merchant.		
63.10	04	SPCL-PRGM-FLG	PIC X(2)	
		The special program flags as defined by VISA.		
63.17	04	ADNL-DATA-IND	PIC X(1)	
		Indicates the presence of sales tax and customer card info in the original Base II clearing of a non T&E commercial card transaction.		
62.18	04	EXCLUD-TRAN-ID-RSN	PIC X(2)	
		A code indicating that a transaction identifier is not included in the transaction.		
59	02	PRIVATE2		
	04	LGTH	PIC X(2)	
	04	ST-CDE	PIC X(2)	
		The private field number two. This field is used for debit requests, representations, and chargebacks. The length subfield is not used by the VisaNet ISO Interface process.		

38	02	PRIVATE4	
	04	LGTH	PIC X(2)
	04	ECHO	PIC X(8)
The private field number three. This field is used in representations for the Auth ID Resp field.			
90	02	ORIG	PIC X(44)
	The original data elements. This field is used in chargebacks to the BASE I issuer, from the original '0220' received from the BASE I issuer. The following format is used:		
		typ	pic x(4)
		tran-dat-tim	pic x(10)
		trace-num	pic x(6)
		acq-inst	pic x(11)
		fwd-inst	pic x(11)
44	02	PAYEE	PIC X(25)
	Used for PLUS' contact for information.		
100 or 33	02	ISS-INST	
	04	LGTH	PIC X(3)
	04	CDE	PIC X(11)
The receiving institution identification code.			
In a debit request or representation, this field is used if the issuer cannot be determined from the PAN.			
In a chargeback, this field is used if the receiving institution identification code was present in the original transaction.			
For a fee collection or funds disbursement message originating at a MIS (acquirer), this field is used as the BIN of the issuer that will receive the message.			
For a fee collection or funds disbursement message originating at a CAS (issuer), this field is used as the BIN of the issuer itself. The field will be used as the forwarding institution ID.			

	02	visa-adj	redefines iss-inst.
	04	lgth	pic x(3).
63.8	04	acq-bus-id	pic x(8).
	02	SUPP-INFO	
	04	LGTH	PIC X(3)
	04	TXT	PIC X(386)
	02	visa-supp-info	redefines supp-info.
	04	lgth	pic x(3).
62	04	payment-srv-fld.	
62.1	06	ind	pic x.
62.2	06	tran-id	pic 9(15).
62.11	06	mult-clrng-seq-num	pic 9(2).
62.15	06	rqstd-pymnt-srv	pic x.
63	04	vdcs-private.	
	06	chgbk-bii-flags	pic x(7).
63.6	06	chgbk-bii-flag	redefines chgbk-bii-flags.
	08	flr-lmt-ind	pic x.
	08	cwb-crb-ind	pic x.
	08	lcs-ind	pic x.
	08	mail-phone-ind	pic x.
	08	spcl-chgbk-ind	pic x.
	08	spcl-cond-ris	pic x.
	08	spcl-cond-merch	pic x.
48	04	addl-data.	
	06	fld-id	pic x.
	06	usage-cde	pic x.
	06	doc-ind	pic x.
	06	chgbk-ref-num	pic x(6).
	06	msg-txt	pic x(50).
	06	cntct-info-msg-txt	redefines msg-txt.
	08	cntct-info.	
		10 cntct-nam	pic x(15).
		10 cntct-phn-num	pic x(10).
	08	atm-msg-txt	pic x(25).
33	04	fwd-inst.	
	06	lgth	pic x(2).
	06	cde	pic x(11).

126	04	srvc-dvlp-ind.	
	06	trnspndr-ind	pic x.
	06	reln-partcpnt-ind	pic x.
	04	micr.	
	06	rttn	pic x(9).
	06	chk-num	pic x(15).
	04	payment-srv-fld-ext	
62.19	06	fpi	pic 9(3).
62.20	06	mrch-vrfcn-val	pic x(10).
	04	emv-data	
	06	emv-data-userfld-1	pic x(88).
137	06	appl-tran-ctr	pic x(4).
	06	emv-data-userfld-2	pic x(42).
104	04	bus-appl-id	pic x(2).
	04	rti	pic x(1).
48	04	feefund-info-txt	pic x(112).

ACI Worldwide, Inc.

Section 9

Resubmittal Store and Forward File (RSAF)

This section provides the basic record structure for a Resubmission Store-and-Forward (RSAF) record for the VisaNet ISO Interface process.

VisaNet RSAF Record Structure

The fields included in a Resubmittal Store-and-Forward File (RSAF) for the VisaNet Interface record are described below.

<u>Position</u>	<u>Level</u>	<u>Field Name and Description</u>	<u>Data Type</u>
01	02	PRIKEY	keytag 0.
	04	TIMESTAMP	TYPE BINARY 64.
		This field contains the timestamp of when the record was added to the RSAF.	
09	02	RVSL-PRIKEY	KEYTAG "IL".
	04	ACQ-INST-ID-CDE	TYPE ID-NUM.
	04	PAN	PIC X(19).
	04	SEQ-NUM	PIC X(12).
	04	MONTH	PIC X(2).
	04	TIM	TYPE *.
61	02	TYP	PIC X.
		The type of record. S - SAF, R - RSAF.	
62	02	ADD-DAT	PIC X(8).
		The date the transaction was added to the RSAF file.	

70	02	LAST-RESP-CDE	PIC X(2).
		The response code from the last attempt to deliver the transaction.	
72	02	LAST-DATE-ATTEMPTED	TYPE DAT.
		The date of the last attempt to deliver the transaction.	
78	02	FILLER	PIC X.
79	02	RESUB-CNTR	TYPE BINARY 16.
		The counter that gets incremented with each attempt to deliver the transaction	
81	02	EXTRN-MSG-LGTH	PIC 9(4).
		The length of the collapsed external message.	
85	02	EXTRN-MSG.	
	04	SAVEAREA	PIC X OCCURS 500 TIMES
		The collapsed external message.	
585	02	INTRN-MSG-LGTH	PIC 9(4).
		The length of the internal message, including tokens.	
589	02	INTRN-MSG.	
	04	SAVEAREA	PIC X OCCURS 3472 TIMES
		The internal message.	

Section 10

Transaction and Response Codes

Transaction And Response Code Mapping

For information on transaction and response code mapping, please refer to the following tables in the VisaNet source code (VISAG and VISAFMTS):

b24^pos^tran^tbl	(POS TRANSACTION TYPE TABLE)
b24^atm^to^visa^resp^table	(BASE24 ATM RESPONSE CODE TABLE)
b24^pos^to^visa^resp^table	(BASE24 POS RESPONSE CODE TABLE)
visa^to^b24^atm^resp^table	(VISANET ATM RESPONSE CODE TABLE)
visa^to^b24^pos^resp^table	(VISANET POS RESPONSE CODE TABLE)

These tables are not contained in this manual because they are continuously updated. Therefore, the tables could not always be kept current if put in this manual.

ACI Worldwide, Inc.

Appendix A

SNA LU-2 Protocol

Network Environment Declarations

The following information gives example Device, Station and Line declarations that can be used when communicating with VISA utilizing VISA's SNA LU-2 protocol. These definitions should be declared via a network control facility. For further information refer to the "NET24-XPNET Network Control Command Reference Manual".

RESET DEVICE

```
SET DEVICE PROFILE PVISALU2
SET DEVICE RECVLEN 4095
SET DEVICE XMITLEN 1024
SET DEVICE MACRO SLU-2
ADD DEVICE VISA^LU^T2, UNDER SYSNAME \CFS,
                        UNDER NODE P1B^GATE
```

RESET LINE

```
SET LINE PORT $HLS.#SNAP3.LU01
SET LINE PROTOCOL PLU
ADD LINE L1BPLU1, UNDER SYSNAME \CFS,
                UNDER NODE P1B^GATE
```

RESET LINE

```
SET LINE PORT $HLS.#SNAP3.LU02
SET LINE PROTOCOL PLU
ADD LINE L1BPLU2, UNDER SYSNAME \CFS,
                UNDER NODE P1B^GATE
```

RESET STATION

```
SET STATION DESTINATION P1B^VISA
SET STATION DEVICE VISA^LU^T2
SET STATION LINENMAE \CFS.P1B^GATE.L1BPLU1
SET STATION RETRY 3
ADD STATION S1BVISALU1, UNDER SYSNAME \CFS,
                        UNDER NODE P1B^GATE
```

RESET STATION

SET STATION DESTINATION P1B^VISA
SET STATION DEVICE VISA^LU^T2
SET STATION LINENMAE \CFS.P1B^GATE.L1BPLU2
SET STATION RETRY 3
ADD STATION S1BVISALU2, UNDER SYSNAME \CFS,
UNDER NODE P1B^GATE

RDT File

This information is an example of the compile commands used by Tandem's SNAX-HLS product. The SNAX/HLS operating environment presumes that a Resource Definition Table (RDT) exists. The RDT accessed by SNAX/HLS is created by compiling an edit file. These command shown below can be used as input to the SNAX-HLS compiler to create the RDTDATA file. For further information regarding the RDTDATA, RDTTEXT and HLSRDT, see the Tandem "SNAX/HLS Configuration and Control Manual".

```
!*SEQ2.00 04/24/91 RDTTEXT 4000 SNAP DH40SNAX !
```

```
! This file was created by SNAX-HLS/HLSCRDT
```

```
! (T9089C10 15Mar88 b23)
```

```
! Date of creation: 11-Mar-89 12:03:19
```

```
!-----
```

```
reset BIND
```

```
! Bind BVISALU2 TEST BIND FOR VISA SNA LU_2
```

```
set bind bind-type NONNEGOTIABLE
```

```
set bind fm-profile 3
```

```
set bind ts-profile 3
```

```
set bind pri-chain-use SINGLE-RU
```

```
set bind pri-rq-mode IMMEDIATE
```

```
set bind pri-chain-protocol any
```

```
set bind pri-two-phase-commit FALSE
```

```
set bind pri-compression-ind FALSE
```

```
set bind pri-eb-send TRUE
```

```
set bind sec-chain-use SINGLE-RU
```

```
set bind sec-rq-mode IMMEDIATE
```

```
set bind sec-chain-protocol exception
```

```
set bind sec-two-phase-commit FALSE
```

```
set bind sec-compression-ind FALSE
```

```
set bind sec-eb-send FALSE
```

```
set bind no-segments FALSE
```

```
set bind fm-header-use FALSE
```

```
set bind brkt-reset betb
```

```
set bind brkt-term CONDITIONAL
```

```
set bind alt-code-use FALSE
```

```
set bind seqno-use FALSE
```

```
set bind bind-queuing FALSE
```

```
set bind send-recv HDUX-FF
```

```
set bind recovery-mode LOSER
```

```
set bind contention-winner SECONDARY
```

```
set bind hdx-ff-reset-sender SECONDARY
```

```
set bind sec-send-pacing-size 0
```

set	bind sec-max-ru	1024
set	bind sec-recv-pacing-size	0
set	bind pri-max-ru	1024
set	bind lu-session-type	2
set	bind ps-usage	000000000000000000000000
set	bind plu-name	NETPNAME


```
add BIND    BVISALU2
!-----
reset PROFILE
! Profile PVISALU2 TEST PROFILE FOR VISA SNA LU_2 (NETPNAME)
set  profile bind-name          BVISALU2
set  profile open-mode          ACQUIRE
set  profile hs-polarity        PRIMARY
set  profile want-sscp-text     FALSE
set  profile response-type      1
set  profile pipeline-lu-ind    FALSE
set  profile translate          FALSE
set  profile lmo                FALSE
set  profile max-requests       2
set  profile want-bind-data     NONE
set  profile user-responses     FALSE
set  profile want-flow-control  FALSE
set  profile encode-eri         FALSE
set  profile single-fmh         FALSE
set  profile omit-modem-wait    FALSE
add  PROFILE    PVISALU2
```

Creating An RDT File

An RDTDATA file can be created by the following set of commands.

1. Edit the source file:

```
> EDIT RDTTEXT  
(Perform changes)
```

```
*EXIT
```

2. Compile the RDTTEXT file:

```
> RUN HLSRDT / IN RDTTEXT, OUT $$.#LP / RDTDATA
```

For more information see the Product Overview section of the "SNAX/HLS Configuration and Control Manual". The three lines of command shown below is another way to create the RDTDATA file.

```
> purge ordtdata  
> rename rdtdata,ordtdata  
> run $system.system.hlsrdt/in rdttext,out $s.#rdtcomp/rdtdata
```

Operating SNAX/HLS

The following set of commands is used to start the new HLSOBJ. For further details see section Operating SNAX/HLS of the "SNAX/HLS Configuration and Control Manual" for more details.

```
> stop $visx  
> hlsobj/in rdtdata, out $sudo,  nowait, name $visx, pri 140/  
  abend^on^error on, max^lus 32, initial^trace 15
```

NOTE: For G Series Operating Systems and above, the Communication Management Interface (CMI) will no longer be supported. Subsystem Control Facility (SCF) commands will replace the CMI commands used to start the SNA sessions in the following example. For further information on SCF, see Tandem manual "Subsystem Control Facility (SCF) Reference Manual".

CMI OBEY File

The following is a list of Communication Management Interface (CMI) commands to start the SNA sessions. For further information on CMI, see Tandem manual "Communication Management Interface Operator Reference Manual".

```
allow all errors
assume line $snap3
abort lu under
abort pu under
abort
delete lu under
delete pu under
delete
add line,character set ascii
add pu $snap3.#pu1,type(13,2),recsize 265,maxlus 2,address %hC1, window 7
add lu $snap3.#lu1,type(14,2),puname #pu1,recsize 265,protocol & snalu,
    address 1, character set ascii
add lu $snap3.#lu2,type(14,2),puname #pu1,recsize 265,protocol & snalu,
    address 2, character set ascii
start
start pu under
start lu under
```

Note The value of addresses mentioned above were set to match the VisaNet Test System. These might need to be changed depending upon the configuration.

Appendix B

HLS/SNAX Support Using A 36XX Controller

HLS/SNAX LU-0 Protocol

The following is a guideline for supporting HLS/SNAX LU-0 protocol using the 36XX communications subsystem for a Interchange.

- I. Define the Communications Interface Unit (CIU) in the CONTROLLERS paragraph of the Tandem system configuration file.

CONTROLLERS :

```
CIU1A      3605      0,1    %300;  
DUMMY      6999      0,1    %540; - Must be valid address
```

This entry defines the CIU as a single port. The CPU and address specifications depend upon the hardware installation. The DUMMY controller is for the Snax \$SSCP process.

- II. Define the CIU paths in the PATHS paragraph.

PATHS :

```
CSS1A      CIU1A;
```

This entry defines paths A and B as shown in MACKIE.

- III. Define the microcode files in the MICROCODE_FILES paragraph.

```
MICROCODE_FILES : TANDEM^MICROCODE^FILES ;
```

- IV. Add this define to the DEFINES paragraph in their system config file :

DEFINES :

```
HLS^36XX^VISA = TYPE 58,  
                SUBTYPE 1,  
                RSIZE 4096,  
                INTERRUPT SNA^CSS^INTERRUPT,  
                MAXPUS 1,  
                FRAMESIZE 268,  
                L2WINDOW 7,
```

SECONDARY,
TRANSLATE,
FULL,
SPEED 4800,
MAXLUS 16,
SMLDEV \$SSCP #;

!FULL DUPLEX
!BAUD RATE

V. Define the lines in the PERIPHERALS paragraph.

```
PERIPHERALS :  
  $SSCP          DUMMY.0, DUMMY.1          SNASVM TYPE 13,  
                                              SUBTYPE 5,  
                                              RSIZE 256;  
  
  $VISA1         CSS1A.0          SNATS     HLS^36XX^VISA;  
  $VISA2         CSS1A.1          SNATS     HLS^36XX^VISA;  
  
  $VISA15        CSS1A.15        SNATS     HLS^36XX^VISA;
```

VI. Defines in the ALLPROCESSORS paragraph.

```
ALLPROCESSORS :  
  FILES_TO_COPY_TO_NEW_SYSTEM    TANDEM^FILES^TO^COPY;  
  SYSTEM_PROCESS_CODE_FILES      TANDEM^PROCESS^CODE^FILES;
```

VII. Using a network control facility, perform the following:

A. Add the following switch process declaration.

```
RESET PROCESS  
  SET PROCESS LIBRARY $SYSACI.XPNET.SKELB  
  SET PROCESS PROGRAM $vol.xxxxOBJ.VISA  
  SET PROCESS PPD $P1VS  
  SET PROCESS PRIORITY 170  
  SET PROCESS CPU 1  
  SET PROCESS QAT 64  
  SET PROCESS QMT 74  
  ADD PROCESS P1A^VISA, UNDER SYSNAME \CFS,  
                        UNDER NODE P1B^GATE
```

- B. Add the following VISA device declaration. Note that the Profile must be the HLS profile for the specific device as defined in the HLS RDTDATA file. If this is an ISO VISA interface set the Device receive and transmit to 4095.

```
RESET DEVICE
  SET DEVICE PROFILE PVISALU0
  SET DEVICE RECVLEN 4095
  SET DEVICE XMITLEN 4095
  SET DEVICE DEFRSP OFF
  ADD DEVICE HLS^VISA, UNDER SYSNAME \CFS,
                        UNDER NODE P1B^GATE
```

- C. Add the following station declaration.

```
RESET STATION
  SET STATION DESTINATION P1A^VISA
  SET STATION DEVICE HLS^VISA
  SET STATION LINENMAE \CFS.P1B^GATE.L1A00001
  SET STATION RETRY 3
  SET STATION QAT 20
  SET STATION QMT 30
  SET STATION LOGICALACK OFF
  ADD STATION S1AVISA1, UNDER SYSNAME \CFS,
                        UNDER NODE P1B^GATE
```

- D. Add the following line declaration.

```
RESET LINE
  SET LINE PROTOCOL PLU
  ADD LINE L1A00001, UNDER SYSNAME \CFS,
                        UNDER NODE P1B^GATE
```


VIII. Bind the protocol support module into the Nucleus.

In the NUCLB file:

ADD CODE * FROM PLU,DELETE

IX. Build SCF and HLS obey files to start up HLS. See below for examples. Note that the pu address is the hex address (Poll/Select) of the VISA, and the lu address is the logical unit of the VISA. It is also very important that the HLS RTDATA file has been set up and compiled for all profiles and binds that need. Reference your HLS/SNAX manual for information.

A. Make sure you have set up a RDTDATA file in which you have put definitions in for the Profile you will be using. Note that this profile name must be in Device definition.

B. Set up an obey file to compile the HLS data files.

```
purge ordtdata
rename rtdtdata,ordtdata
run $system.system.hlsrdtd/in rdttext,out $s.#rdtcomp/rdtdtdata
```

C. SCF config file to define line parameters:

```
assume line $VISA1
ALLOW 3 ERRORS
add line,character set ascii
add pu $VISA1.#pu1,type(13,2),recsize 265, maxlus 2,address %he4
add lu $VISA1.#lu1,type(14,0),pname #pu1, recsize 265, & protocol
    snalu, address 1, character set ascii
start subsys $SSCP
```

D. SCF start file to start the line:

```
allow 3 errors
start subsys $SSCP
assume line $VISA1
start line
start, sub all
```

E. HLS start file to start the HLS process:

```
run $system.system.hlsobj/in rtdtdata,name $hls,nowait,out &
$s.#dhl,CPU 1/0,abend^on^error on,max^lus 100
```

****NOTE - HLS will only support 50 open sessions per HLS process. If you have more than 50 devices you will need to add additional HLS process.

X. Bring up your VISA lines and stations in the following manner.

1. Start up HLS using your HLS obey file.
2. SCF/in/ your SCF config file.
3. SCF/in/ your SCF start file.
4. From a network control facility, start your VISA line and station.

XI. The following are examples of a Bind and Profile used for the Rdttext file for a VISA.

A. Bind definition for VisaNet:

```
!-----
reset BIND
! Bind BVISALU0 BIND FOR VISA SNA LU_0
  set bind bind-type          NONNEGOTIABLE
  set bind fm-profile         4
  set bind ts-profile         3
  set bind pri-chain-use      SINGLE-RU
  set bind pri-rq-mode        IMMEDIATE
  set bind pri-chain-protocol ANY
  set bind pri-two-phase-commit FALSE
  set bind pri-compression-ind FALSE
  set bind pri-eb-send        FALSE
  set bind sec-chain-use      SINGLE-RU
  set bind sec-rq-mode        IMMEDIATE
  set bind sec-chain-protocol EXCEPTION
  set bind sec-two-phase-commit FALSE
  set bind sec-compression-ind FALSE
  set bind sec-eb-send        FALSE
  set bind no-segments        FALSE
  set bind fm-header-use      FALSE
  set bind brkt-reset         INB
  set bind brkt-term          UNCONDITIONAL
  set bind alt-code-use       FALSE
  set bind seqno-use          FALSE
  set bind bis-sent           FALSE
  set bind bind-queuing       FALSE
  set bind send-recv          FDUX
  set bind recovery-mode      LOSER
  set bind contention-winner  SECONDARY
  set bind hdx-ff-reset-sender SECONDARY
  set bind sec-send-pacing-size 7
  set bind sec-max-ru         832
  set bind sec-recv-pacing-size 7
  set bind pri-max-ru         832
  set bind lu-session-type    0
  set bind ps-usage           000000000000000000000000
  set bind plu-name           NETPNAME
add BIND                      BVISALU0
```

B. Profile definition for VisaNet:

```
!-----  
reset PROFILE  
! Profile PVISALU0 PROFILE FOR VISA SNA LU_0 (NETPNAME)  
  set profile bind-name          BVISALU0  
  set profile open-mode          ACQUIRE  
  set profile hs-polarity        PRIMARY  
  set profile want-sscp-text     FALSE  
  set profile response-type      1  
  set profile pipeline-lu-ind     FALSE  
  set profile translate          FALSE  
  set profile lmo                FALSE  
  set profile max-requests       3  
  set profile want-bind-data     NONE  
  set profile user-responses     FALSE  
  set profile want-flow-control  FALSE  
  set profile encode-eri         FALSE  
  set profile single-fmh         FALSE  
  set profile omit-modem-wait    FALSE  
add PROFILE          PVISALU0
```

Appendix C

X.25 Protocol

Network Environment Declarations

The following information gives example Device, Station and Line declarations that can be used when communicating with VISA utilizing VISA's X.25 protocol. These definitions may be declared via a network control facility. For further information see the "NET24-XPNET Network Control Command Reference Manual".

RESET PROCESS

```
SET PROCESS LIBRARY $SYSACI.XPNET.SKELB
SET PROCESS PROGRAM $vol.xxxxOBJ.VISA
SET PROCESS PPD $SBVI
SET PROCESS PRIORITY 159
SET PROCESS CPU 5
SET PROCESS QAT 0
ADD PROCESS P1B^VISA, UNER SYSNAME \CFS, UNDER NODE P1B^GATE
```

RESET DEVICE

```
SET DEVICE RECVLEN 512
SET DEVICE XMITLEN 512
ADD DEVICE VISA1^SWITCH^X25, UNDER SYSNAME \CFS, UNDER NODE
P1B^GATE
```

RESET LINE

```
SET LINE ETE NONE
SET LINE PORT $COM22.#PORT100
SET LINE WFCALL ON
SET LINE RECALL 2
SET LINE DUPLEX FULL
SET LINE VERDTE OFF
SET LINE PROTOCOL X.25
ADD LINE L1B^X25^01, UNDER SYSNAME \CFS, UNDER NODE P1B^GATE
```

RESET STATION

```
SET STATION DESTINATION P1B^VISA
SET STATION DEVICE VISA1^SWITCH^X25
SET STATION LINENAME \CFS.P1B^GATE.L1B^X25^01
ADD STATION S1BX2501, UNDER SYSNAME \CFS, UNDER NODE P1B^GATE
```

NOTE: For D Series Operating Systems and above, Subsystem Control Facility (SCF) commands will replace the CMI commands used to start the X.25 sessions in the following example. For further information on SCF, see Tandem manual "Subsystem Control Facility (SCF) Reference Manual".

CMI OBEY File

The following is a list of Communication Management Interface (CMI) commands to start the X.25 sessions. For further information on CMI, see Tandem manual "Communication Management Interface Operator Reference Manual".

The customers system management group should be responsible for correctly configuring the X.25 ports. Any sample configuration we provide may not cover all of the available options the customer may wish. Here is a sample configuration and it may not include how the customer may eventually implement its X.25 configuration.

The user will also have to type the following commands under CMI. (D customers and above will be using SCF commands and should refer to the SCF example following the CMI example.)

CMI Example:

```
assume line $<ldev name>
abort
alter      ,      netaddr <my DTE address>
alter      ,      framemode <dte or dce>
alter      ,      extended off
alter      ,      netid <my netid>
abort      su      under
delete     su      under
add        su      #<port name>, recsize 128, protocol ptp, type(9,0)
add        su      #<port name>, recsize 128, protocol ptp, type(9,0)
add        su      #<port name>, recsize 128, protocol ptp, type(9,0)
start
```

SCF Example:

```
assume line $<ldev name>
abort
alter      ,      netaddr <my DTE address>
alter      ,      framemode <dte or dce>
alter      ,      extended off
alter      ,      netid <my netid>
abort      sub      all
delete     sub      all
add        su      #<port name>, recsize 128, protocol ptp, devtype(9,0)
add        su      #<port name>, recsize 128, protocol ptp, devtype(9,0)
add        su      #<port name>, recsize 128, protocol ptp, devtype(9,0)
start      sub      all
start
```

ACI Worldwide, Inc.

Appendix D

3270 Multipoint Protocol

Network Environment Declarations

Sample declarations are provided below. For further information, refer to the "NET24-XPNET Network Control Command Reference Manual".

RESET PROCESS

```
SET PROCESS LIBRARY $SYSACI.XPNET.SKELB
SET PROCESS PROGRAM $vol.xxxxOBJ.VISA
SET PROCESS PPD $VISA
SET PROCESS PRIORITY 139
SET PROCESS CPU 1
ADD PROCESS P1A^VISA, UNDER SYSNAME \CFS, UNDER NODE P1A^GATE
```

RESET DEVICE

```
SET DEVICE RECVLEN 4000
SET DEVICE XMITLEN 1000
ADD DEVICE VISA^SWITCH, UNDER SYSNAME \CFS, UNDER NODE
P1A^GATE
```

RESET LINE

```
SET LINE ERANALYSIS 30
SET LINE PORT $SYNC6
SET LINE TIMEOUT 100
SET LINE PROTOCOL CBIS
SET LINE RETRY 3
ADD LINE L1A^VISA, UNDER SYSNAME \CFS, UNDER NODE P1A^GATE
```

RESET STATION

```
SET STATION DESTINATION P1A^VISA
SET STATION PADDRESS " " 128
SET STATION SADDRESS " " " "
SET STATION RETRY 3
SET STATION DEVICE VISA^SWITCH
SET STATION LINENAME \CFS.P1A^GATE.L1A^VISA
ADD STATION S1A^VISA, UNDER SYSNAME \CFS, UNDER NODE
P1A^GATE
```

ACI Worldwide, Inc.

Appendix E

TCP/IP Protocol

Network Environment Declarations

Sample declarations are provided below. For further information, refer to the "NET24-XPNET Network Control Command Reference Manual".

To implement this change within the XPNET configuration, three network environment declarations are required. For further information, refer to the "NET24-XPNET Network Control Command Reference Manual".

If no userdata is defined for the station, then at least 17 bytes of station userdata must be declared. This may be accomplished by declaring userdata for the station via a network control facility as follows:

```
RESET STATION USERDATA
  OFFSET 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
```

A new DEVICE declaration must be added. This new DEVICE will be used by the VISANET STATIONS. The INPUT FORMAT and OUTPUT FORMAT macro definitions must be enhanced to recognize the existence of additional reserved bytes in the VisaNet format. As an example:

```
RESET DEVICE
SET DEVICE RECVLEN 2048
SET DEVICE XMITLEN 2048
SET DEVICE POLLFORMAT EOT P1 P2
SET DEVICE SELECTFORMAT EOT P1 P2
SET DEVICE INPUTFORMAT ? ? ^ TXT
SET DEVICE OUTPUTFORMAT NUL NUL TXT
ADD DEVICE CTS^VISANET^DEV, UNDER SYSNAME \CFS,
  UNDER NODE P1A^NODE
```

Note that the INPUT FORMAT and OUTPUT FORMAT were modified to account for additional bytes in the record format.

The LINE entry must be modified to refer to the CTS protocol. For example:

```
RESET LINE
SET LINE ERANALYSIS 30
SET LINE PORT $TVIS
SET LINE CMETHOD ACCEPT
SET LINE FMM ALL
SET LINE PROTOCOL CTS
ADD LINE L1A^VISA, UNDER SYSNAME /CFS
        UNDER NODE P1A^NODE
```

The STATION entry must be modified to refer to the modified DEVICE entry. In addition, the USERDATA (which was declared globally above) must be supplied a value to indicate the new VisaNet record format to the CTS/E. To do this, refer to the USERDATA by the globally-defined name and supply a value of "-2 -K+". The "-2" indicates the VisaNet format and the "-K+" indicates the presence of KEEPALIVE functionality within the Tandem TCP/IP layer. For example:

```
RESET STATION
SET STATION DESTINATION P3A^VISA
SET STATION DEVICE CTS^VISANET^DEV
SET STATION RADRESS
SET STATION LINENAME \CFS.P1A^GATE.L1A^VISA
SET STATION USERDATA OFFSET 0 "-2 -K+" 0
ADD STATION S1A^VISA, UNDER SYSNAME \CFS,
        UNDER NODE P1A^NODE
```

The SEND-ETX LCONF param needs to be present for the Visa process and should be set to "N".

HEARTBEAT AND SHUTDOWN MESSAGES

VISA uses a heartbeat and shutdown message for customers using the Direct Exchange program instead of connecting through a VAP.

Appendix F

Tokens

The table below identifies the various tokens used by the VisaNet ISO Interface along with their token IDs. For more information on these tokens, refer to the "BASE24 Tokens Manual", "BASE24-atm EMV Support Manual" and "BASE24-pos EMV Support Manual".

ID	Token Name	Product
03	AT 50 token	BASE24-atm
04	PS 50 token	BASE24-pos
05	Check Auth token	BASE24-pos
12	MICR Data token	BASE24-base
16	Alternate Merchant ID token	BASE24-pos
17	PS2000 token	BASE24-pos
18	Account Qualifier token	BASE24-base
19	PS2000 Offline token	BASE24-pos
20	Interchange Compliance token	BASE24-pos
21	PS2000 ATM token	BASE24-atm
23	Track 1 token	BASE24-base
24	AT Flag 1 token	BASE24-atm
25	Surcharge token	BASE24-base
29	Check Auth2 token	BASE24-pos
31	Check Callback token	BASE24-pos
A5	Non-currency Dispense token	BASE24-atm
A6	Interchange Compliance ATM token	BASE24-atm
B2	EMV Request Data token	BASE24-base
B3	EMV Discretionary Data token	BASE24-base
B4	EMV Status token	BASE24-base
B5	EMV Response Data token	BASE24-base
B6	EMV Script Data token	BASE24-base
B8	Transaction Profile token	BASE24-base
B9	Transaction Description token	BASE24-base
BA	Acquirer Routing token	BASE24-base
BJ	EMV Issuer Script Results token	BASE24-base
C0	PS 51 token	BASE24-pos
C2	Purchase token	BASE24-pos
C4	Point of Service Data token	BASE24-pos
C6	Trans Stain token	BASE24-pos
C7	Cardholder Serial Number token	BASE24-pos
C8	Merchant Serial Number token	BASE24-pos

Tokens

CB	POS Balances Token	BASE24-pos
CF	IAVS Data token	BASE24-pos
CQ	Reward Token	BASE24-pos
CT	Transaction Specific Data Token	BASE24-pos
CV	Healthcare Transit Token	BASE24-pos
CW	Healthcare Service Token	BASE24-pos
CZ	POS Data2 Token	BASE24-pos
S0	Intra-Country Data Token	BASE24-base
S1	Gateway Information Token	BASE24-base
S4	EMV Supplemental Data Token	BASE24-base

The table below identifies the various tokens used by the VisaNet ISO Interface along with their token IDs. Each of these tokens is described on the following pages.

ID	Token Name	Product
B0	Switch Token (Acquirer)	BASE24-base
B1	Switch Token (Issuer)	BASE24-base

Switch Token (Token Ids B0 And B1)

Described below are the fields in the VISA Switch token which redefines the Switch token (swi-tn).

<u>Position</u>	<u>Level</u>	<u>Field Name and Description</u>	<u>Data Type</u>
1-147		VISA-SWI-TKN-DATA	
1	02	LGTH Indicates the length of the Switch token.	BINARY 16 SIGNED
3	02	FIID The FIID for the specific switch. For Visa the FIID will be "VISA".	PIC X(4).
7	02	VER-ID Indicates the version of the Switch token. At this time the version is 17.	PIC X(2).
9	02	NTWK-ID-CDE Bit-63.1 (sem.vdcs^private.ntwk^id^cde) The Network ID identifies the originating or an interim network.	PIC X(4).
13	02	ISS-INST-ID-CDE Bit-121 (sem.iss^inst^id.cde) A Visa defined code that identifies the issuer when the issuer cannot be determined from the account number in the message.	PIC X(11).
24	02	SETL-DAT Bit-15 (sem.setl^dat) The transaction's settlement month and day. (mmdd)	PIC 9(4).

28	02	FWD-INST-CDE	PIC X(11).
		Bit-33 (sem.fwd^inst.cde)	
		The forwarding institution identification code. This code identifies the message originator.	
39	02	POS-ENTRY-MDE	PIC 9(4).
		Bit-22 (sem.pos^entry^mde)	
		The Visa value for Point of Service Entry Mode. Identifies the actual method used to capture the account number and expiration date when a terminal is used.	
43	02	RESP-CDE	PIC X(2).
		Bit-39 (sem.resp^cde)	
		This field contains the response code associated with this transaction.	
		This token field will not contain significant data in Acquirer tokens, B0, when BASE24 is the authorizer.	
45	02	USER-APR08-FLD	PIC X(6).
51	02	MRCH-VOL-IND	PIC X(2).
		Bit-63.18 (sem.vdcs^private.mrch^vol^ind)	
		Merchant Volume Indicator. To be used in Visa's Volume-tiered Interchange Fee Program.	
53	02	INTRNTL-SRV-ASMNT	PIC X.
		Bit-63.21 (sem.vdcs^private.intrntl^srv^asmnt)	
		Indicates if the transaction was assessed an international service fee.	

54	02	CRD-RSLTS	PIC X(2).
		Bit 2 of bit 62.23 (sem.payment^srv^fld.crd^rsIts)	
		Indicates the program the card in the transaction was eligible for.	
56	02	CCRD-IND	PIC X.
		Bit 48, usage 16 and 34 (sem.addl^visa^cmrcl^data.ccrd^ind)	
		The Visa CCDR (Commercial Card Data Repository) Indicator indicates whether CCRD data is included in the Visa Commerce transaction.	
57	02	FEE-PGM-IND	PIC X(3).
		Bit 63.19 (sem.vdcs^private.fee^pgm^ind)	
		Fee Program Indicator. A code that indicates which Fee program the message is assigned.	
60	02	STIP-CDE	PIC X(4).
		Bit 63.4 (sem.vdcs^private.stip^cde)	
		Stand In Processing Code. A code that indicates why SMS STIP responded for the issuer or why the SMS switch generated an advice.	
64	02	MSG-TYP (sem.typ)	PIC 9(4).
		Message Type. The type of message that was sent to Visa (0100, 0110, 0200, etc.).	

68	02	DEF-BILL-IND	PIC X.
		Bit 3 of bit 126.12 (sem.visa^private^use^fld.srv^dvlp^fld)	
		Deferred Billing Indicator. Identifies transactions for which the billing of the merchandise occurred after the merchandise was delivered to the cardholder.	
		USER-OCT02-FLD5 REDEFINES DEF-BILL-IND	
		This field has been replaced by the DEFERRED-BILLING-IND field in the POS Merchant token.	
69	02	PROC-CDE	PIC X(6).
		Bit 3 (sem.proc^cde)	
		Processing Code. The processing code that was sent to or received from Visa.	
75	02	REIMB-ATTR	PIC X.
		Bit 63.11 (sem.vdcs^private.reimb^att)	
		Reimbursement Attribute. A code that identifies the applicable interchange reimbursement fee for the transaction.	
76	02	ECOMM-GDS-IND	PIC X(2).
		Bit 62.19 (sem.payment^srv^fld.ecomm^gds^ind)	
		Electronic Commerce Goods Indicator. A code indicating the type of goods purchased in an Internet transaction.	
		USER-OCT02-FLD6 REDEFINES ECOMM-GDS-IND	
		This field has been replaced by the E-COMM-GOODS-IND field in the POS Merchant token (new token).	

78	02	CAVV-RSLT-CDE	PIC X.
Bit 44.13 (sem.add^resp^data.info^r.cavv^rslt^cde)			
Cardholder Authentication Verification Value. A code indicating the outcome of CAVV validation.			
USER-OCT02-FLD7 REDEFINES CAVV-RSLT-CDE			
This field has been replaced by the CAVV-AAV-RSLT-CDE field in the PS51 token (new field).			
79	02	MRCH-VRFCN-VAL	PIC X(10).
Bit 62.20 (sem.payment^srv^fld.mrch^vrfcn^val)			
Merchant Verification Value. A code assigned by Visa and the acquirer to a specific merchant.			
89	02	TRACE-NUM	PIC X(6).
Bit 11 (sem.trace^num)			
Trace Number. A number that uniquely identifies a cardholder transaction.			
95	02	REF-NUM	PIC X(12).
Bit 37 (sem.ref^num)			
Retrieval Reference Number. Used with other key data elements to identify and track all messages relating to a cardholder.			
107	02	OFF-PREMISE	PIC X.
Bit 4 of bit 126.12 (sem.visa^private^use^fld.srv^dvlp^fld)			
Off premise indicator. Identifies whether the terminal a transaction was initiated at a remote or non-remote ATM terminal.			
"Y" - Off premise transaction			
" " - Not an off premise transaction			

108	02	RSK. 04 SCORE 04 RSN-CDE	PIC X(2). PIC X(2).
		Bit 62.21 (sem.payment^srv^fld.rsk)	
		Risk score and reason code supplied by Visa to issuers on request and advices.	
112	02	COND. 04 CDE1 04 CER-NUM 04 CDE3	PIC X(2). PIC X(2). PIC X(2).
		Bit 62.22 (sem.payment^srv^fld.cond)	
		Condition codes supplied by Visa to issuers on request and advices.	
118	02	DEC-POSN-IND	PIC X(6).
		Bit 63.13 (sem.vdcs^private.dec^posn)	
		Visa currency precision indicator consists of three fields that are set based on the decimal positions of various amount fields in the external message. Participating acquirers set positions 1 and 2 to indicate how many decimal places the minor unit of currency contains for the transaction amount. Visa sets the remaining positions based on decimal places for the settlement amount and cardholder amount.	
		This user field was added to keep the entire switch token structure even.	
124	02	ISA-AMT 04 AMT-FEES 06 FEE-TYP 06 CRNCY-CDE 06 MINOR-UNIT 06 AMT-SIGN 06 AMT	PIC 9(2). PIC 9(3). PIC 9. PIC 9. PIC 9(8).
		Bit 46 (sem.isa^amt).	

		.Amount of assessment fees for international transactions. Available in the LAC region only.	
139	02	CHIP-TXN-IND	PIC X.
		Bit 60, subfield 6 (sem.pos^entry.emv^tran^ind)	
		Chip Transaction Indicator identifies that chip data is dropped from a Common Core Definition (CCD) or Generic EMV Transpot transaction.	
140	02	RESP-SRC-RSN-CDE	PIC X.
		Bit 44, subfield 1 (sem.add^resp^data.info^r.resp^src^rsn^cde)	
		Response Source/Reason Code - identifies the source of the field 39 response decision.	
141	02	CHRGBCK-RGHTS-IND	PIC X(2).
		Bit 62, subfield 16 (sem.payment^srv^fld.chrgbck^rghts^ind)	
		Chargeback Rights Indicator - supplied by Visa on request and response for ATM Transactions.	
143	02	MIS-CAS-CDE	PIC X(4).
		Bit map position 63.3 (sem.vdcs^private.mis^cas^cde)	
		Message Reason Code - contains a code explaining the reason for sending the message.	
147	02	PRTL-AUTH-IND	PIC X.
		Bit map position 60.10 Partial Authorization Indicator – a value “1” in this field indicates that the terminal will accept partial amount approvals.	
148	02	TRAN-FEE.	
	04	IND	PIC X.
	04	AMT	PIC 9(8).

Bit map position 28
Transaction Fee
IND is a C (credit) or D (debit).

157 02 TRAN-CRNCY-CDE PIC X(3).

Bit map position 49
Transaction Currency Code

ACI Worldwide, Inc.