

OpenCart — Materialize template

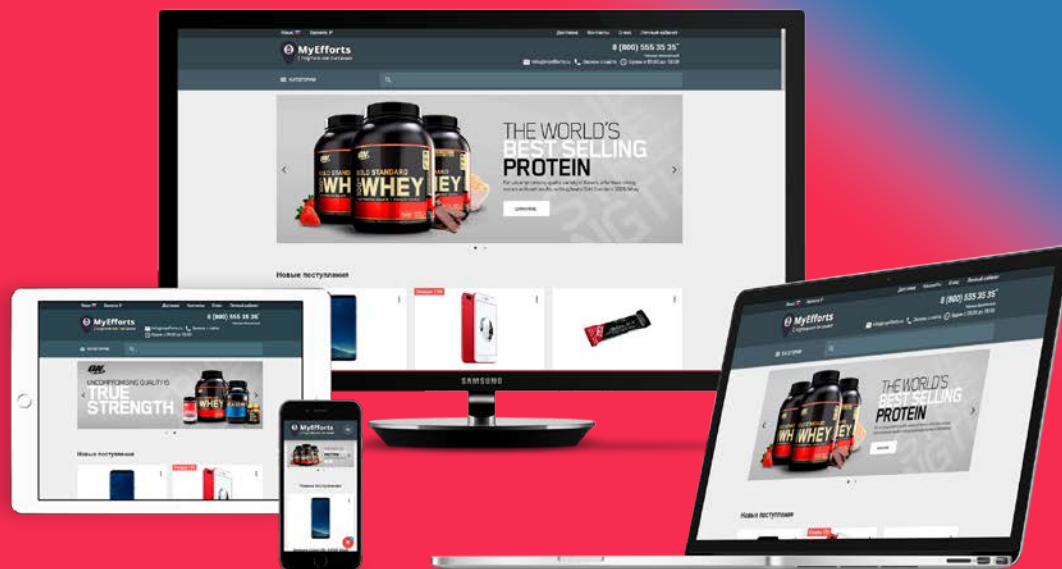




Table of contents

Installation.....	3
Installation for languages other than English and Russian.....	5
How to translate	5
Particular attention in translating.....	6
Order a translation from the theme developer	7
Add Products.....	8
Product description.....	8
Image processing in description	8
Disabling the Cart Button.....	11
Uninstall a template.....	12
Contact the developer	13
To thank the developer	13

Installation

1. Copy the **materialize** folder to: /catalog/view/theme;
2. Open **phpMyAdmin** and import the file **sql_install_materialize_theme.ocmod** from the install/sql;
3. Go to the administrative part of your site:
 - 3.1. Open the «Extensions»;
 - 3.2. Open the «Extension Installer»;
 - 3.3. Click the "Download" button and install the files from the install/ocmod folder in sequence:
 - 3.3.1. **materialize_theme.ocmod.xml**
 - 3.3.2. **materialize_english.ocmod.xml**¹
 - 3.3.3. **materialize_russian.ocmod.xml**²
 - 3.4. In the same section of the «Extensions» open the «Modifications»;
 - 3.5. In the upper right corner click the «Update» button ;
 - 3.6. In the same section of the «Extensions» open the «Extensions»;
 - 3.7. In the drop-down list, select «Themes» and opposite the name of your site, click the «Edit» button ;
 - 3.8. Opposite to the «Theme Directory» in the drop-down list, select **materialize**;
 - 3.9. Specify the recommended settings for the **materialize** template according to the table below:

Products	
Default Items Per Page	18

¹ If you do not need English, skip this step.

² If you do not need Russian, skip this step.


List Description Limit	460
Images	
Category Image Size	100x100
Product Image Thumb Size	250x250
Product Image Popup Size	1200x1200 (2000x2000 maximum)
Product Image List Size	250x250
Additional Product Image Size	100x100
Related Product Image Size	250x250
Compare Image Size	90x90
Wish List Image Size	47x47
Cart Image Size	42x42
Store Image Size	Dimensions according to the size of your logo.

3.10. Click the save button in the upper right corner .

Installation for languages other than English and Russian

1. Complete all steps from the installation instructions ³.
2. In the folder install/ocmod there is a file **materialize_your_language.ocmod.xml** – this is a workpiece for translation into the language you need.

How to translate

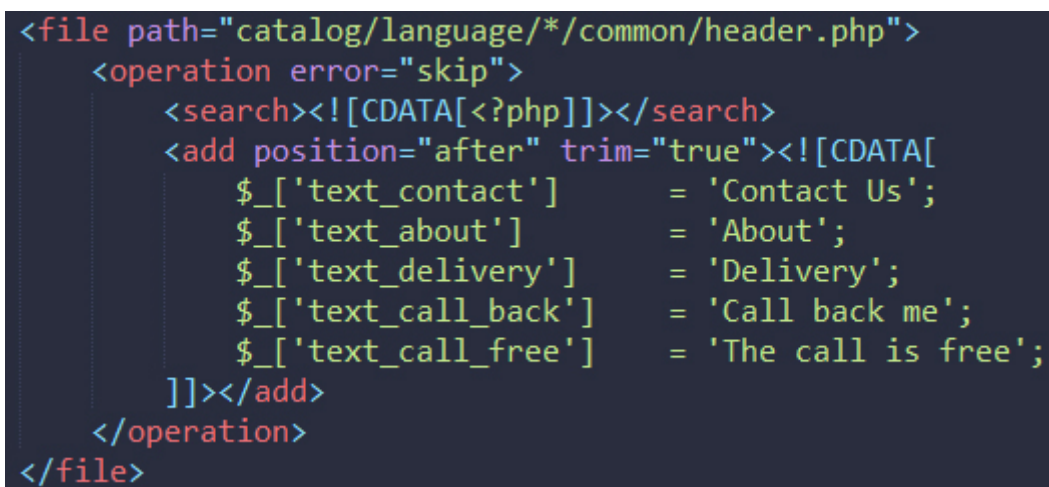

```
<file path="catalog/language/*/common/header.php">
  <operation error="skip">
    <search><![CDATA[<?php]]></search>
    <add position="after" trim="true"><![CDATA[
      $_['text_contact']      = 'Contact Us';
      $_['text_about']        = 'About';
      $_['text_delivery']     = 'Delivery';
      $_['text_call_back']    = 'Call back me';
      $_['text_call_free']    = 'The call is free';
    ]]></add>
  </operation>
</file>
```

Figure 1. An example of the text that needs to be translated.

1. The screenshot shows a typical construction of the workpiece file. In each line **catalog/language/*/** – it is necessary * to replace with the code of your language. For example, in the English file this is **en-gb** so all the lines have the form `<file path="catalog/language/*/common/header.php">`. For convenience, in your text editor use the function of multiple replacement, for example, to find: `/*/` replace everything with `/en-gb/`.
2. Opposite the text variables after the character is equal in quotation marks the text to be translated. Keeping this construction, translate everything that is in quotes to your language.

³ If you do not need English or Russian, skip steps 3.3.2. and 3.3.3. respectively.

Particular attention in translating

```
<file path="catalog/language/*/common/cart.php">
  <operation error="skip">
    <search><![CDATA[$_['text_items']      = '%s item(s) - %s';]]></search>
    <add position="replace" trim="true"><![CDATA[
      $_['text_items']      = '%s';
    ]]></add>
  </operation>
</file>
<file path="catalog/language/*/checkout/cart.php">
  <operation error="skip">
    <search><![CDATA[$_['text_items']      = '%s item(s) - %s';]]></search>
    <add position="replace" trim="true"><![CDATA[
      $_['text_items']      = '%s';
    ]]></add>
  </operation>
</file>
<file path="catalog/language/*/product/compare.php">
  <operation error="skip">
    <search><![CDATA[$_['text_compare']      = 'Product Compare (%s)';]]></search>
    <add position="replace" trim="true"><![CDATA[
      $_['text_compare']      = '%s';
    ]]></add>
  </operation>
</file>
```

Figure 2. Particular attention when translating.

Variables such as **text_items** and **text_compare** contain another variable **%s**, which is responsible for changing numbers. For the **materialize** template, all the text is cut out, leaving only the variable **%s**. Those. It's not necessary to translate, but to cut everything except **%s**. To understand which text to crop, open the files for your OpenCart translation along the appropriate paths:

- catalog/language/*/common/cart.php
- catalog/language/*/checkout/cart.php
- catalog/language/*/product/compare.php⁴

and copy the text in quotes in your language into a file-billet.

Attention! Lines **\$_['text_items'] = '%s';** and **\$_['text_compare'] = '%s';** remain unchanged!

⁴ * — instead of /*/ the code for your language, for English, for example: /en-gb/, and the whole path catalog/language/en-gb/common/cart.php


Order a translation from the theme developer

To order a translation for your language, provide a link to download your language files from the developer's site, or from the marketplace on the site opencart.com (the translate is free).

Please send the link through the contact information at the end of the documentation.

Add Products

Product description

Here, the nuances of the description of the product card through the source code will be considered . In general, all the code obeys the rules of the [Materialize](#) framework.

Headers include html header tags, starting with h2. After closing the `</h2>` tag, add the separating line with the html code `<div class="divider"></div>`. Example:

```
<h2>Обновления iPhone 7 Plus</h2>
<div class="divider"></div>
```

Figure 3. Design of headings in product description.

Add the subheads to the h3 tags, according to the hierarchical logic. Paragraphs are enclosed in the `<p></p>`. Example:

```
<p>Представляем модель iPhone 7 Plus (MPR62RU/A), выполненную в красном
цвете (Red) с объемом встроенной памяти 256GB. Долгожданная седьмая версия
iPhone от Apple (Айфон 7 от Эппл) предлагает вам проработанный дизайн,
увеличенную скорость и плавность работы, превосходное качество съемки,
улучшенный звук и удобство пользования всеми функциями аппарата благодаря
новой iOS 10.</p>
```

Figure 4. Decoration of paragraphs in the description of goods.

To create a list with a green checkmark, add the `ul list-check` class to the `ul`. Example:

<pre><ul class="list-check"> соотношение аминокислот 4:1:1; гарантированное качество Ajinomoto®; усилен 2,5 гр. глутамина; защищает мышечную ткань от возможного повреждения; увеличивает выносливость и обеспечивает энергией; помогает увеличить задержку азота и усилить синтез белка, для наращивания мышечной массы; легко растворяется и имеет потрясающий вкус. </pre>	<ul style="list-style-type: none">✓ соотношение аминокислот 4:1:1;✓ гарантированное качество Ajinomoto®;✓ усилен 2,5 гр. глутамина;✓ защищает мышечную ткань от возможного повреждения;✓ увеличивает выносливость и обеспечивает энергией;✓ помогает увеличить задержку азота и усилить синтез белка, для наращивания мышечной массы;✓ легко растворяется и имеет потрясающий вкус.
---	---

Figure 5. Decoration of the list with a green checkmark.

To design an adaptive design, use the Materialize framework grid. [More on using the grid](#).

Image processing in description

The simplest design for images with a signature:


```
<figure>
  
  <figcaption class="center">Кamera iPhone 7 Plus RED</figcaption>
</figure>
```

Figure 6. Decoration images in the product description.

[lazysizes](#)(lazyload) — lazy loading of images, to speed up page loading.

- Add the lazoload class to the **img** tag;
- Attribute **src** replace with **data-src**;
- Write a new **src** attribute, specifying a value for it
 “data:image/gif;base64,R0lGODlhAQABAAAAACH5BAEKAAEALAAAAABAAEAA
 AICTAEAOw==” (пока изображение не загрузится, вместо него будет пустое
 место) or
 “data:image/gif;base64,R0lGODlhIAAgAPUSAPr6+sTExOjo6PDw8NDQ0H5+fvb29
 ubm5vz8/JKSkoaGhuLi4qCgoD4+PkpKSmxsbAwMDAAAAP///7i4uOzs7FZWVpq
 amq6urtzc3NjY2O7u7sjlyGBgYLCwsB4eHs7OziwsLKioqHx8fF5eXkxMTAAAAAA
 AA
 AACH/C05FVF
 NDQVBFMi4wAwEAAAAh/hhPcHRpbWl6ZWQgd2l0aCBlemdpZi5jb20AlfkEBAoA/
 wAsAAAAACAAIAAABrxAiXBILElgi6JyScQYmpFlgEklXhocqLR4eFaHk0ZjAo5Oh9
 3Bl1gRwPmZnotJlgT9Xh9TheK3BJwW3tfBARcYg+BenxMAgWQSWBiTgFnjYQl
 QxaQBQxqfodraaBoCp2Xo5hFE50hqqTLDaWShaV9uFWgt7kAvr6WwcECuKSkws
 KxS8bMu7y9v9DSddG6XrDY1VzG2RraT8rdmdvmfOFyzr/nus3jvY3w37bo9H3m9
 8Xe9Wjy+f3T7qoEAQA+QQFCgASACwAAAAAGQAYAAAGIUCJcEgkGhwOQXFp
 BBAJjQahGGBKNGXLMzodjiIPJqFQ6F65w0AEbE2QnWfpELQeWBfkiRAqlzDWBV
 ZCIW9xUwMQER5NRQN5hhIFa1VCBgGXdmvlvgQGC2sNRh+XmJUHC0tQql2kAQs
 lgrElGK2xtgAErra7BrtnAMDBsL6VB8bHxsTFyMfKEgjCws7T1NXW19jXw4JBACH
 5BAUKABYALAEAAAAeAA4AAAZ4QllwSCQqFIOicslcFAqLloEpDXylTqixkaASrYJh
 NiokNLje4QZcfpIlLMhrba2tZLJmUGvBwASY0IOcn1+gW55Z1NGXQgHkIBibAtkZ
 w9fHhERjJFJYp9YHGGKmxENWJ6GI6YefEqqaSSmeE2SXgQRI2+GuEtBACH5BA
 UKABkALAcAAAAZABIAAAZ3QllwKAwEAMSkEqE0DpKLZVGTdBI7hYn0wL0eh4t
 CdtSdWoUWMZJsMH8IBPGbXXwr1FJw2RrAe5tITwNiDFcVDQ0YeUkWghgPiA0Pi

1IKkRVaepQSlpGFUGuLGA0KApuip5tGq06BIAERsbKxrrqKzs6GbC6yrC0EAlfkEBQ
oAEwAsDgAAABIAGQAABnVAyWEoLBqPACJyWVQWAXimUwjNSJ2f6jVJhW650
A2zCfYaN2KktpkoFATLD1fAcBcYY6o9QchLQnYBXH53A36HfgSKi31jBA2QkZCO
kpJ5jlyliAERb5ogEaF4hwsNoREggkwTCFQepw9xUwUQoWRzUwOFEkEAlfkEBQo
AFgAsEgABAA4AHQAABnJAiXBILBIPBmMROVAemU4ANDqIVoXT6yYQSCoJXO
43vBGMuQtEVBxtfxwePNYqNvry/t9KZe7vw0MXk4cDYTYVA+GDRwERAEGA RIEF
YsJWBERI0QMDoZDI5ldnBdEEBEgbgWZgm0emXNOAaxuDREdSkEAlfkEBQoAGA
AsCAAHABgAGQAABYggJo5kWRqGqaoAdbxrrjAwvHJsSXQM3u0s9Hy0oI95muq
QRMwg4n04esQI9LltJ3XXJKgSkXJGIQCaERQMGUWBZGAKcATqxnqwWZUGjoSA
FFGQrARERARgKe2YjAE6ChIYGDg0cS4OFYolvjyMVeylBloYiBHsXRKEkDw2iPahn
TBAQCzm0tbYhACH5BAUKABMALAcADgAZABIAAAaDQABCQiwaj8KkcolEHp5Q
aHMarQ6nWOY1yzU8u4PAYms8TMCBtABMTaudolDTMihu3JjllXlhCBgMawUFH
WVuZXwNEgQNDX4dg2NIX0QNfGOMjkQKhFkBfAVEmX6LkVgel6KNpBIJg1qtfIG
qmqKDG00dESBlq0YMBRlso2xTDg5rYEEAlfkEBQoAFgAsAgASABwADgAABXOg
JI7LaJ5o0hRQoJ6HoTJeFHkvGccm0diRBiGn2wEkD6CnM+IMYZ9j0QAsDEaJhn
AQcAG6Gegh8SiRtA/JomBVg4INrUDNNr/hvgZDtG67vUQVcnx1lxtcdkTWWhMkh
YaAKgENHD2PfJFwhH6a0QoKV0QhACH5BAUKABsALAAADgAgABIAAAV94BK
MZLBlaKquQOu2UCTPEcPe6KHvekzLNtyNxyuRTsLkS8IsohgOQIPHnFQa2CkVh3l
gGw+MdrTKfCuBIAWpJKe+wWehIGgh3Tn3JVFXzYMjA3ILTgxzggOBg055c2IPj4u
MCYd5kZJVjpaXdgZOGQUWK4qYjKOcpkKkTCEAlfkEBQoAFAAsAAAHABcAGQA
ABolAiYTBEBORh6RQuVQSIhFP4GhgAq5IKwgaIS2oYKRYyIBwC4OwevngktbwRS
MyhcftR4J+r8cLHQ2Bgg0TfhKAg4GFhnx8ho+PAQpfkBIECQWZkAIMmQVFkZ4J
GU1pdp51SwGpVVmmlot5q6W0ao5XVIZgq5S4WK22s7VCFLqqrL5+wsOVyc3M
QQAh+QQFCgAWACwAAAEADgAdAAAGekCJcCgkDIhIYSICSilZkQjDSfREj1RJIPrl
ChvX4WSCXEQbxYbaOCxE2Rx1QyQYkgLEiUM+zSbkdf4PDWxeGGULiYqJSAoFj5
AFhUqRkJNFi4pem2V4XhsBoVQEoaJJGKUbgqOhCwhEB7GYAIhYWbKGuLe6Tryj
q0NBADs=" (animated gif loader ). Example:

```

<figure>
  
  <figcaption class="center">iPhone 7 (PRODUCT)RED™ Special Edition</figcaption>
</figure>

```

Figure 7. Lazy loading of images in the description of goods.

- To increase the image by click, use [PhotoSwipe](#). You will need two versions of the image: a smaller version will be downloaded first and the original version will be downloaded by click. The link to the original image is indicated in the href attribute of the <a> tag, and you **must** specify the size of the original image in the **data-size** attribute. A thumbnail is placed inside the <a> tag. Example:

```

<figure class="waves-effect waves-light">
  <a href="image/catalog/goods/bcaa/nanox/4-1-1/original/nanox-bcaa-4-1-1-apple-
  banner.jpg" data-size="1329x827">
    
  </a>
  <figcaption class="center">Nanox BCAA powder с яблочным вкусом</figcaption>
</figure>

```

Figure 8. Enlarged image by click.

- The waves-effect and waves-light classes for figure are specified to add a "wave" effect when clicking on an image.

Disabling the Cart Button

Go to the «Data tab and go down the page, opposite the « Button cart» in the drop-down list, select «Disabled». Save the changes.








Figure 9. Disable the add to cart button.

Uninstall a template

1. Go to the administrative part of your site. Open the «Extensions», выберите «Extensions». In the drop-down list, select «Themes» and click the edit button .
Opposite the «Theme Directory» select «default» and click Save ;
2. In the same section of the «Extensions», select «Modifications». Select all additions to the Materialize theme, click the delete button , then click the update button ;
3. Open **phpMyAdmin** and import the file **sql_uninstall_materialize_theme.ocmod** from the install/sql folder;
4. Delete the **materialize** folder from: /catalog/view/theme.

Contact the developer

E-mail	gatalsky94@yandex.ru
GitHub	github.com/trydalcoholic/opencart-materialize
OpenCart Marketplace	www.opencart.com/index.php?route=marketplace/extension/info&extension_id=30715

To thank the developer

- I will be glad for the positive feedback on the OpenCart MarketPlace:
https://www.opencart.com/index.php?route=marketplace/extension/info&extension_id=30715
- Also, you can thank the developer financially thanks to this link:
<https://money.yandex.ru/to/41001413377821>