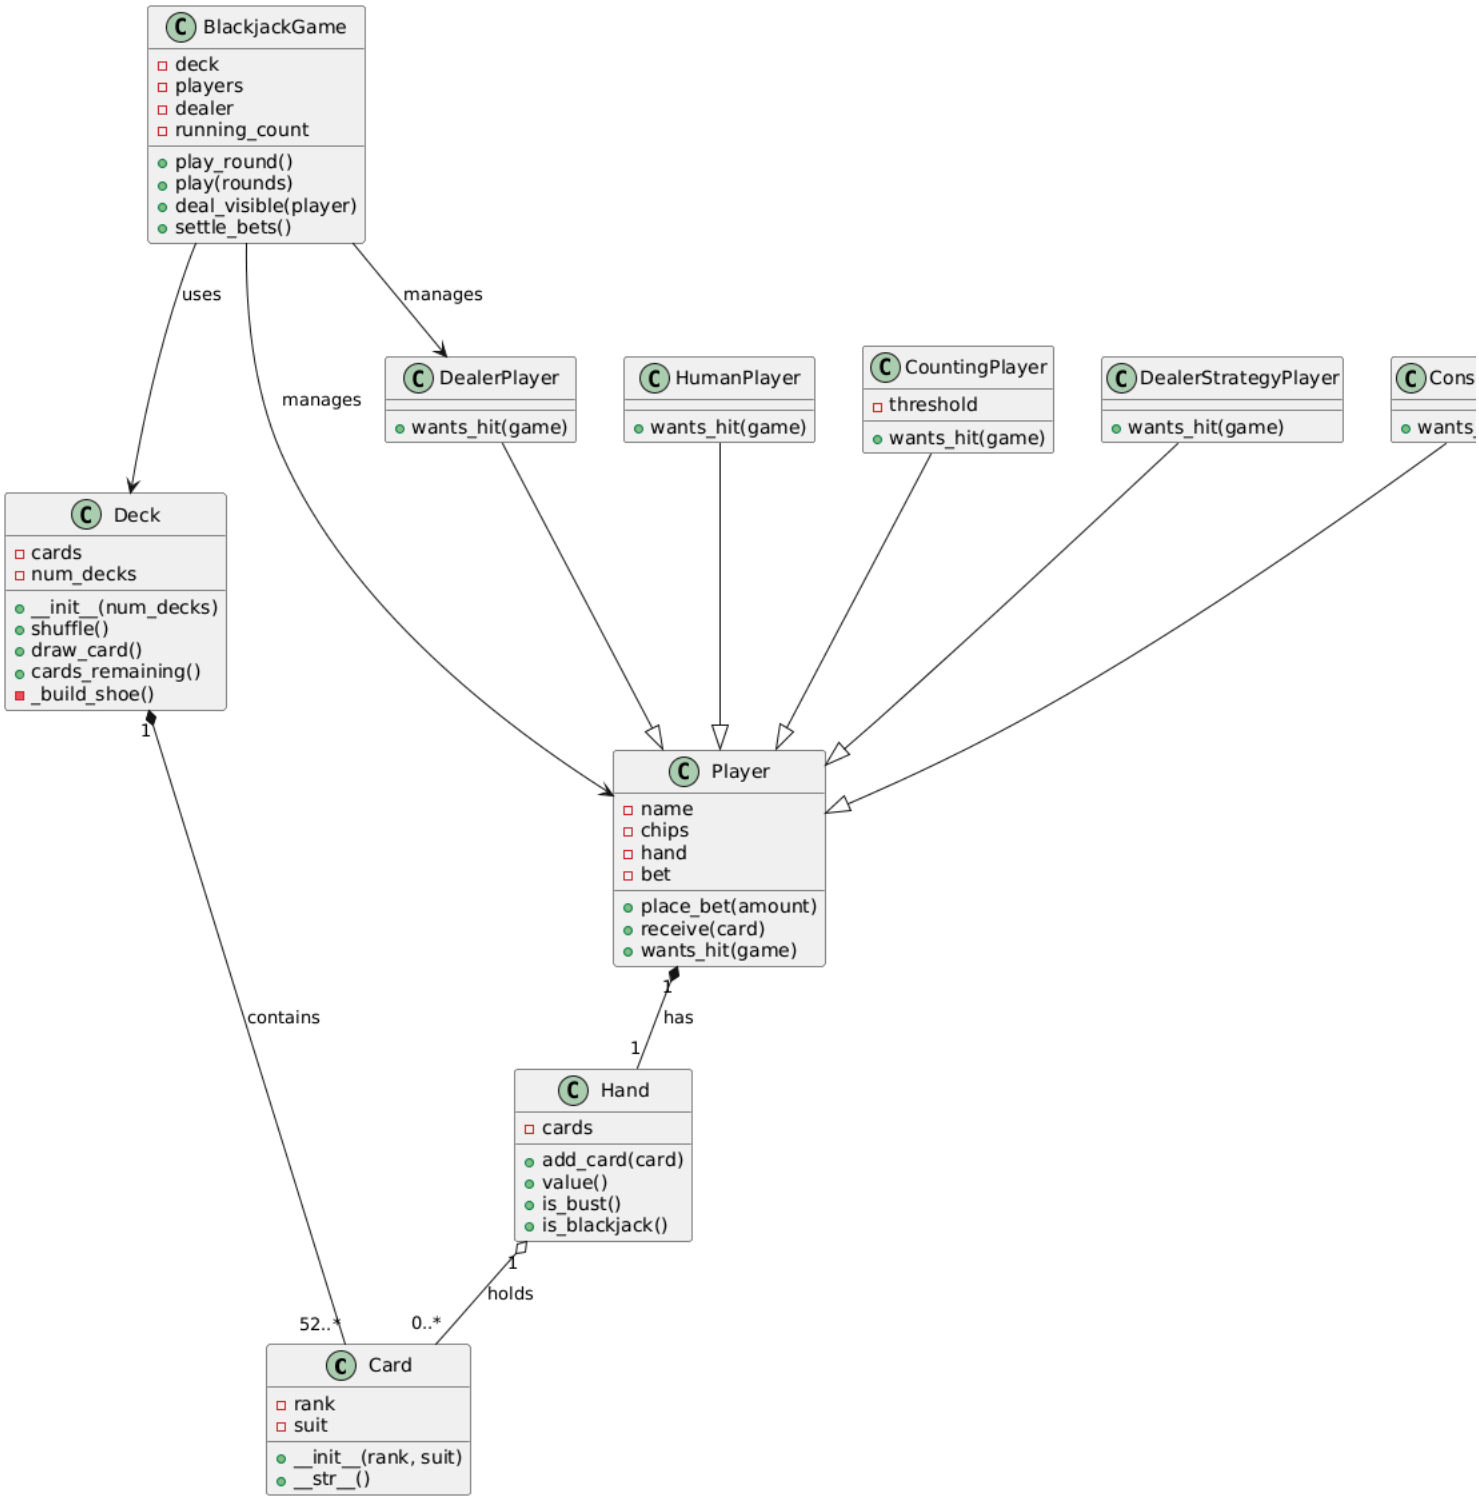

BlackjackGame
- deck
- players
- dealer
- running_count
+ play_round()
+ play(rounds)
+ deal_visible(player)
+ settle_bets()
uses
manages
manages
DealerPlayer
+ wants_hit(game)
HumanPlayer
+ wants_hit(game)
CountingPlayer
- threshold
+ wants_hit(game)
DealerStrategyPlayer
+ wants_hit(game)
Cons
+ wants_
Deck
- cards
- num_decks
+ __init__(num_decks)
+ shuffle()
+ draw_card()
+ cards_remaining()
- _build_shoe()
1
contains
Player
- name
- chips
- hand
- bet
+ place_bet(amount)
+ receive(card)
+ wants_hit(game)
1
has
1
Hand
- cards
+ add_card(card)
+ value()
+ is_bust()
+ is_blackjack()
1
holds
52..*
0..*
Card
- rank
- suit
+ __init__(rank, suit)
+ __str__()