

**Tema3\_HW3**

# **Warehouse Management**

**Indications**

# Contents

- Database Connection
- Layered Architecture
- Reflection Techniques
- Source Code



# Database Connection

# Database Connection

## Prerequisites

### Prerequisites:

- **Install MySQL and MySQL Workbench (see Install Mysql.pdf)**
- **Create a database in MySQL Workbench:**
  - **Schema:** schooldb
  - **Table:** student



# Database Connection Code

- This class contains the name of the driver (initialized through reflection), the database location (DBURL), and the user and the password for accessing the MySQL Server
- The connection to the DB will be placed in a *Singleton*\* object
- The class contains methods for creating a connection, getting an active connection and closing a connection, a Statement or a ResultSet

```
public class ConnectionFactory {  
    private static final Logger LOGGER = Logger.getLogger(ConnectionFactory.class.getName());  
    private static final String DRIVER = "com.mysql.cj.jdbc.Driver";  
    private static final String DBURL = "jdbc:mysql://localhost:3306/schooldb";  
    private static final String USER = "root";  
    private static final String PASS = "root";  
  
    private static ConnectionFactory singleInstance = new ConnectionFactory();  
  
    private ConnectionFactory() {  
        try {  
            Class.forName(DRIVER);  
        } catch (ClassNotFoundException e) {  
            e.printStackTrace();  
        }  
    }  
  
    private Connection createConnection() {}  
    public static Connection getConnection() {}  
    public static void close(Connection connection) {}  
    public static void close(Statement statement) {}  
    public static void close(ResultSet resultSet) {}  
}
```

# Database Connection

## Table Mapping

- In order to extract elements from the DB table, a special class (*named entity*) must be created.
- This class MUST have the fields exactly the same type as the columns from the corresponding table
- The class must have also constructors, getters and setters

```
public class Student {  
    private int id;  
    private String name;  
    private String address;  
    private String email;  
    private int age;  
}
```



	id	name	address	email	age
1	1	Ion	Baritiu	ion@cs.utcluj.ro	22
2	2	Maria	Observator	maria@cs.utcluj.ro	22
»		NULL	NULL	NULL	NULL

# Database Connection Dependencies

- In order for the Java application to interact with the DB, a special **.jar** library must be added to the application
- It can be added either as an external jar file dependency or as a maven dependency, in case of a Maven project

docs			File folder
src			File folder
mysql-connector-java-5.1.41-bin.jar	992,808	944,711	Executable Jar File
CHANGES	242,633	80,747	File
COPYING	18,122	6,787	File
README	61,407	13,437	File
README.txt	63,658	16,116	Text Document
build.xml	91,463	13,940	XML File

```
<dependencies>

  <dependency>
    <groupId>mysql</groupId>
    <artifactId>mysql-connector-java</artifactId>
    <version>6.0.6</version>
  </dependency>

</dependencies>
```

- The Java application uses this external library to communicate with the MySQL server
- It sends queries to the server using **Statements** and it receives the results of the queries as **ResultSet**



# Database Connection Statement

## Creating and executing a query - Statement:

- Define a string with the query
- Create a connection to the DB
- Initialize the query
- Add the parameters to the query (the ?  
Will be replaced with data from the application)
- Execute the query

```
private final static String findStatementString = "SELECT * FROM student where id = ?";

public static Student findById(int studentId) {
    Student toReturn = null;

    Connection dbConnection = ConnectionFactory.getConnection();
    PreparedStatement findStatement = null;
    ResultSet rs = null;
    try {
        findStatement = dbConnection.prepareStatement(findStatementString);
        findStatement.setLong(1, studentId);
        rs = findStatement.executeQuery();
    }
}
```

# Database Connection

## Result Set

- The results of the query execution are stored in a result set:
- Each element of the result set corresponds to a row from the table
- The result set can be iterated
- The properties/values from the columns can be extracted if the column name is known


```
rs = findStatement.executeQuery();  
rs.next();  
  
String name = rs.getString("name");  
String address = rs.getString("address");  
String email = rs.getString("email");  
int age = rs.getInt("age");
```

# Database Connection

## Closing the connection

- After each operation the connection must be closed:

- The result set
- The statement
- The connection

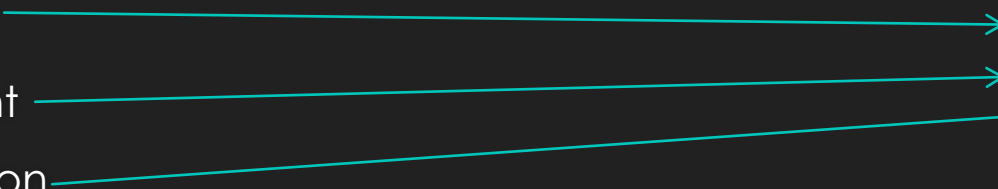


```
ConnectionFactory.close(rs);  
ConnectionFactory.close(findStatement);  
ConnectionFactory.close(dbConnection);
```

The background of the slide is split horizontally. The top half is a teal color with a fine, diagonal line pattern. The bottom half is a solid black color. A jagged, sawtooth-like line separates the two colors, starting from the left edge, dipping down, and then rising back to the top edge.


# Layered Architecture

# 3- tier architecture

- Split the application in different layers
- Each layer has a special purpose and calls functions of the layers below it

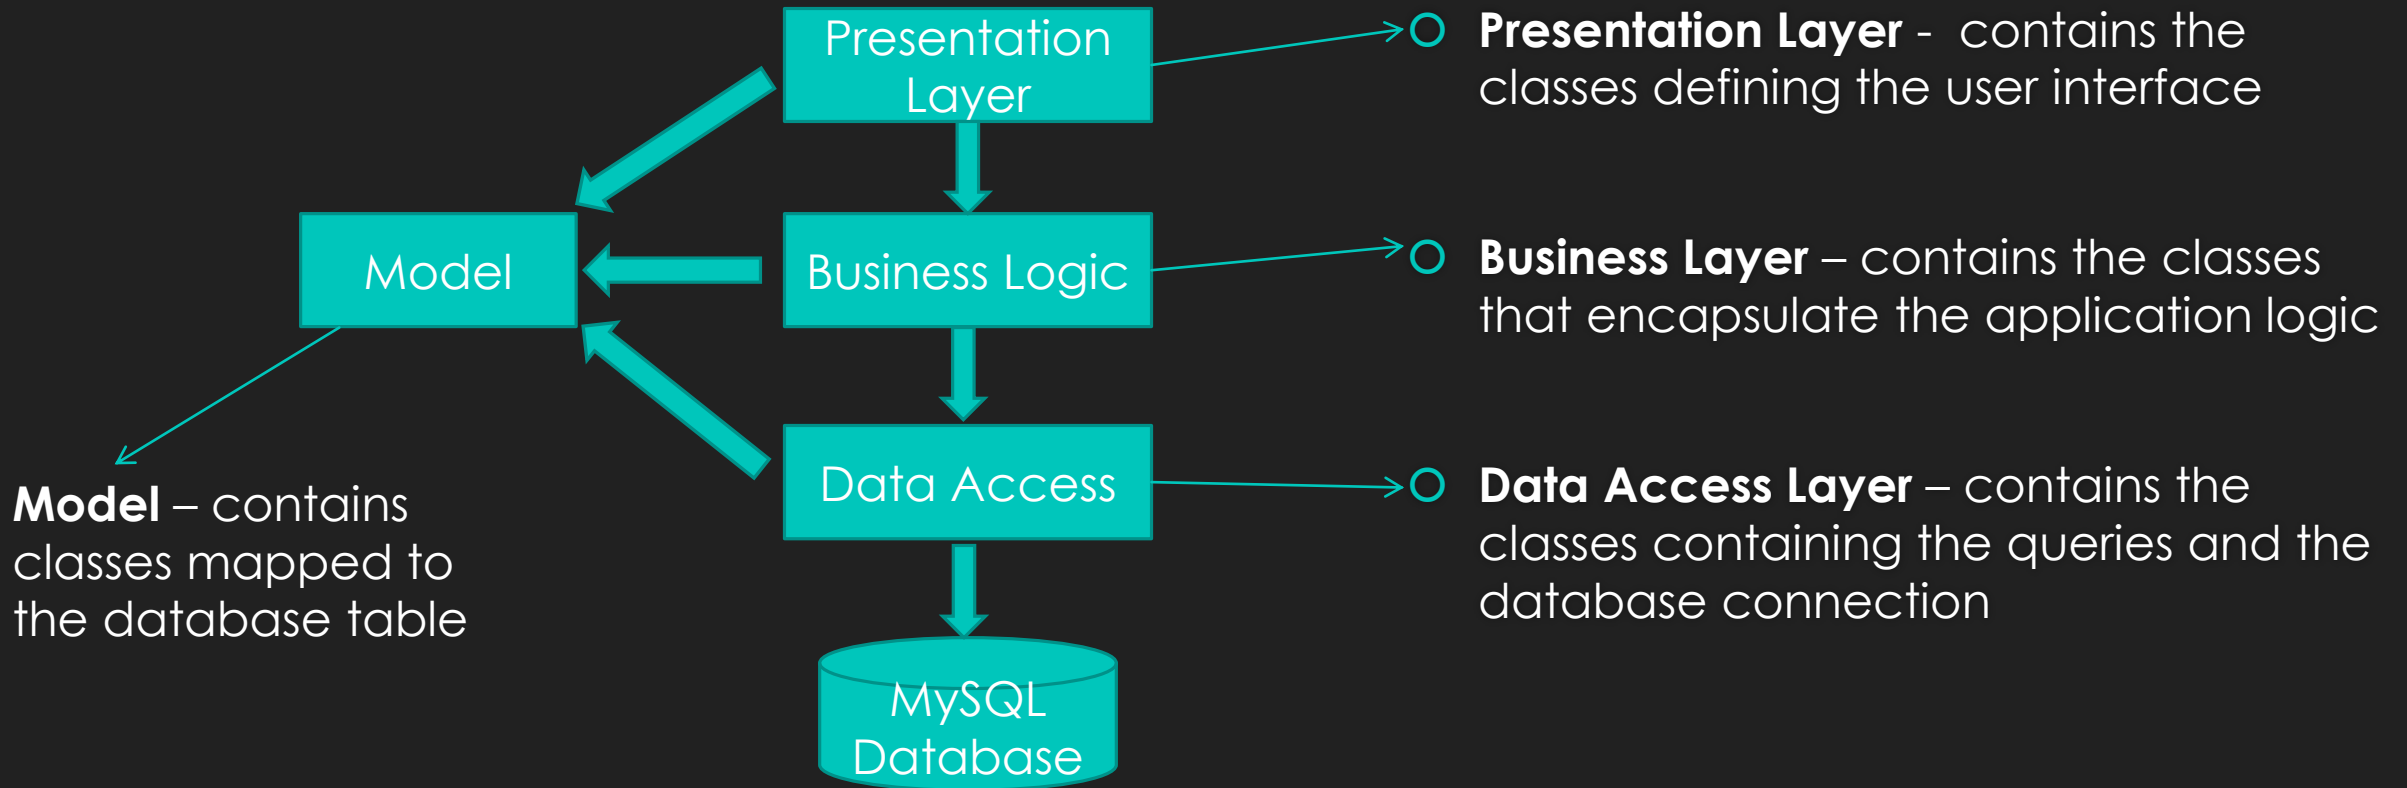

# 3- tier architecture

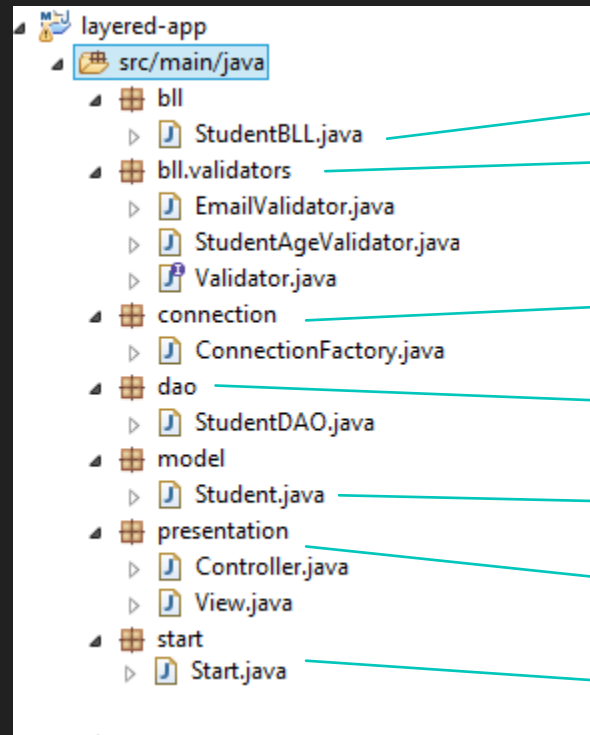

Business Logic Classes:

→ ○ StudentBLL

→ ○ Validators - validate the fields

→ Database connection

→ Database access classes (also containing queries)

→ Model Classes

→ UI Classes

→ Main Class

The background consists of a teal upper section and a black lower section, separated by a jagged horizontal line. The teal section has a fine, diagonal hatching pattern.

# Reflection Techniques

# Extract properties and values

○ Problem: Given an instance of any object, extract the fields and the corresponding values

(1) Line 9 – obtain the class of the object and request the declared fields of that class

(2) For each declared field :

- Line 10 - Set the field accessible ( most of them are private => need to change permissions)
- Line 13 - Return the value of the current field contained in the specified object
- Line 14 - Print the field's name and its value

```
5 public class ReflectionExample {  
6  
7     public static void retrieveProperties(Object object) {  
8  
9         for (Field field : object.getClass().getDeclaredFields()) {  
10            field.setAccessible(true);  
11            Object value;  
12            try {  
13                value = field.get(object);  
14                System.out.println(field.getName() + "=" + value);  
15            } catch (IllegalArgumentException e) {  
16                e.printStackTrace();  
17            } catch (IllegalAccessException e) {  
18                e.printStackTrace();  
19            }  
20        }  
21    }  
22 }  
23  
24 }
```



# Generic Repository

```
26 public class AbstractDAO<T> {  
27     protected static final Logger LOGGER = Logger.getLogger(AbstractDAO.class.getName());  
28  
29     private final Class<T> type;  
30  
31     @SuppressWarnings("unchecked")  
32     public AbstractDAO() {  
33         this.type = (Class<T>) ((ParameterizedType) getClass().getGenericSuperclass()).getActualTypeArguments()[0];  
34     }  
35 }  
36
```

- Problem: Propose a smart solution for constructing the DAO classes using Generics and Reflection
  - Line 26 - Define a class AbstractDAO that defines the common operations for accessing a table: Insert, Update, Delete, FindById, FindAll. Define the operations on the specified generic type **<T>** (! **T can be any Java Model Class that is mapped to the Database, and has the same name as the table and the same instance variables and data types as the table fields**)
  - Line 29; Line 33 - For each AbstractDAO object obtain the class of the generic type T

# Generic Repository

- Problem: Propose a smart solution for constructing the DAO classes using Generics and Reflection – *findById* method
  - Line 54- A generic query is build using the id field name (! The value "id" can be replaced in a generic way by defining a custom annotation for PK and obtaining the name of the annotated field)
  - Line 37-44- Build the generic select query using the name of the class previously obtained (! The approach considers that the name of the Java model class is the same with the table in db. For a more generic approach, define a custom annotation for the table name, where the developer can specify a name different from the name of the class)
  - Line 56- the connection is obtain from the ConnectionFactory previously defined
  - Line 58- The id is considered to be of type int. (! For a more generic approach, the type of the PK can be specified in a generic way, similarly with the generic Type T)
  - Line 61- Using the ResultSet obtained after executing the statement, we will obtain the list of objects. Only the first element is of interest, since the db should contain only one entry with the specified id

```
37 private String createSelectQuery(String field) {  
38     StringBuilder sb = new StringBuilder();  
39     sb.append("SELECT ");  
40     sb.append(" * ");  
41     sb.append(" FROM ");  
42     sb.append(type.getSimpleName());  
43     sb.append(" WHERE " + field + " =?");  
44     return sb.toString();  
45 }
```

```
50 public T findById(int id) {  
51     Connection connection = null;  
52     PreparedStatement statement = null;  
53     ResultSet resultSet = null;  
54     String query = createSelectQuery("id");  
55     try {  
56         connection = ConnectionFactory.getConnection();  
57         statement = connection.prepareStatement(query);  
58         statement.setInt(1, id);  
59         resultSet = statement.executeQuery();  
60  
61         return createObjects(resultSet).get(0);  
62     } catch (SQLException e) {  
63         LOGGER.log(Level.WARNING, type.getName() + "DAO:findById " + e.getMessage());  
64     } finally {  
65         ConnectionFactory.close(resultSet);  
66         ConnectionFactory.close(statement);  
67         ConnectionFactory.close(connection);  
68     }  
69     return null;  
70 }  
71 }
```

# Generic Repository

- Problem: Propose a smart solution for constructing the DAO classes using Generics and Reflection – *findByld method (cntd)*

- Line 72 – Given a result set, obtain the list of model objects of type T

- Line 76 - For each *result* from the ResultSet

- Line 77 – Create a new instance of type T

- Line 78 - For each *field* of the class T

- Line 79 - Retrieve from the current *result* the value of the current *field*
    - Line 80-81 – Obtain the method for setting a value to the *field*
    - Line 82 - using the obtained method set the value to the field

```
72 private List<T> createObjects(ResultSet resultSet) {  
73     List<T> list = new ArrayList<T>();  
74  
75     try {  
76         while (resultSet.next()) {  
77             T instance = type.newInstance();  
78             for (Field field : type.getDeclaredFields()) {  
79                 Object value = resultSet.getObject(field.getName());  
80                 PropertyDescriptor propertyDescriptor = new PropertyDescriptor(field.getName(), type);  
81                 Method method = propertyDescriptor.getWriteMethod();  
82                 method.invoke(instance, value);  
83             }  
84             list.add(instance);  
85         }  
86     } catch (InstantiationException e) {  
87         // ...  
88     }  
89 }
```

# Generic Repository

```
5 public class StudentDAO extends AbstractDAO<Student> {  
6  
7  
8  
9     //uses basic CRUD methods from superclass  
10  
11     //TODO: create only student specific queries  
12 }
```

- Problem: Propose a smart solution for constructing the DAO classes using Generics and Reflection- *Usage*
  - Line 5 – Define a class (StudentDAO) that extends the AbstractDAO and specify the model class used: Student
  - The generic methods are directly accessed through inheritance
  - Other specific methods can be implemented at this level

# Source Code

- Download the source code from:
  - Simple layered project: [https://utcn\\_dsrl@bitbucket.org/utcn\\_dsrl/pt-layered-architecture.git](https://utcn_dsrl@bitbucket.org/utcn_dsrl/pt-layered-architecture.git)
  - Reflection example: [https://utcn\\_dsrl@bitbucket.org/utcn\\_dsrl/pt-reflection-example.git](https://utcn_dsrl@bitbucket.org/utcn_dsrl/pt-reflection-example.git)