

VISVESVARAYA TECHNOLOGICAL UNIVERSITY

“JnanaSangama”, Belgaum -590014, Karnataka.



LAB RECORD

Computer Network Lab (23CS5PCCON)

Submitted by

Samarth Kumar Dubey (1BM23CS235)

in partial fulfilment for the award of the degree of

**BACHELOR OF ENGINEERING
in
COMPUTER SCIENCE AND ENGINEERING**



B.M.S. COLLEGE OF ENGINEERING

(Autonomous Institution under VTU)

BENGALURU-560019

Academic Year 2024-25 (odd)

B.M.S. College of Engineering

Bull Temple Road, Bangalore 560019

(Affiliated To Visvesvaraya Technological University, Belgaum)

Department of Computer Science and Engineering



CERTIFICATE

This is to certify that the Lab work entitled “Computer Network (23CS5PCCON)” carried out by Samarth Kumar Dubey (**1BM23CS235**), who is Bonafide student of **B.M.S. College of Engineering**. It is in partial fulfilment for the award of **Bachelor of Engineering in Computer Science and Engineering** of the Visvesvaraya Technological University, Belgaum. The Lab report has been approved as it satisfies the academic requirements of the above-mentioned subject and the work prescribed for the said degree.

Ramya K M Assistant Professor Department of CSE, BMSCE	Dr. Kavitha Sooda Professor & HOD Department of CSE, BMSCE
--	--

Index-Cycle-I

Sl. No.	Date	Experiment Title	Page No.
1	04/10/2024	Create a topology involving multiple hubs and a switch connecting them to simulate with simple PDU.	1
2	18/10/2024	Configure IP address to routers in packet tracer. Explore the following messages: ping responses, destination unreachable, request timed out, reply	5
3	25/10/2024	Configure default route, static route to the router	10
4	08/11/2024	Configure DHCP within a LAN and outside LAN.	18
5	22/11/2024	Configure RIP routing Protocol in Routers	24
6	22/11/2024	Configure OSPF routing protocol	28
7	22/11/2024	Demonstrate the TTL/ Life of a Packet	35
8	08/11/2024	Configure Web Server, DNS within a LAN.	38
9	20/12/2024	To construct simple LAN and understand the concept and operation of Address Resolution Protocol (ARP)	43
10	20/12/2024	To understand the operation of TELNET by accessing the router in server room from a PC in IT office.	47
11	20/12/2024	To construct a VLAN and make the PC's communicate among a VLAN	50
12	20/12/2024	To construct a WLAN and make the nodes communicate wirelessly	54

Github Link:

github.com/SankethHanasi/CN_1BM22CS242


Index-Cycle-II

Sl. No.	Date	Experiment Title	Page No.
1	15/11/2024	Write a program for error detecting code using CRC-CCITT (16-bits).	57
2	15/11/2024	Write a program for congestion control using Leaky bucket algorithm	60
3	20/12/2024	Using TCP/IP sockets, write a client-server program to make client sending the file name and the server to send back the contents of the requested file if present.	62
4	20/12/2024	Using UDP sockets, write a client-server program to make client sending the file name and the server to send back the contents of the requested file if present.	65

Cycle-I


Program 1

- i. Create a topology involving multiple hubs and a switch connecting them to simulate with simple PDU.
- ii. Procedure along with the topology

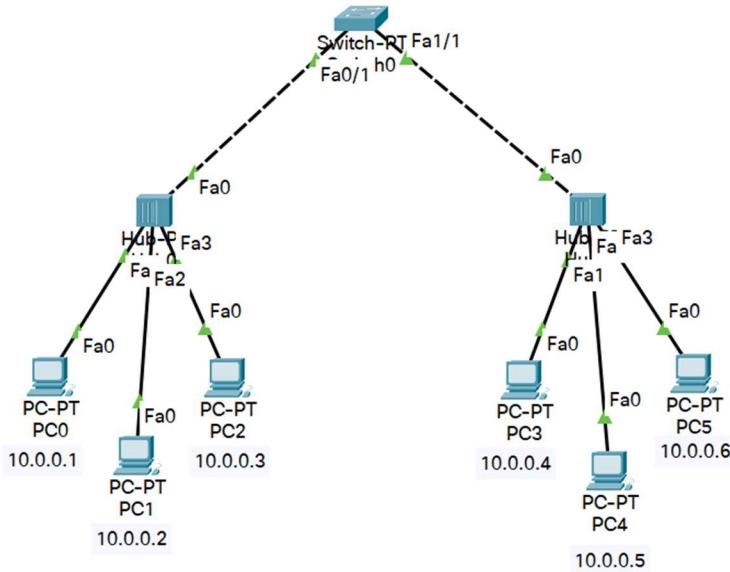


- iii. Screen shots/ output


Hub behaviour at sending end

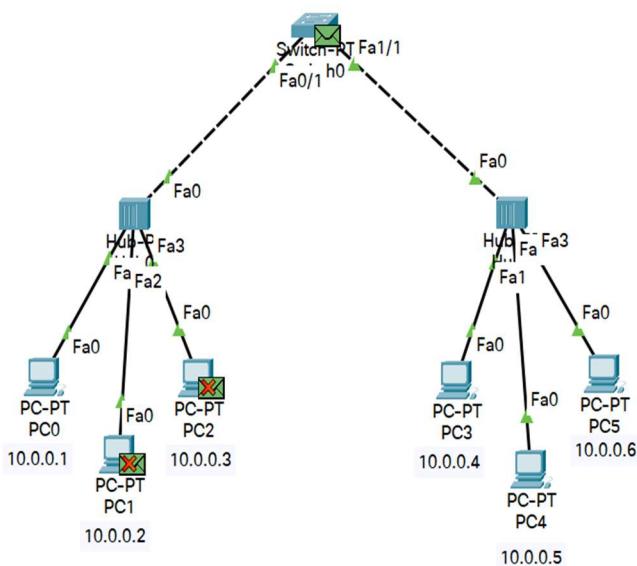


Switch behaviour

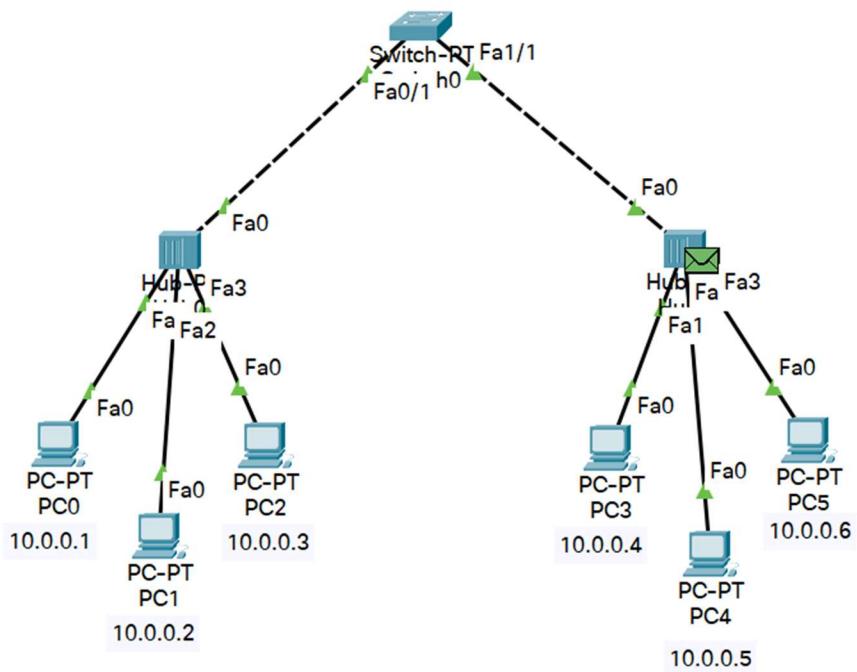

Hub behaviour at receiving end

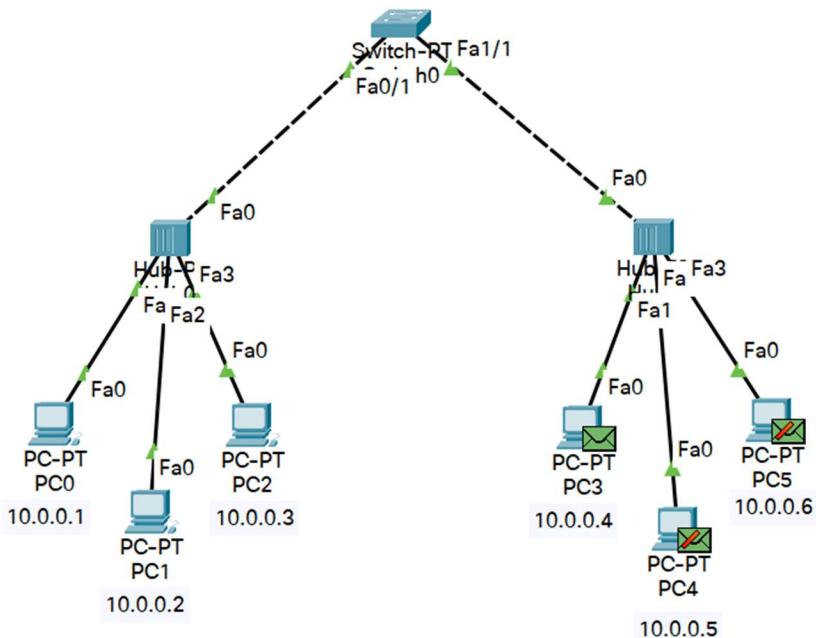

Hub behaviour when back to sender

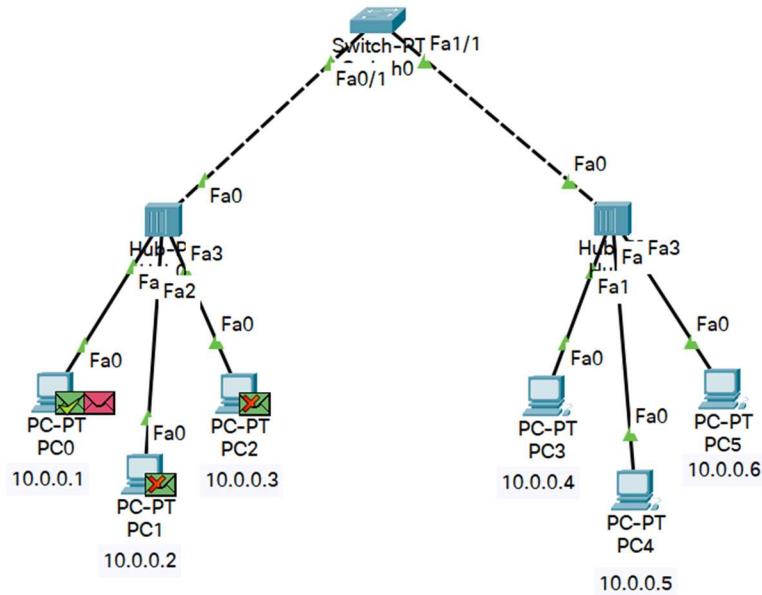

Ping command to connectivity

Screenshot of the Packet Tracer Command Prompt window:


```
Packet Tracer PC Command Line 1.0
C:\>ping 10.0.0.4

Pinging 10.0.0.4 with 32 bytes of data:
Reply from 10.0.0.4: bytes=32 time<1ms TTL=128
Reply from 10.0.0.4: bytes=32 time<1ms TTL=128
Reply from 10.0.0.4: bytes=32 time=1ms TTL=128
Reply from 10.0.0.4: bytes=32 time<1ms TTL=128

Ping statistics for 10.0.0.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms


C:\>
```

iv. Observation

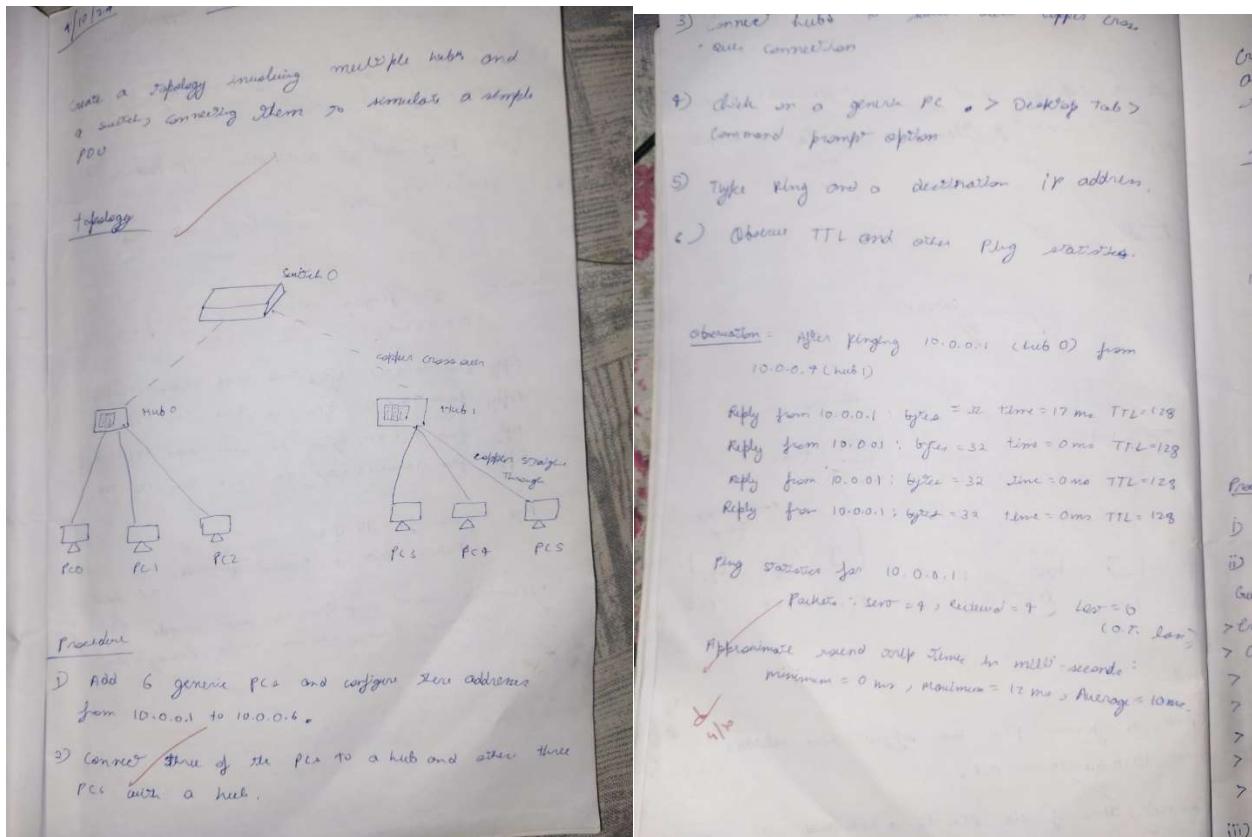

Program 2

- i. Create a topology involving multiple hubs and a switch connecting them to simulate with simple PDU.
- ii. Procedure along with the topology

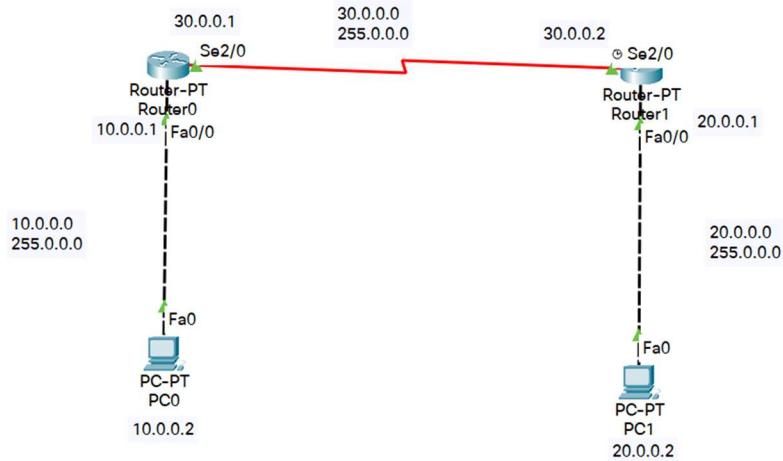

- iii. Screen shots/ output

Router0 configuration

The screenshot shows the Router0 CLI interface. The user is in configuration mode, specifically configuring the Fa0/0 and Se2/0 interfaces. The configuration commands entered are:

```
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Fa0/0
Router(config-if)#ip address 10.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed
state to up


Router(config-if)#exit
Router(config)#interface Se2/0
Router(config-if)#ip address 30.0.0.1 255.0.0.0
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to
up
```

At the bottom of the window, there are buttons for "Copy" and "Paste". A checkbox labeled "Top" is also present.

Router1 configuration

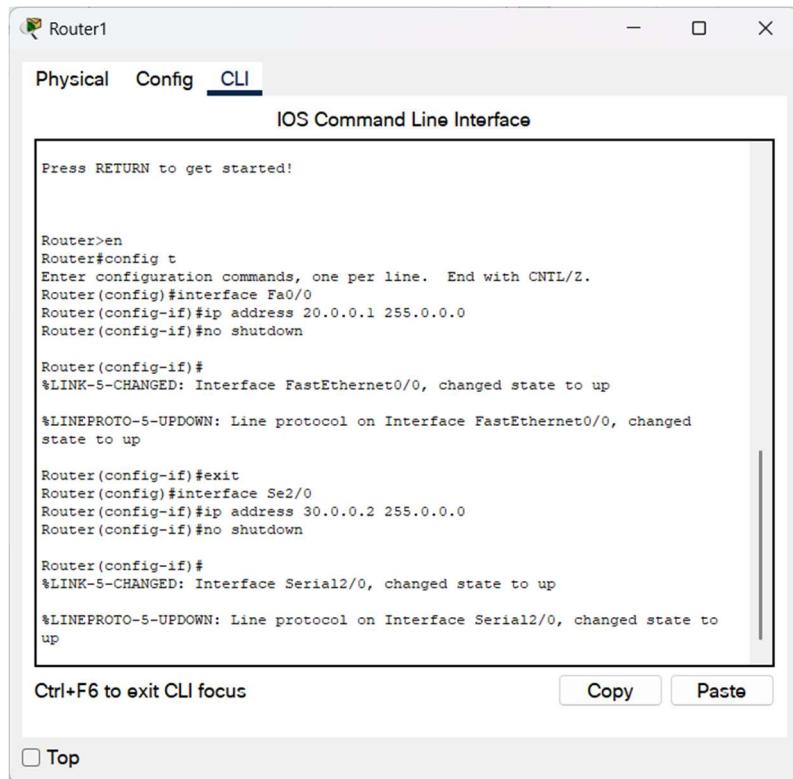

The image shows a window titled "Router1" with the tab "CLI" selected. The title bar also includes "Physical" and "Config". Below the tabs is the text "IOS Command Line Interface". A message box says "Press RETURN to get started!". The main area contains the following configuration commands:

```
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Fa0/0
Router(config-if)#ip address 20.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed
state to up

Router(config-if)#exit
Router(config)#interface Se2/0
Router(config-if)#ip address 30.0.0.2 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to
up
```

At the bottom left is the text "Ctrl+F6 to exit CLI focus". On the right are "Copy" and "Paste" buttons. Below the buttons is a checkbox labeled "Top".

Ip route command in Router0

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 20.0.0.0 255.0.0.0 30.0.0.2
Router(config)#

```

Ip route command in Router1

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z
Router(config)#ip route 10.0.0.0 255.0.0.0 30.0.0.1
Router(config)#

```

Destination host Unreachable (Before establishing network Fully)

PC1

Physical Config Desktop Programming

Command Prompt X

```
Packet Tracer PC Command Line 1.0
C:\>ping 10.0.0.2

Pinging 10.0.0.2 with 32 bytes of data:

Reply from 20.0.0.1: Destination host unreachable.

Ping statistics for 10.0.0.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

Request Timed Out

PC2

Physical Config Desktop Programming

Command Prompt X

```
Packet Tracer PC Command Line 1.0
C:\>ping 20.0.0.2

Pinging 20.0.0.2 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 20.0.0.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

Reply from Destination

PC0

Physical Config Desktop Programming

Command Prompt


```
Packet Tracer PC Command Line 1.0
C:\>ping 20.0.0.2

Pinging 20.0.0.2 with 32 bytes of data:

Reply from 20.0.0.2: bytes=32 time=1ms TTL=126
Reply from 20.0.0.2: bytes=32 time=18ms TTL=126
Reply from 20.0.0.2: bytes=32 time=1ms TTL=126
Reply from 20.0.0.2: bytes=32 time=1ms TTL=126

Ping statistics for 20.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 18ms, Average = 5ms
```

iv. Observation

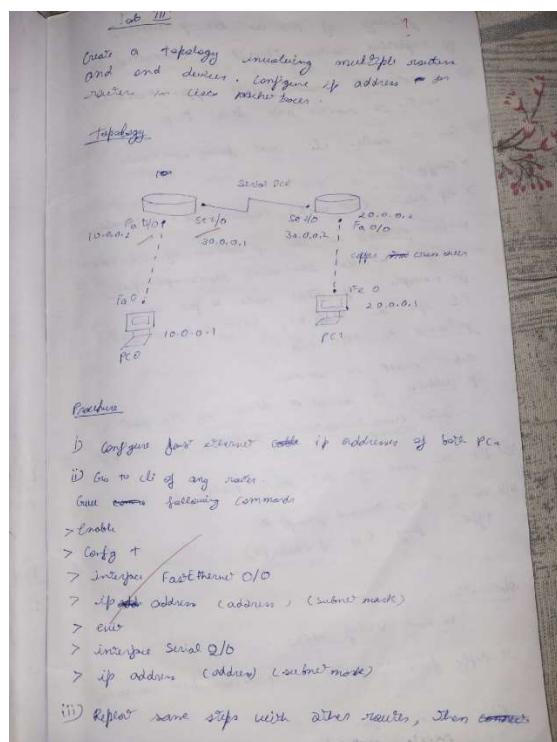

*Reply from 20.0.0.1 : bytes=32 time=8ms
TTL=126*

Ping statistics for 20.0.0.1:
 Packets: sent = 4, received = 4, lost = 0
 Approximate round trip times in milli-seconds:
 Minimum = 1ms, Maximum = 8ms, Average = 5ms

without gateway configuration


*Pinging 20.0.0.1 with 32 bytes of data:
Request timed out*

~~Ping statistics for 20.0.0.1:
 Packets: sent = 4, received = 0, lost = 4~~

Note : Show ip route command in CLI shows all connections for the router

Program 3

- i. Configure default route, static route to the router
- ii. Procedure along with the topology

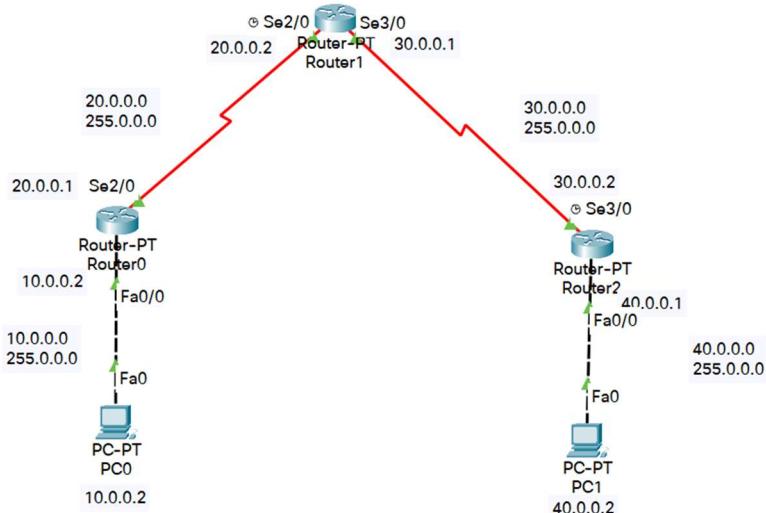

- iii. Screen shots/ output

Router0 configuration

```
Router0
Physical Config CLI
IOS Command Line Interface
Would you like to enter the initial configuration dialog? [yes/no]: n
Press RETURN to get started!

Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Fa0/0
Router(config-if)#ip address 10.0.0.2 255.0.0.0
Router(config-if)#no shutdown


Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed
state to up
%IP-4-DUPLICATE: Duplicate address 10.0.0.2 on FastEthernet0/0, sourced by
000C.CFC2.65B0

Router(config-if)#exit
Router(config)#interface Se2/0
Router(config-if)#ip address 20.0.0.1 255.0.0.0
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#
Ctrl+F6 to exit CLI focus
Copy Paste
Top
```

Router1 configuration

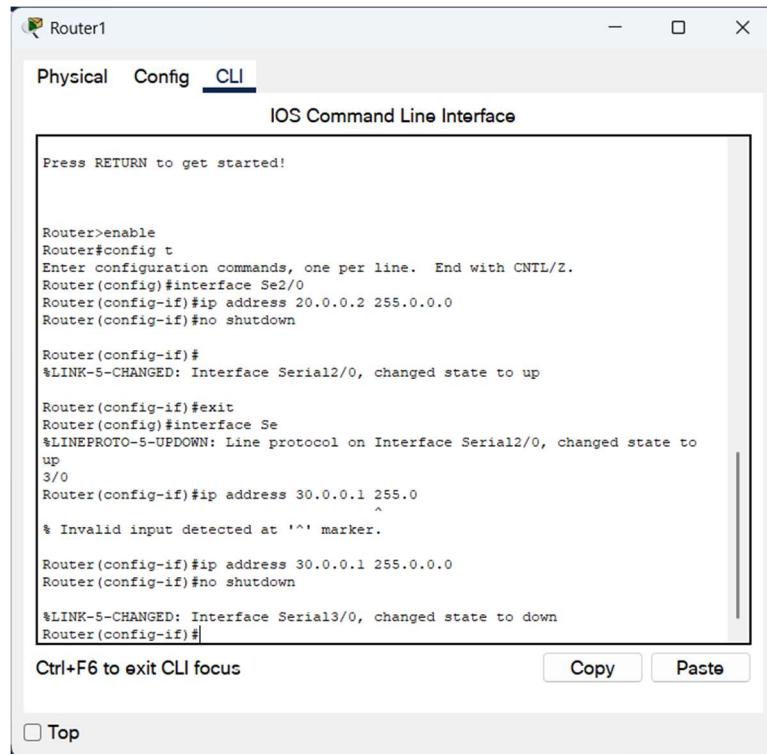

The screenshot shows a Windows-style application window titled "Router1". The tab bar at the top has three tabs: "Physical", "Config", and "CLI", with "CLI" being the active tab. The main area is labeled "IOS Command Line Interface". It displays the following configuration commands:

```
Press RETURN to get started!

Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Se2/0
Router(config-if)#ip address 20.0.0.2 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

Router(config-if)#exit
Router(config)#interface Se
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to
up
3/0
Router(config-if)#ip address 30.0.0.1 255.0
^
% Invalid input detected at '^' marker.


Router(config-if)#ip address 30.0.0.1 255.0.0.0
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial3/0, changed state to down
Router(config-if)#

Ctrl+F6 to exit CLI focus
```

At the bottom of the window, there are two buttons: "Copy" and "Paste". Below the buttons is a checkbox labeled "Top".

Router2 configuration

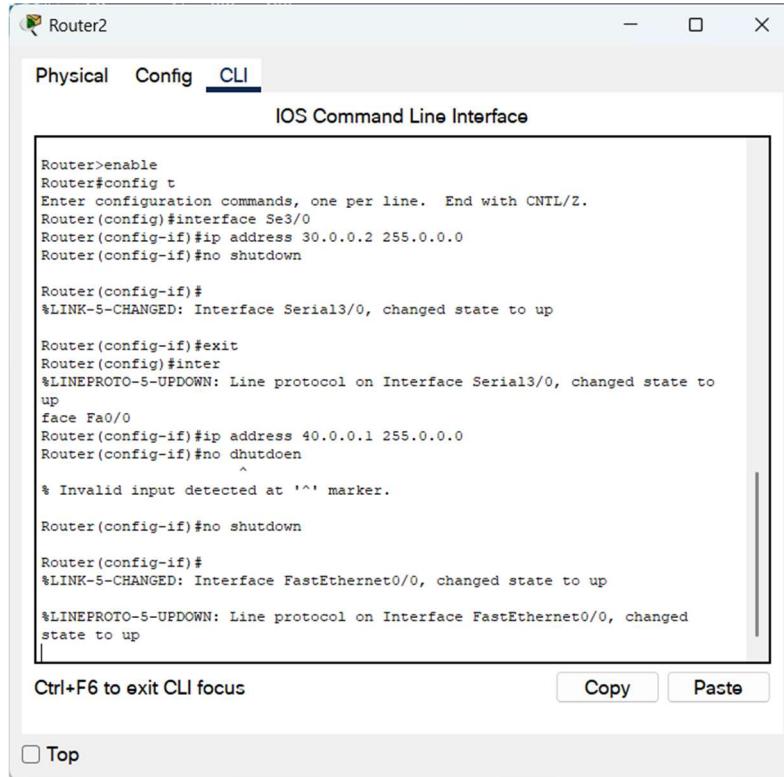

The screenshot shows a Windows-style application window titled "Router2". The tab bar at the top has three tabs: "Physical", "Config", and "CLI", with "CLI" being the active tab. The main area is labeled "IOS Command Line Interface". It displays the following configuration commands:

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Se3/0
Router(config-if)#ip address 30.0.0.2 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up

Router(config-if)#exit
Router(config)#inter
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to
up
face Fa0/0
Router(config-if)#ip address 40.0.0.1 255.0.0.0
Router(config-if)#no shutdown
^
% Invalid input detected at '^' marker.

Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed
state to up
```

At the bottom of the window, there are two buttons: "Copy" and "Paste". Below the buttons is a checkbox labeled "Top".

Static Routing:

Router0

Router0

Physical Config CLI

IOS Command Line Interface

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 30.0.0.0 255.0.0.0 20.0.0.2
Router(config)#ip route 40.0.0.0 255.0.0.0 20.0.0.2
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, FastEthernet0/0
C    20.0.0.0/8 is directly connected, Serial2/0
S    30.0.0.0/8 [1/0] via 20.0.0.2
S    40.0.0.0/8 [1/0] via 20.0.0.2

Router#
```

Ctrl+F6 to exit CLI focus

Top

Router1

Router1

Physical Config CLI

IOS Command Line Interface

```
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.1
Router(config)#ip route 40.0.0.0 255.0.0.0 30.0.0.2
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 20.0.0.1
C    20.0.0.0/8 is directly connected, Serial2/0
C    30.0.0.0/8 is directly connected, Serial3/0
S    40.0.0.0/8 [1/0] via 30.0.0.2

Router#
```

Ctrl+F6 to exit CLI focus

Top

Router2

Router2

Physical Config **CLI**

IOS Command Line Interface

```

Router>enable
Router>config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 10.0.0.0 255.0.0.0 30.0.0.1
Router(config)#ip route 20.0.0.0 255.0.0.0 30.0.0.1
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
      area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is not set

S 10.0.0.0/8 [1/0] via 30.0.0.1
S 20.0.0.0/8 [1/0] via 30.0.0.1
C 30.0.0.0/8 is directly connected, Serial3/0
C 40.0.0.0/8 is directly connected, FastEthernet0/0

Router#

```

Ctrl+F6 to exit CLI focus **Copy** **Paste**

Top

Dynamic Routing:

Route0

Router0

Physical Config **CLI**

IOS Command Line Interface

```

S 30.0.0.0/8 [1/0] via 20.0.0.2
S 40.0.0.0/8 [1/0] via 20.0.0.2

Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 0.0.0.0 0.0.0.0 20.0.0.2
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
      area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is 20.0.0.2 to network 0.0.0.0

C 10.0.0.0/8 is directly connected, FastEthernet0/0
C 20.0.0.0/8 is directly connected, Serial2/0
S 30.0.0.0/8 [1/0] via 20.0.0.2
S 40.0.0.0/8 [1/0] via 20.0.0.2
S* 0.0.0.0/0 [1/0] via 20.0.0.2

Router#

```

Ctrl+F6 to exit CLI focus **Copy** **Paste**

Top

Router2

The screenshot shows the Router2 CLI interface. The title bar says "Router2". Below it, there are tabs for "Physical", "Config", and "CLI", with "CLI" being the active tab. The main window is titled "IOS Command Line Interface". It displays the following command output:

```

C 30.0.0.0/8 is directly connected, Serial3/0
C 40.0.0.0/8 is directly connected, FastEthernet0/0

Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 0.0.0.0 0.0.0.0 30.0.0.1
Router(config)#exit
Router#
*SIS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
      area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is 30.0.0.1 to network 0.0.0.0

S 10.0.0.0/8 [1/0] via 30.0.0.1
S 20.0.0.0/8 [1/0] via 30.0.0.1
C 30.0.0.0/8 is directly connected, Serial3/0
C 40.0.0.0/8 is directly connected, FastEthernet0/0
S* 0.0.0.0/0 [1/0] via 30.0.0.1

Router#

```

Below the terminal window, there are "Copy" and "Paste" buttons. At the bottom left, there is a checkbox labeled "Top".

Pinging:

```

C:\>ping 40.0.0.2


Pinging 40.0.0.2 with 32 bytes of data:

Reply from 40.0.0.2: bytes=32 time=21ms TTL=125
Reply from 40.0.0.2: bytes=32 time=17ms TTL=125
Reply from 40.0.0.2: bytes=32 time=25ms TTL=125
Reply from 40.0.0.2: bytes=32 time=2ms TTL=125

Ping statistics for 40.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 25ms, Average = 16ms

```

iv. Observation

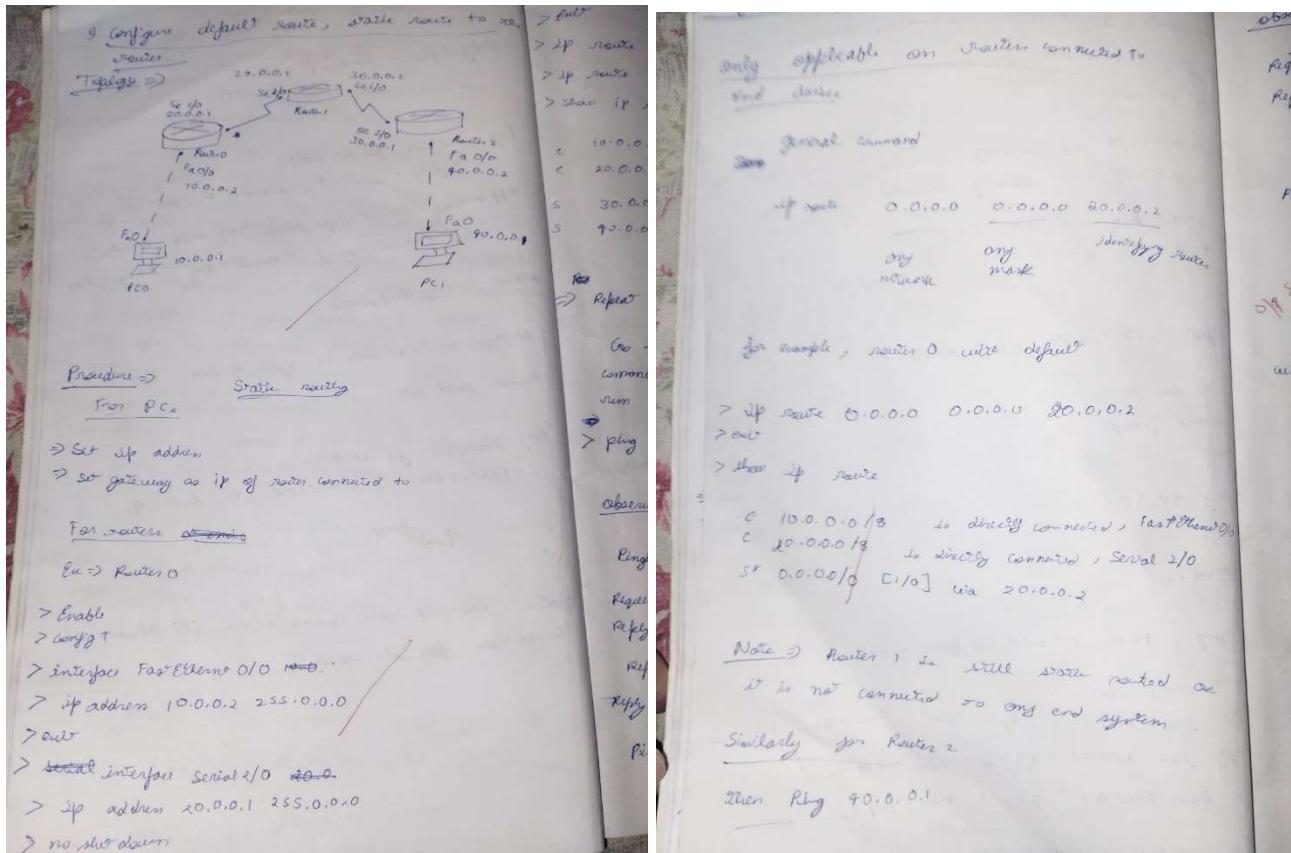

observation

Successfull

Request timed out

Reply from 40.0.0.1 bytes=32 time=2ms TTL=65

"

Plug interface for 40.0.0.1

Packets sent = 4, Received = 3, Lost = 1 (100% loss)

3 (Loss)

10 sec

without configuring route

Reply from 40.0.0.1 : Destination host unreachable

"


"

Plug interface for 40.0.0.1

Packets sent = 4, Received = 0, Lost = 4 (100% loss)

Program 4


- i. Configure DHCP within a LAN and outside LAN.
- ii. Procedure along with the topology

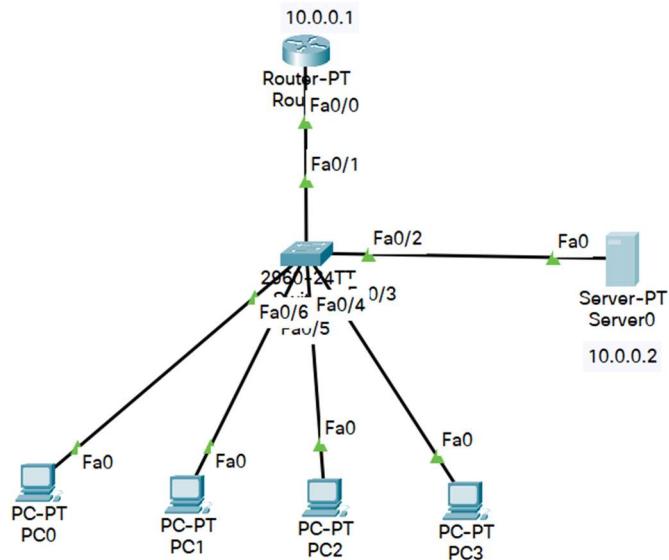


- iii. Screen shots/ output

DHCP Within LAN


DHCP Configuration

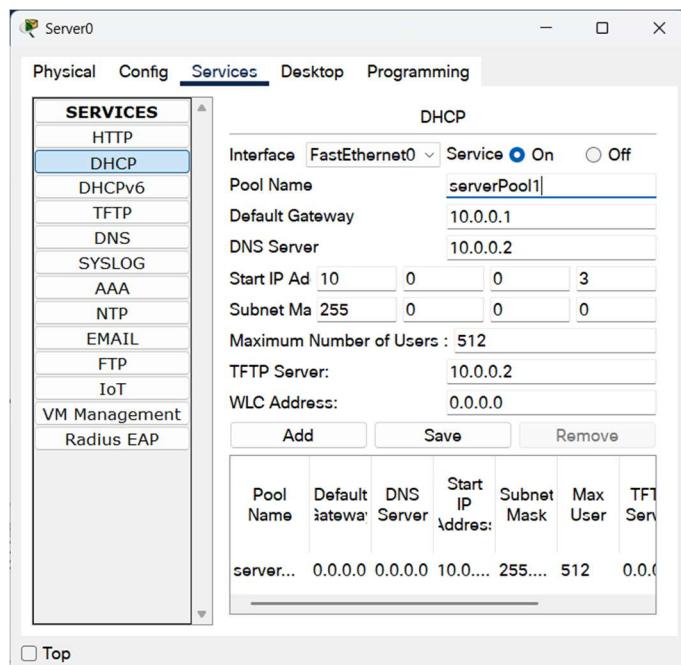


PC settings

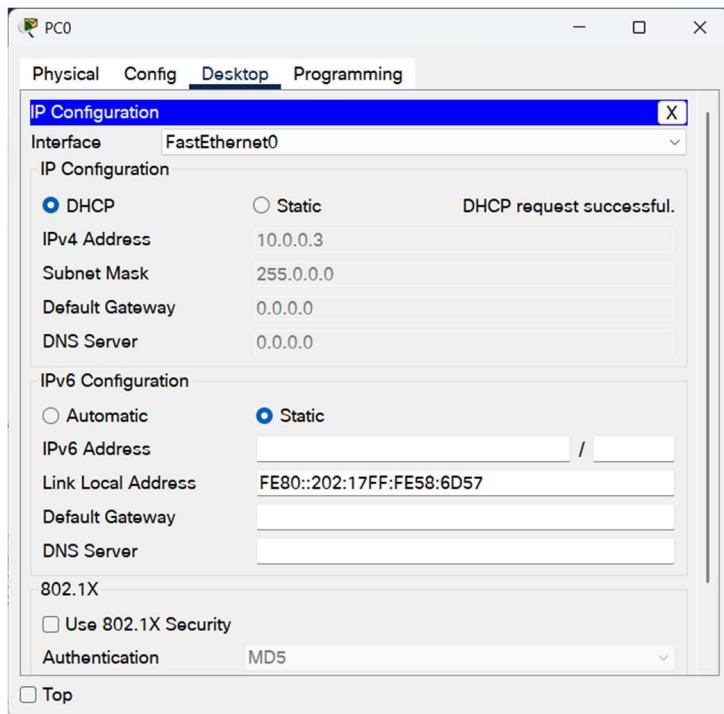


DHCP outside LAN:

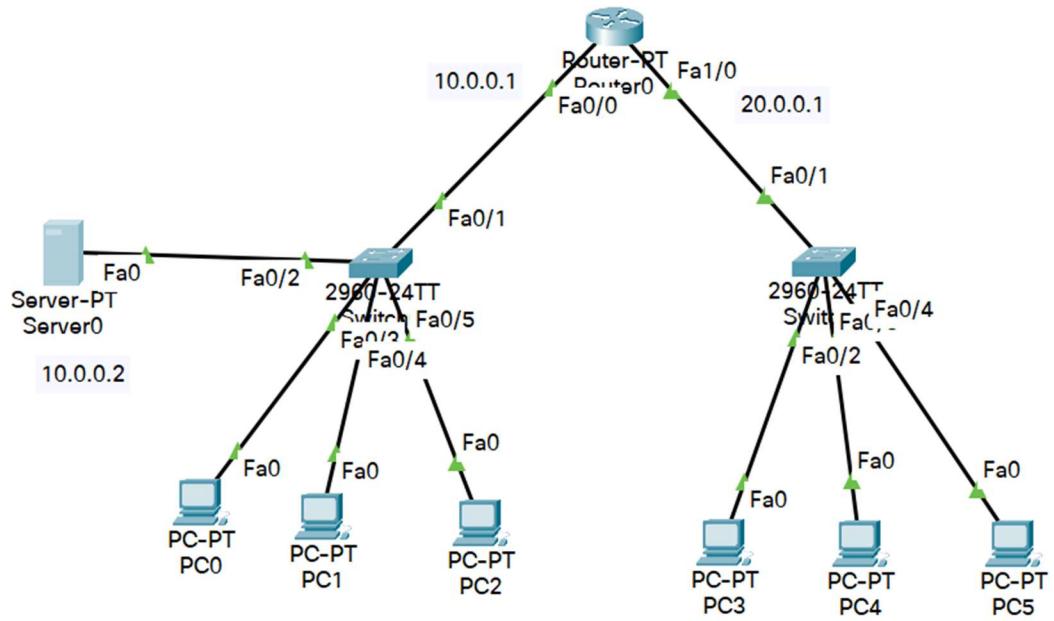

DHCP configuration for inside LAN

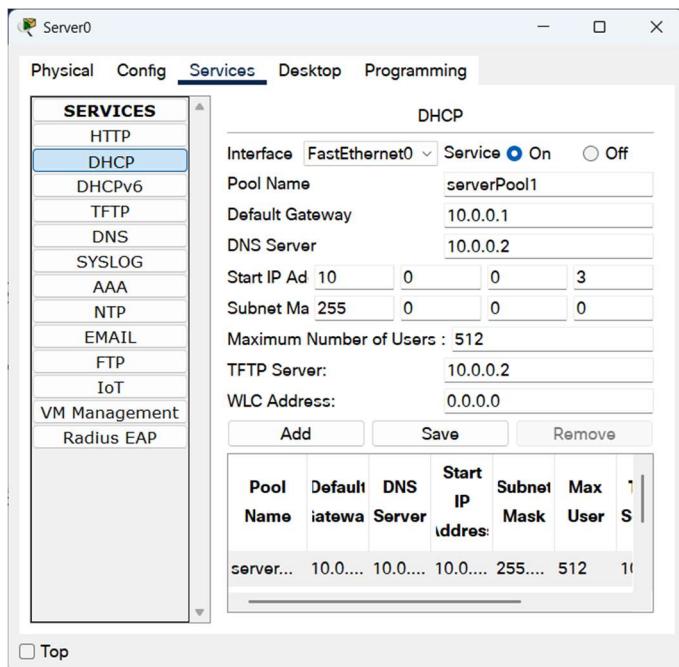

DHCP configuration for outside LAN

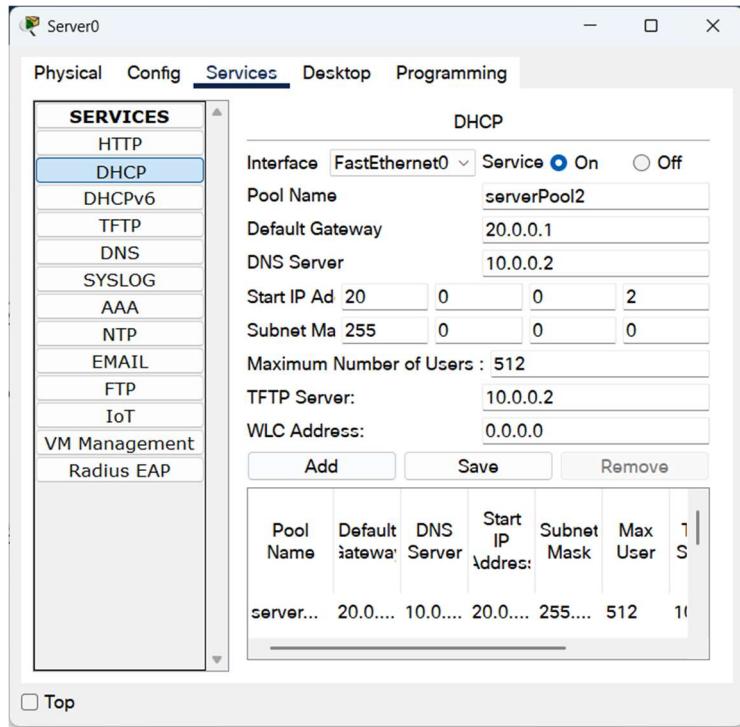


Ip helper command in Router



```
Router(config-if)#exit
Router(config)#interface Fa1/0
Router(config-if)#ip helper-address 10.0.0.2
Router(config-if)#


```

PC setting in another network

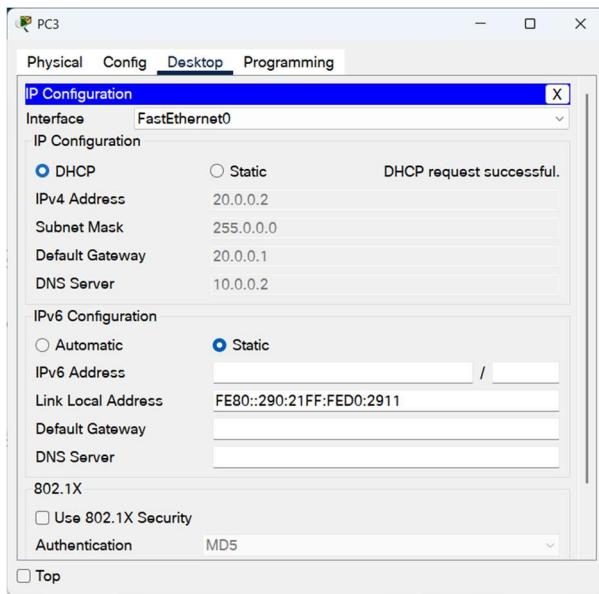


iv. Observation

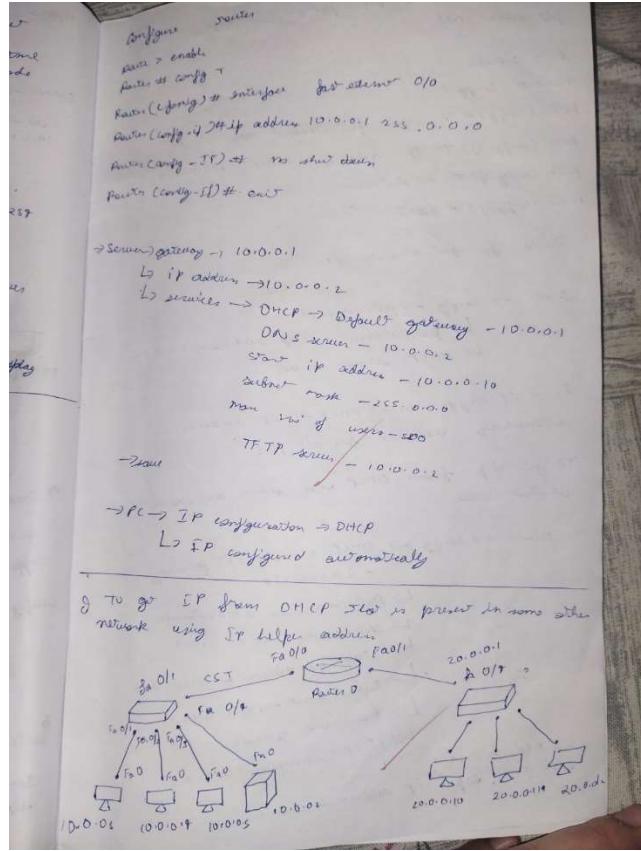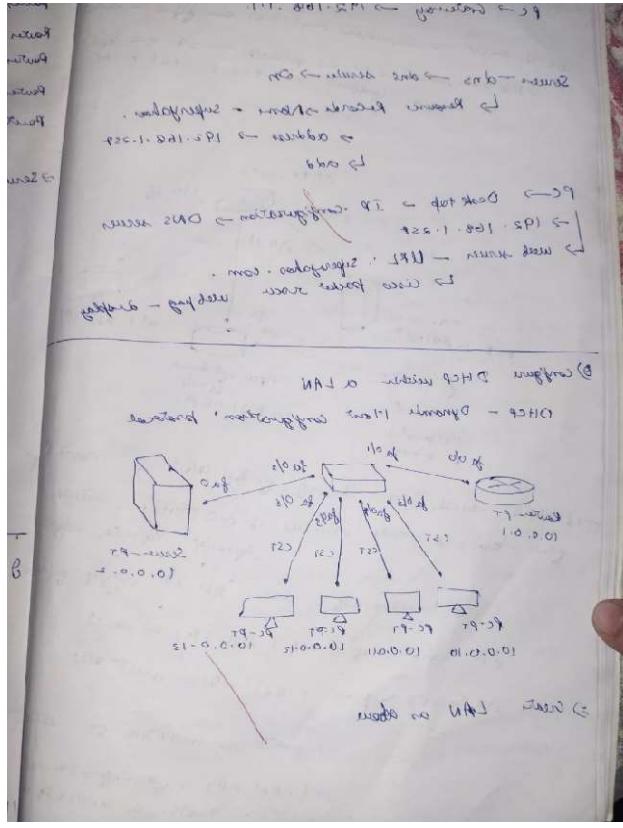

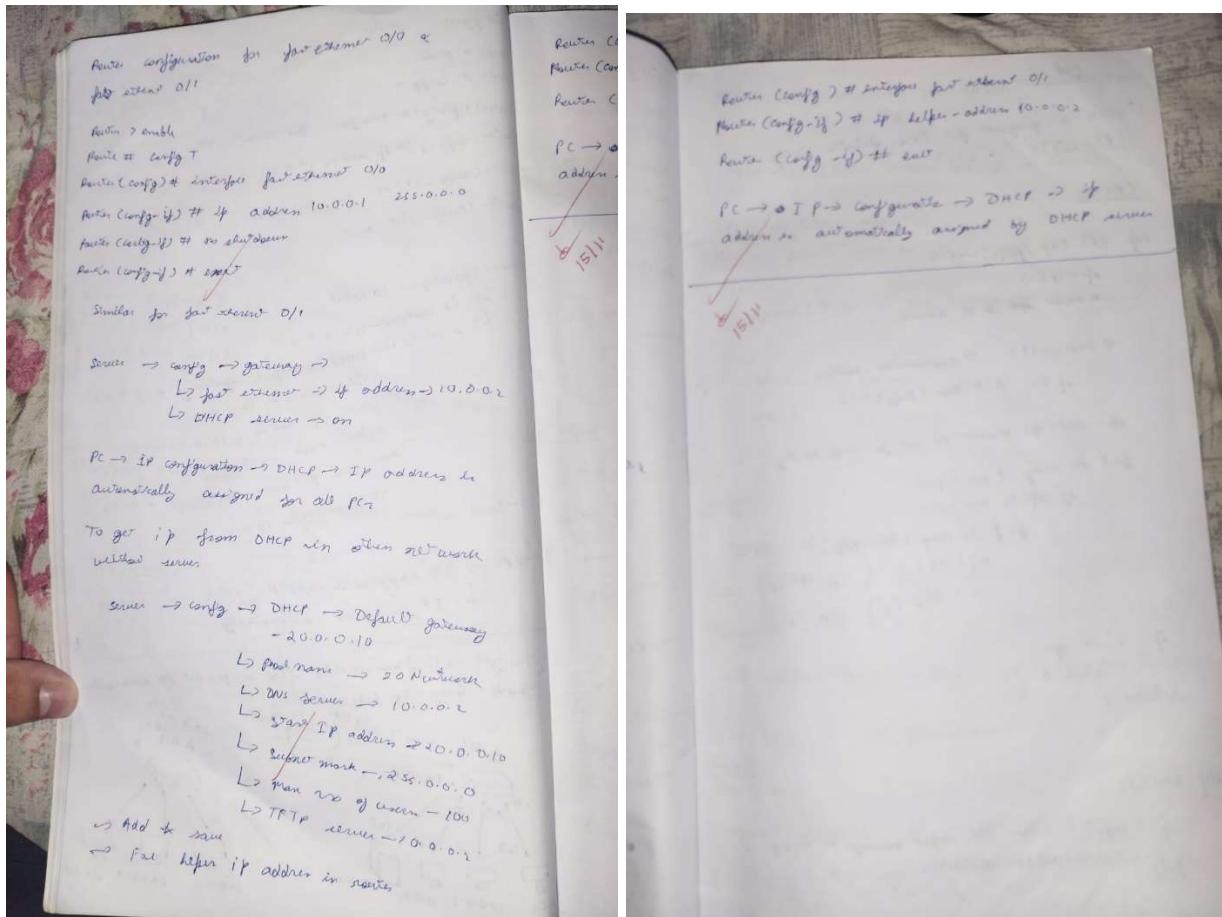

Program 5

- i. Configure RIP routing Protocol in Routers
- ii. Procedure along with the topology

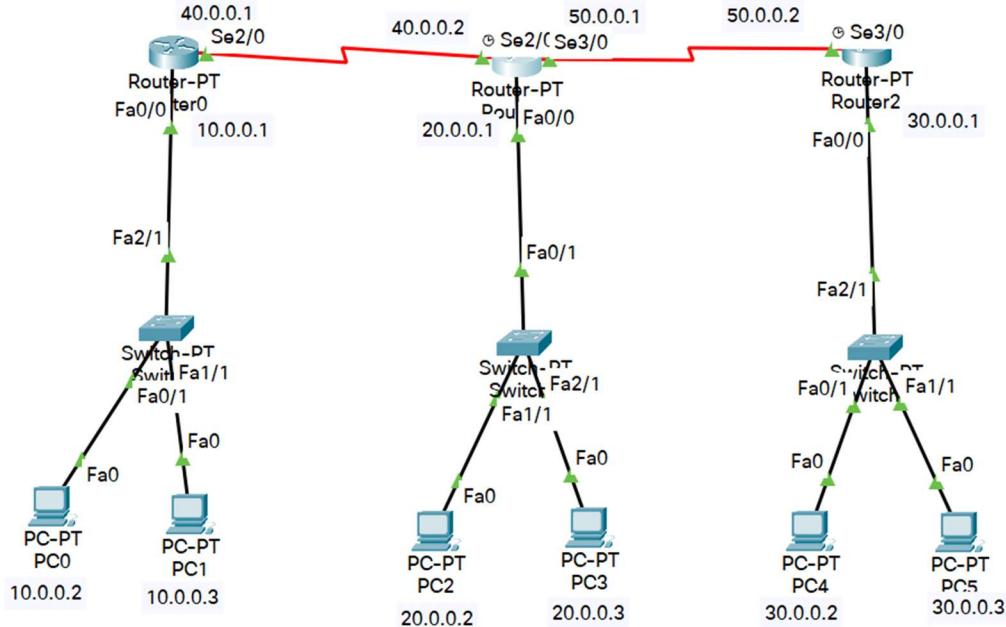

- iii. Screen shots/ output

Router0

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#network 10.0.0.0
Router(config-router)#network 40.0.0.0
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, FastEthernet0/0
C    40.0.0.0/8 is directly connected, Serial2/0
```

Router1

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#network 40.0.0.0
Router(config-router)#network 50.0.0.0
Router(config-router)#network 20.0.0.0
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is not set

R    10.0.0.0/8 [120/1] via 40.0.0.1, 00:00:08, Serial2/0
C    20.0.0.0/8 is directly connected, FastEthernet0/0
R    30.0.0.0/8 [120/1] via 50.0.0.2, 00:00:10, Serial3/0
C    40.0.0.0/8 is directly connected, Serial2/0
C    50.0.0.0/8 is directly connected, Serial3/0
```

Router2

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#network 30.0.0.0
Router(config-router)#network 50.0.0.0
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is not set

R    10.0.0.0/8 [120/2] via 50.0.0.1, 00:00:28, Serial3/0
R    20.0.0.0/8 [120/1] via 50.0.0.1, 00:00:28, Serial3/0
C    30.0.0.0/8 is directly connected, FastEthernet0/0
R    40.0.0.0/8 [120/1] via 50.0.0.1, 00:00:28, Serial3/0
C    50.0.0.0/8 is directly connected, Serial3/0
```

Pinging:


```
Packet Tracer PC Command Line 1.0
C:\>ping 20.0.0.2

Pinging 20.0.0.2 with 32 bytes of data:

Request timed out.
Reply from 20.0.0.2: bytes=32 time=9ms TTL=126
Reply from 20.0.0.2: bytes=32 time=1ms TTL=126
Reply from 20.0.0.2: bytes=32 time=9ms TTL=126

Ping statistics for 20.0.0.2:
  Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
  Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 9ms, Average = 6ms
```

iv. Observation

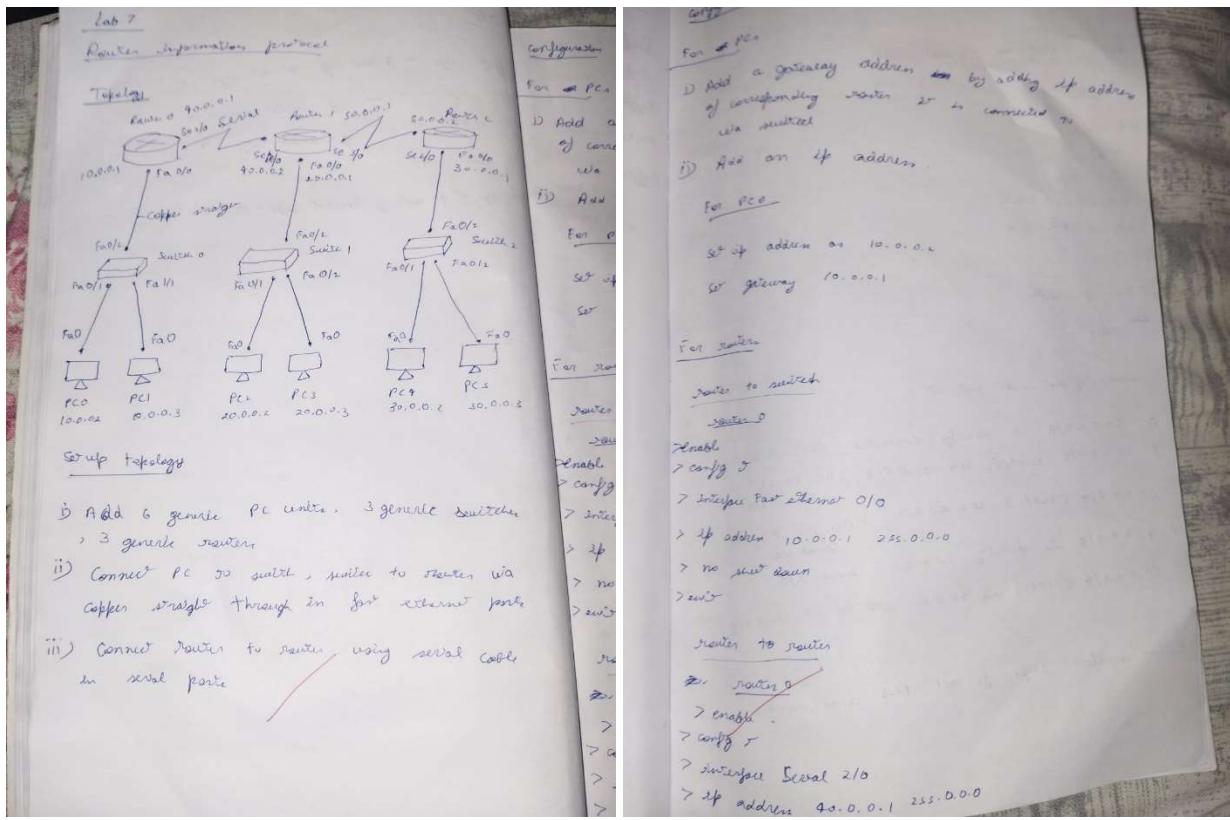

Router information printed
Router 0
 > Enable
 > Config +
 > Router rip
 > Network 10.0.0.0
 > Network 90.0.0.0
 > Exit
 > Show ip route
Show cells
 Routing of last router not set
 C 10.0.0.0/8 is directly connected, Fast Ethernet 0/0
 R 20.0.0.0/8 [120/1] via 90.0.0.2, 00:00:29, Serial 2/0
 C 30.0.0.0/8 [120/1] via 90.0.0.2, 00:00:29, Serial 2/0
 R 90.0.0.0/8 is directly connected, Serial 2/0
 C 50.0.0.0/8 [120/1] via 90.0.0.2, 00:00:29, Serial 2/0


Show ip
 R 10.0.0.0/8
 C 20.0.0.0/8
 R 30.0.0.0/8
 C 40.0.0.0/8
 C 50.0.0.0/8
Show ip route for router 2
 R 10.0.0.0/8 C 120/3 via 50.0.0.1, 00:00:02, Serial 2/0
 R 20.0.0.0/8 C 120/1 via 50.0.0.1, 00:00:02, Serial 2/0
 C 30.0.0.0/8 is directly connected, Fast Ethernet 0/0
 R 40.0.0.0/8 C 120/1 via 50.0.0.1, 00:00:02, Serial 2/0
 C 50.0.0.0/8 is directly connected, Serial 2/0

Observe
 > Go to PC 0
 > Plug
 Plugged
 Request
 Reply
 Reply
 Reply

Observation
 Plugged 20.0.0.3 with 32 bytes of data:
 Request timed out
 Reply from 20.0.0.3: bytes = 32, time = 8 ms, TTL = 126
 Reply from 20.0.0.3: bytes = 32, time = 8 ms, TTL = 126

Program 6

- i. Configure OSPF routing protocol
- ii. Procedure along with the topology

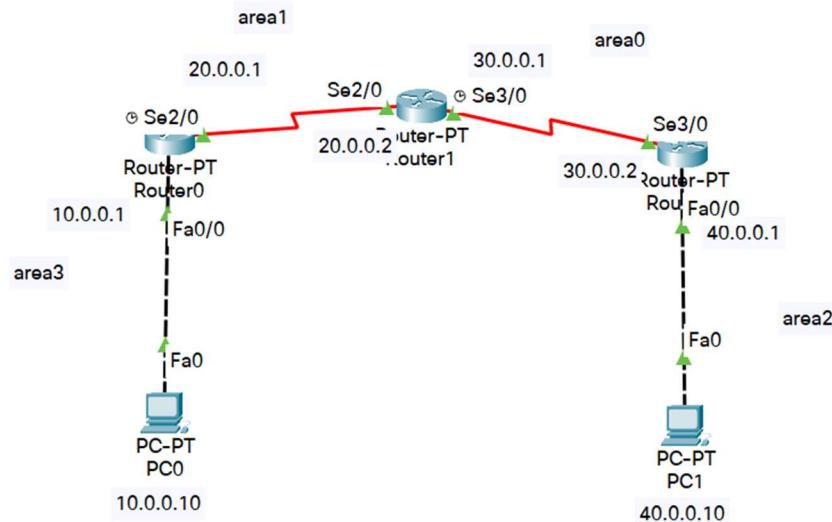

- iii. Screen shots/ output

Encapsulation:

Router0

```
Router>enable
Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface Fa0/0
Router(config-if)#ip address 10.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed
state to up

Router(config-if)#exit
Router(config)#interface Se2/0
Router(config-if)#ip address 20.0.0.1 255.0.0.0
Router(config-if)#encapsulation ppp
Router(config-if)#clock rate 64000
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#exit
Router(config)#+
```

Router1

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Se2/0
Router(config-if)#ip address 20.0.0.2 255.0.0.0
Router(config-if)#encapsulation ppp
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to
up

Router(config-if)#exit
Router(config)#interface Se3/0
Router(config-if)#ip address 30.0.0.1 255.0.0.0
Router(config-if)#encapsulation ppp
Router(config-if)#clock rate 64000
Router(config-if)#no shutdown
^
% Invalid input detected at '^' marker.

Router(config-if)#no shutdown
```

Router2

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Fa0/0
Router(config-if)#ip address 40.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed
state to up
%IP-4-DUPADDR: Duplicate address 40.0.0.1 on FastEthernet0/0, sourced by
000D.BDDA.0123

Router(config-if)#exit
Router(config)#interface Se3/0
Router(config-if)#ip address 30.0.0.2 255.0.0.0
Router(config-if)#encapsulation ppp
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to
up
```

OSPF Routing Protocol

Router0

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#router-id 1.1.1.1
Router(config-router)#network 10.0.0.0 0.255.255.255 area 3
Router(config-router)#network 20.0.0.0 0.255.255.255 area 1
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#sho
00:27:19: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on Serial2/0 from LOADING to FULL, Loading Done
w ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, FastEthernet0/0
     20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        20.0.0.0/8 is directly connected, Serial2/0
C        20.0.0.2/32 is directly connected, Serial2/0
O  IA 30.0.0.0/8 [110/128] via 20.0.0.2, 00:00:02, Serial2/0
O  IA 40.0.0.0/8 [110/129] via 20.0.0.2, 00:00:02, Serial2/0
```

Router1

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#router-id 2.2.2.2
Router(config-router)#network 20.0.0.0 0.255.255.255 area 1
Router(config-router)#network 30.0.0.0 0.255.255.255 area 0
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

00:26:21: %OSPF-5-ADJCHG: Process 1, Nbr 3.3.3.3 on Serial3/0 from LOADING to FULL, Loading Done
00:27:18: %OSPF-5-ADJCHG: Process 1, Nbr 1.1.1.1 on Serial2/0 from LOADING to FULL, Loading Done

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is not set

     20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        20.0.0.0/8 is directly connected, Serial2/0
C        20.0.0.1/32 is directly connected, Serial2/0
     30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        30.0.0.0/8 is directly connected, Serial3/0
C        30.0.0.2/32 is directly connected, Serial3/0
O  IA 40.0.0.0/8 [110/65] via 30.0.0.2, 00:02:00, Serial3/0
```

Router2

```

Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#router-id 3.3.3.3
Router(config-router)#network 40.0.0.0 0.255.255.255 area 2
Router(config-router)#network 30.0.0.0 0.255.255.255 area 0
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#
00:26:19: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on Serial3/0 from LOADING to FULL, Loading Done

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is not set

O IA 20.0.0.0/8 [110/128] via 30.0.0.1, 00:02:45, Serial3/0
  30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     30.0.0.0/8 is directly connected, Serial3/0
C     30.0.0.1/32 is directly connected, Serial3/0
C     40.0.0.0/8 is directly connected, FastEthernet0/0

```

Configure Loopback address

Router0

```

Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface loopback 0

Router(config-if)#
%LINK-5-CHANGED: Interface Loopback0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to
up

Router(config-if)#ip address 172.16.1.252 255.255.0.0
Router(config-if)#no shutdown

```

Router1

```

Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface loopback 0

Router(config-if)#
%LINK-5-CHANGED: Interface Loopback0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to
up

Router(config-if)#ip address 172.16.1.253 255.255.0.0
Router(config-if)#no shutdown
Router(config-if)#

```

Router2

```

Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface loopback 0

Router(config-if)#
%LINK-5-CHANGED: Interface Loopback0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to
up

Router(config-if)#ip address 172.16.1.254 255.255.0.0
Router(config-if)#no shutdown
Router(config-if)#

```

Create Virtual Link

Router0

```

Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#area 1 virtual-link 2.2.2.2
Router(config-router)#

```

Router1

```

Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
01:11:01: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from
backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0

01:11:11: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from
backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0

Router(config)#route
01:11:21: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from
backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
r ospf 1
Router(config-router)#
01:11:31: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from
backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0

Router(config-router)#area 1 v
01:11:41: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from
backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
irtual-link 1.1.1.1
Router(config-router)#
01:11:56: %OSPF-5-ADJCHG: Process 1, Nbr 1.1.1.1 on OSPF_VL0 from LOADING to
FULL, Loading Done


```

Pinging

```
C:\>ping 40.0.0.10
Pinging 40.0.0.10 with 32 bytes of data:
Reply from 40.0.0.10: bytes=32 time=24ms TTL=125
Reply from 40.0.0.10: bytes=32 time=18ms TTL=125
Reply from 40.0.0.10: bytes=32 time=18ms TTL=125
Reply from 40.0.0.10: bytes=32 time=20ms TTL=125

Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 18ms, Maximum = 24ms, Average = 20ms
```

iv. Observation

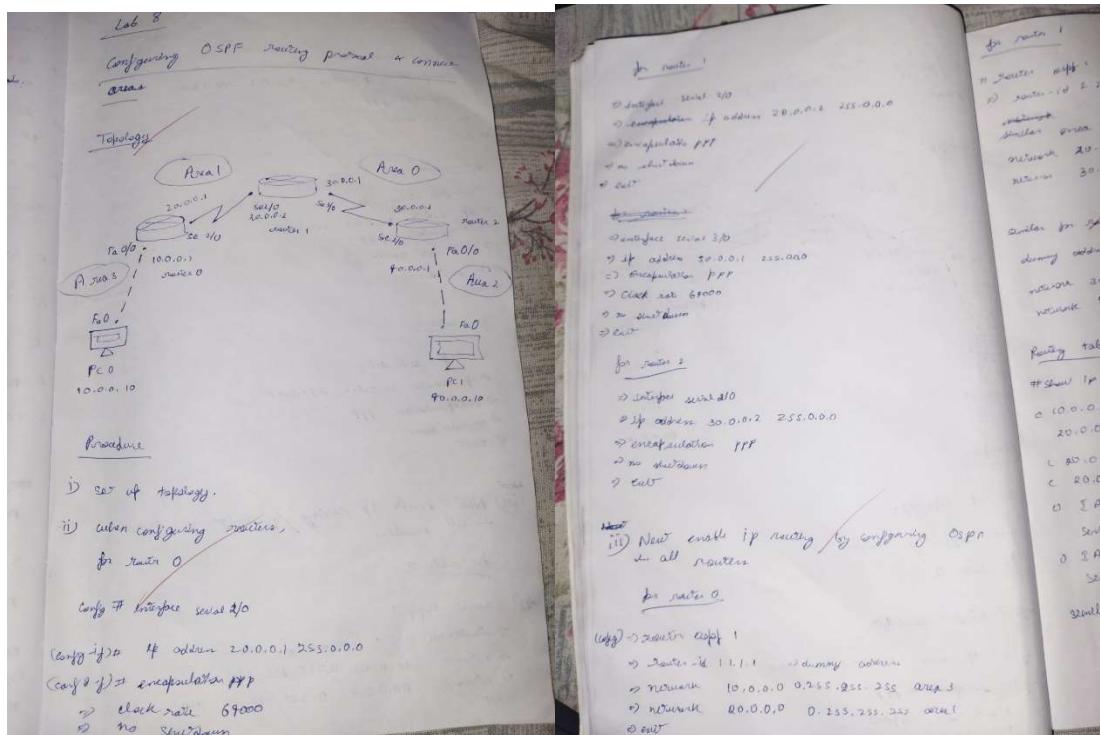

for router 1

Router config

a) Router-ID 2.2.2.2

subnets
similar area commands

network 20.0.0.0 0.255.255.255 area 0
network 30.0.0.0 0.255.255.255 area 1

similar for Router 2

dummy address 3.2.3.3

network 30.0.0.0 0.255.255.255 area 0
network 40.0.0.0 0.255.255.255 area 1

Routing table R1

Show IP route

- c 10.0.0.0/8 to directly connected, FE 0/0
- c 20.0.0.0/8 to usually subnetted, 2 subnets, 2 mask
- c 20.0.0.0/8 to directly connected, serial 2/0
- c 20.0.0.2/32 to directly connected, serial 2/0
- o 3A 30.0.0.0/8 C110/128 via 20.0.0.2, 00:01:52, serial 2/0
- o 3A 40.0.0.0/8 C110/128 via 20.0.0.2, 00:00:09, serial 2/0

similar for R2 and R3

R1

o 3A 10.0.0.0/8 C110/128 via 20.0.0.1, 00:01:52, serial 2/0

c 20.0.0.0/8 to usually subnetted, 2 subnets, 2 mask

c 20.0.0.0/8 to directly connected, serial 2/0

c 20.0.0.2/32 to directly connected, serial 2/0

c 30.0.0.0/8 to directly connected, serial 2/0

c 30.0.0.0/8 to directly connected, serial 2/0

o 3A 40.0.0.0/8 C110/128 via 30.0.0.3, 01:27:37, serial 2/0

c 172.16.1.0 to directly connected, loopback 0

R2

o 5A 20.0.0.0/8 C110/128 via 30.0.0.1, 00:01:20, serial 2/0

30.0.0.0/8 to usually subnetted, 2 subnets, 2 mask

c 30.0.0.0/8 to directly connected, serial 2/0

c 30.0.0.1/32 to directly connected, serial 2/0

c 90.0.0.0/8 to directly connected, Fast-Ethernet 0/0

c 90.0.0.0/8 to directly connected, 1 subnet

c 172.16.0.0/24 to subnetted, 1 subnet, loopback 0

c 172.16.1.0 to directly connected, loopback 0

o 3A 10.0.0.0/8 C110/128 via 30.0.0.1, 00:00:04, serial 2/0

Add loopback address

R1

Router(config)# interface loopback 0

(Config-if)# ip add 172.16.1.252 255.255.255.252

(Config-if)# no shutdown

R1

(Config)# interface loopback 0

if add 172.16.1.253 255.255.255.0.0

no shutdown

R2

interface loopback 0

if add 172.16.1.259 255.255.255.0.0

no shutdown

Show IP route

Router R2

- c 10.0.0.0/8 to directly connected, FE 0/0
- c 20.0.0.0/8 to usually subnetted, 2 subnets, 2 mask
- c 20.0.0.0/8 to directly connected, serial 2/0
- c 20.0.0.2/32 to directly connected, serial 2/0
- o 30.0.0.0/8 C110/128 via 20.0.0.2, 00:11:14, serial 2/0
- o 40.0.0.0/8 C110/128 via 20.0.0.2, 00:11:14, serial 2/0
- c 172.16.0.0/16 to directly connected, loopback 0

Router(config) # traceroute 1
Area 1 Ethernet-Link 2.2.2.2

R1

Router config

Area 1 Ethernet Link 1.1.1.1

Ping from 10.0.0.10 to 90.0.0.10

Request timed out

Ping from 90.0.0.10 : bytes=32 time=16ms TTL=128

Ping statistics for 90.0.0.10

Packet = Serial 0, Router = 3, Cost = 1 (Cost 6ms)

Avg round trip time in millisecond

Minimum = 2 ms, Maximum = 16 ms, Average = 6 ms

Conclusion

After OSPF configuration, R1, R2 & R3 establish adjacency and exchange routes for all areas.

The routing tables show OSPF inter-area routes (5A) for networks 10.0.0.0 > 20.0.0.0 > 30.0.0.0 and 90.0.0.0 > 20.0.0.0 > 30.0.0.0 via links successfully connect non-backbone Area 0 through R1.

Ping tests between configured end-to-end successfully.

Lab 9
FEC Paths


PC0
PC1
PC2
Server

Simulator

Pling
PC>
No
P>
Pling



Program 7

- i. Demonstrate the TTL/ Life of a Packet
- ii. Procedure along with the topology


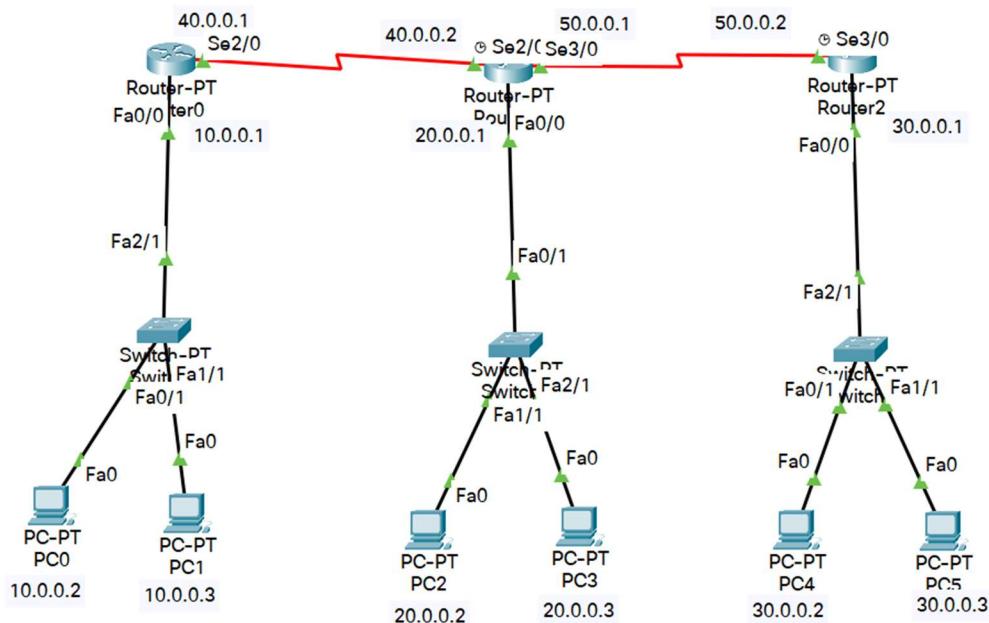


- iii. Screen shots/ output

Packet at Router0

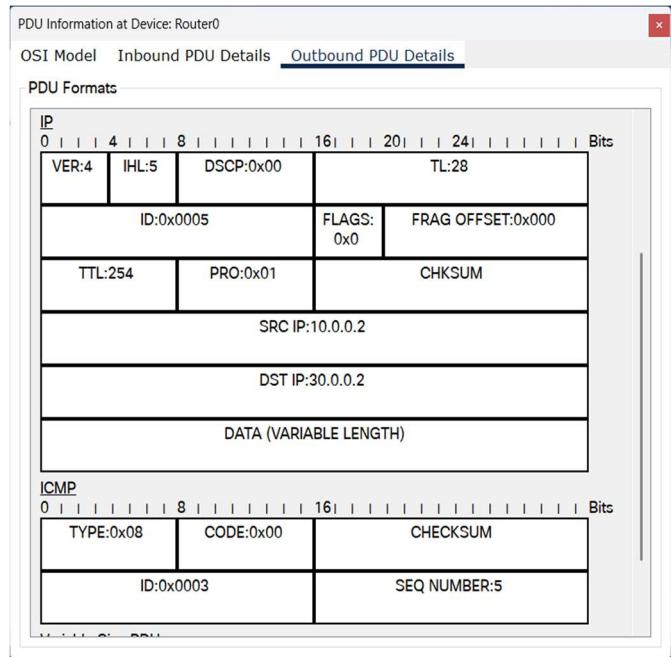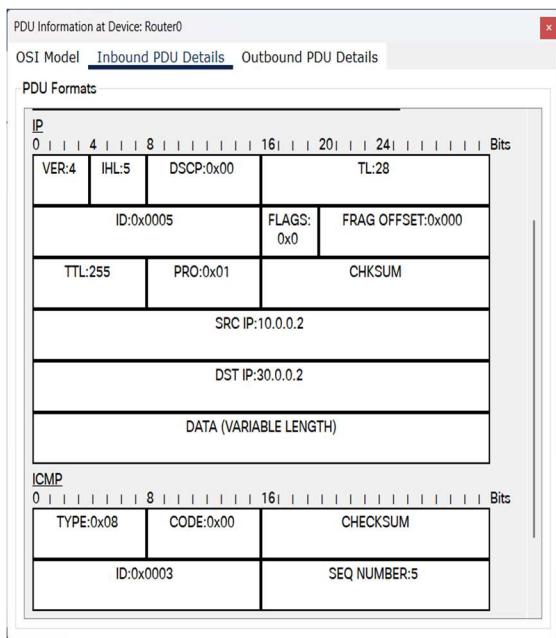

Packet at Router1

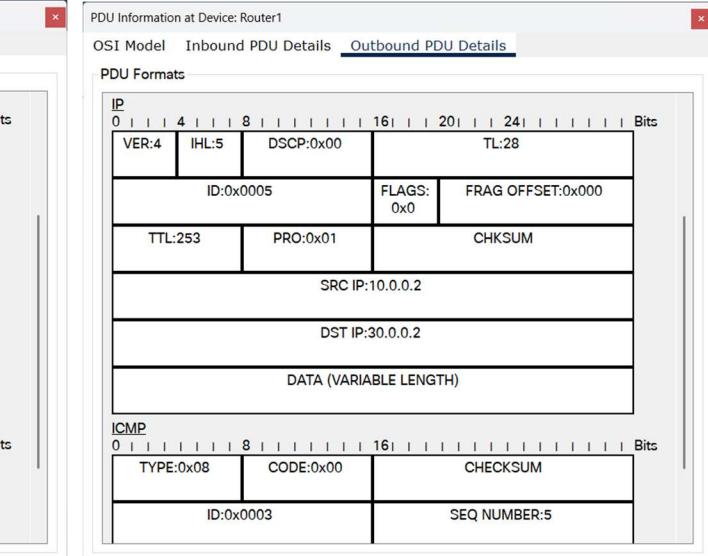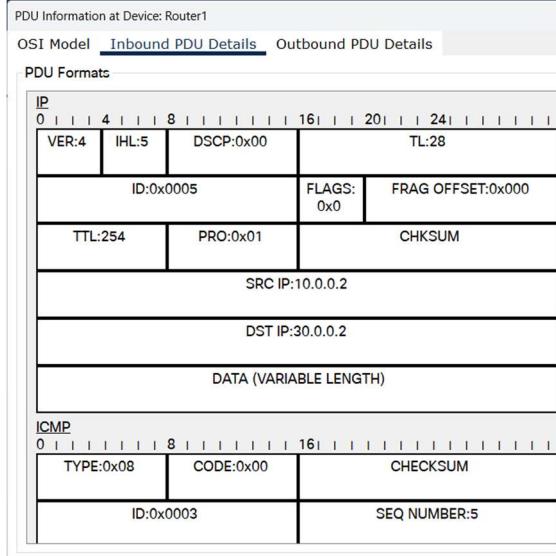

Packet at Router2

PDU Information at Device: Router2

OSI Model Inbound PDU Details Outbound PDU Details

PDU Formats


IP				Bits
VER:4	IHL:5	DSCP:0x00	TL:28	
ID:0x0005		FLAGS: 0x0	FRAG OFFSET:0x000	
TTL:253	PRO:0x01	CHKSUM		
SRC IP:10.0.0.2				
DST IP:30.0.0.2				
DATA (VARIABLE LENGTH)				

ICMP				Bits
TYPE:0x08	CODE:0x00	CHECKSUM		
ID:0x0003	SEQ NUMBER:5			

IP				Bits
VER:4	IHL:5	DSCP:0x00	TL:28	
ID:0x0005		FLAGS: 0x0	FRAG OFFSET:0x000	
TTL:252	PRO:0x01	CHKSUM		
SRC IP:10.0.0.2				
DST IP:30.0.0.2				
DATA (VARIABLE LENGTH)				

ICMP				Bits
TYPE:0x08	CODE:0x00	CHECKSUM		
ID:0x0003	SEQ NUMBER:5			

iv. Observation

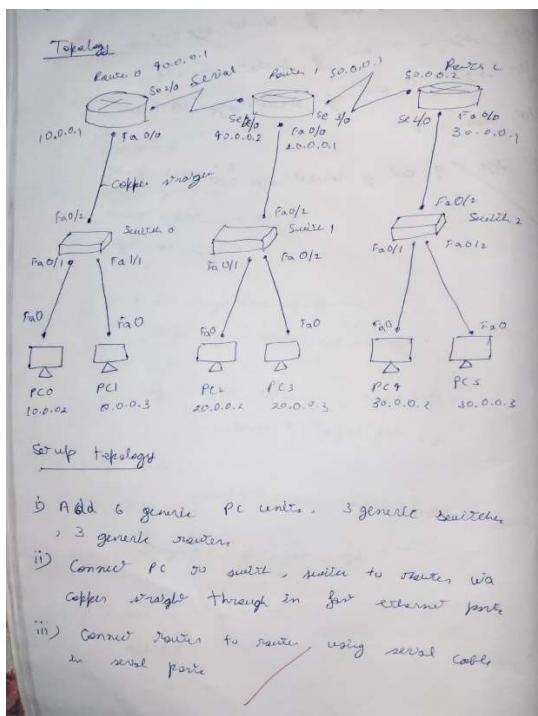

Observation

Go to PC0

⇒ Ping 20.0.0.3

⇒ Plugged 20.0.0.3 with 32 bytes of data?

Request timed out

Reply from 20.0.0.3 : bytes = 32 , time = 8 ms , TTL = 126

Reply from 20.0.0.3 : bytes = 32 , time = 1 ms , TTL = 126

Reply from 20.0.0.3 : bytes = 32 , time = 8 ms , TTL = 126

Play statistics for 20.0.0.3:

Packets : sent = 4, Received = 3,

Loss = 1 (25% loss),

Approximate round trip time in milli-seconds,


minimum = 1 ms, maximum = 8 ms,

Average = 5 ms.

✓
20/11


Program 8

- i. Configure Web Server, DNS within a LAN.
- ii. Procedure along with the topology


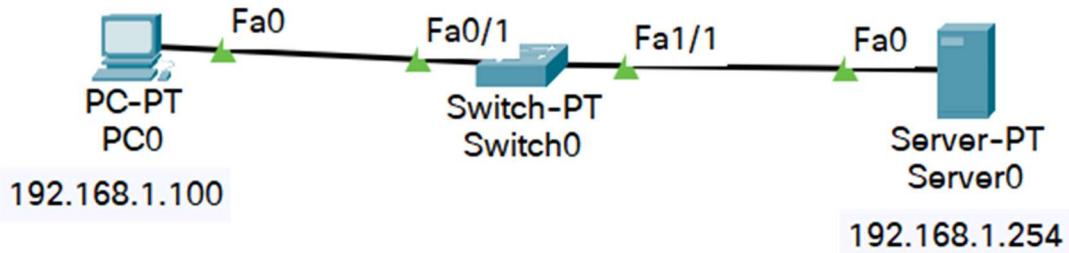




- iii. Screen shots/ output

Server's services


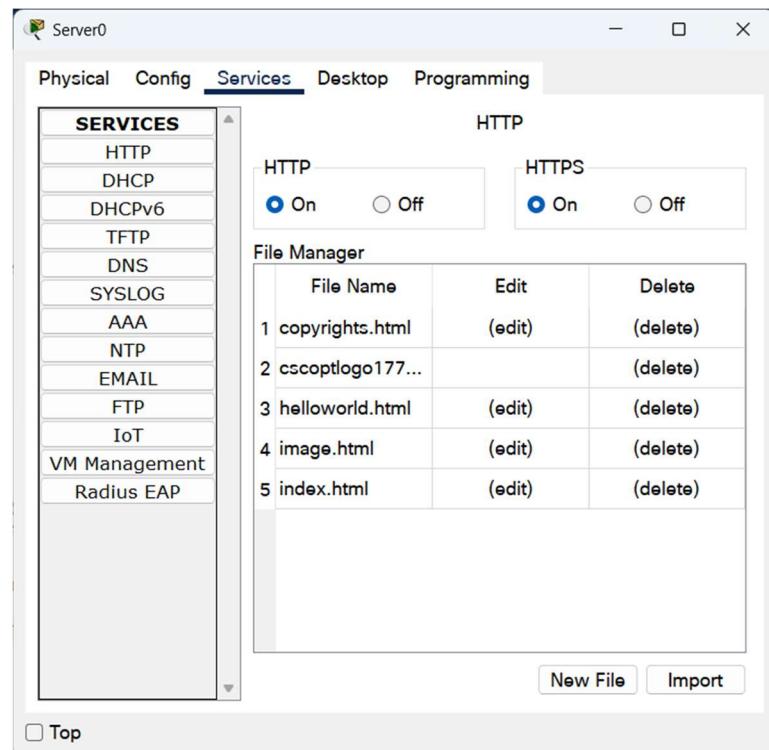


PC's Web Browser

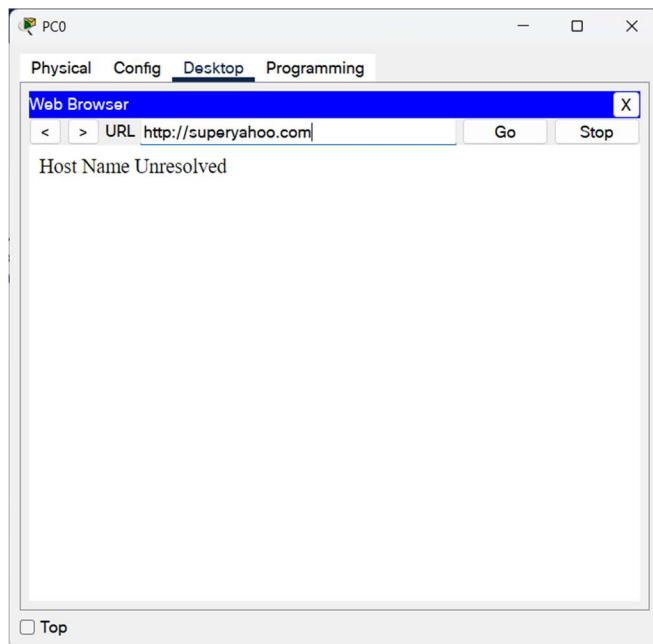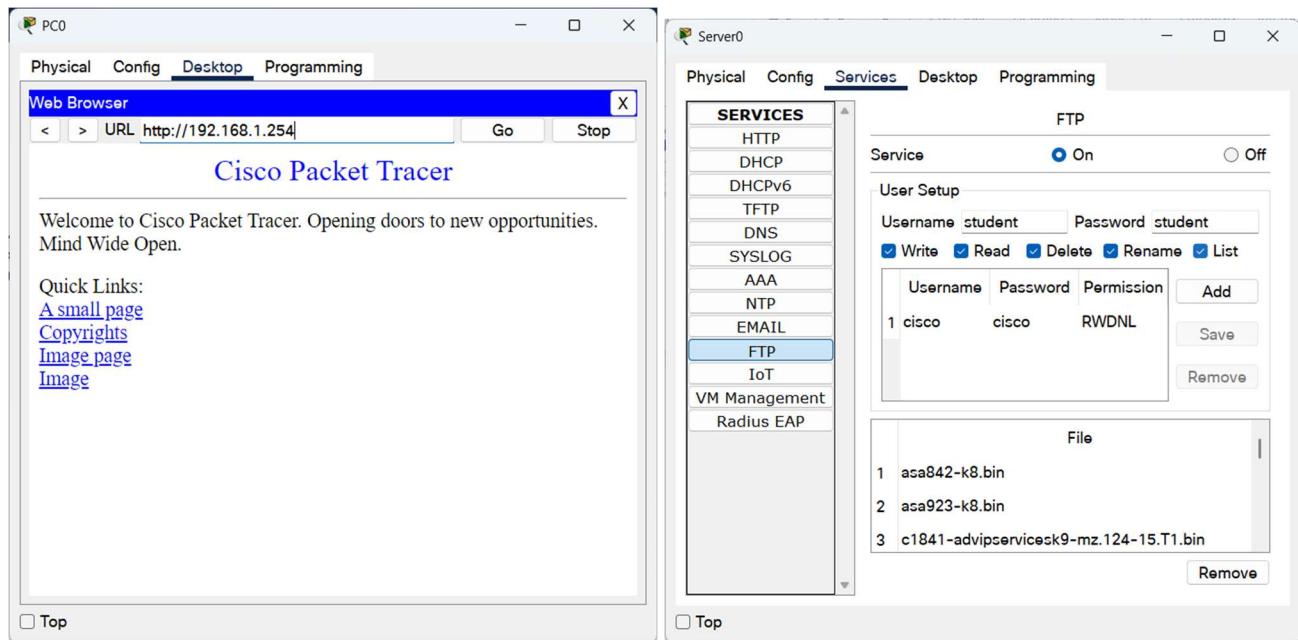

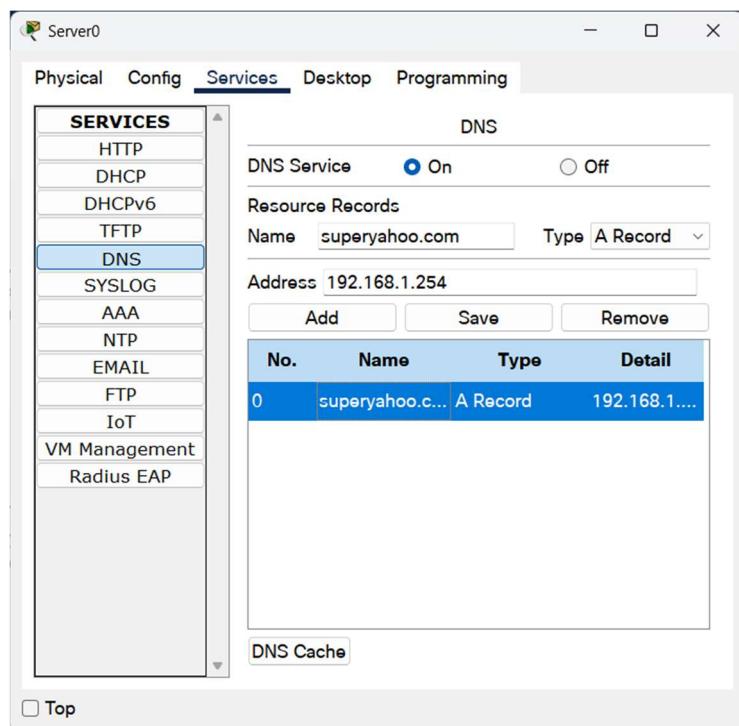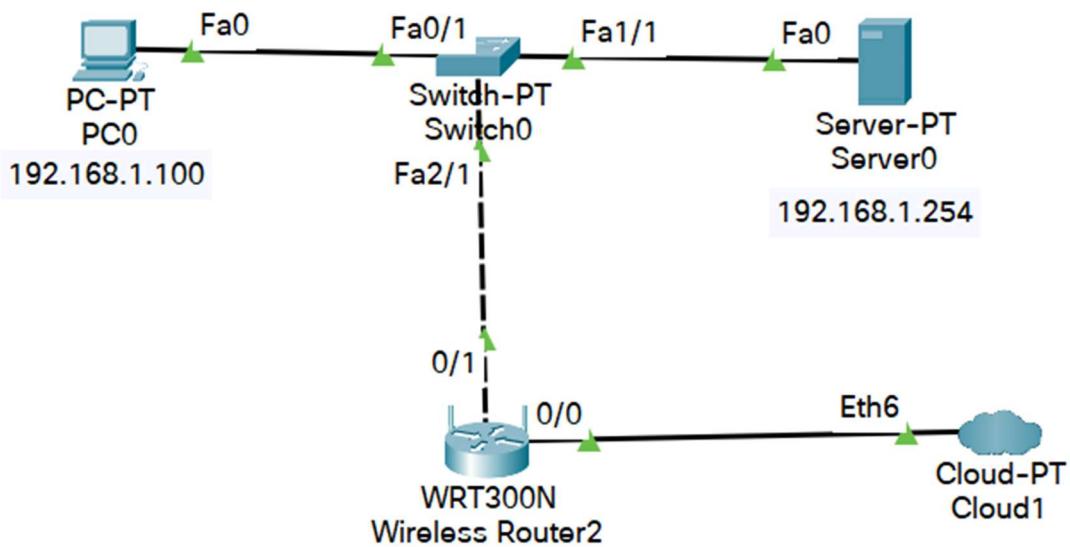


iv. Observation

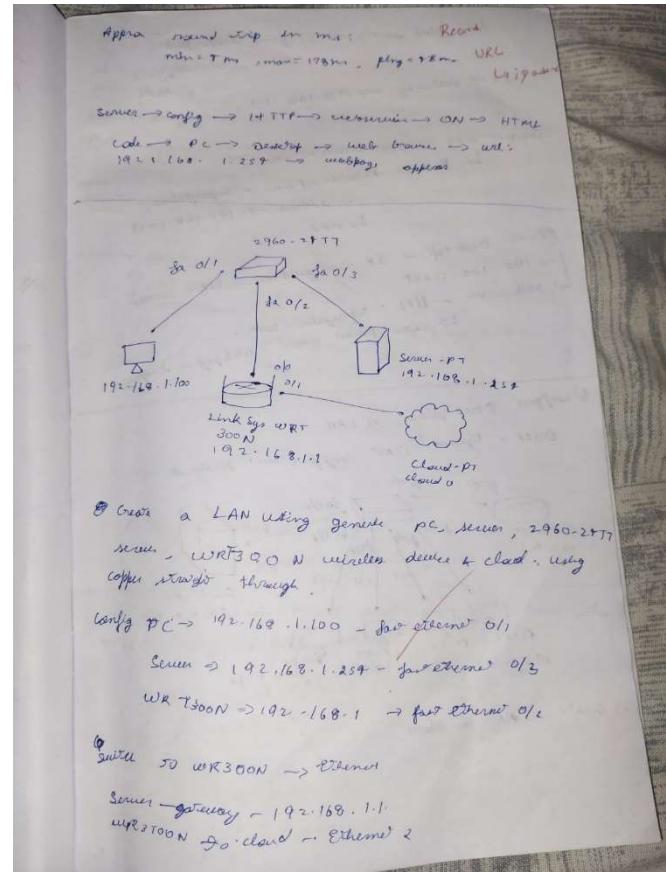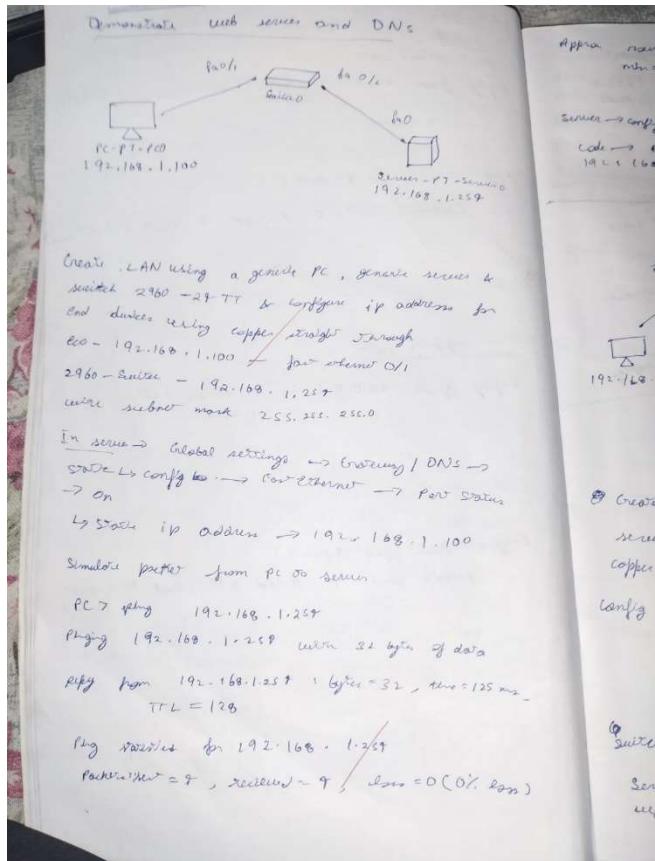


Program 9

- i. To construct simple LAN and understand the concept and operation of Address Resolution Protocol (ARP)
- ii. Procedure along with the topology

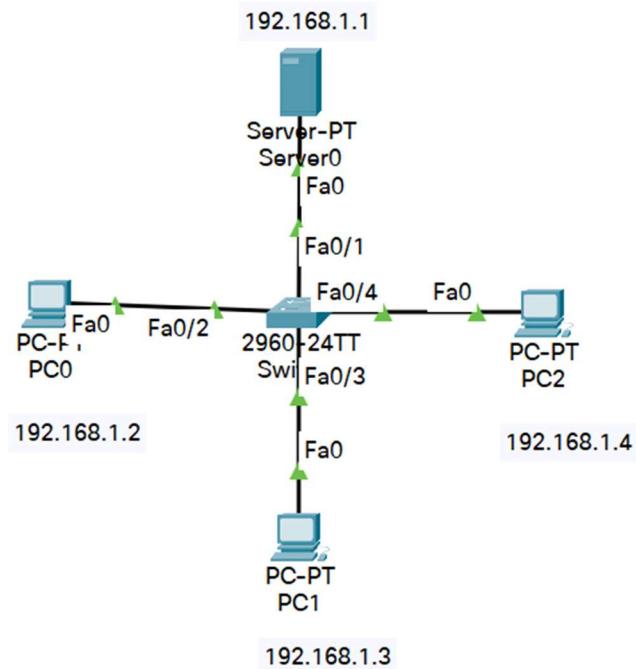


- iii. Screen shots/ output

ARP Table of PC

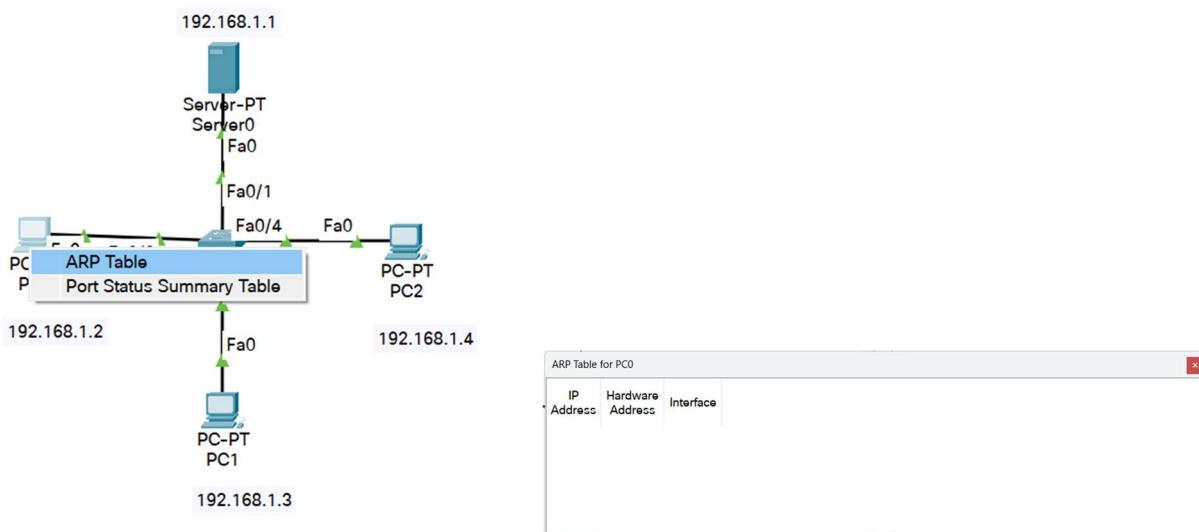


ARP Table of Server

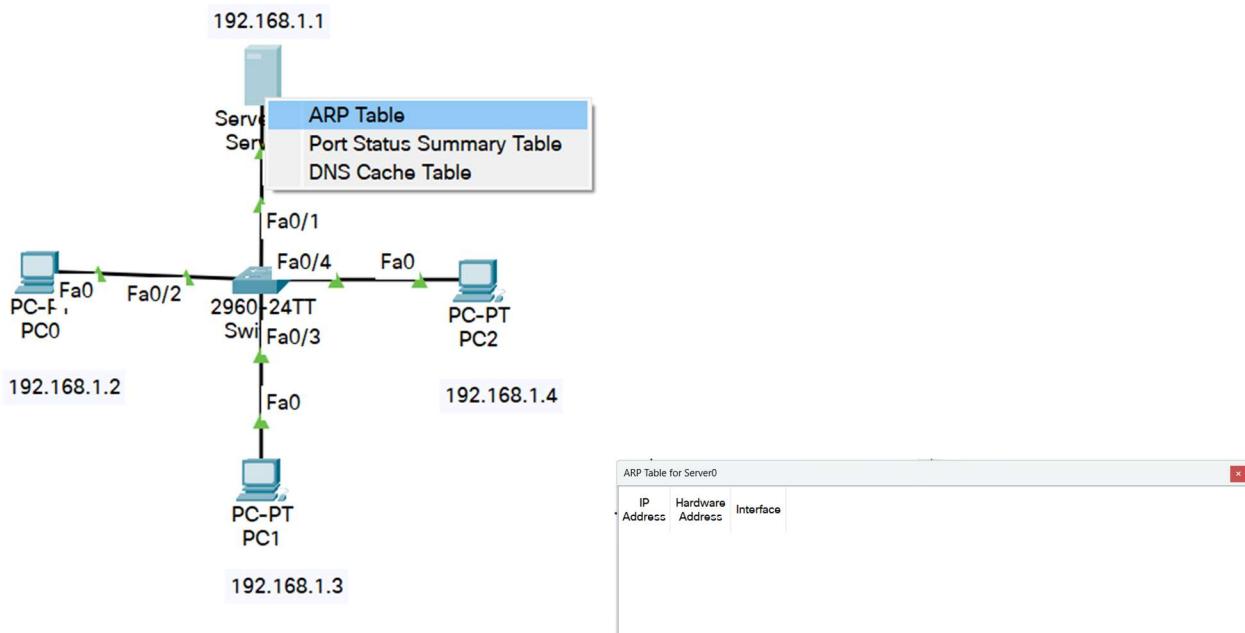


Command at PC

```
Packet Tracer PC Command Line 1.0
C:\>arp -a
No ARP Entries Found
C:\>
```

Pinging in Simulation Mode

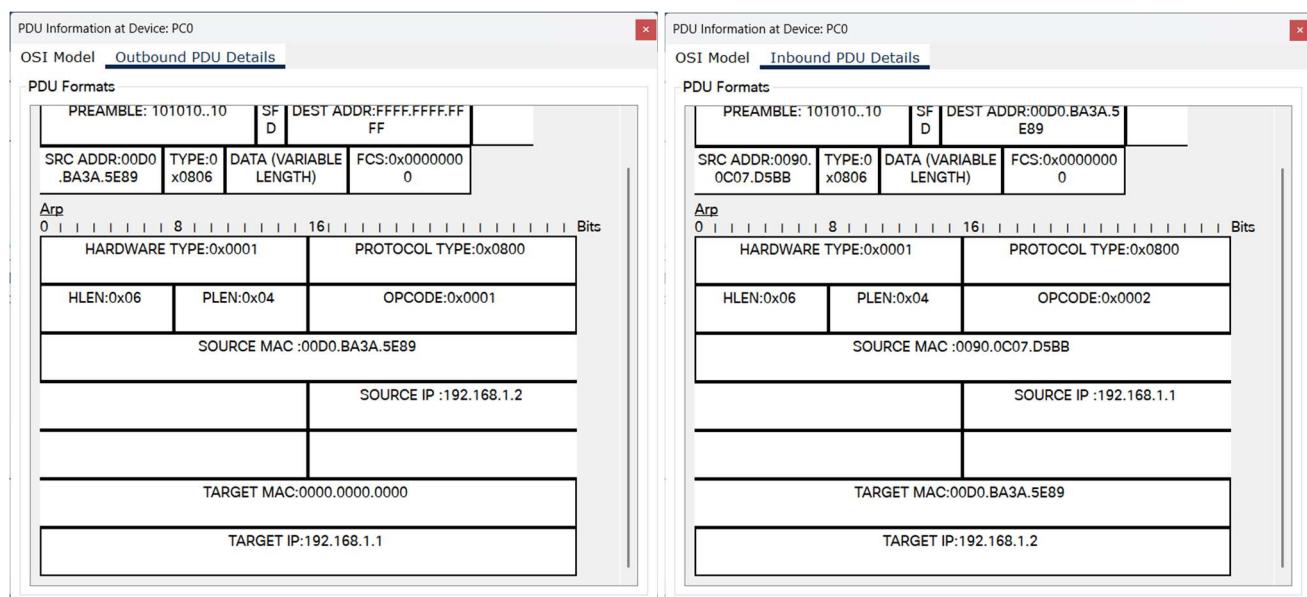


iv. Observation

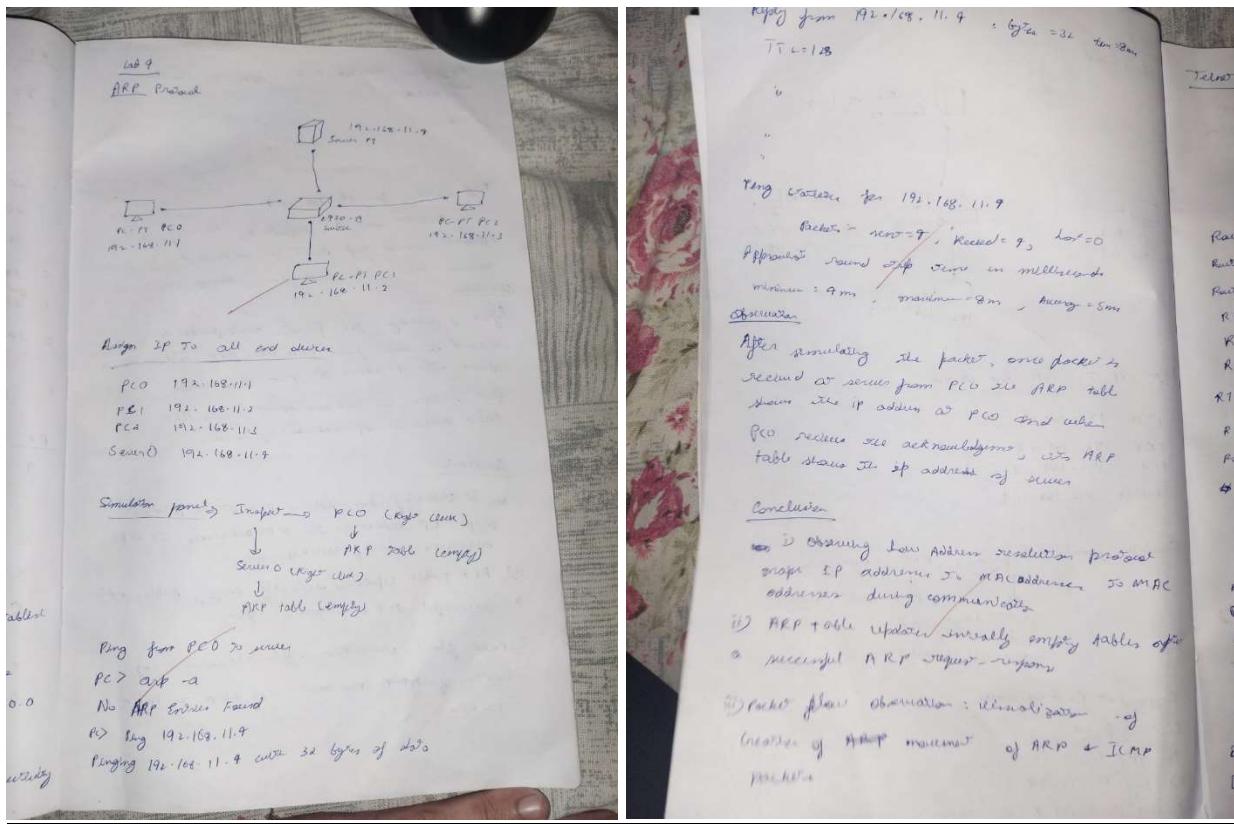

Program 10

- i. To understand the operation of TELNET by accessing the router in server room from a PC in IT office.
- ii. Procedure along with the topology

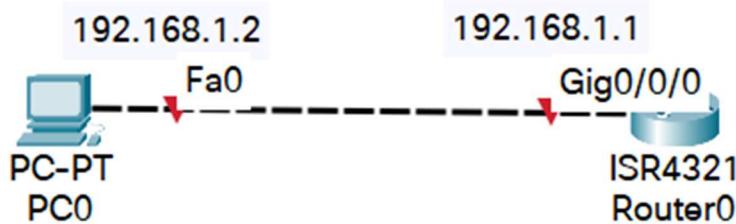

- iii. Screen shots/ output

Router

```
Router>enable
Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#hostname R1
R1(config)#enable secret hello
R1(config)#interface g0/0/0
R1(config-if)#ip address 192.168.1.1 255.255.255.0
R1(config-if)#no shutdown


R1(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0/0, changed state to up


R1(config-if)#line vty 0 5
R1(config-line)#login
% Login disabled on line 2, until 'password' is set
% Login disabled on line 3, until 'password' is set
% Login disabled on line 4, until 'password' is set
% Login disabled on line 5, until 'password' is set
% Login disabled on line 6, until 'password' is set
% Login disabled on line 7, until 'password' is set
R1(config-line)#password pass
R1(config-line)#end
R1#
%SYS-5-CONFIG_I: Configured from console by console

R1#wr
Building configuration...
[OK]
R1#|
```

PC

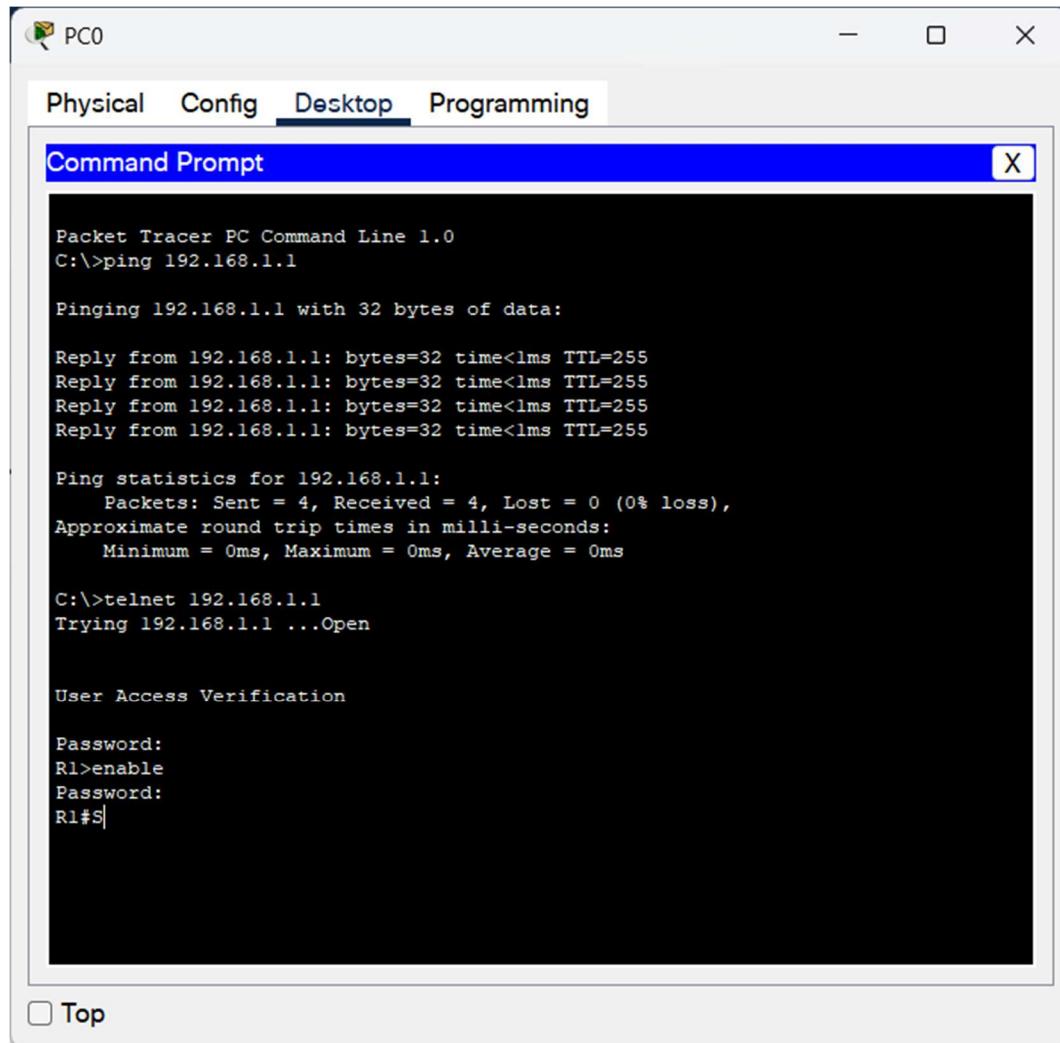


iv. Observation

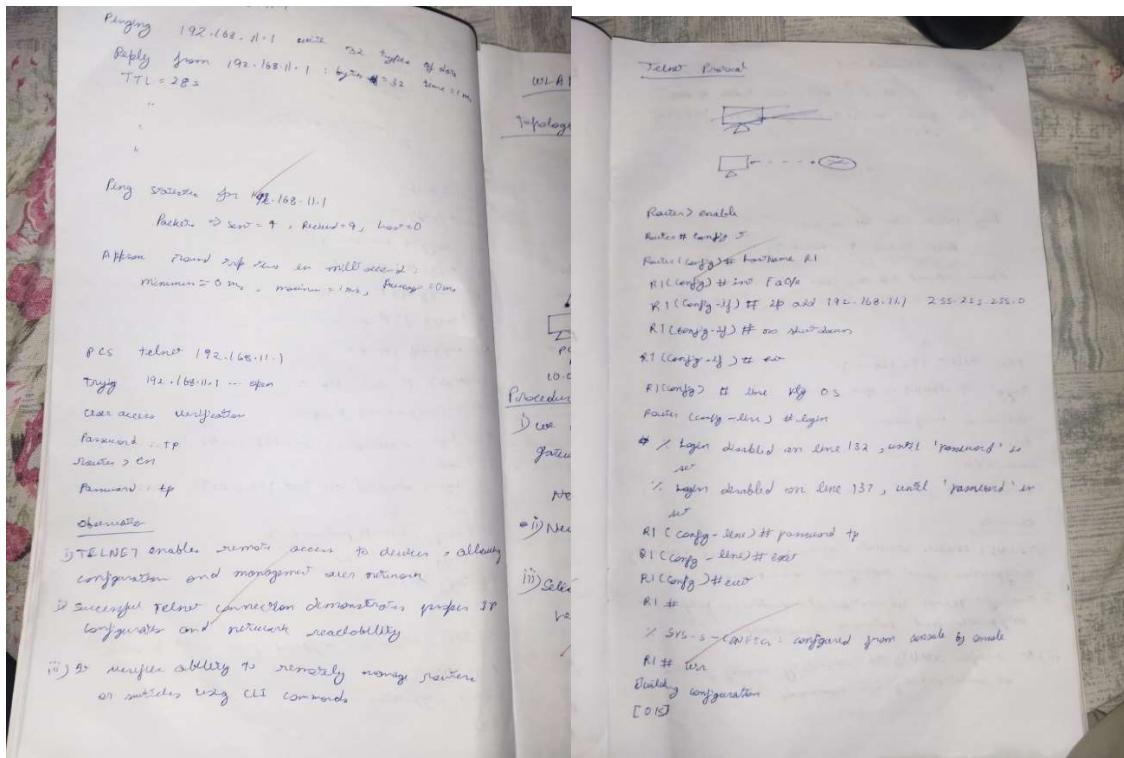


Program 11

- i. To construct a VLAN and make the PC's communicate among a VLAN
- ii. Procedure along with the topology

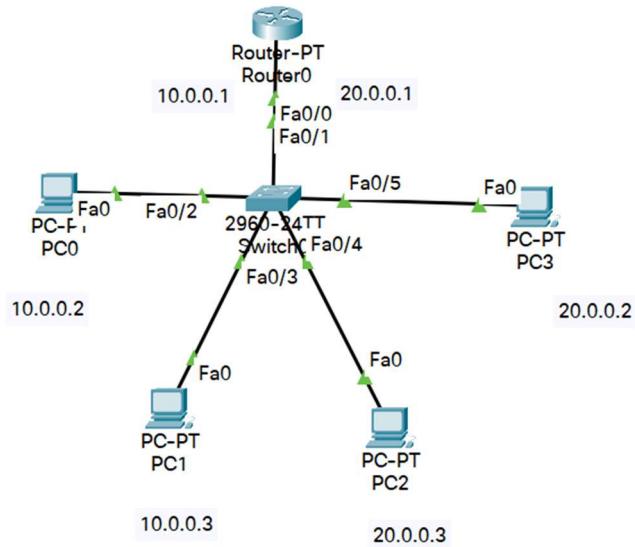


- iii. Screen shots/ output

Switch Configuration

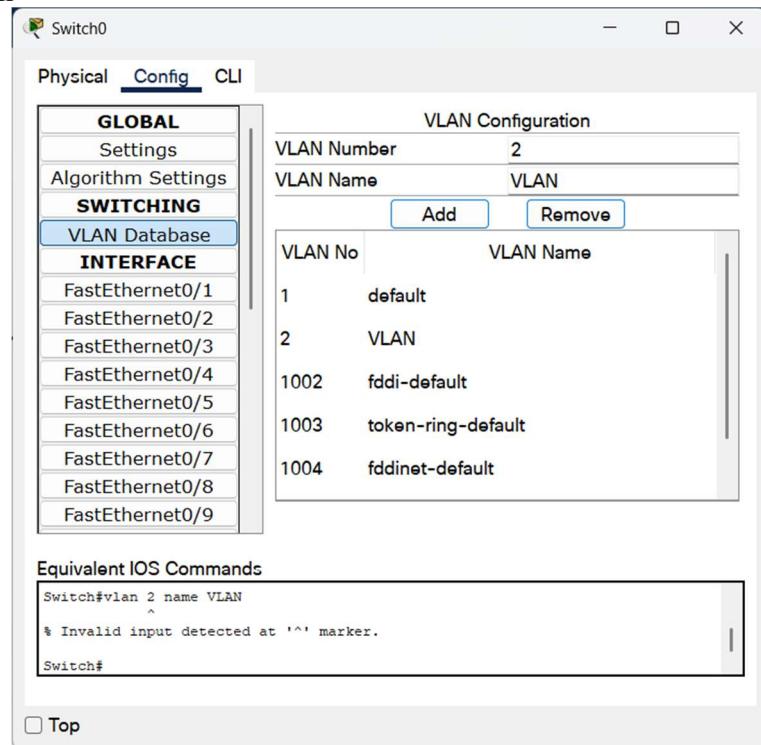

Configuration of port connected to router

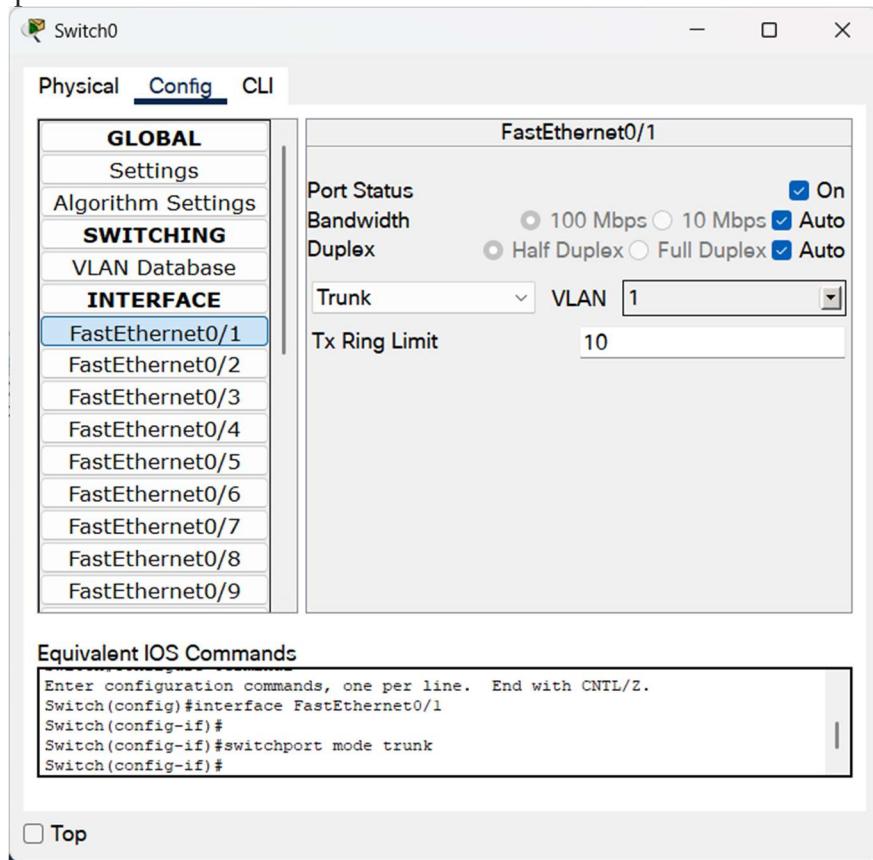

Configuration of ports connected to other networks

This screenshot shows the configuration interface for "Switch0" with two separate panels for different ports.

Left Panel (FastEthernet0/4):

- Port Status:** On (checked)
- Bandwidth:** 100 Mbps (radio button selected)
- Duplex:** Auto (radio button selected)
- Access:** VLAN 2 (dropdown selected)
- Tx Ring Limit:** 10

Right Panel (FastEthernet0/5):

- Port Status:** On (checked)
- Bandwidth:** 100 Mbps (radio button selected)
- Duplex:** Auto (radio button selected)
- Access:** VLAN 2 (dropdown selected)
- VLAN Options:** A dropdown menu is open, showing three entries: "1:default", "2:VLAN" (which is checked), and "1002:fddi-default".
- Tx Ring Limit:** 10

Both panels have their own "Equivalent IOS Commands" sections:

Left Panel (FastEthernet0/4):

```
Switch(config)#interface FastEthernet0/4
Switch(config-if)#
Switch(config-if)#switchport access vlan 2
Switch(config-if)#

```

Right Panel (FastEthernet0/5):

```
Switch(config)#interface FastEthernet0/5
Switch(config-if)#
Switch(config-if)#switchport access vlan 2
Switch(config-if)#

```

A "Top" button is located at the bottom left of each panel.

Configuartion of Router

Router0

Physical Config **CLI**

IOS Command Line Interface

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Fa0/0
Router(config-if)#ip address 10.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed
state to up

Router(config-if)#exit
Router(config)#interface Fa0/0.1
Router(config-subif)#
%LINK-5-CHANGED: Interface FastEthernet0/0.1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0.1, changed
state to up


Router(config-subif)#encapsulation dot1q 2
Router(config-subif)#ip address 20.0.0.1 255.0.0.0
Router(config-subif)#no shutdown
Router(config-subif)#exit
Router(config)#

Ctrl+F6 to exit CLI focus
```

Top

Copy **Paste**

iv. Observation

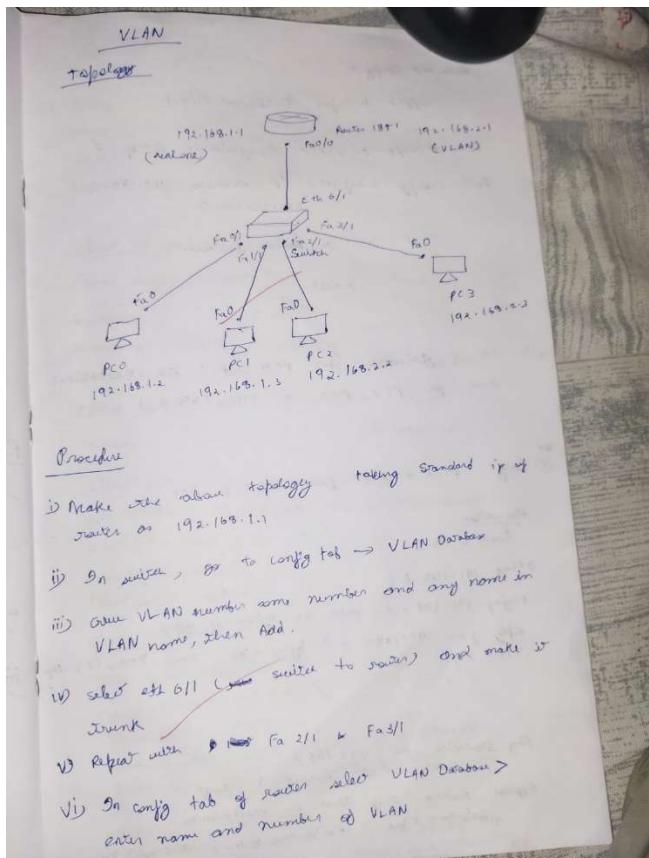

First turn stem off in the physical tab
Bring WMP 300N wireless interface to the port of the device \rightarrow then turn on

v) In config tab there is a new wireless interface address. Configure web interface SSID, WEP, WEP key and normal IP address & gateway to the device

Observation

Ringing from PC0 to PC1

> Ping 10.0.0.3

Pinging 10.0.0.3 with 32 bytes of data

Reply from 10.0.0.3: bytes=32, time=1ms
TTL=255


..
..

Pling Statistics for 10.0.0.3
Packets \rightarrow Sent=1, Received=1, Lost=0


Average round trip time in milliseconds
Minimum: 0 ms, Maximum: 1 ms, Average: 0 ms


Program 12


- i. To construct a WLAN and make the nodes communicate wirelessly.
- ii. Procedure along with the topology

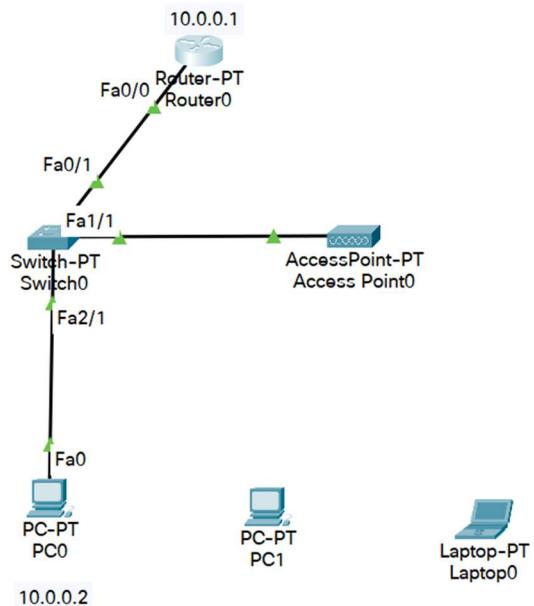

- iii. Screen shots/ output

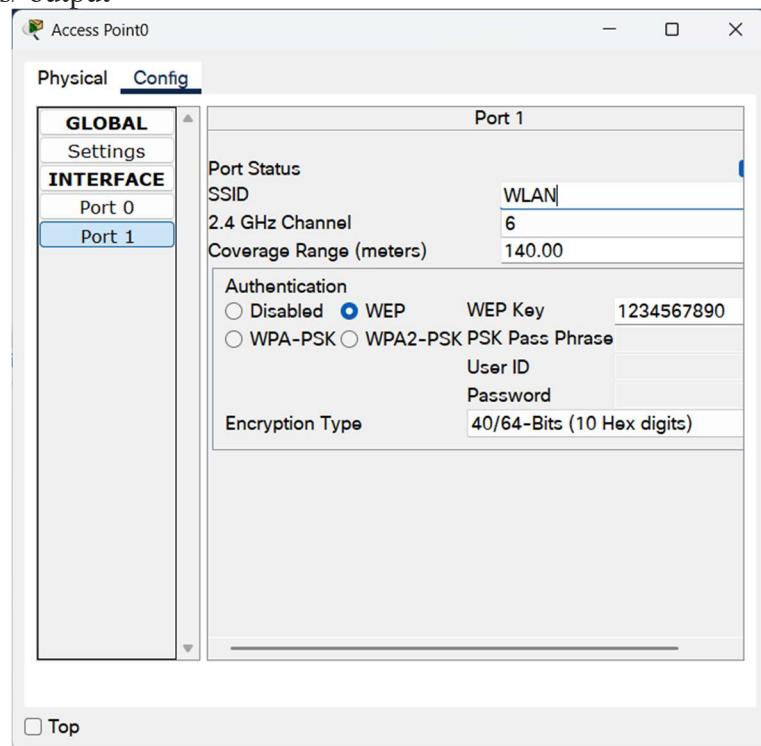

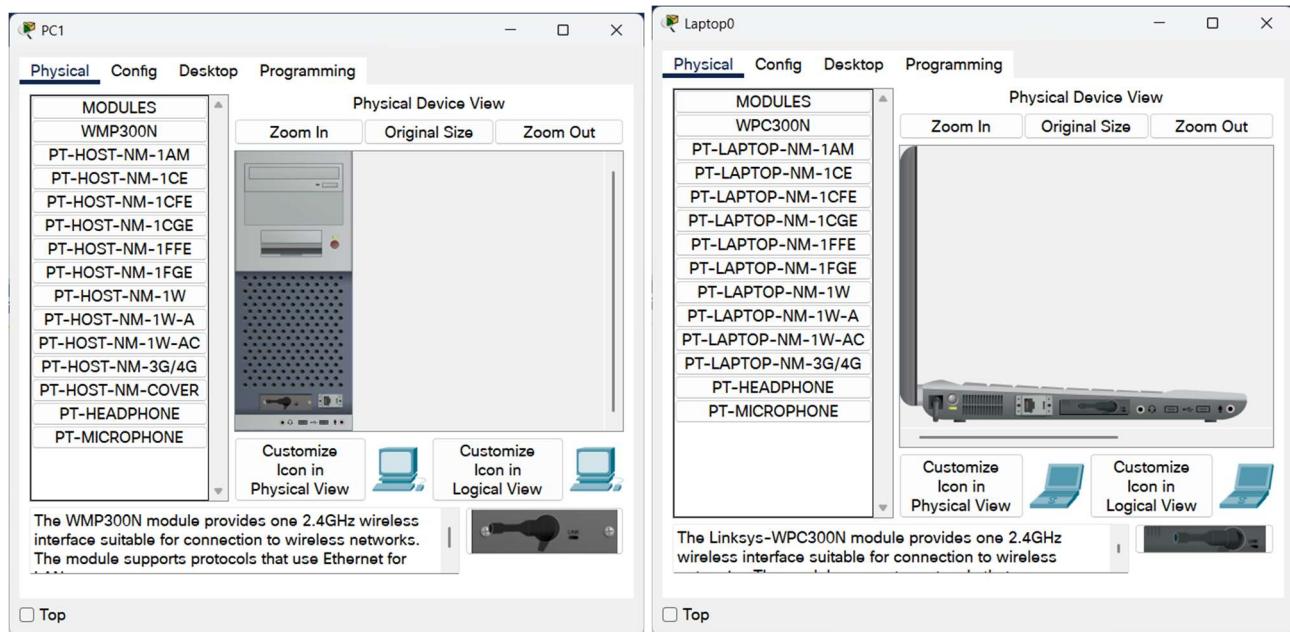

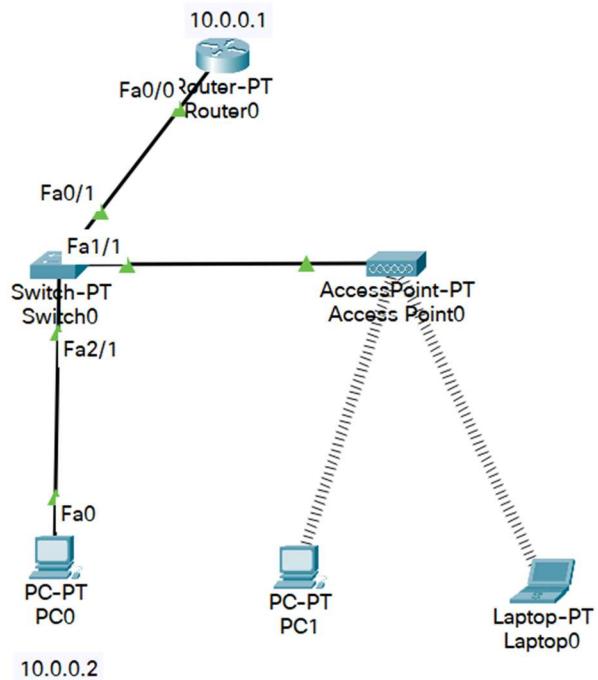

Ping:

Screenshot of the Packet Tracer Command Prompt window titled "Command Prompt". The window shows the following command and its output:

```

Packet Tracer PC Command Line 1.0
C:\>

C:\>ping 10.0.0.3

Pinging 10.0.0.3 with 32 bytes of data:

Reply from 10.0.0.3: bytes=32 time=40ms TTL=128
Reply from 10.0.0.3: bytes=32 time=25ms TTL=128
Reply from 10.0.0.3: bytes=32 time=26ms TTL=128
Reply from 10.0.0.3: bytes=32 time=24ms TTL=128


Ping statistics for 10.0.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 24ms, Maximum = 40ms, Average = 28ms

C:\>

```

The window has tabs: Physical, Config, Desktop, Programming. The Desktop tab is selected.

iv. Observation

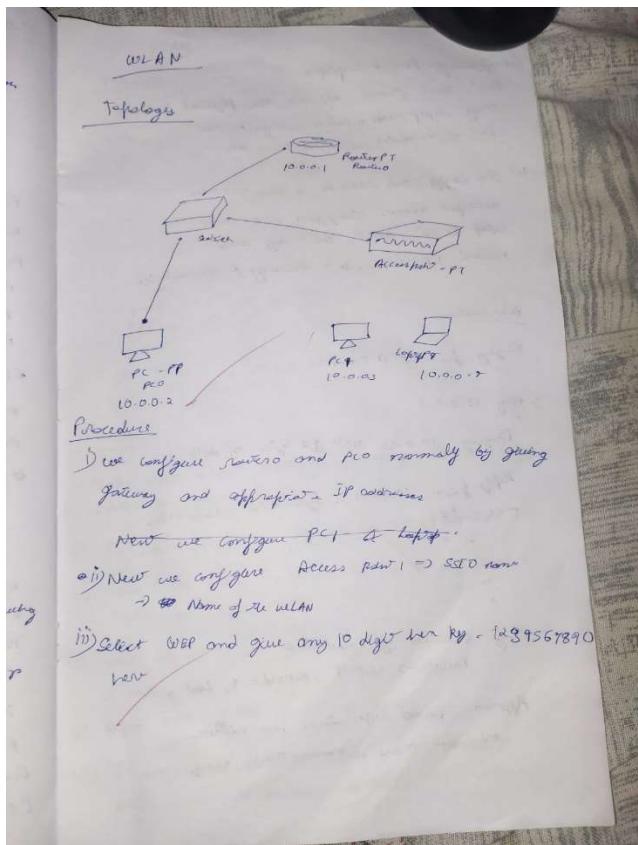

First turn them off in the physical tab
Dong uMP300N wireless interface to the port of the decline \rightarrow then turn on

v) In config tab there is a new wireless interface added. Configure it to use SSID, WEP, WEP key and normal IP address & connectivity to the decline

Observation

Pinging from PC0 to PC1

> Ping 10.0.0.3

Pinging 10.0.0.3 with 32 bytes of data

Reply from 10.0.0.3 : bytes=32, time=18ms
TTL=285

" "

" "

Ping statistics for 10.0.0.3
Packets \rightarrow Sent=1, Received=1, Lost=0

Average round trip time in milliseconds
minimum: 0 ms, maximum: 1 ms, message: 0 ms

Cycle-II

Program 1

- i. Write a program for error detecting code using CRC-CCITT (16-bits).
- ii. Procedure

```
def crc_ccitt_16_bitstream(bitstream: str, poly: int = 0x1021, init_crc: int = 0xFFFF) -> int:  
    crc = init_crc  
    for bit in bitstream:  
        crc ^= int(bit) << 15 # Align the bit with CRC's uppermost bit  
        for _ in range(1): # Process the single bit  
            if crc & 0x8000: # Check if the leftmost bit is set  
                crc = (crc << 1) ^ poly  
            else:  
                crc <<= 1  
            crc &= 0xFFFF # Ensure CRC remains 16-bit  
    return crc  
  
def append_crc_to_bitstream(bitstream: str) -> str:  
    crc = crc_ccitt_16_bitstream(bitstream)  
    crc_bits = f'{crc:016b}' # Convert CRC to a 16-bit binary string  
    return bitstream + crc_bits  
  
def verify_crc_bitstream(bitstream_with_crc: str) -> bool:  
    if len(bitstream_with_crc) < 16:  
        return False # Not enough bits to contain CRC  
    data, received_crc = bitstream_with_crc[:-16], bitstream_with_crc[-16:]  
    calculated_crc = crc_ccitt_16_bitstream(data)  
    return calculated_crc == int(received_crc, 2)  
  
if __name__ == "__main__":  
    # User input for original bitstream  
    message_bits = input("Enter the original bitstream (e.g., 11010011101100): ")  
  
    # Calculate and append CRC  
    bitstream_with_crc = append_crc_to_bitstream(message_bits)  
    print(f'Bitstream with CRC: {bitstream_with_crc}')  
  
    # User input for verification  
    user_bitstream = input(  
        "Enter the received bitstream for verification (e.g., 1101001110110011011011000011): "  
    )
```

```
# Verify CRC
is_valid = verify_crc_bitstream(user_bitstream)
print(f'crc valid: {is_valid}')
```

iii. Screen shots/ output

```
In [1]: runcell(0, 'E:/python_files/untitled2.py')

Enter the original bitstream (e.g., 11010011101100): 11111
Bitstream with CRC: 111111111111111100000


Enter the received bitstream for verification (e.g., 11010011101100110110110111000011): 111111111111111100000
CRC valid: True

In [2]: runcell(0, 'E:/python_files/untitled2.py')

Enter the original bitstream (e.g., 11010011101100): 11111
Bitstream with CRC: 111111111111111100000

Enter the received bitstream for verification (e.g., 11010011101100110110110111000011): 111111111111111100001
CRC valid: False
```

iv. Observation

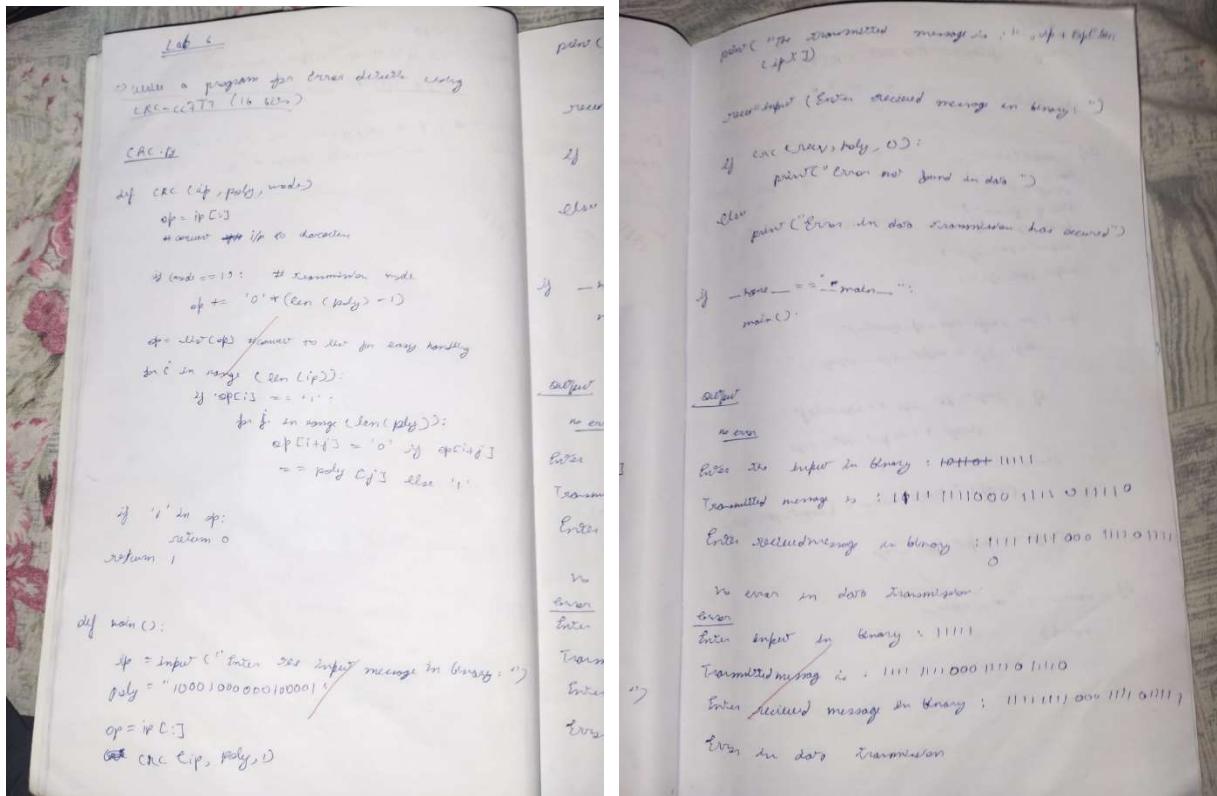

Program 2

- i. Write a program for congestion control using Leaky bucket algorithm
- ii. Procedure

```
def main():
    # Initial packets in the bucket
    storage = 0

    # Total number of times bucket content is checked
    no_of_queries = 4

    # Total number of packets that can be accommodated in the bucket
    bucket_size = 10

    # Number of packets that enter the bucket at a time
    input_pkt_size = 4

    # Number of packets that exit the bucket at a time
    output_pkt_size = 1

    for _ in range(no_of_queries):
        # Space left in the bucket
        size_left = bucket_size - storage

        if input_pkt_size <= size_left:
            # Update storage
            storage += input_pkt_size
        else:
            print(f"Packet loss = {input_pkt_size}")

        print(f"Buffer size = {storage} out of bucket size = {bucket_size}")


        # Remove packets from storage
        storage -= output_pkt_size

if __name__ == "__main__":
    main()
```

- iii. Screen shots/ output

```
In [3]: runcell(0, 'E:/Engineering/5Sem/CN/Experiments/untitled3.py')
Buffer size = 4 out of bucket size = 10
Buffer size = 7 out of bucket size = 10
Buffer size = 10 out of bucket size = 10
Packet loss = 4
Buffer size = 9 out of bucket size = 10
```

iv. Observation

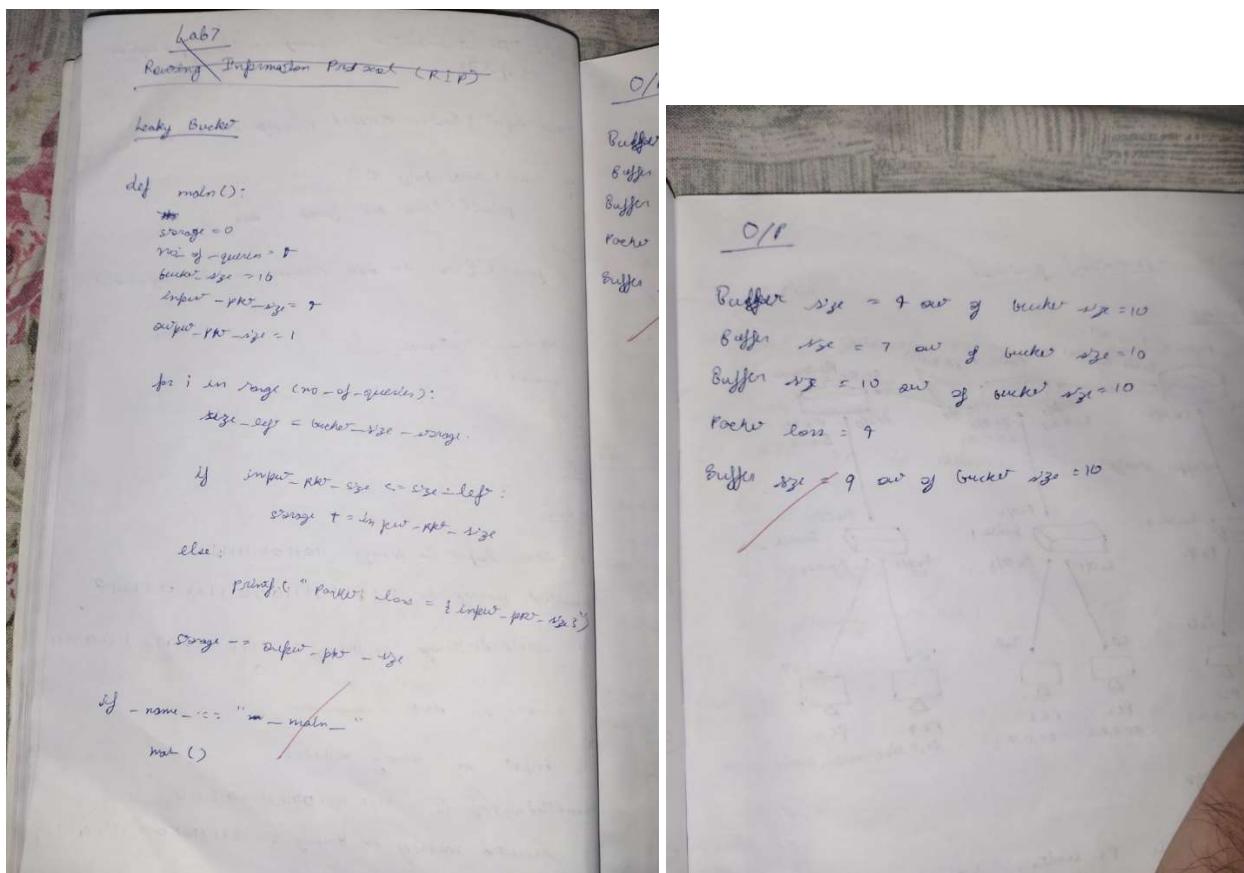

Program 3

- i. Using TCP/IP sockets, write a client-server program to make client sending the file name and the server to send back the contents of the requested file if present.
- ii. Procedure

```
clientTCP.py
from socket import *
serverName = '127.0.0.1'
serverPort = 12000
clientSocket = socket(AF_INET, SOCK_STREAM)
clientSocket.connect((serverName,serverPort))
sentence = input("\nEnter file name: ")

clientSocket.send(sentence.encode())
filecontents = clientSocket.recv(1024).decode()
print ('\nFrom Server:\n')
print(filecontents)
clientSocket.close()
```


```
serverTCP.py
from socket import *
serverName="127.0.0.1"
serverPort = 12000
serverSocket = socket(AF_INET,SOCK_STREAM)
serverSocket.bind((serverName,serverPort))
serverSocket.listen(1)
while 1:
    print ("The server is ready to receive")
    connectionSocket, addr = serverSocket.accept()
    sentence = connectionSocket.recv(1024).decode()

    file=open(sentence,"r")
    l=file.read(1024)

    connectionSocket.send(l.encode())
    print ('\nSent contents of ' + sentence)
    file.close()
    connectionSocket.close()
```

iii. Screen shots/ output

Client

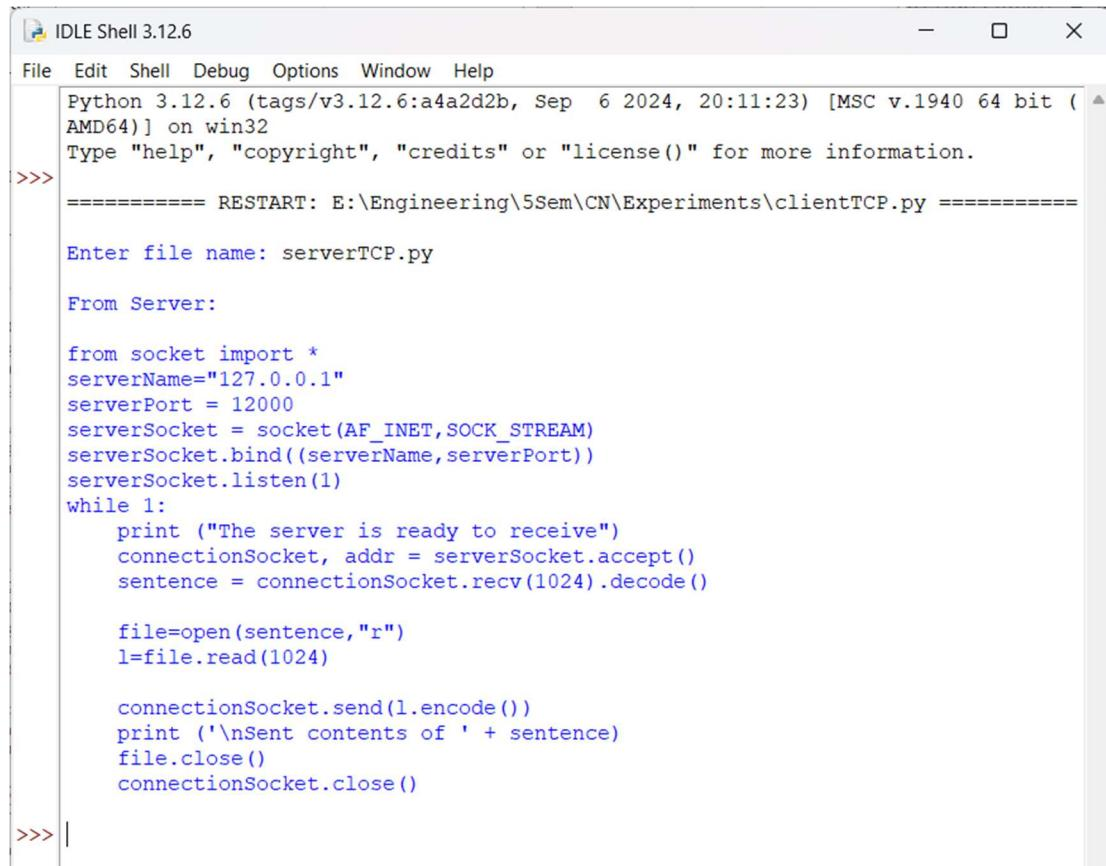

```
IDLE Shell 3.12.6
File Edit Shell Debug Options Window Help
Python 3.12.6 (tags/v3.12.6:a4a2d2b, Sep 6 2024, 20:11:23) [MSC v.1940 64 bit (AMD64)] on win32
Type "help", "copyright", "credits" or "license()" for more information.

>>> ===== RESTART: E:\Engineering\5Sem\CN\Experiments\clientTCP.py =====

Enter file name: serverTCP.py

From Server:


from socket import *
serverName="127.0.0.1"
serverPort = 12000
serverSocket = socket(AF_INET, SOCK_STREAM)
serverSocket.bind((serverName,serverPort))
serverSocket.listen(1)
while 1:
    print ("The server is ready to receive")
    connectionSocket, addr = serverSocket.accept()
    sentence = connectionSocket.recv(1024).decode()

    file=open(sentence,"r")
    l=file.read(1024)

    connectionSocket.send(l.encode())
    print ('\nSent contents of ' + sentence)
    file.close()
    connectionSocket.close()

>>> |
```

Server

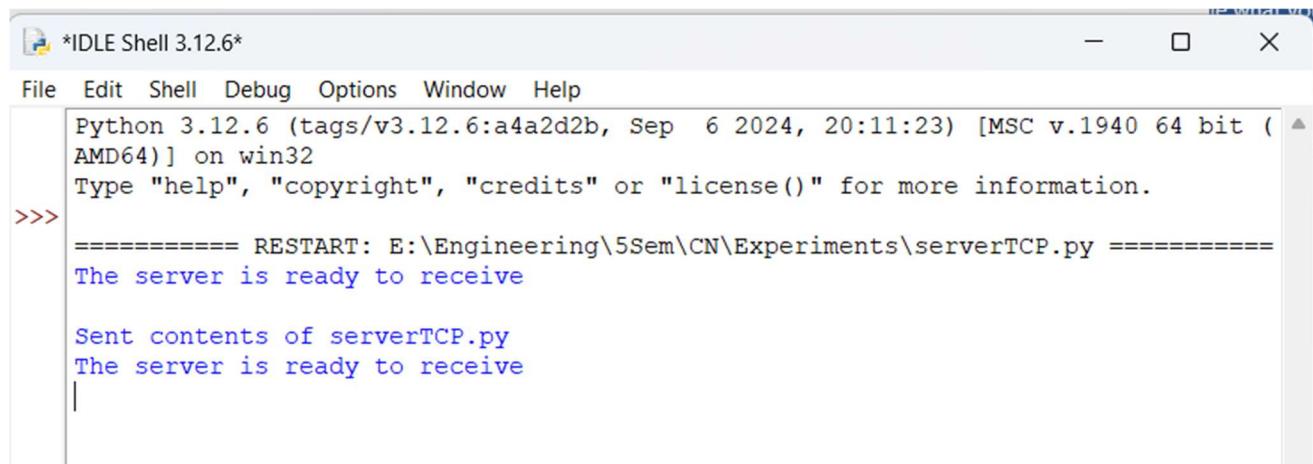


```
*IDLE Shell 3.12.6*
File Edit Shell Debug Options Window Help
Python 3.12.6 (tags/v3.12.6:a4a2d2b, Sep 6 2024, 20:11:23) [MSC v.1940 64 bit (AMD64)] on win32
Type "help", "copyright", "credits" or "license()" for more information.

>>> ===== RESTART: E:\Engineering\5Sem\CN\Experiments\serverTCP.py =====
The server is ready to receive

Sent contents of serverTCP.py
The server is ready to receive
```

iv. Observation

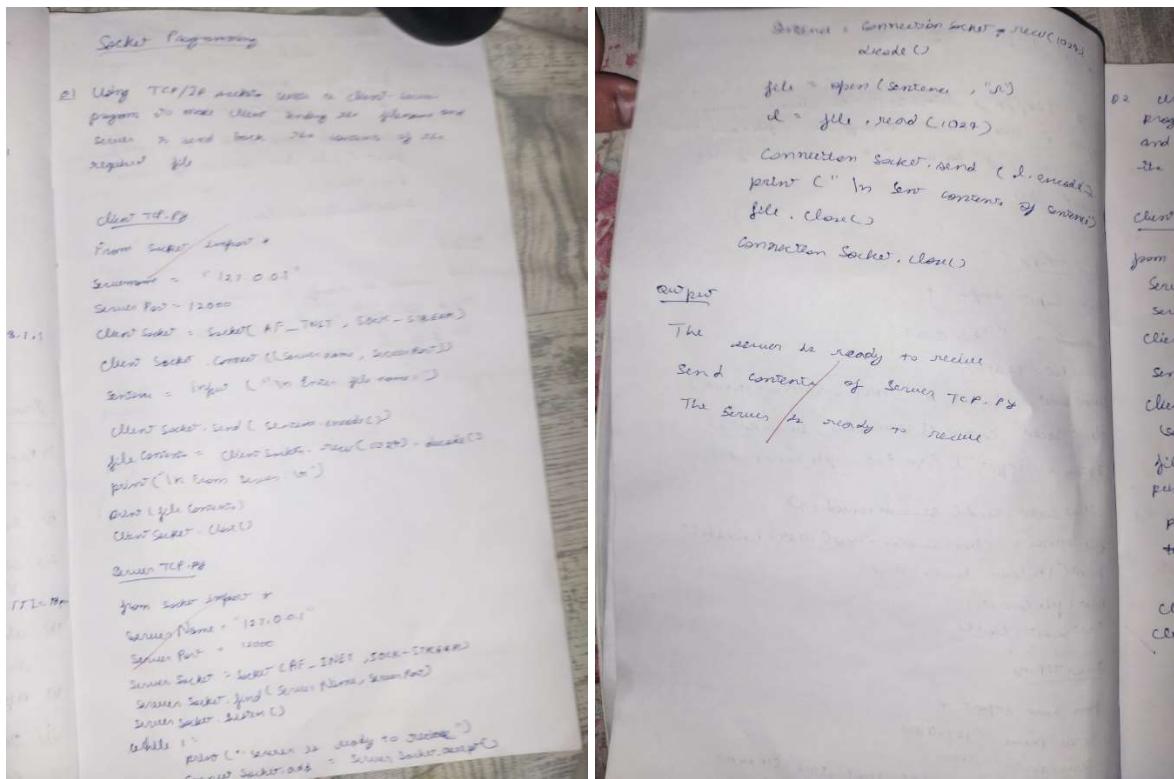

Program 4

- i. Using UDP sockets, write a client-server program to make client sending the file name and the server to send back the contents of the requested file if present.
- ii. Procedure

clientUDP.py

```
from socket import *
serverName = "127.0.0.1"
serverPort = 12000
clientSocket = socket(AF_INET, SOCK_DGRAM)

sentence = input("\nEnter file name: ")

clientSocket.sendto(bytes(sentence,"utf-8"),(serverName, serverPort))
```

```
filecontents,serverAddress = clientSocket.recvfrom(2048)
print ('\nReply from Server:\n')
print (filecontents.decode("utf-8"))
# for i in filecontents:
#     print(str(i), end = "")
clientSocket.close()
clientSocket.close()
```

serverUDP.py

```
from socket import *
serverPort = 12000
serverSocket = socket(AF_INET, SOCK_DGRAM)
serverSocket.bind(("127.0.0.1", serverPort))
print ("The server is ready to receive")
while 1:
    sentence, clientAddress = serverSocket.recvfrom(2048)
    sentence = sentence.decode("utf-8")
    file=open(sentence,"r")
    con=file.read(2048)
```


```
serverSocket.sendto(bytes(con,"utf-8"),clientAddress)
```

```
print ('\nSent contents of', end = ' ')
print (sentence)
# for i in sentence:
```

```
# print (str(i), end = ")
file.close()
```

iii. Screen shots/ output

Client

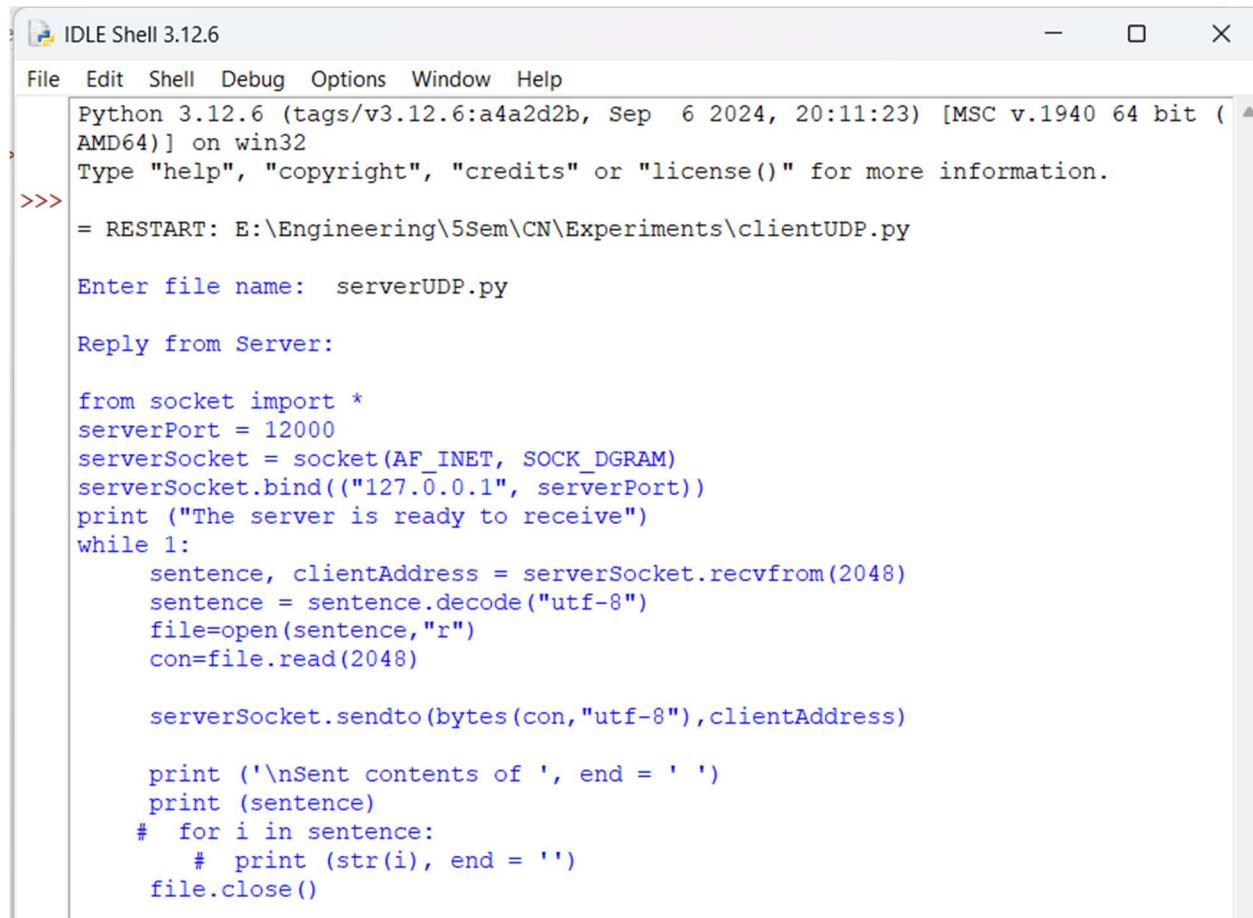

```
IDLE Shell 3.12.6
File Edit Shell Debug Options Window Help
Python 3.12.6 (tags/v3.12.6:a4a2d2b, Sep  6 2024, 20:11:23) [MSC v.1940 64 bit (AMD64)] on win32
Type "help", "copyright", "credits" or "license()" for more information.
>>>
= RESTART: E:\Engineering\5Sem\CN\Experiments\clientUDP.py

Enter file name:  serverUDP.py


Reply from Server:

from socket import *
serverPort = 12000
serverSocket = socket(AF_INET, SOCK_DGRAM)
serverSocket.bind(("127.0.0.1", serverPort))
print ("The server is ready to receive")
while 1:
    sentence, clientAddress = serverSocket.recvfrom(2048)
    sentence = sentence.decode("utf-8")
    file=open(sentence,"r")
    con=file.read(2048)

    serverSocket.sendto(bytes(con,"utf-8"),clientAddress)

    print ('\nSent contents of ', end = ' ')
    print (sentence)
#   for i in sentence:
#       #  print (str(i), end = '')
    file.close()
```

Server

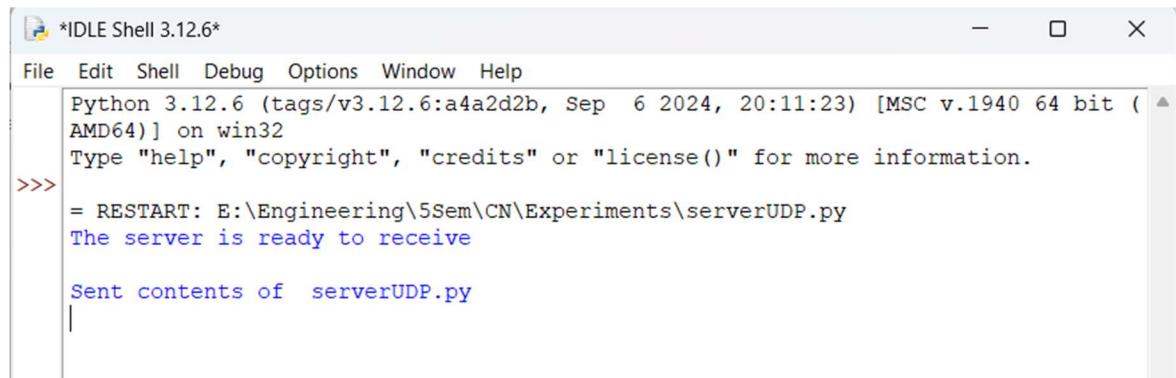

```
*IDLE Shell 3.12.6*
File Edit Shell Debug Options Window Help
Python 3.12.6 (tags/v3.12.6:a4a2d2b, Sep  6 2024, 20:11:23) [MSC v.1940 64 bit (AMD64)] on win32
Type "help", "copyright", "credits" or "license()" for more information.
>>>
= RESTART: E:\Engineering\5Sem\CN\Experiments\serverUDP.py
The server is ready to receive

Sent contents of  serverUDP.py
```

iv. Observation

