Amrita Vishwa Vidyapeetham

Real-Time Multi-Core Sorting and Median Filter Service

26ELC331 — Real-Time Operating Systems

Anmol Govindarajapuram Krishnan - CB.EN.U4EEE23103
Mauli Rajguru - CB.EN.U4EEE23120
Sanjay TS - CB.EN.U4EEE23136

October 17, 2026

d.2 Outline

Introduction
System Architecture
Implementation Details
Dataset & Dual Layouts
Two-Fold Verification & Results
Applications & Conclusion

PART 1

Introduction

A client offloads continuous **floating-point time-series** sensor data to a server.

The server must:

- Sort blocks with a **multi-threaded parallel merge sort**,
- Filter sensor outliers with a **rolling median filter**,
- Notify completion asynchronously via a **QNX pulse event**.

The client then collects the calculated median and a memory-offset descriptor.

Real-Time Constraints
High-rate telemetry arrives continuously. Impulsive sensor glitches distort statistical averages and must be removed without stalling collection.

Architectural Rules
QNX synchronous IPC for submission, 2-part IOV transfer ($\geq$ 64 KiB payload), and an asynchronous completion pulse.

Sensor faults produce high-magnitude impulse spikes. A single faulty sample ruins an arithmetic mean completely:

Window Readings	Mean	Median	Truth
5.0, 5.0, 5.0, 5.0, 5.0	5.0 V	5.0 V	5.0 V
5.0, 5.0, 5.0, 5.0, 50.0	**14.0 V**	**5.0 V**	5.0 V

A 50 V transient corrupts the mean by 9 V, but the median stays at 5 V.

- **Odd kernel width**: Guarantees an unambiguous central sample.
- **Preserving time order**: Median filtering requires chronological order; it must run on a raw copy, not the sorted array.
- **Dual purpose**: Parallel sort gives block percentiles; rolling median cleans live signals.

Rolling median cleanly strips 10–40σ transient spikes without distorting baseline data.

Formal Contract First
A shared header (`protocol.h`) establishes message types, struct layouts, and 64 KiB block boundaries before writing application logic.


Modular Pipeline
Virtual sensor → block loader → message passing → parallel merge sort. Each module is fully testable on PC and target.

- **Zero padding overhead**: 16 384 float32 samples is exactly 65 536 bytes (64 KiB).
- **Deterministic execution**: Stable merge logic guarantees identical results across 1, 2, 4, or 8 threads.
- **Non-blocking server**: Synchronous ack releases the client immediately; processing continues in worker threads.
- **Empirical rigor**: All performance numbers are measured directly on Raspberry Pi 4 hardware.

PART 2


System Architecture

d.8 System overview

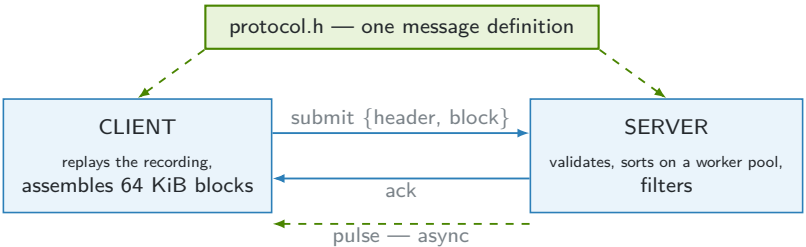


Both programs compile against the same header file. The 64 KiB block crosses as the second part of an IOV transfer: the header is read, validated, and only then is the payload pulled into memory.

d.9 Client: connect, offload, collect

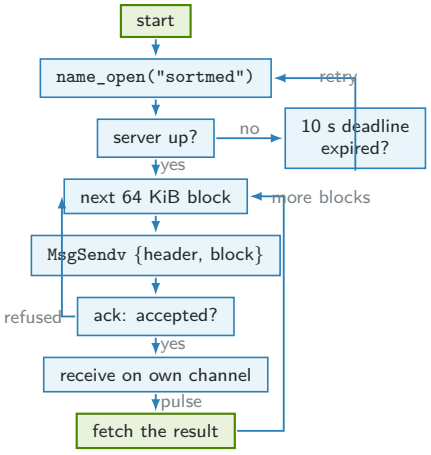


no server within 10 s → report it and exit, never hang

d.10 Server: accept, validate, answer

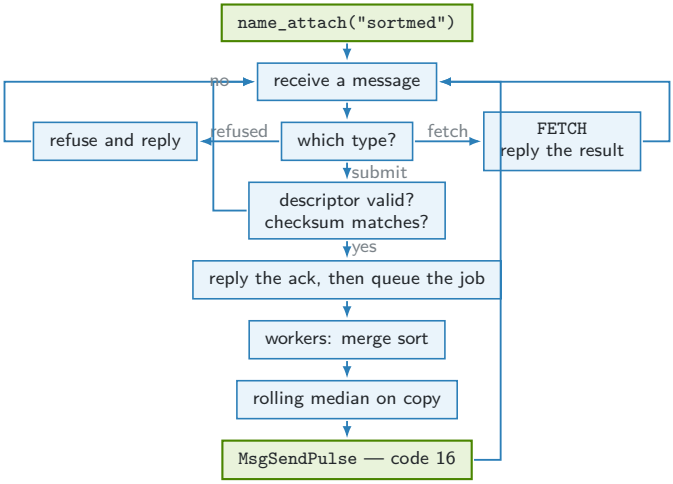

d.11 Data flow: what changes at each step

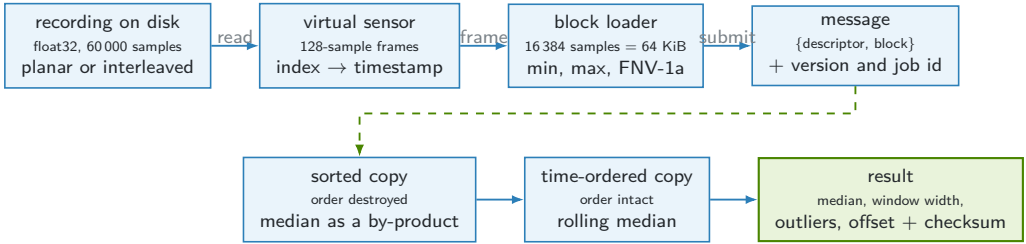

Two buffers, not one. The sort destroys the time order the filter reads, so the arriving block is never sorted in place — its checksum describes it as it arrived.

Every hand-off in this chain is byte-deterministic: fixed-width fields, cleared structs, a zero-padded short block — so any two stages can be compared exactly.

PART 3

Implementation Details

d.13 Virtual Sensor: Architecture & Mechanics

`app/sensor.c` emulates a hardware telemetry device:

- **Sliding Window Buffer**: Keeps 4096 records in RAM (`SENSOR_WINDOW_SAMPLES`). Refills on demand via `fread()` as reads advance.
- **Configurable Striding**: Reads planar format (`stride 1, offset 0`) or interleaved records (`stride 4, offset k`) with one code path:

```
idx = (i - win_first) * stride + offset
```

- **Device-Style Frames**: `sensor_read()` yields at most one frame (default 128 samples).
- **Synthetic Clock**: Exact sample

Strict Input Validation
Validates byte sizes upon opening. Explicitly rejects non-multiple float sizes, zero rates, mismatched strides, or bad offsets.

Pacing Mechanism
`sensor_read_paced()` compares the virtual delivery deadline against monotonic clock (`clock_gettime` / `nanosleep`) to hold real-world sensor rates.

```c
/* Bounded window refill & strided extraction */
while (n < cap) {
    if (s->window_count == 0 ||
        s->next < s->window_first ||
        s->next >= s->window_first + s->
     window_count) {
        if (sensor_fill(s, s->next) != 0)
            return (n > 0) ? (int)n : -1;
    }
    size_t off = (s->next - s->window_first) *
                 s->cfg.stride + s->cfg.offset;
    dst[n++] = s->window[off];
    s->next++;
    s->delivered++;
}
```

- **Sliding Window**: `sensor_fill()` seeks to the required sample and reads a bounded chunk.
- **Zero Memory Bloat**: The full file never resides in memory at once.
- **Exact Stride**: Extracts one channel at index `off` whether planar or 4-channel interleaved.

One unified inner loop handles all file format

`app/block_loader.c` packages sensor frames into transport parcels:

- **Exact 64 KiB Payload**: Reads frames until `PROTO_BLOCK_SAMPLES` (16 384 floats = 65 536 B) is reached.
- **Channel Mapping**: Maps protocol channel to interleaved stride offset:

  `Voltage` → 1, `Current` → 2, `Temp` → 3
- **Zero-Padded Final Block**: Tail samples of incomplete blocks are explicitly zeroed so uninitialized memory is never transmitted.

Descriptor Metadata
Generates `proto_block_desc_t` for every block:

- Sequence number & first sample index
- Valid sample count
- Min/Max boundaries
- 32-bit FNV-1a checksum

Checksum covers **only declared samples**, not the zero-padding. Guarantees deterministic seals across all runs.

```
/* Read full 64 KiB block, pad short tail, seal */
got = sensor_read_block(l->sensor,
                        block->samples,
                        PROTO_BLOCK_SAMPLES);
if (got <= 0) return got;

if ((uint32_t)got < PROTO_BLOCK_SAMPLES) {
    memset(&block->samples[got], 0,
           (PROTO_BLOCK_SAMPLES - got) * sizeof(
    float));
}
desc->samples  = (uint32_t)got;
desc->checksum = proto_checksum_block(block->
    samples,
                                      desc->
    samples);
```

- **Safe Zeroing**: Prevents undefined stack/heap leaks across process boundaries.
- **Reproducibility**: Ensures identical block bytes and checksums on identical data.
- **Server Verification**: The server rejects the submit if the checksum differs by even 1 bit.

Deterministic packing meets the $\geq$64 KB rule

app/protocol.h defines the shared binary contract:

Message	Size	Description
SUBMIT	48 B	Type, version, job ID, descriptor
BLOCK	64 KiB	16 384 raw float32 sampl
ACK	8 B	Reply status and assigne
PULSE	1 B code	Code 16, async completi
FETCH	8 B	Client requests result for
RESULT	48 B	Median, offsets, checksums, runtime

Static Assertions (C99)
Checks struct sizes and offsets at compile time: `sizeof(proto_block_t)` is pinned to exactly 65 536 bytes.

Safety and Isolation
Message types start at 0x1000, safely above QNX kernel IO message range (0x100–0x1FF). Pulse code 16 sits in user space (`_PULSE_CODE_MINAVAIL`).

d.18 Parallel Merge Sort: Phase Architecture

`app/mergesort.c` coordinates a POSIX thread pool:

- **Thresholding**: Inputs < 4096 samples run serial merge sort (pool overhead exceeds benefit).
- **Phase 0 (Partitions)**: 64 KiB block splits into k slices ($k = \min(n/1024, \text{threads})$). Workers sort slices concurrently into scratch.
- **Phases** $1 \ldots \log_2(k)$ **(Merges)**: Workers merge adjacent pairs of sorted runs. Buffer pointers swap (ping-pong) between phases.
- **Odd Phase Copy**: If final merge landed in scratch buffer, it is copied back to

POSIX Barrier Synchronization
Uses 1 mutex and 2 condition variables:

- `work_ready`: Broadcasts tasks.
- `phase_done`: Signals completion.

No sleeps, no busy-waiting.

Deterministic and Stable
Ties pick from the left run ($a_i \leq b_j$). Equal items preserve order; output is bit-identical across 1, 2, 4, and 8 threads.

d.19 Parallel Merge Sort: Barrier Code Walkthrough

```c
/* Post tasks to workers & wait for phase
     completion */
static void post_phase(mergesort_pool_t *p,
     unsigned ntasks) {
    pthread_mutex_lock(&p->lock);
    p->ntasks     = ntasks;
    p->next_task  = 0;
    p->tasks_done = 0;
    pthread_cond_broadcast(&p->work_ready);

    while (p->tasks_done < p->ntasks)
        pthread_cond_wait(&p->phase_done, &p->lock
     );

    pthread_mutex_unlock(&p->lock);
}
```

- **Manager Thread**: Prepares task list, broadcasts `work_ready`, blocks on `phase_done`.
- **Worker Threads**: Pull next available task index under mutex, execute sort/merge, increment `tasks_done`.
- **Last Finisher**: Signals `phase_done` when `tasks_done == ntasks`.

Strict synchronization without artificial dela

PART 4

Dataset & Dual Layouts

d.21 Synthetic Battery Telemetry (PyBaMM)

Realistic multi-channel battery dataset with known ground truth:

- **Simulation**: LG M50 cell model (`Chen2020`) with lumped thermal dynamics, discharged at 0.5C, 1C, 2C.
- **Channels**: Time, Voltage, Current, Temperature (60 000 samples at 100 Hz = 600 s).
- **Noise Injection**: Additive white Gaussian noise (AWGN) + 1.5% impulsive spikes (10–40σ), bursts, and dropouts.
- **Answer Key**: Exact boolean corruption mask preserved offline to score filter accuracy.

Metric	Value
Discharge runs	3 (0.5C, 1C, 2C)
Samples per run	60 000
Channels per sample	4
Total tensor values	720 000
Raw payload size	6.2 MiB (44 blocks)
Corrupted cells	8 040 (1.489%)

Predictable, reproducible testbench for sorting and outlier rejection.

Planar Format
One file per channel (`r1_voltage.bin`). 60 000 contiguous float32 values (240 000 B).
$\text{sample}_i = \text{file}[i]$ (`stride 1, offset 0`).

Interleaved Format
One shared file (`Chen2020_c1...bin`). 60 000 records of 4 floats (960 000 B): $[t_s, V, I, T]$.
$\text{sample}_i = \text{file}[4i+k]$ (`stride 4, offset k`).

Why the Distinction Matters
On a planar file, numbers can be read sequentially. On an interleaved file, sorting without selecting a channel sorts seconds against volts against amperes!

- `block_loader_channel_offset()` isolates this mapping (Voltage is offset 1, not 2).
- Both routes produce **byte-identical 64 KiB blocks** and matching checksums:

```
Block 0:  0xe90d24d2, Block 1:
0xc98cd3b2...
```

PART 5

Two-Fold Verification & Results

Two-Fold Verification Strategy

Testing is executed in a rigorous **two-fold manner**:

Fold 1: Host-Side Unit Testing

- Standard GCC/POSIX testbench off the board.
- Tests edge boundaries (0 to 64 samples, ± 0.0).
- Catches 1-bit checksum tampering.
- Asserts Planar vs Interleaved equivalence.
- Verified against standard `qsort`.

1418 checks, 0 failed, 0 skipped.


Fold 2: On-Target QNX Execution

- Cross-compiled with `qcc -Vgcc_ntoaarch64le`.
- Embedded inside boot IFS image (`ifs-rpi4.bin`).
- Bare-metal Raspberry Pi 4 (Cortex-A72).
- Real-time multi-core scaling (1, 2, 4 cores).
- Direct IFS payload file processing.


100% verified pass rate on physical hardware.

Hardware Target
Raspberry Pi 4 Model B with 4 Cortex-A72 cores running QNX 8.0.0. Booted directly from SD card into RAM IFS image.

Zero Network Dependency
Controlled strictly via FTDI USB-to-serial adapter on GPIO 14/15 (`/dev/ser1`) at 115200 8N1. Self-contained and noise-free.




d.26 Console: Board Boot and Initialization

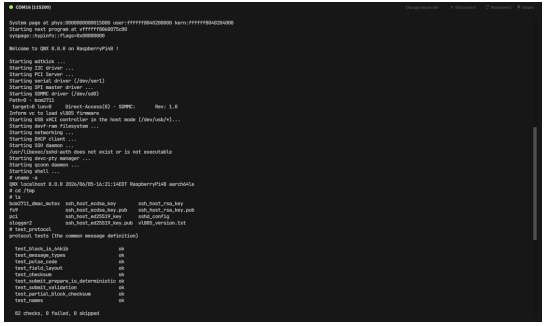


Raspberry Pi 4 boot sequence under QNX 8.0.0. All four Cortex-A72 cores are brought online by `procnto-smp-instr`. System shell initializes on serial console.

d.27 Console: Protocol Layer Verification

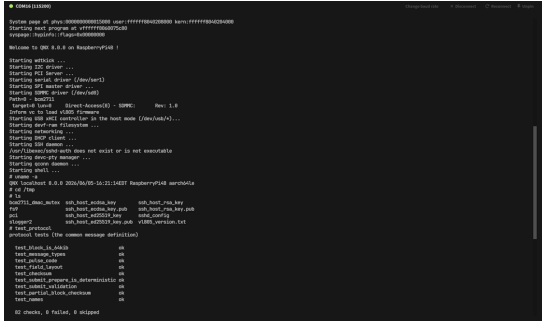


`test_protocol` executing on target: 82 checks, 0 failed. Pins the exact 64 KiB block size, application message ID ranges, pulse codes, and FNV-1a checksum.

d.28 Console: Virtual Sensor Verification

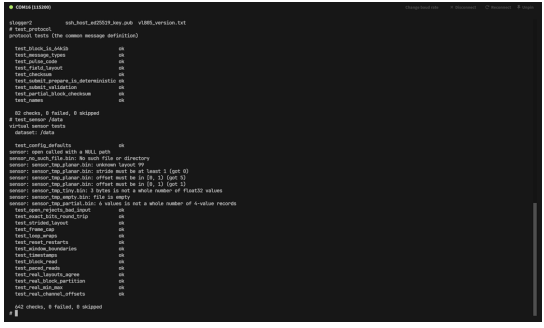


`test_sensor /data`: 642 checks passed. Console verifies robust error trapping: explicitly naming and rejecting invalid strides, bad offsets, and unaligned files.

d.29 Console: Block Loader Verification

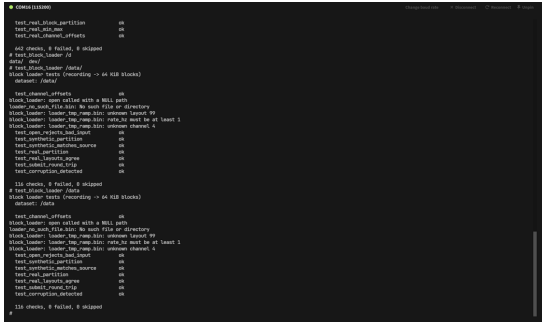


`test_block_loader /data`: 116 checks passed. Confirms planar and interleaved inputs produce byte-identical 64 KiB blocks and detects bit corruption.

d.30 Console: On-Board Payload Verification

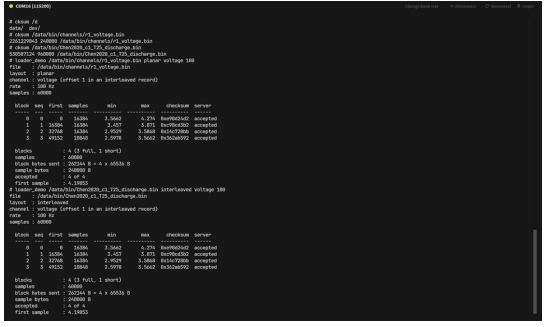


Direct `cksum` comparison of embedded IFS files, followed by `loader_demo`. Checksums match host-generated dataset exactly; blocks 0–3 accepted.

d.31 Console: Live Sensor Streaming Demo

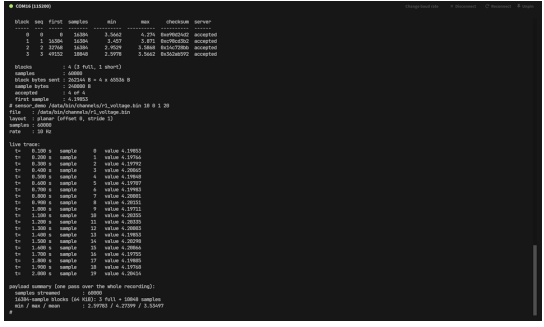


sensor_demo streaming at 10 Hz with hardware monotonic pacing. Reads sample-by-sample, aggregating 60 000 readings into 4 structured blocks.

d.32 Console: Parallel Sorting Verification

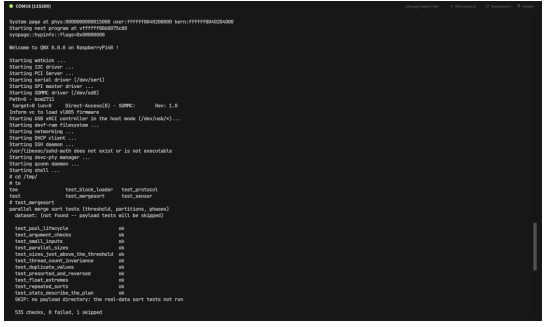


`test_mergesort`: 578 checks passed. Tests edge boundaries (0 to 64 samples), duplicate values, reverse sequences, and thread invariance.

d.33 Console: Real-Time Multi-Core Execution

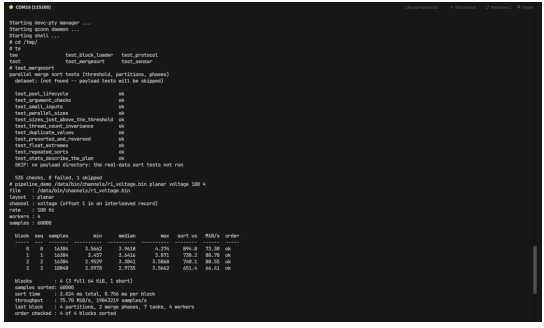

`pipeline_demo` on real voltage telemetry with 4 workers. Phase plan dynamically reflects load: **4 partitions, 2 merge phases, 7 tasks**.

d.34 Console: Core Scaling Sweep

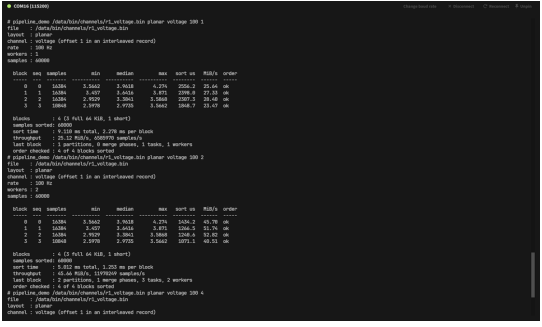

Worker sweep (1, 2, 4 threads) sorting 64 KiB blocks. Execution time drops from 2.278 ms $\rightarrow$ 1.253 ms $\rightarrow$ 0.757 ms. Medians and ranges remain perfectly identical.

d.35 Benchmark Analysis and Throughput

Workers	Time/Block	Throughput	Spee
1	2.278 ms	25.12 MiB/s	1
2	1.253 ms	45.66 MiB/s	1
4	**0.757 ms**	**75.55 MiB/s**	**3.01×**

Measured on physical Raspberry Pi 4 running QNX 8.0.0 SMP.

Massive Real-Time Headroom
One 64 KiB block represents **163.84 seconds** of 100 Hz sensor telemetry. Sorting completes in **0.757 ms** — over **216 000×** real-time speed.

- Excellent parallel efficiency (3.01× scaling on 4 physical cores).
- Negligible thread barrier overhead.

PART 6

Applications & Conclusion

Practical Industrial Applications

- **Battery Management Systems (BMS)**: High-voltage battery packs generate noisy current/voltage transients during switching. Median filtering suppresses noise while parallel sorting evaluates cell distributions.
- **Industrial Edge Gateways**: Embedded telemetry hubs aggregate thousands of sensor channels; offloading 64 KiB blocks to worker threads keeps acquisition tasks responsive.
- **Automotive Telemetry (ADAS)**: Mission-critical sensor feeds (radar, wheel speed) require deterministic, reproducible sorting across bus channels.
- **Flight Data Recorders**: Summarizing real-time telemetry into verifiable, checksummed statistical descriptors.

Directly applicable wherever high-speed sensor streams require outlier rejection and rapid percentile extraction.

- **Milestone 1 (Complete)**: 64 KiB block architecture, dual planar/interleaved dataset, protocol contract, and virtual sensor.
- **Milestone 2 (Complete)**: Multi-threaded parallel merge sort with POSIX mutex and condition variable phase barriers; verified on target.
- **Two-Fold Verification**: 1418 host checks + bare-metal target suite with 100% pass rate.
- **Performance**: 0.757 ms sort time per 64 KiB block (3.01× speedup on 4 cores).
- **Upcoming Milestones**:
  - M3: QNX client–server IPC messaging and rolling median filter implementation.
  - M4: Asynchronous pulse event delivery and end-to-end timing validation.

Questions and Discussion

THANK YOU

Real-Time Multi-Core Sorting and Median Filter Service

Anmol Govindarajapuram Krishnan - CB.EN.U4EEE23103
Mauli Rajguru - CB.EN.U4EEE23120
Sanjay TS - CB.EN.U4EEE23136

26ELC331 - Real-Time Operating Systems