


`dns.Question.deserialize`

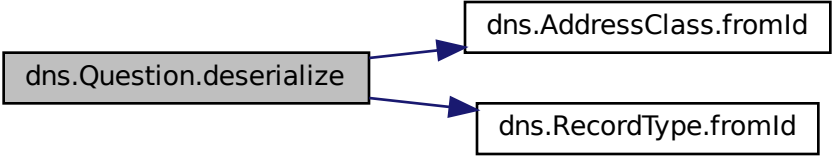

```
graph LR; A[dns.Question.deserialize] --> B[dns.AddressClass.fromId]; A --> C[dns.RecordType.fromId];
```

The diagram illustrates a function call. A gray rectangular box on the left contains the text `dns.Question.deserialize`. Two blue arrows originate from the right side of this box. The top arrow points to a white rectangular box containing `dns.AddressClass.fromId`. The bottom arrow points to another white rectangular box containing `dns.RecordType.fromId`. All boxes have a thin black border.

`dns.AddressClass.fromId`

`dns.RecordType.fromId`