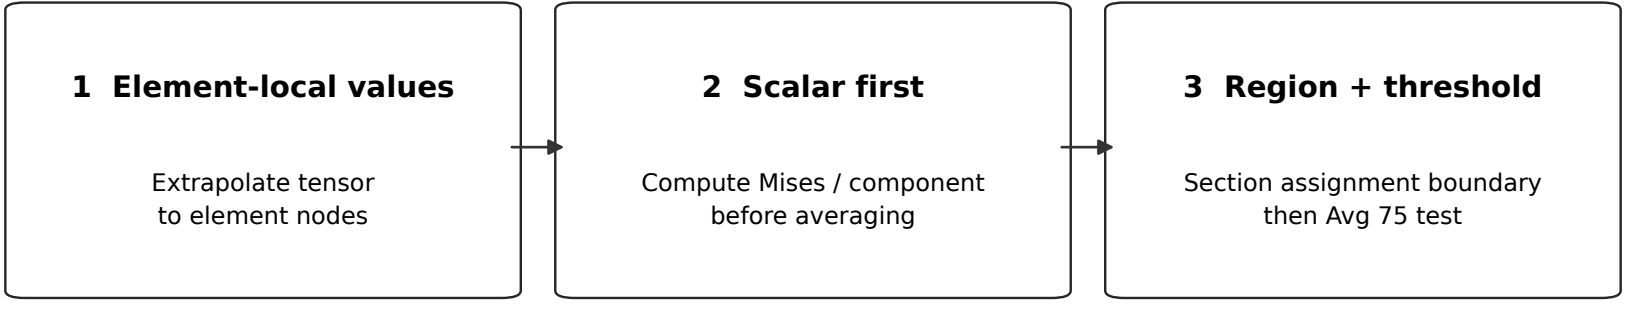

Rejected averages and region boundaries retain separate coincident points.

NodeLabel preserves identity; missing values remain NaN.