

VISVESVARAYA TECHNOLOGICAL UNIVERSITY

“JnanaSangama”, Belgaum -590014, Karnataka.



LAB RECORD

Computer Network Lab (23CS5PCCON)

Submitted by

Shreyansh Sethiya (1BM22CS269)

in partial fulfilment for the award of the degree of

**BACHELOR OF ENGINEERING
in
COMPUTER SCIENCE AND ENGINEERING**



B.M.S. COLLEGE OF ENGINEERING

(Autonomous Institution under VTU)

BENGALURU-560019

Academic Year 2024-25 (odd)

B.M.S. College of Engineering

Bull Temple Road, Bangalore 560019

(Affiliated To Visvesvaraya Technological University, Belgaum)

Department of Computer Science and Engineering



CERTIFICATE

This is to certify that the Lab work entitled “Computer Network (23CS5PCCON)” carried out by **Shreyansh Sethiya (1BM22CS269)** who is Bonafide student of **B.M.S. College of Engineering**. It is in partial fulfilment for the award of **Bachelor of Engineering in Computer Science and Engineering** of the Visvesvaraya Technological University, Belgaum. The Lab report has been approved as it satisfies the academic requirements of the above-mentioned subject and the work prescribed for the said degree.

Sneha P Assistant Professor Department of CSE, BMSCE	Dr. Kavitha Sooda Professor & HOD Department of CSE, BMSCE
--	--

Index-Cycle-I

Sl. No.	Date	Experiment Title	Page No.
1	04/10/2024	Create a topology involving multiple hubs and a switch connecting them to simulate with simple PDU.	1
2	18/10/2024	Configure IP address to routers in packet tracer. Explore the following messages: ping responses, destination unreachable, request timed out, reply	5
3	25/10/2024	Configure default route, static route to the router	10
4	08/11/2024	Configure DHCP within a LAN and outside LAN.	16
5	22/11/2024	Configure RIP routing Protocol in Routers	21
6	22/11/2024	Configure OSPF routing protocol	24
7	22/11/2024	Demonstrate the TTL/ Life of a Packet	30
8	08/11/2024	Configure Web Server, DNS within a LAN.	32
9	20/12/2024	To construct simple LAN and understand the concept and operation of Address Resolution Protocol (ARP)	36
10	20/12/2024	To understand the operation of TELNET by accessing the router in server room from a PC in IT office.	39
11	20/12/2024	To construct a VLAN and make the PC's communicate among a VLAN	42
12	20/12/2024	To construct a WLAN and make the nodes communicate wirelessly	46

Github Link:
<https://github.com/Shreyanshsethiya/CNLAB>

Index-Cycle-II

Sl. No.	Date	Experiment Title	Page No.
1	15/11/2024	Write a program for error detecting code using CRC-CCITT (16-bits).	50
2	15/11/2024	Write a program for congestion control using Leaky bucket algorithm	52
3	20/12/2024	Using TCP/IP sockets, write a client-server program to make client sending the file name and the server to send back the contents of the requested file if present.	54
4	20/12/2024	Using UDP sockets, write a client-server program to make client sending the file name and the server to send back the contents of the requested file if present.	57

1BM22CS269

INDEX

Name : Shreyanshi Sethiya Class : 5E


Section : Roll No. : Subject : S.N.L.P.T. Observations

Sl. No.	Date	Title	Page No.	Teacher's Sign. / Remarks
1	27/10/24	CAT-0	1-2	
2	04/11/24	CAT-1	3-6	
3	07/11/24	CAT-2		
4	10/11/24	CAT-3		
5	25/11/24	CAT-4		
6	11-11-24	CAT-5 - Work done using DNS		
7	11-11-24	CAT-5 - → DHCP configuration		
8	15-11-24	CAT-6 CRC Program		
9	15-11-24	CAT-6 Leaky algorithm		
10	22/11/24	CAT-7 Routing Information Protocol		
11	29/11/24	CAT-8 OSPF Routing Protocol		
12	06/12/24	CAT-9 ARP Server		
13	13/12/24	CAT-10 TELNET protocol		
14	13/12/24	CAT-11 WLAN		
15	13/12/24	CAT-12 VCAN		
16	20/12/24	CAT-12 Socket Programming		

Cycle-I


Program 1

- i. Create a topology involving multiple hubs and a switch connecting them to simulate with simple PDU.
- ii. Procedure along with the topology

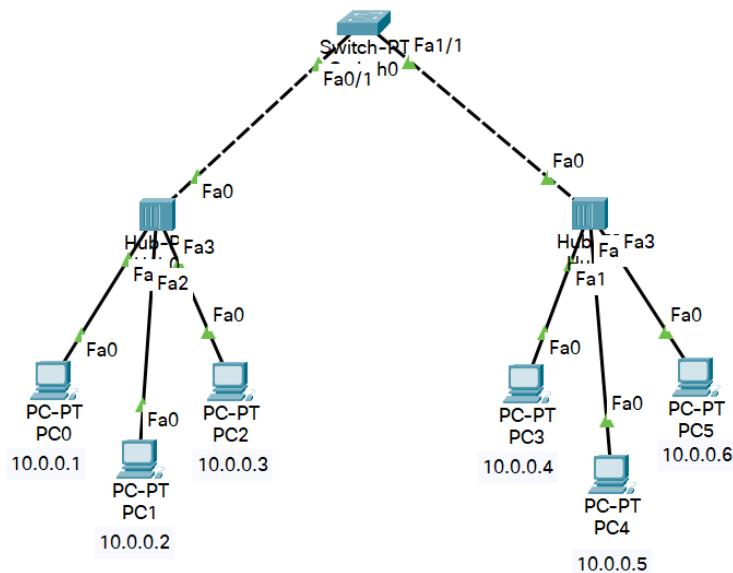


- iii. Screen shots/ output


Hub behaviour at sending end

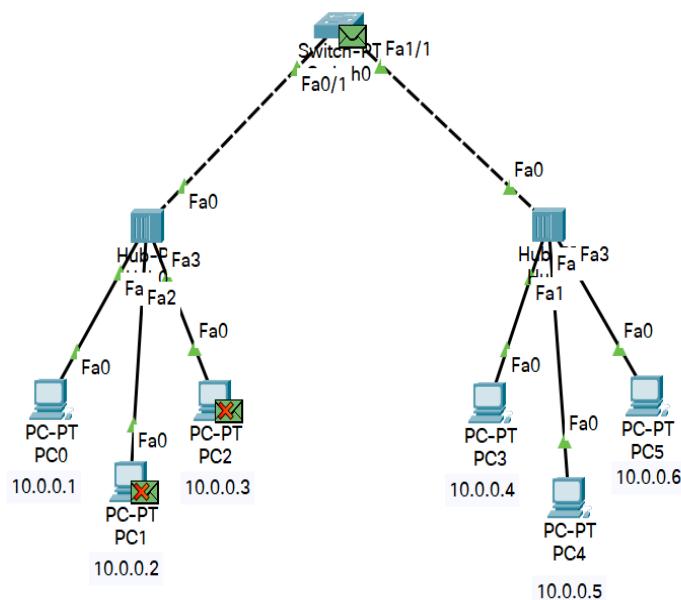


Switch behaviour

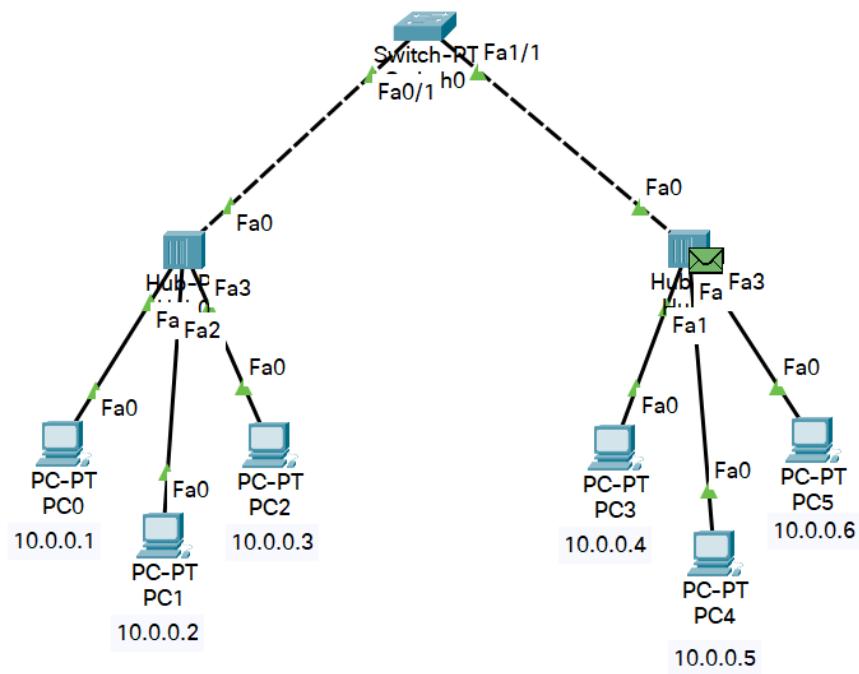

Hub behaviour at receiving end

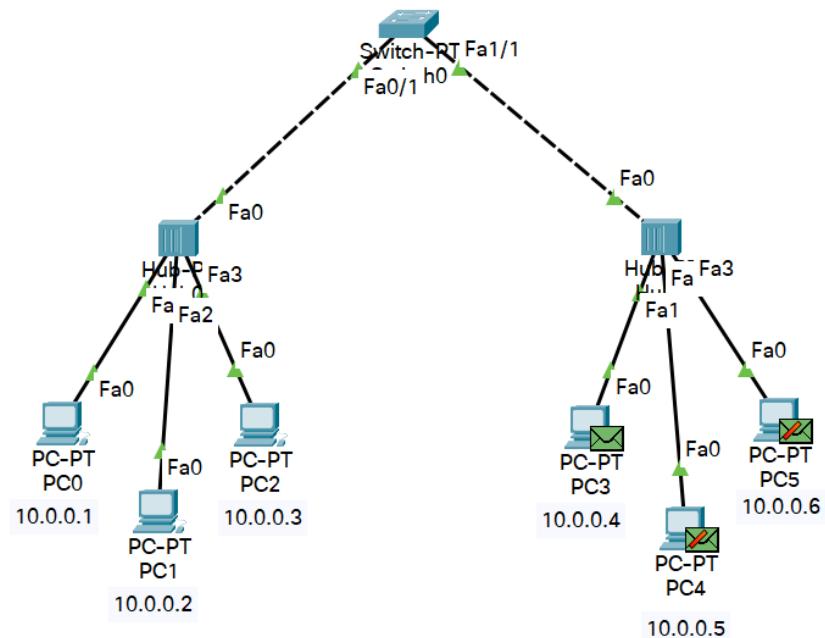

Hub behaviour when back to sender

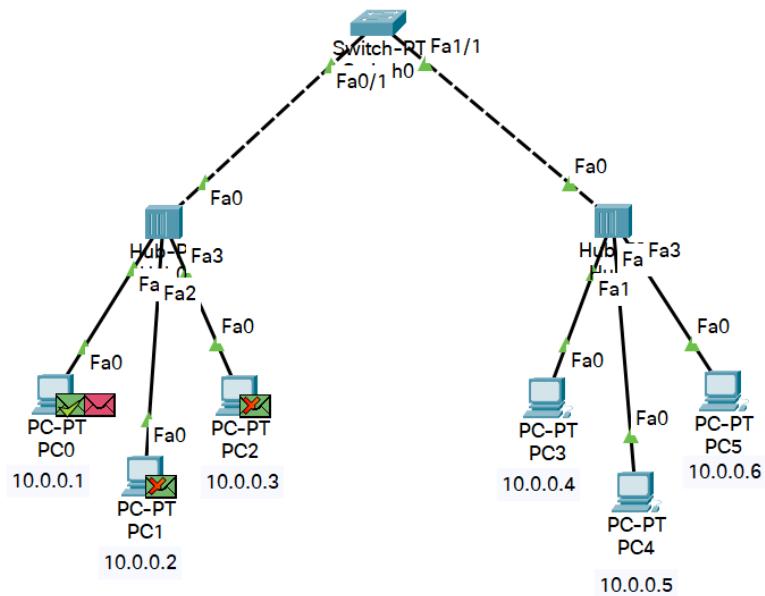

Ping command to connectivity

A screenshot of a Windows Command Prompt window titled "PC0". The window shows the output of a ping command from PC0 to PC4. The text in the window is as follows:

```
Packet Tracer PC Command Line 1.0
C:\>ping 10.0.0.4



Pinging 10.0.0.4 with 32 bytes of data:

Reply from 10.0.0.4: bytes=32 time<1ms TTL=128
Reply from 10.0.0.4: bytes=32 time<1ms TTL=128
Reply from 10.0.0.4: bytes=32 time=1ms TTL=128
Reply from 10.0.0.4: bytes=32 time<1ms TTL=128

Ping statistics for 10.0.0.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms


C:\>
```

iv. Observation

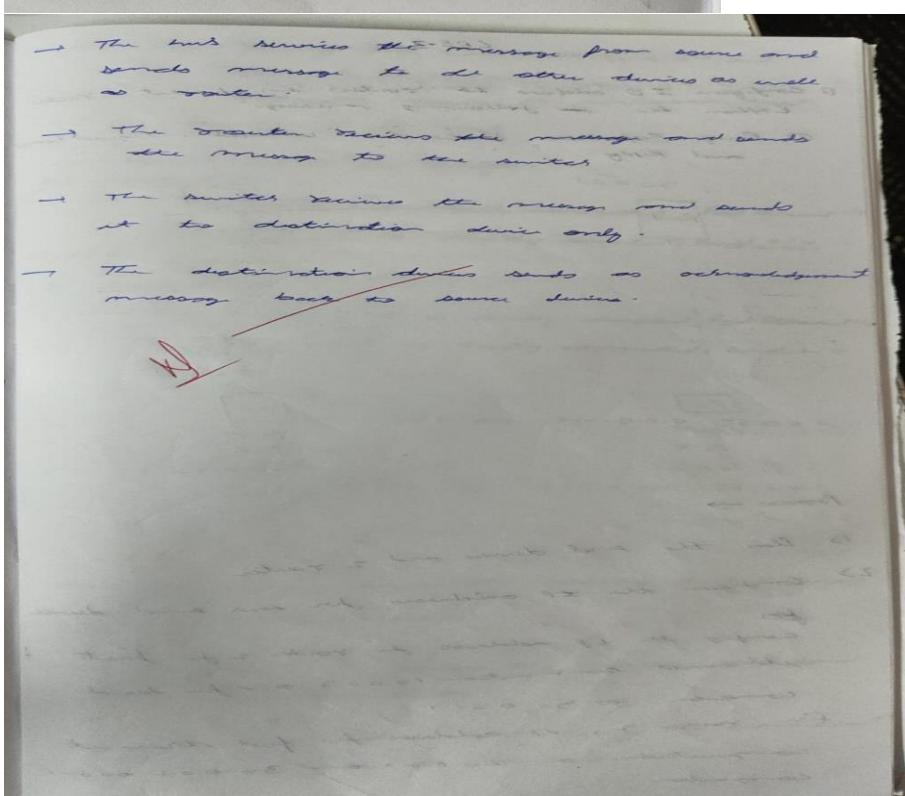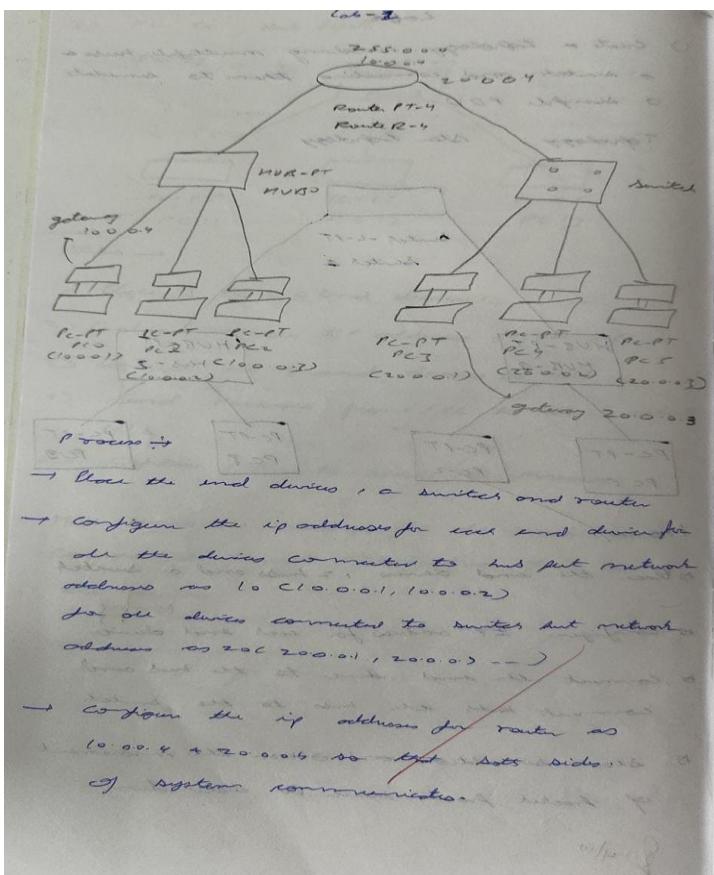

Program 2

- i. Create a topology involving multiple hubs and a switch connecting them to simulate with simple PDU.
- ii. Procedure along with the topology

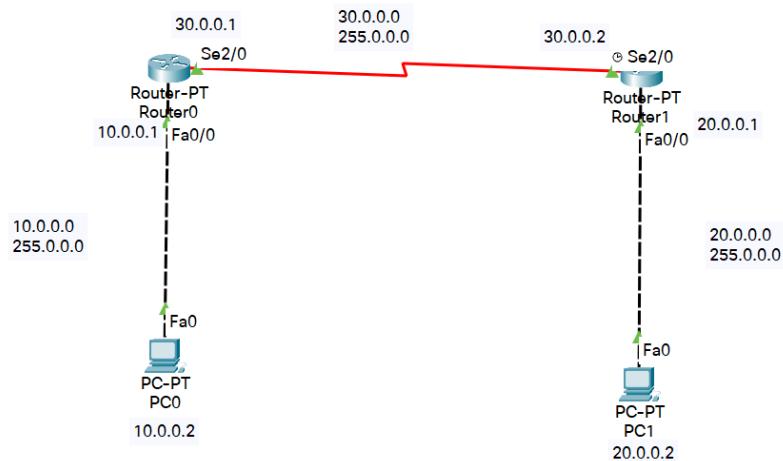

- iii. Screen shots/ output

Router0 configuration

```
Router0
Physical Config CLI
IOS Command Line Interface
Press RETURN to get started!

Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Fa0/0
Router(config-if)#ip address 10.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up


Router(config-if)#exit
Router(config)#interface Se2/0
Router(config-if)#ip address 30.0.0.1 255.0.0.0
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up

Ctrl+F6 to exit CLI focus           Copy   Paste
Top
```

Router1 configuration

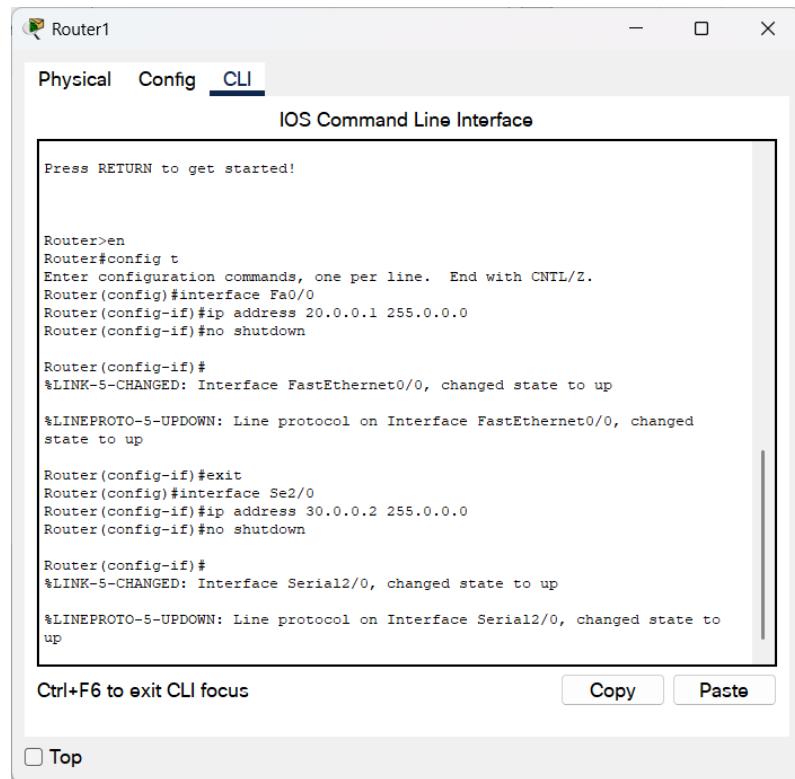

The image shows a window titled "Router1" with a tab bar containing "Physical", "Config", and "CLI". The "CLI" tab is selected, displaying the "IOS Command Line Interface". A message at the top says "Press RETURN to get started!". Below it, configuration commands are listed:

```
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Fa0/0
Router(config-if)#ip address 20.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed
state to up

Router(config-if)#exit
Router(config)#interface Se2/0
Router(config-if)#ip address 30.0.0.2 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to
up
```

At the bottom of the interface, there are buttons for "Copy" and "Paste", and a checkbox labeled "Top".

Ip route command in Router0

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 20.0.0.0 255.0.0.0 30.0.0.2
Router(config)#

```

Ip route command in Router1

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z
Router(config)#ip route 10.0.0.0 255.0.0.0 30.0.0.1
Router(config)#

```

Destination host Unreachable (Before establishing network Fully)

PC1

Physical Config Desktop Programming

Command Prompt X

```
Packet Tracer PC Command Line 1.0
C:\>ping 10.0.0.2

Pinging 10.0.0.2 with 32 bytes of data:

Reply from 20.0.0.1: Destination host unreachable.

Ping statistics for 10.0.0.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

Request Timed Out

PC2

Physical Config Desktop Programming

Command Prompt X

```
Packet Tracer PC Command Line 1.0
C:\>ping 20.0.0.2

Pinging 20.0.0.2 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 20.0.0.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

Reply from Destination

PC0

Physical Config Desktop Programming

Command Prompt


```
Packet Tracer PC Command Line 1.0
C:\>ping 20.0.0.2

Pinging 20.0.0.2 with 32 bytes of data:

Reply from 20.0.0.2: bytes=32 time=1ms TTL=126
Reply from 20.0.0.2: bytes=32 time=18ms TTL=126
Reply from 20.0.0.2: bytes=32 time=1ms TTL=126
Reply from 20.0.0.2: bytes=32 time=1ms TTL=126

Ping statistics for 20.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 18ms, Average = 5ms
```

iv. Observation

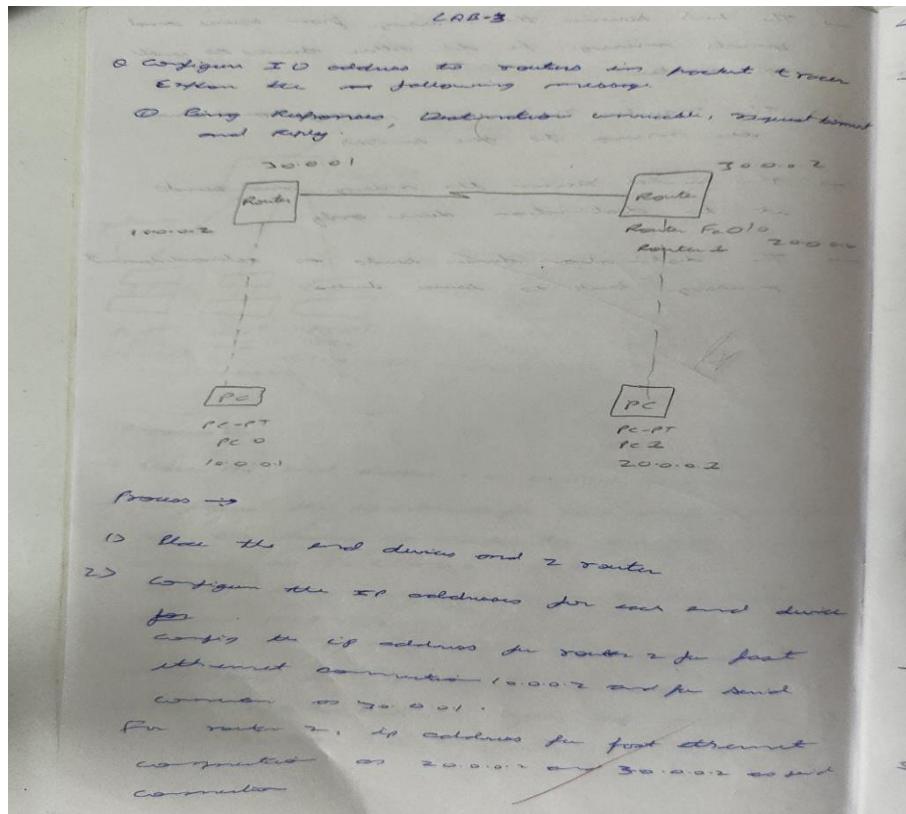

1 Set the gateway for route 1 as 20.0.0.1 and destination as 30.0.0.2

→ Connect both the routers to unknown host using command ip route

command cat for routes.

for router 1 →

← 10.0.0.0/8 is directly connected, Fast Ethernet 0/0

← 30.0.0.0/8 is directly connected, Serial 2/0

for router 2 →

← 20.0.0.0/8 is directly connected, Fast Ethernet 0/0

← 30.0.0.0/8 is directly connected, Serial 2/0

for route 2:

if route 200.0.0 255.0.0.0 30.0.0.2
← serial 1

for route 3:

if route 10.0.0.0 255.0.0.0 30.0.0.1
← serial 0


→ The router receives the message & fwd sends it to destination.

→ The router 1 receives the message & fwd sends it to destination.

→ The destination host sends the acknowledgement message back to the source.

Program 3

- i. Configure default route, static route to the router
- ii. Procedure along with the topology

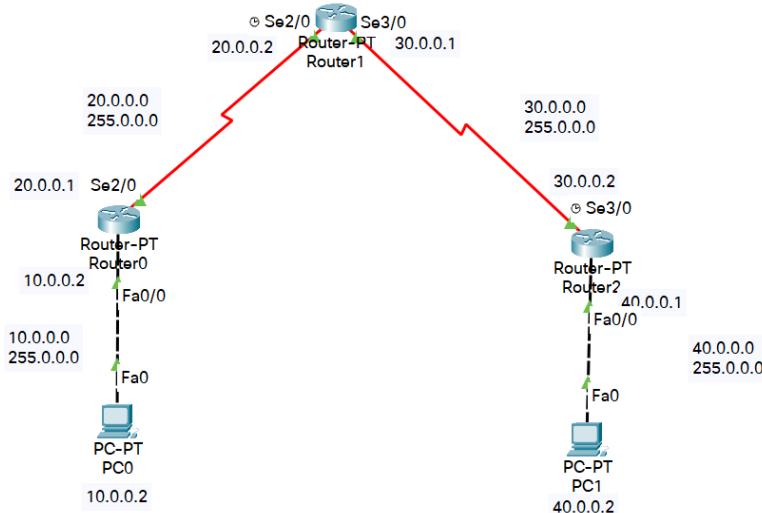

- iii. Screen shots/ output

Router0 configuration

```
Router0
Physical Config CLI
IOS Command Line Interface
Would you like to enter the initial configuration dialog? [yes/no]: n
Press RETURN to get started!

Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Fa0/0
Router(config-if)#ip address 10.0.0.2 255.0.0.0
Router(config-if)#no shutdown


Router(config-if)#
*LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

*LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed
state to up
*IP-4-DUPLICADDR: Duplicate address 10.0.0.2 on FastEthernet0/0, sourced by
00C.CFC2.65B0

Router(config-if)#exit
Router(config)#interface Se2/0
Router(config-if)#ip address 20.0.0.1 255.0.0.0
Router(config-if)#no shutdown

*LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#
Ctrl+F6 to exit CLI focus
Copy Paste
Top
```

Router1 configuration

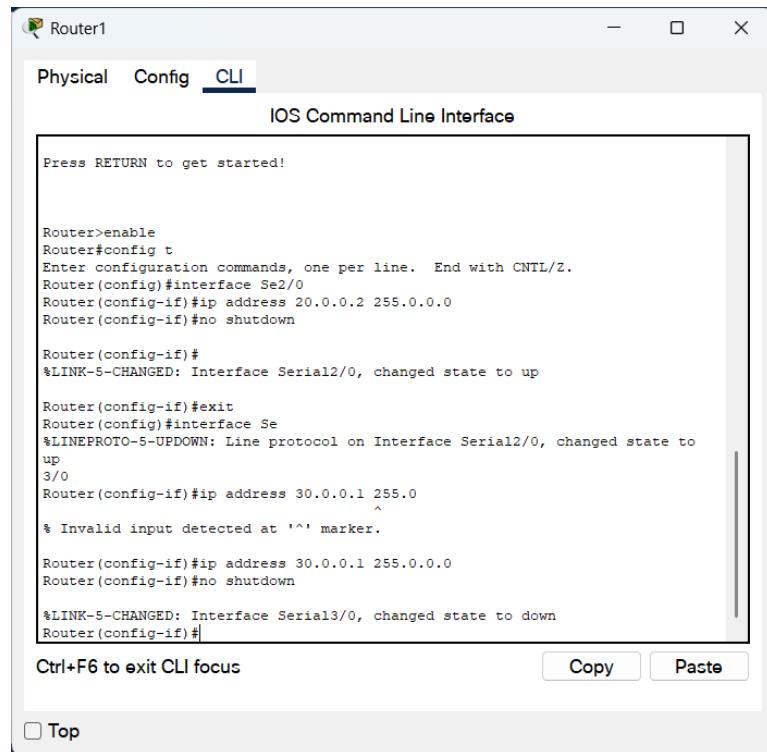

Router1

Physical Config **CLI**

IOS Command Line Interface

```
Press RETURN to get started!

Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Se2/0
Router(config-if)#ip address 20.0.0.2 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

Router(config-if)#exit
Router(config)#interface Se
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to
up
3/0
Router(config-if)#ip address 30.0.0.1 255.0.0.0
          ^
% Invalid input detected at '^' marker.

Router(config-if)#ip address 30.0.0.1 255.0.0.0
Router(config-if)#no shutdown


%LINK-5-CHANGED: Interface Serial3/0, changed state to down
Router(config-if)#

Ctrl+F6 to exit CLI focus
```

Top

Copy Paste

Router2 configuration

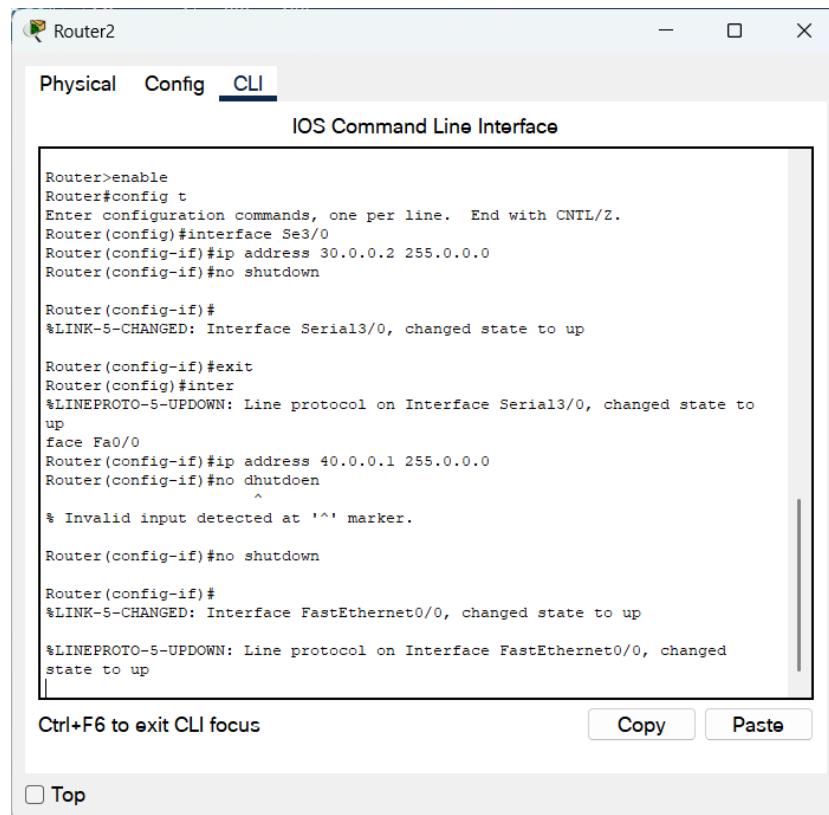

Router2

Physical Config **CLI**

IOS Command Line Interface

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Se3/0
Router(config-if)#ip address 30.0.0.2 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up

Router(config-if)#exit
Router(config)#inter
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to
up
face Fa0/0
Router(config-if)#ip address 40.0.0.1 255.0.0.0
Router(config-if)#no dhtddo
          ^
% Invalid input detected at '^' marker.

Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed
state to up
```

Top

Ctrl+F6 to exit CLI focus

Copy Paste

Static Routing:

Router0

Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 30.0.0.0 255.0.0.0 20.0.0.2
Router(config)#ip route 40.0.0.0 255.0.0.0 20.0.0.2
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area * - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route

Gateway of last resort is not set

C 10.0.0.0/8 is directly connected, FastEthernet0/0
C 20.0.0.0/8 is directly connected, Serial2/0
S 30.0.0.0/8 [1/0] via 20.0.0.2
S 40.0.0.0/8 [1/0] via 20.0.0.2

Router#

Ctrl+F6 to exit CLI focus

Top

Router1

Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.1
Router(config)#ip route 40.0.0.0 255.0.0.0 30.0.0.2
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area * - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route

Gateway of last resort is not set

S 10.0.0.0/8 [1/0] via 20.0.0.1
C 20.0.0.0/8 is directly connected, Serial2/0
C 30.0.0.0/8 is directly connected, Serial3/0
S 40.0.0.0/8 [1/0] via 30.0.0.2

Router#

Ctrl+F6 to exit CLI focus

Top

Router2

Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 10.0.0.0 255.0.0.0 30.0.0.1
Router(config)#ip route 20.0.0.0 255.0.0.0 30.0.0.1
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

```
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is not set

S  10.0.0.0/8 [1/0] via 30.0.0.1
S  20.0.0.0/8 [1/0] via 30.0.0.1
C  30.0.0.0/8 is directly connected, Serial3/0
C  40.0.0.0/8 is directly connected, FastEthernet0/0

Router#
```

Ctrl+F6 to exit CLI focus

Top

Dynamic Routing:

Route0

S 30.0.0.0/8 [1/0] via 20.0.0.2
S 40.0.0.0/8 [1/0] via 20.0.0.2

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 0.0.0.0 0.0.0.0 20.0.0.2
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is 20.0.0.2 to network 0.0.0.0


C  10.0.0.0/8 is directly connected, FastEthernet0/0
C  20.0.0.0/8 is directly connected, Serial2/0
S  30.0.0.0/8 [1/0] via 20.0.0.2
S  40.0.0.0/8 [1/0] via 20.0.0.2
S* 0.0.0.0/0 [1/0] via 20.0.0.2

Router#
```

Ctrl+F6 to exit CLI focus

Top

Router2

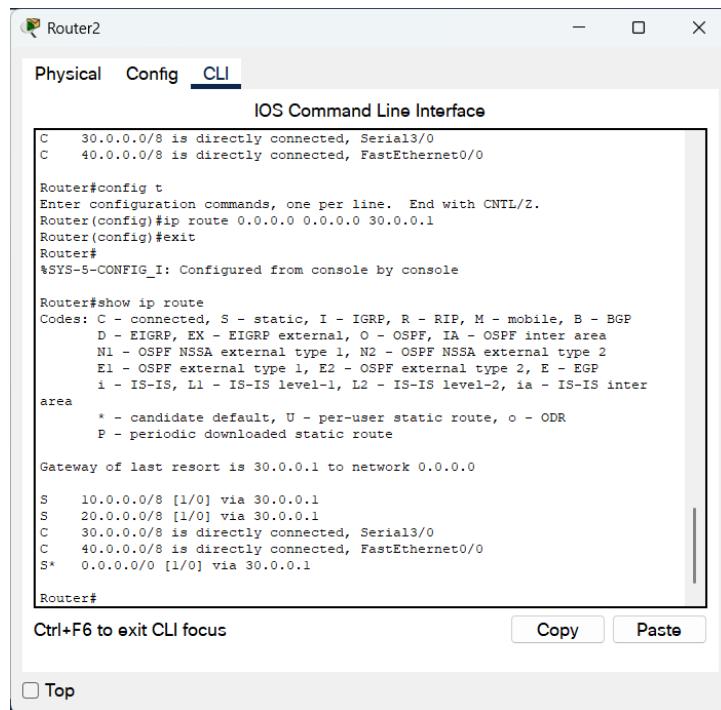

The screenshot shows the Router2 CLI interface. The title bar says "Router2". The tabs "Physical" and "Config" are visible, with "Config" being the active tab. The main window displays the IOS Command Line Interface. The command entered was "show ip route". The output shows the following:

```
C 30.0.0.0/8 is directly connected, Serial3/0
C 40.0.0.0/8 is directly connected, FastEthernet0/0

Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 0.0.0.0 0.0.0.0 30.0.0.1
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is 30.0.0.1 to network 0.0.0.0

S 10.0.0.0/8 [1/0] via 30.0.0.1
S 20.0.0.0/8 [1/0] via 30.0.0.1
C 30.0.0.0/8 is directly connected, Serial3/0
C 40.0.0.0/8 is directly connected, FastEthernet0/0
S* 0.0.0.0/0 [1/0] via 30.0.0.1

Router#
```

At the bottom of the window, there are "Copy" and "Paste" buttons, and a "Top" link.

Pinging:


```
C:\>ping 40.0.0.2

Pinging 40.0.0.2 with 32 bytes of data:

Reply from 40.0.0.2: bytes=32 time=21ms TTL=125
Reply from 40.0.0.2: bytes=32 time=17ms TTL=125
Reply from 40.0.0.2: bytes=32 time=25ms TTL=125
Reply from 40.0.0.2: bytes=32 time=2ms TTL=125

Ping statistics for 40.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 25ms, Average = 16ms
```

iv. Observation

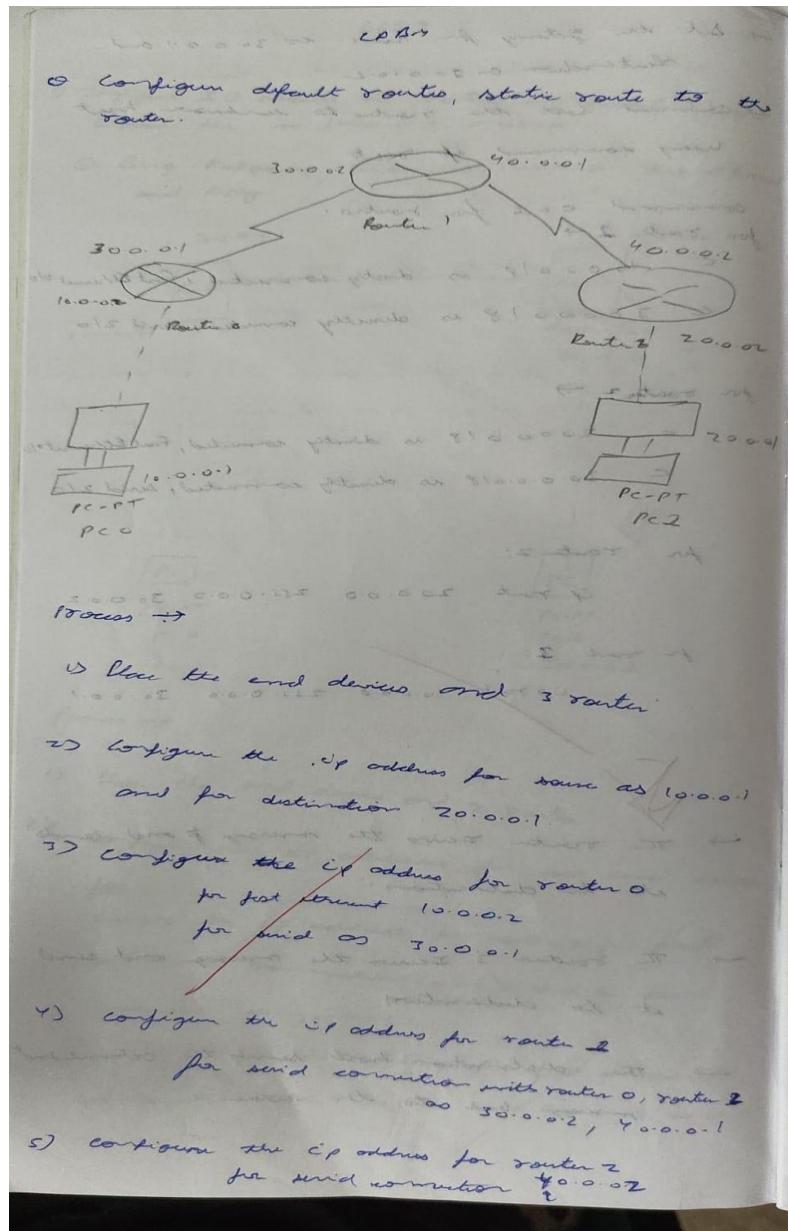

for fast ethernet 200.0.2

Set the gateway for source as 70.0.0.1
and for destination as 40.0.0.2

→ convert route the routers to unknown
next using commands.

for router 0: 40.0.0.0 255.0.0.0 70.0.0.2
(iproute) 20.0.0.0 255.0.0.0 30.0.0.2

for router 1: 10.0.0.0 255.0.0.0 20.0.0.1
20.0.0.0 255.0.0.0 40.0.0.2

for router 2: 70.0.0.0 255.0.0.0 40.0.0.1
10.0.0.0 255.0.0.0 40.0.0.1

→ The routers receive the message from
source and sends it to router 2.

→ The router 2 receives the message from
router 1 and sends it to the destination.

for default coding.

if route 0.0.0.0 0.0.0.0 200.0.2

Routers show ip route


10.0.0.0/8 is directly connected FastEthernet

20.0.0.0/8 is directly connected serial 2/0

0.0.0.0/0 (1/0) via 200.0.2

Program 4


- i. Configure DHCP within a LAN and outside LAN.
- ii. Procedure along with the topology

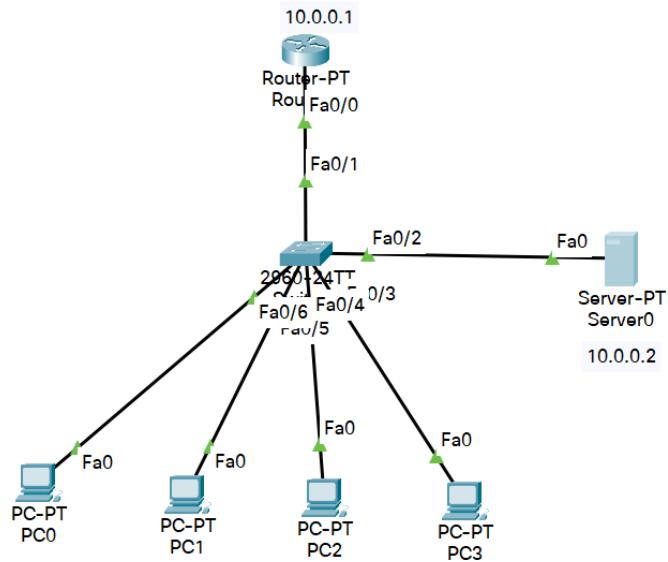


- iii. Screen shots/ output

DHCP Within LAN


DHCP Configuration

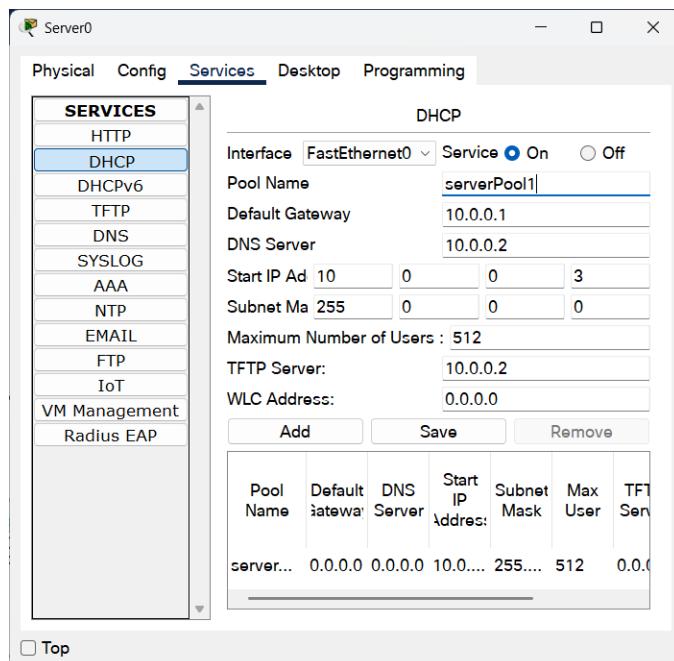


PC settings

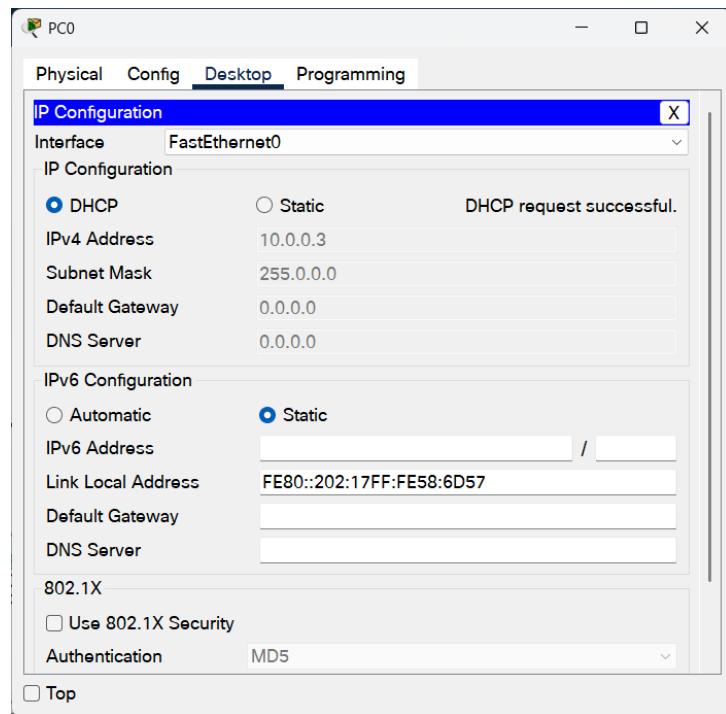


DHCP outside LAN:

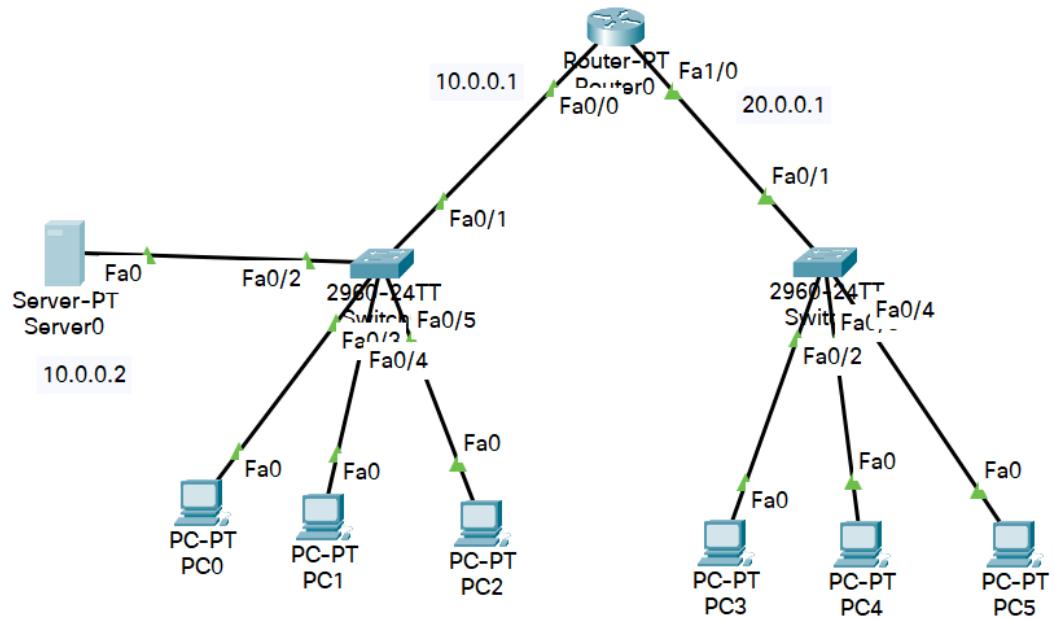

DHCP configuration for inside LAN

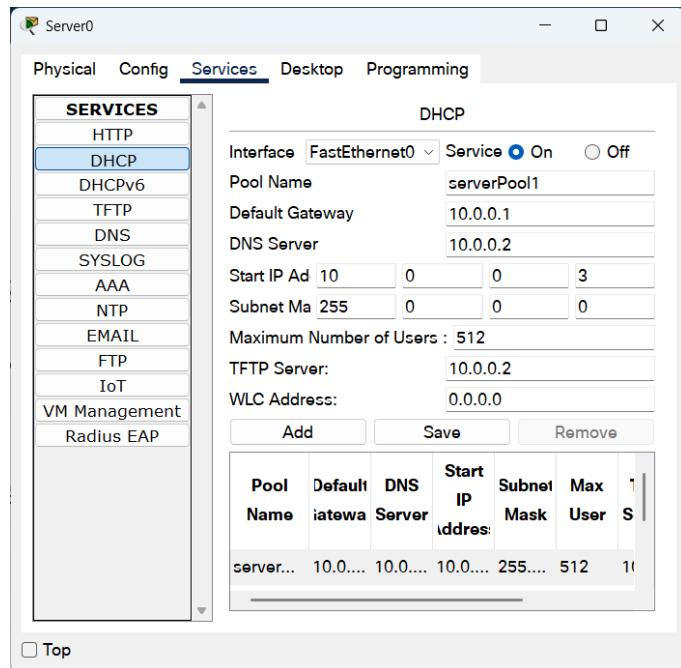

DHCP configuration for outside LAN

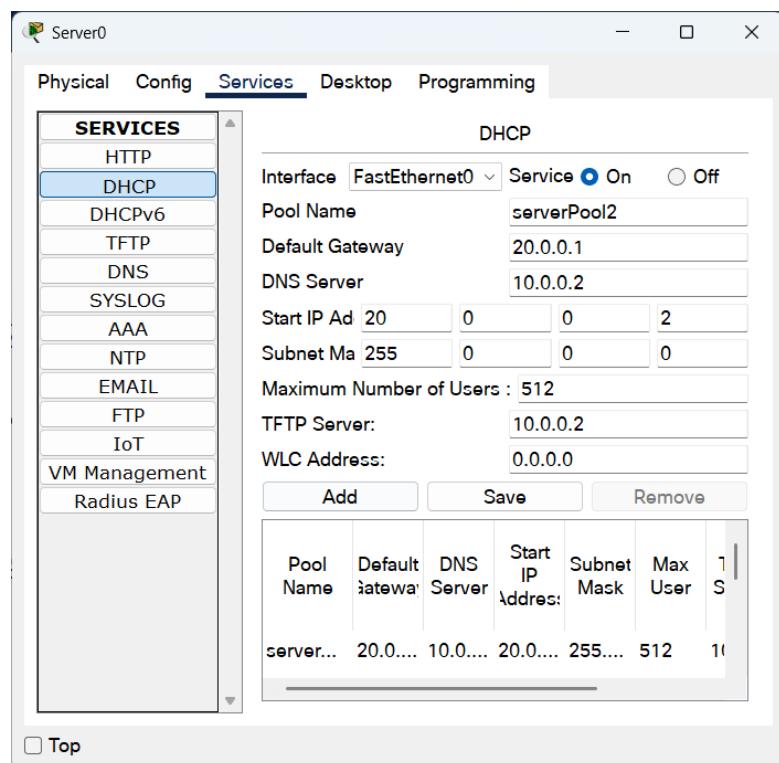


Ip helper command in Router


```
Router(config-if)#exit
Router(config)#interface Fa1/0
Router(config-if)#ip helper-address 10.0.0.2
Router(config-if)#

```


PC setting in another network

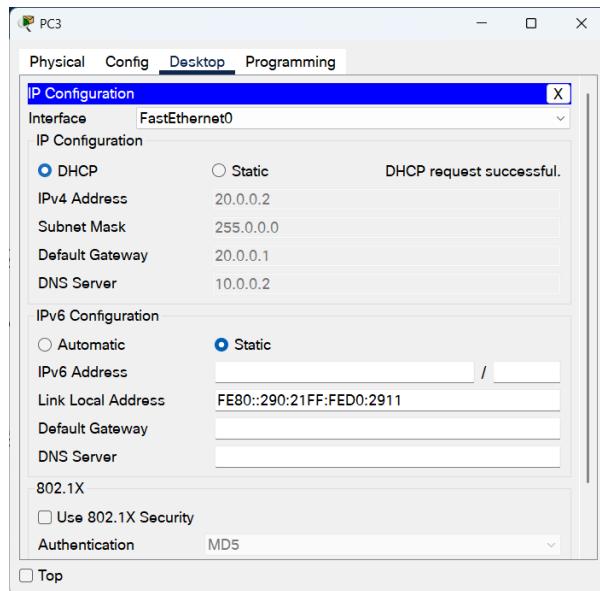

iv. Observation

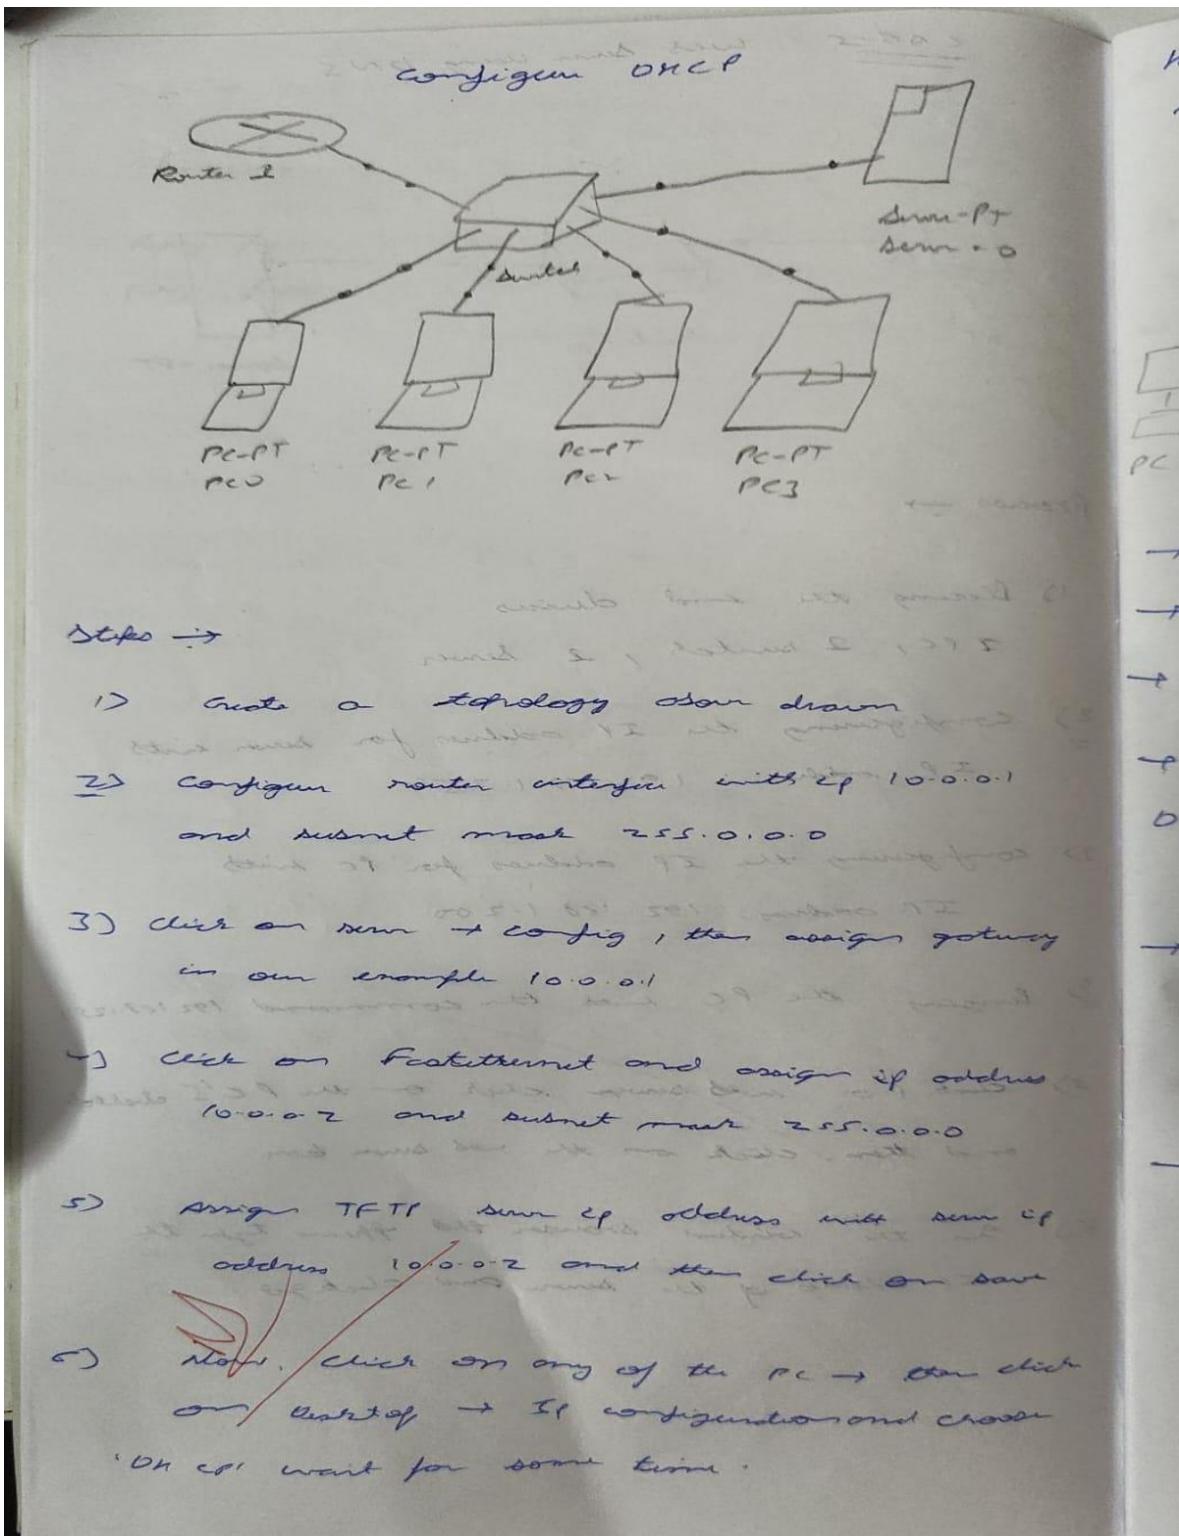


How to get it from DHCP present in some other network.

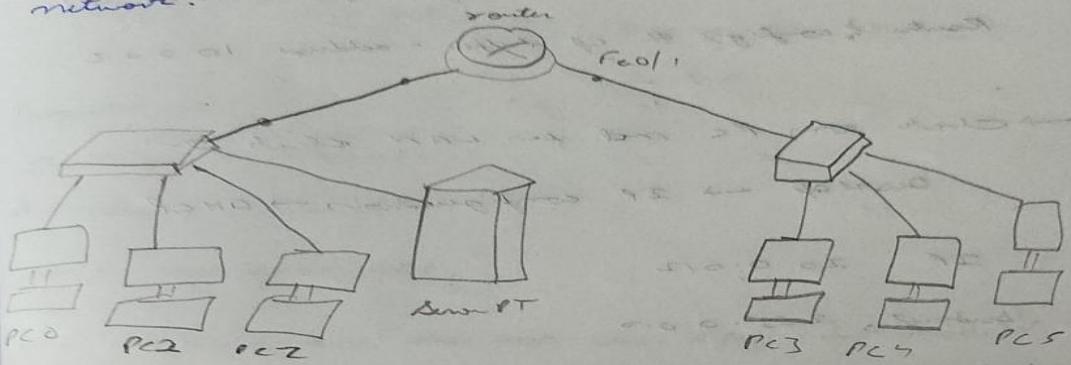

- Convert topology as shown above.
- Configure router interface d0 & d1 with IP address
- Click on server → config → gateway → 192.0.0.1
- Assign IP address 10.0.0.2 & subnet mask 255.0.0.0
DHCP will automatically assign 10 network for default pool.
- Check PC in the LAN with server and check if DHCP is working fine
- PC → Network → IP configuration → DHCP
 - Default gateway 192.0.0.1
 - DHCP Server 192.0.0.2
 - IP address 192.0.0.10
 - Subnet mask 255.0.0.0
 - Maximum number of lease 100
 - IP try 10.0.0.2

Program 5

- i. Configure RIP routing Protocol in Routers
- ii. Procedure along with the topology

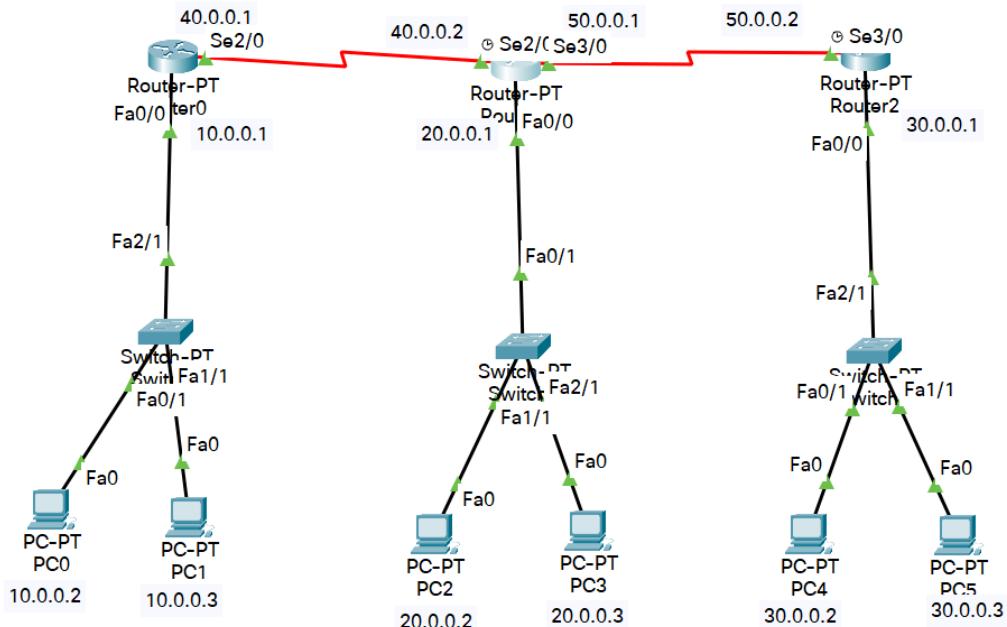

- iii. Screen shots/ output

Router0

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#network 10.0.0.0
Router(config-router)#network 40.0.0.0
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, FastEthernet0/0
C    40.0.0.0/8 is directly connected, Serial2/0
```

Router1

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#network 40.0.0.0
Router(config-router)#network 50.0.0.0
Router(config-router)#network 20.0.0.0
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is not set

R    10.0.0.0/8 [120/1] via 40.0.0.1, 00:00:08, Serial2/0
C    20.0.0.0/8 is directly connected, FastEthernet0/0
R    30.0.0.0/8 [120/1] via 50.0.0.2, 00:00:10, Serial3/0
C    40.0.0.0/8 is directly connected, Serial2/0
C    50.0.0.0/8 is directly connected, Serial3/0
```

Router2

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#network 30.0.0.0
Router(config-router)#network 50.0.0.0
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is not set

R    10.0.0.0/8 [120/2] via 50.0.0.1, 00:00:28, Serial3/0
R    20.0.0.0/8 [120/1] via 50.0.0.1, 00:00:28, Serial3/0
C    30.0.0.0/8 is directly connected, FastEthernet0/0
R    40.0.0.0/8 [120/1] via 50.0.0.1, 00:00:28, Serial3/0
C    50.0.0.0/8 is directly connected, Serial3/0
```

Pinging:


```
Packet Tracer PC Command Line 1.0
C:\>ping 20.0.0.2

Pinging 20.0.0.2 with 32 bytes of data:

Request timed out.
Reply from 20.0.0.2: bytes=32 time=9ms TTL=126
Reply from 20.0.0.2: bytes=32 time=1ms TTL=126
Reply from 20.0.0.2: bytes=32 time=9ms TTL=126

Ping statistics for 20.0.0.2:
  Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
  Minimum = 1ms, Maximum = 9ms, Average = 6ms
```

iv. Observation

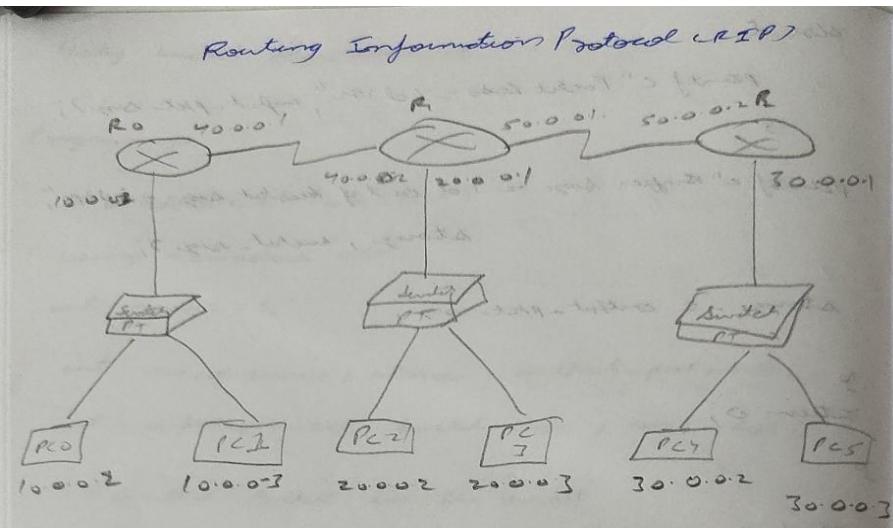

- Place the end devices, 8 switches and 3 routers
- Connect the topology as shown above
- Configure the ip address of PC0, PC1 as 10.0.0.2 and 10.0.0.3 and corresponding router as 10.0.0.1
- for PC2, PC3 as 20.0.0.2 and 20.0.0.3,
for router as 20.0.0.1
- for PC4, PC5 as 30.0.0.2 and 30.0.0.3 and corresponding router as 30.0.0.1
- give the subnet for R0 as 40.0.0.1
for R1 as 40.0.0.2
for R2 as R0 as 50.0.0.1
and R2 as 50.0.0.2
- run the following command:

for all the routers and R123

- go to config mode
- type enable (Router#)
- Router# enable
- config t
- Router# ip
- # network 10.0.0.0
- # network 40.0.0.0

Run the same commands for Router 1 & Router 2

for Router 1 as network 20.0.0.0

network 40.0.0.0

network 50.0.0.0

for Router 2 as network 30.0.0.0


network 50.0.0.0

- The router receives the message from host and forward it to other router which in turn would send it to destination

~~Host~~

Program 6

- i. Configure OSPF routing protocol
- ii. Procedure along with the topology

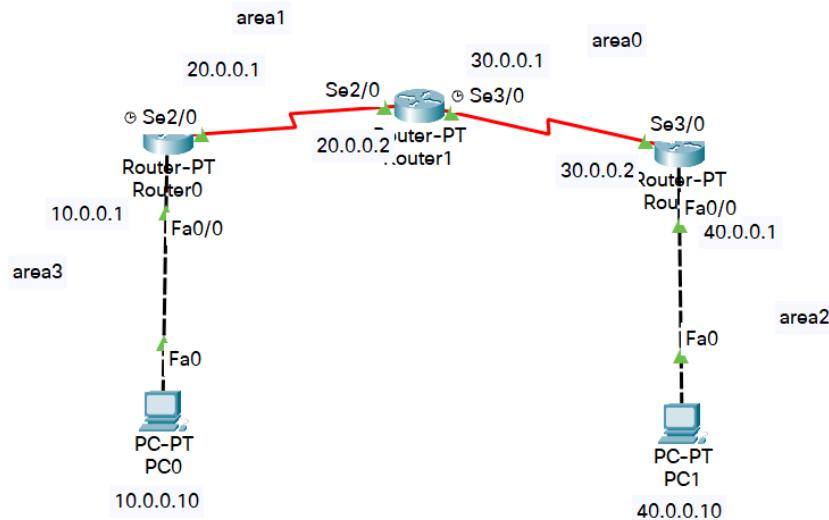

- iii. Screen shots/ output

Encapsulation:

Router0

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Fa0/0
Router(config-if)#ip address 10.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed
state to up

Router(config-if)#exit
Router(config)#interface Se2/0
Router(config-if)#ip address 20.0.0.1 255.0.0.0
Router(config-if)#encapsulation ppp
Router(config-if)#clock rate 64000
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#exit
Router(config)#

```

Router1

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Se2/0
Router(config-if)#ip address 20.0.0.2 255.0.0.0
Router(config-if)#encapsulation ppp
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to
up

Router(config-if)#exit
Router(config)#interface Se3/0
Router(config-if)#ip address 30.0.0.1 255.0.0.0
Router(config-if)#encapsulation ppp
Router(config-if)#clock rate 64000
Router(config-if)#no shutdown
^
% Invalid input detected at '^' marker.

Router(config-if)#no shutdown
```

Router2

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Fa0/0
Router(config-if)#ip address 40.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed
state to up
%IP-4-DUPADDR: Duplicate address 40.0.0.1 on FastEthernet0/0, sourced by
000D.BDDA.0123

Router(config-if)#exit
Router(config)#interface Se3/0
Router(config-if)#ip address 30.0.0.2 255.0.0.0
Router(config-if)#encapsulation ppp
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to
up
```

OSPF Routing Protocol

Router0

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#router-id 1.1.1.1
Router(config-router)#network 10.0.0.0 0.255.255.255 area 3
Router(config-router)#network 20.0.0.0 0.255.255.255 area 1
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#sho
00:27:19: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on Serial2/0 from LOADING to FULL, Loading Done
w ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, FastEthernet0/0
     20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        20.0.0.0/8 is directly connected, Serial2/0
C        20.0.0.2/32 is directly connected, Serial2/0
O  IA 30.0.0.0/8 [110/128] via 20.0.0.2, 00:00:02, Serial2/0
O  IA 40.0.0.0/8 [110/129] via 20.0.0.2, 00:00:02, Serial2/0
```

Router1

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#router-id 2.2.2.2
Router(config-router)#network 20.0.0.0 0.255.255.255 area 1
Router(config-router)#network 30.0.0.0 0.255.255.255 area 0
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

00:26:21: %OSPF-5-ADJCHG: Process 1, Nbr 3.3.3.3 on Serial3/0 from LOADING to FULL, Loading Done
00:27:18: %OSPF-5-ADJCHG: Process 1, Nbr 1.1.1.1 on Serial2/0 from LOADING to FULL, Loading Done

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is not set

     20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        20.0.0.0/8 is directly connected, Serial2/0
C        20.0.0.1/32 is directly connected, Serial2/0
     30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        30.0.0.0/8 is directly connected, Serial3/0
C        30.0.0.2/32 is directly connected, Serial3/0
O  IA 40.0.0.0/8 [110/65] via 30.0.0.2, 00:02:00, Serial3/0
```

Router2

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#router-id 3.3.3.3
Router(config-router)#network 40.0.0.0 0.255.255.255 area 2
Router(config-router)#network 30.0.0.0 0.255.255.255 area 0
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#
00:26:19: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on Serial3/0 from LOADING to FULL, Loading Done

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
      * - candidate default, U - per-user static route, o - ODR
      P - periodic downloaded static route

Gateway of last resort is not set

O IA 20.0.0.0/8 [110/128] via 30.0.0.1, 00:02:45, Serial3/0
  30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     30.0.0.0/8 is directly connected, Serial3/0
C     30.0.0.1/32 is directly connected, Serial3/0
C     40.0.0.0/8 is directly connected, FastEthernet0/0
```

Configure Loopback address

Router0

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface loopback 0

Router(config-if)#
%LINK-5-CHANGED: Interface Loopback0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to
up

Router(config-if)#ip address 172.16.1.252 255.255.0.0
Router(config-if)#no shutdown
```

Router1

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface loopback 0

Router(config-if)#
%LINK-5-CHANGED: Interface Loopback0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to
up

Router(config-if)#ip address 172.16.1.253 255.255.0.0
Router(config-if)#no shutdown
Router(config-if)#

```

Router2

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface loopback 0

Router(config-if)#
%LINK-5-CHANGED: Interface Loopback0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to
up

Router(config-if)#ip address 172.16.1.254 255.255.0.0
Router(config-if)#no shutdown
Router(config-if)#+
```

Create Virtual Link

Router0

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#area 1 virtual-link 2.2.2.2
Router(config-router)#+
```

Router1

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
01:11:01: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from
backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0

01:11:11: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from
backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0

Router(config)#route
01:11:21: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from
backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
r ospf 1
Router(config-router)#
01:11:31: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from
backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0

Router(config-router)#area 1 v
01:11:41: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from
backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
irtual-link 1.1.1.1
Router(config-router)#
01:11:56: %OSPF-5-ADJCHG: Process 1, Nbr 1.1.1.1 on OSPF_VL0 from LOADING to
FULL, Loading Done
```

Pinging


```
C:\>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time=24ms TTL=125
Reply from 40.0.0.10: bytes=32 time=18ms TTL=125
Reply from 40.0.0.10: bytes=32 time=18ms TTL=125
Reply from 40.0.0.10: bytes=32 time=20ms TTL=125

Ping statistics for 40.0.0.10:
  Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
  Approximate round trip times in milli-seconds:
    Minimum = 18ms, Maximum = 24ms, Average = 20ms
```

iv. Observation

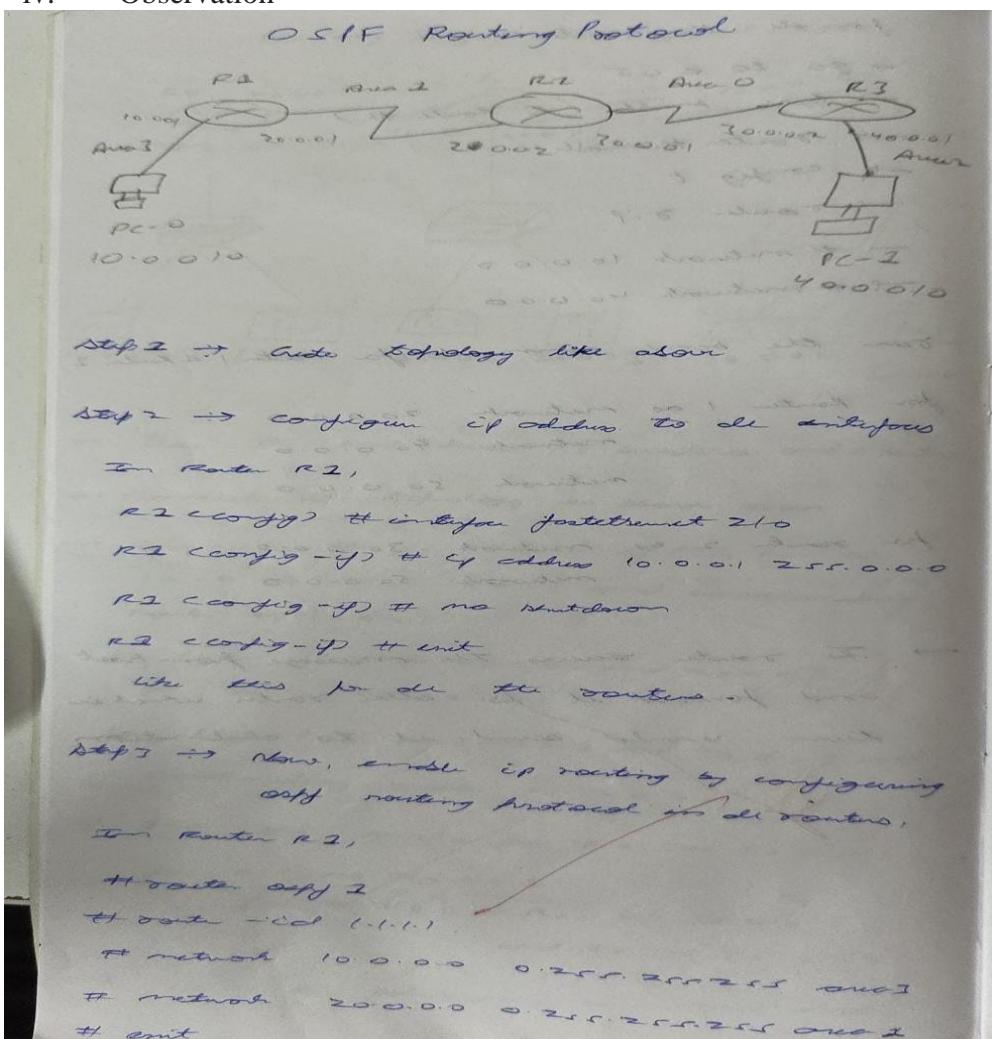

In Router R2,

router off 2 was there. I did not do it.
router add 2222 2222 2222 area 2
network 2000.0.0.255 255.255.255 area 2
network 30.0.0.0 0.255.255.255 area 0
exit

Step 4 : now check routing table of R2

using command
router # show ip route

Step 5 : Create virtual link between R1, R2 by this
we make a virtual link to connect area 1
to area 0.

For Router 2 # router off 2

area 2 virtual-link 2222

For Router 2 → # area 2 virtual-link (1.1.1)
exit


Step 6 → Second R3 get address from R1. Now
check routing table of R3.

Step 7 → check connectivity status host 10.0.0.10 to
10.0.0.10

✓



Program 7

- i. Demonstrate the TTL/ Life of a Packet
 - ii. Procedure along with the topology


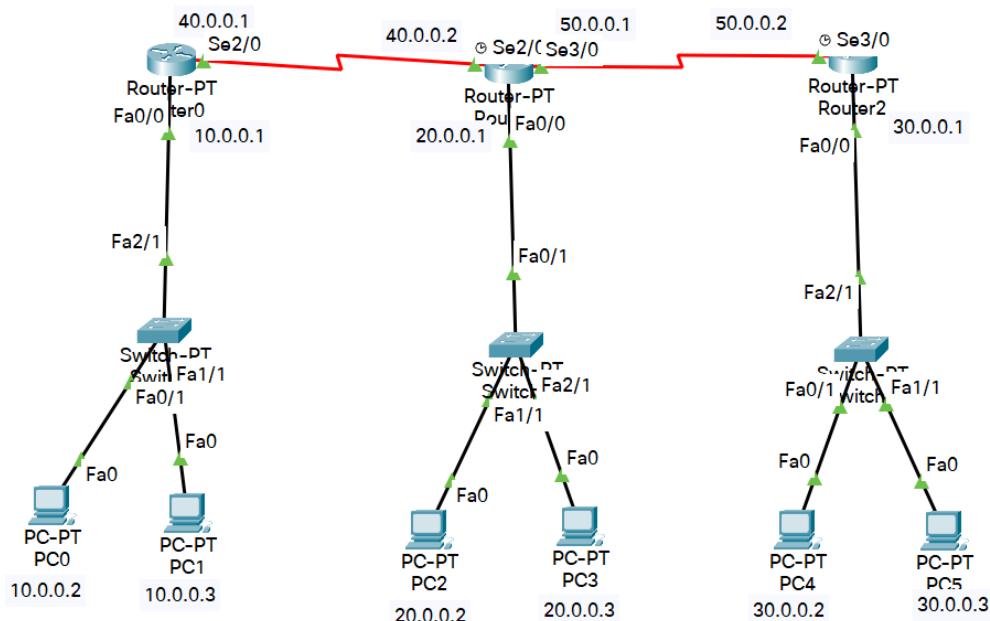


- ### iii. Screen shots/ output



Packet at Router0

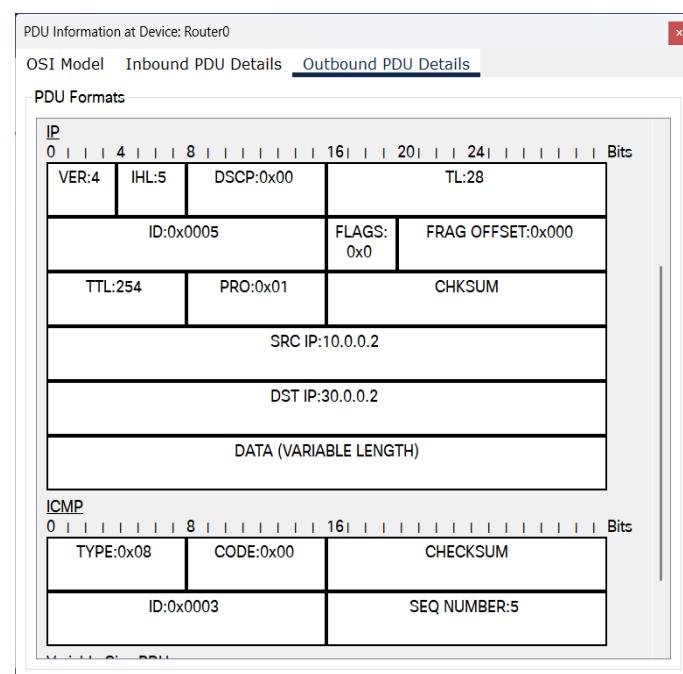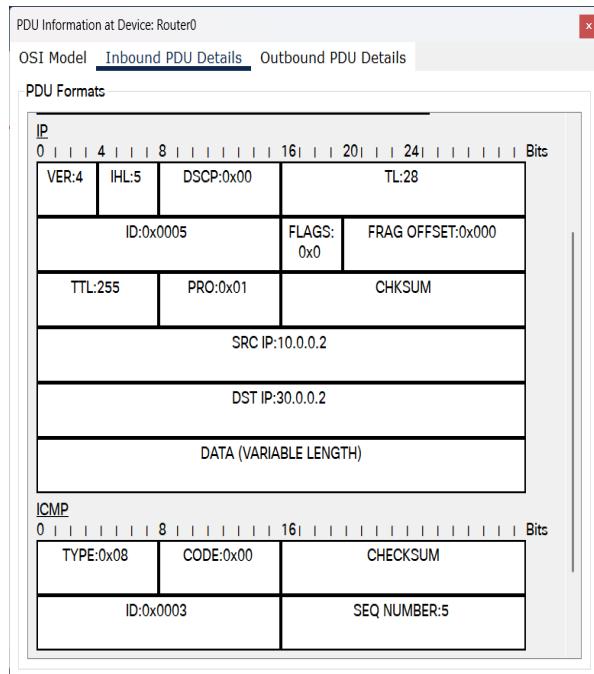

Packet at Router1

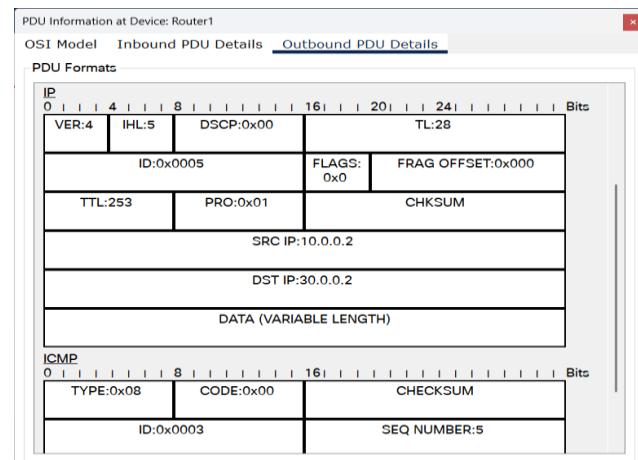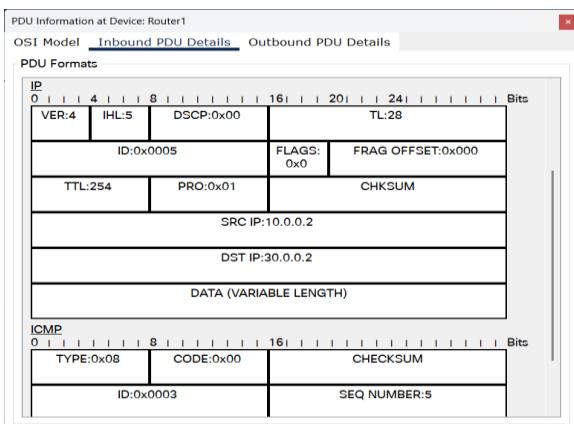


Packet at Router2

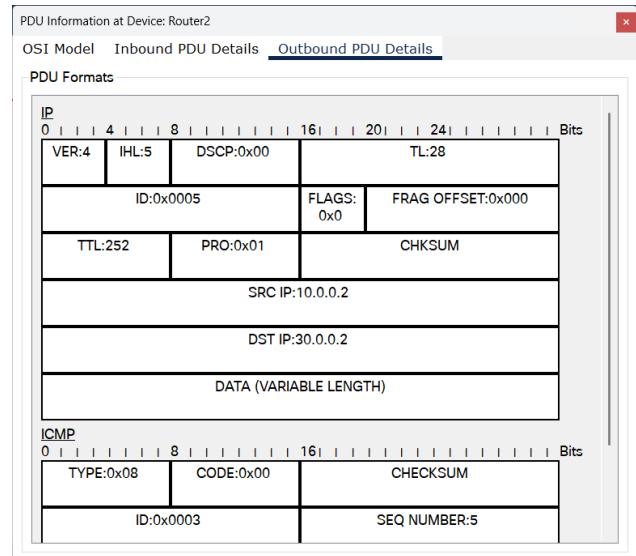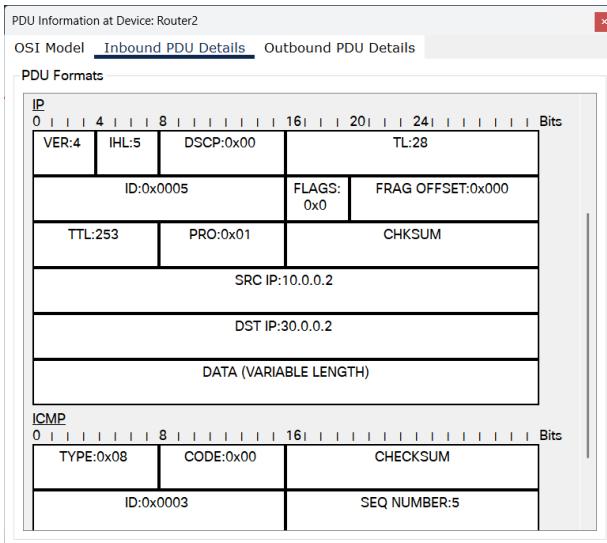


Program 8

- i. Configure Web Server, DNS within a LAN.
- ii. Procedure along with the topology


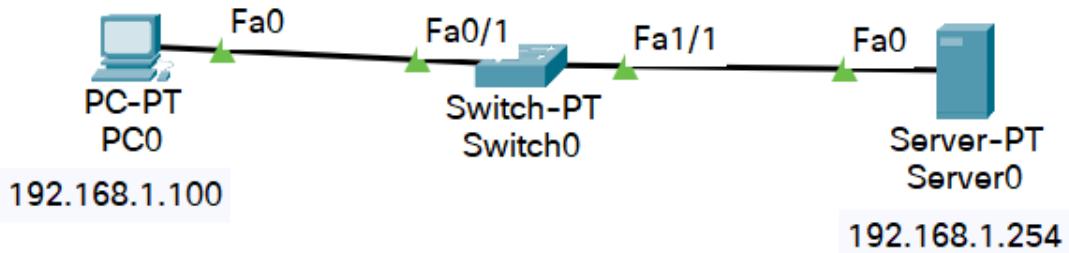




- iii. Screen shots/ output

Server's services

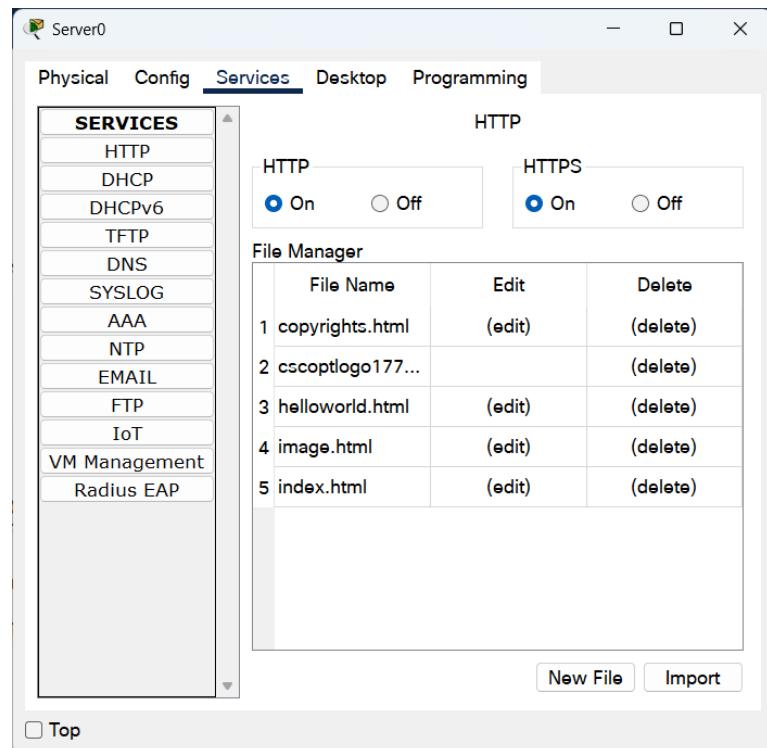


PC's Web Browser

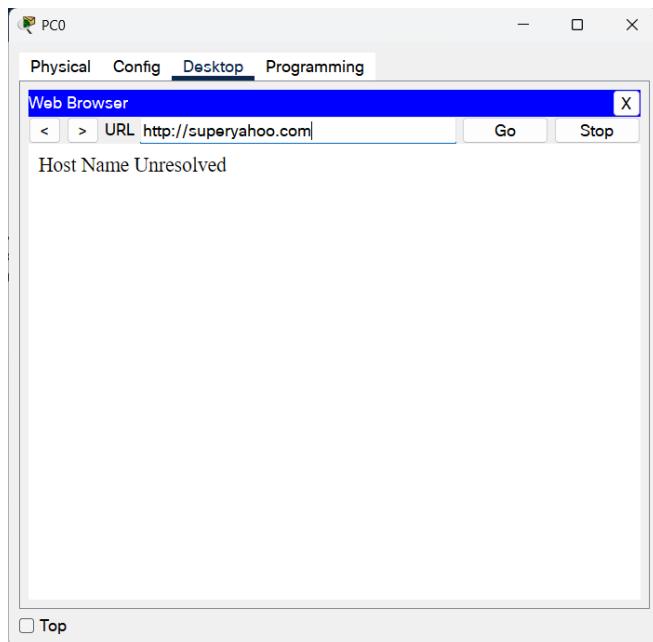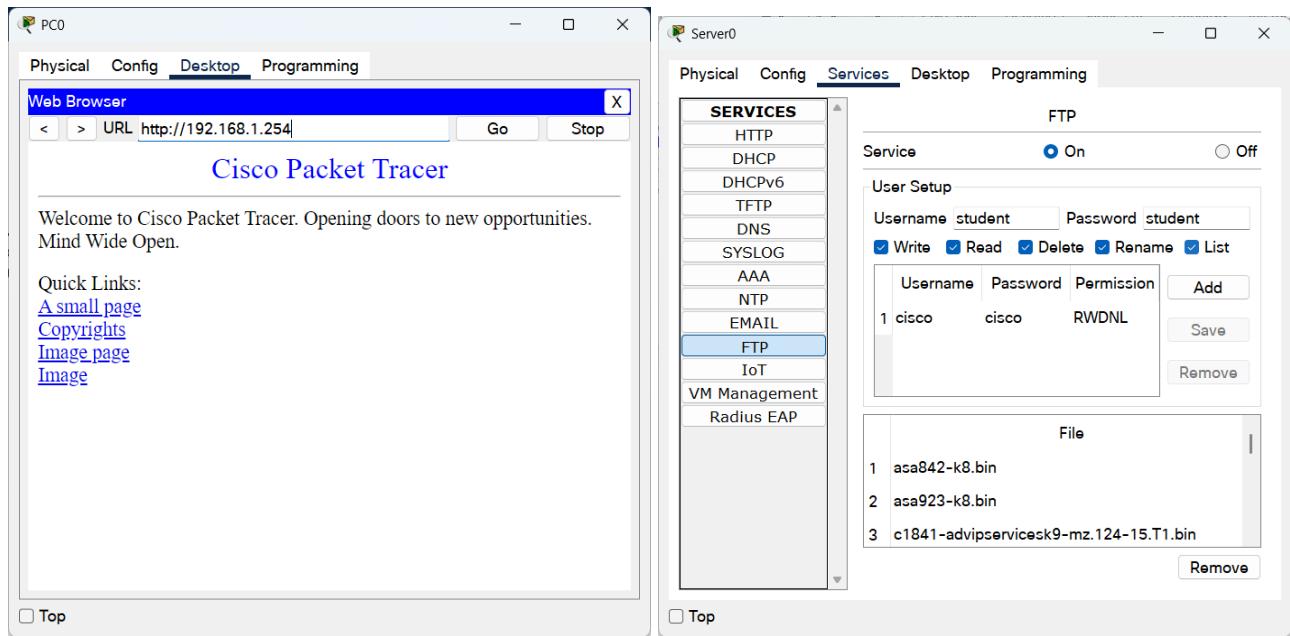

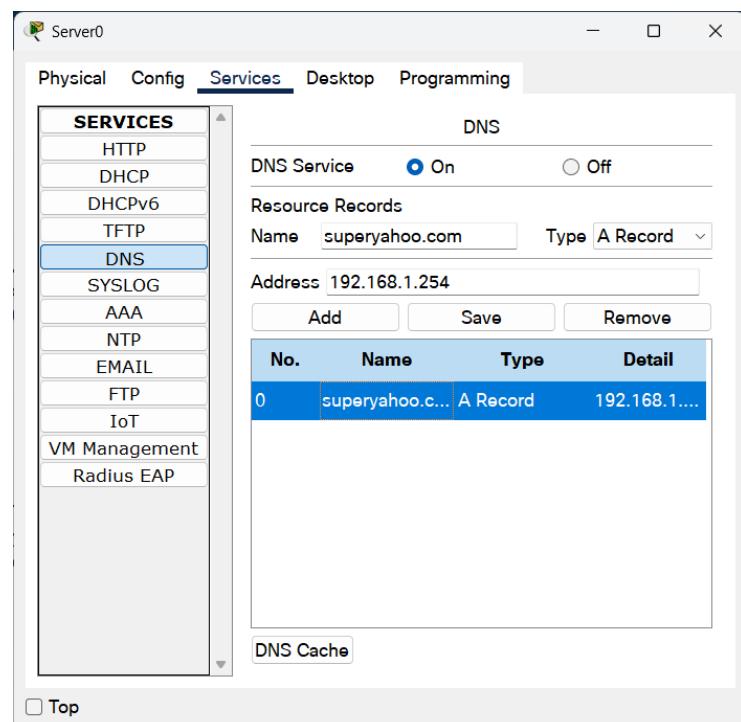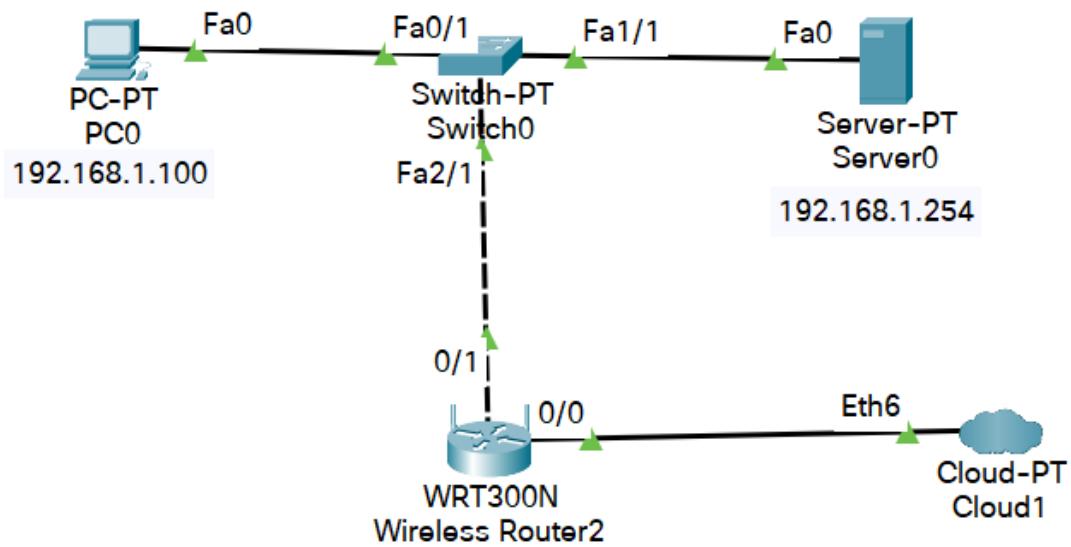


iv. Observation

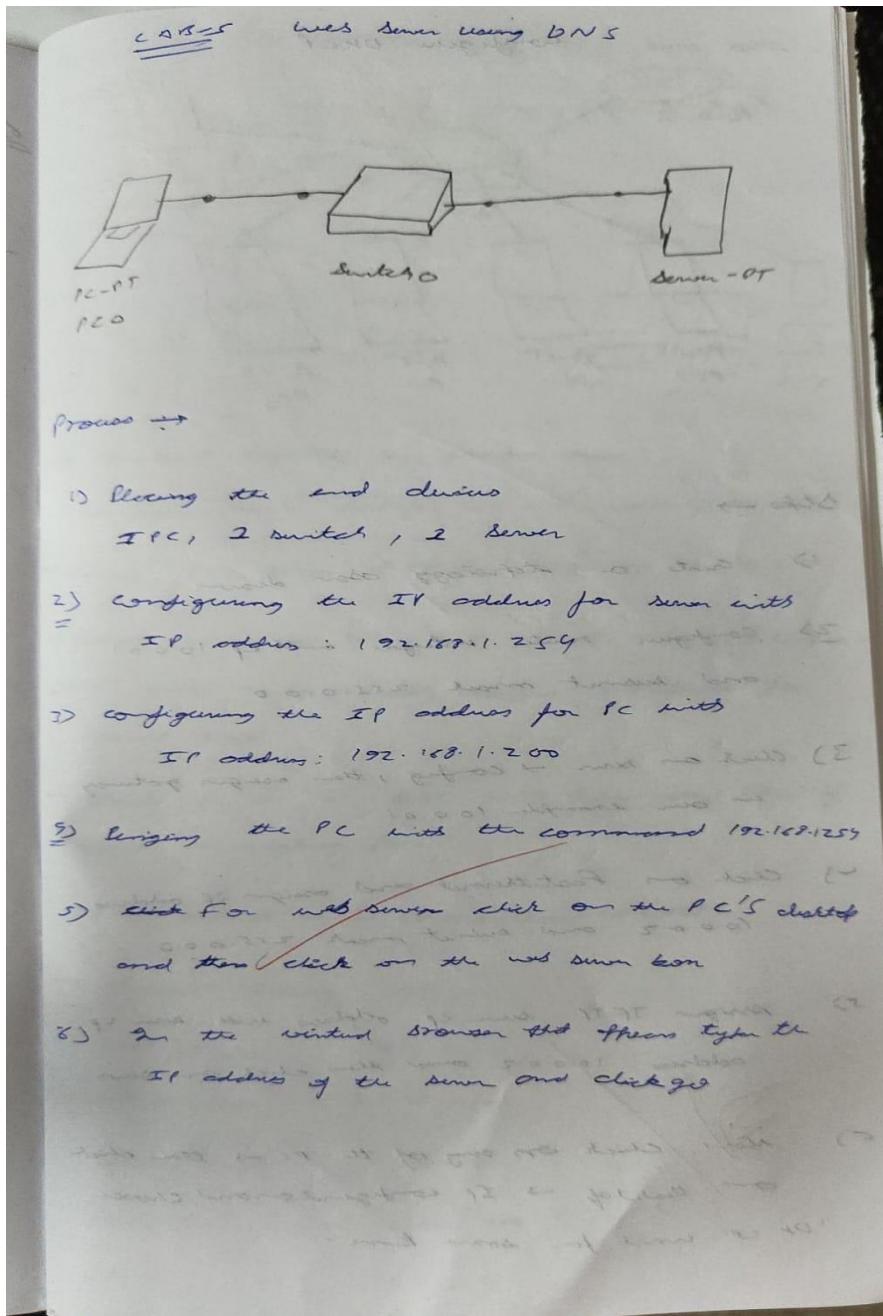


Program 9

- i. To construct simple LAN and understand the concept and operation of Address Resolution Protocol (ARP)
- ii. Procedure along with the topology

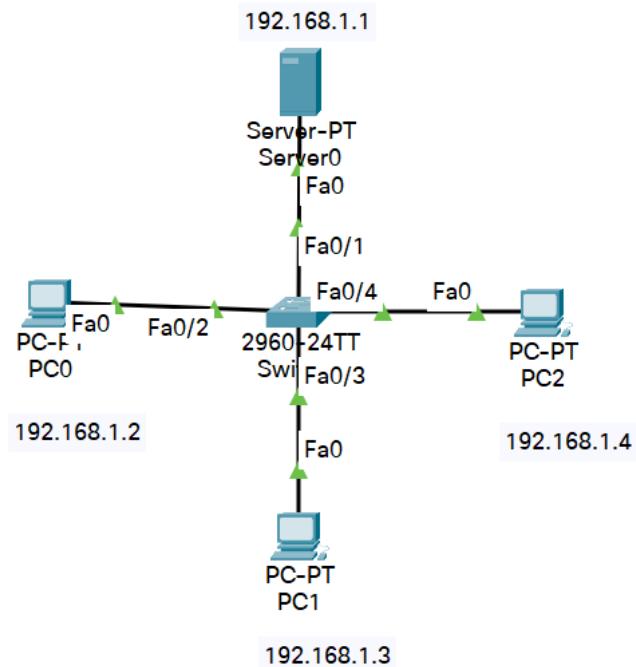


- iii. Screen shots/ output

ARP Table of PC

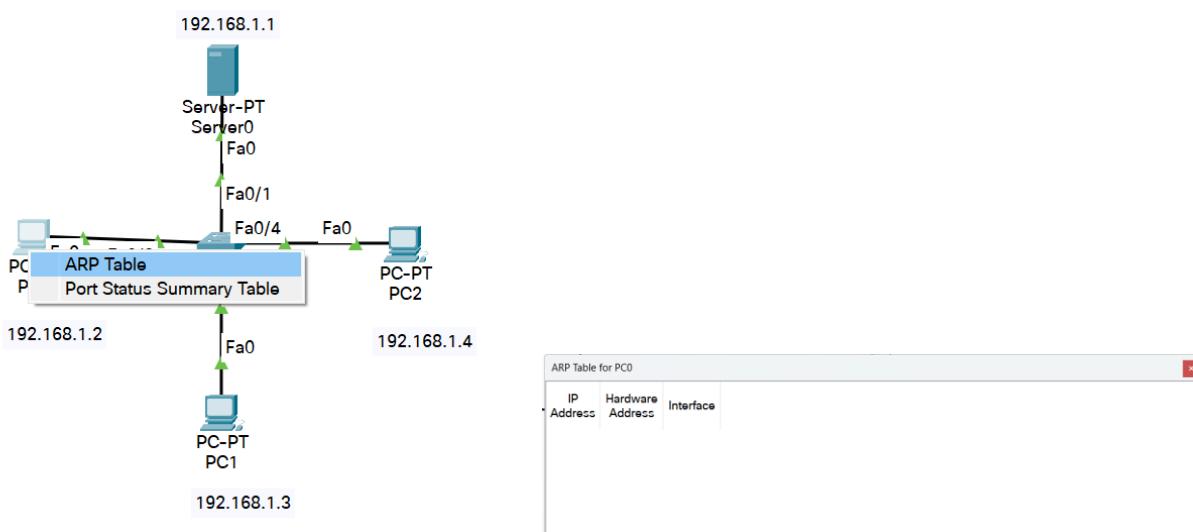


ARP Table of Server

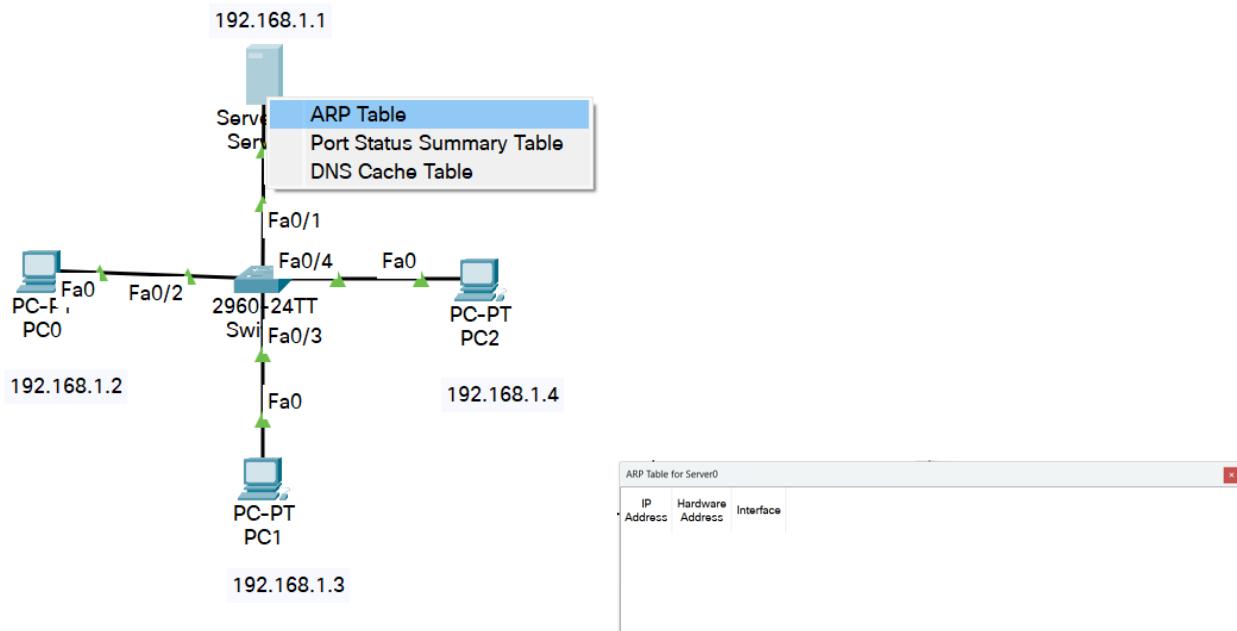


Command at PC

```
Packet Tracer PC Command Line 1.0
C:\>arp -a
No ARP Entries Found
C:\>
```

Pinging in Simulation Mode

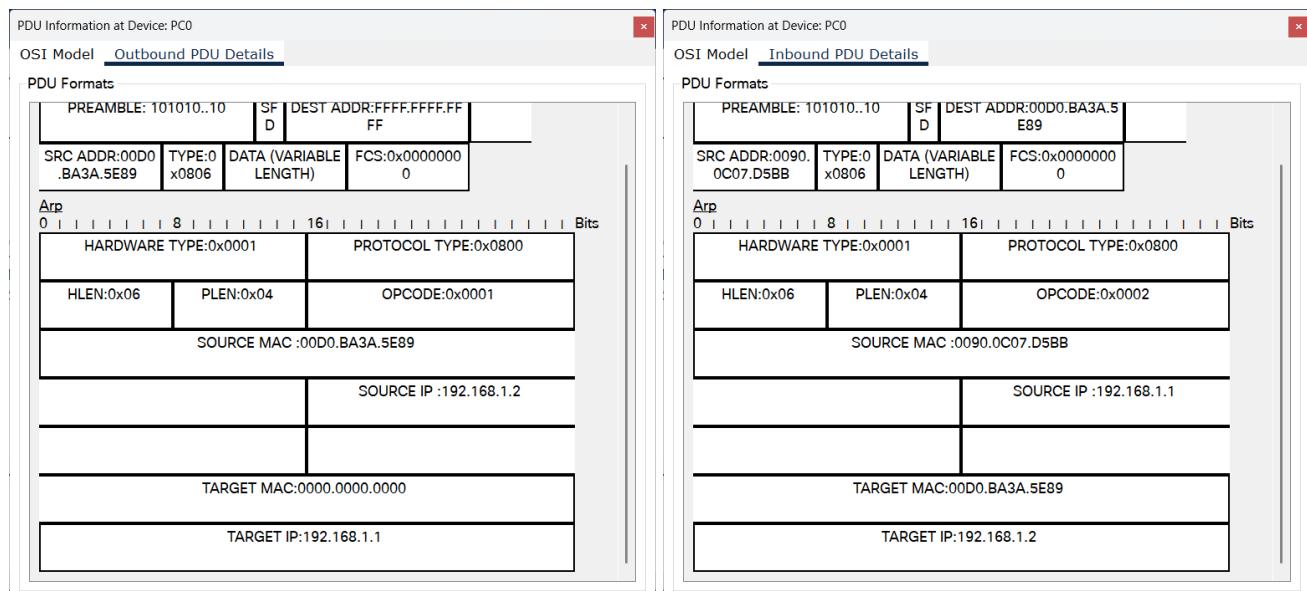


iv. Observation

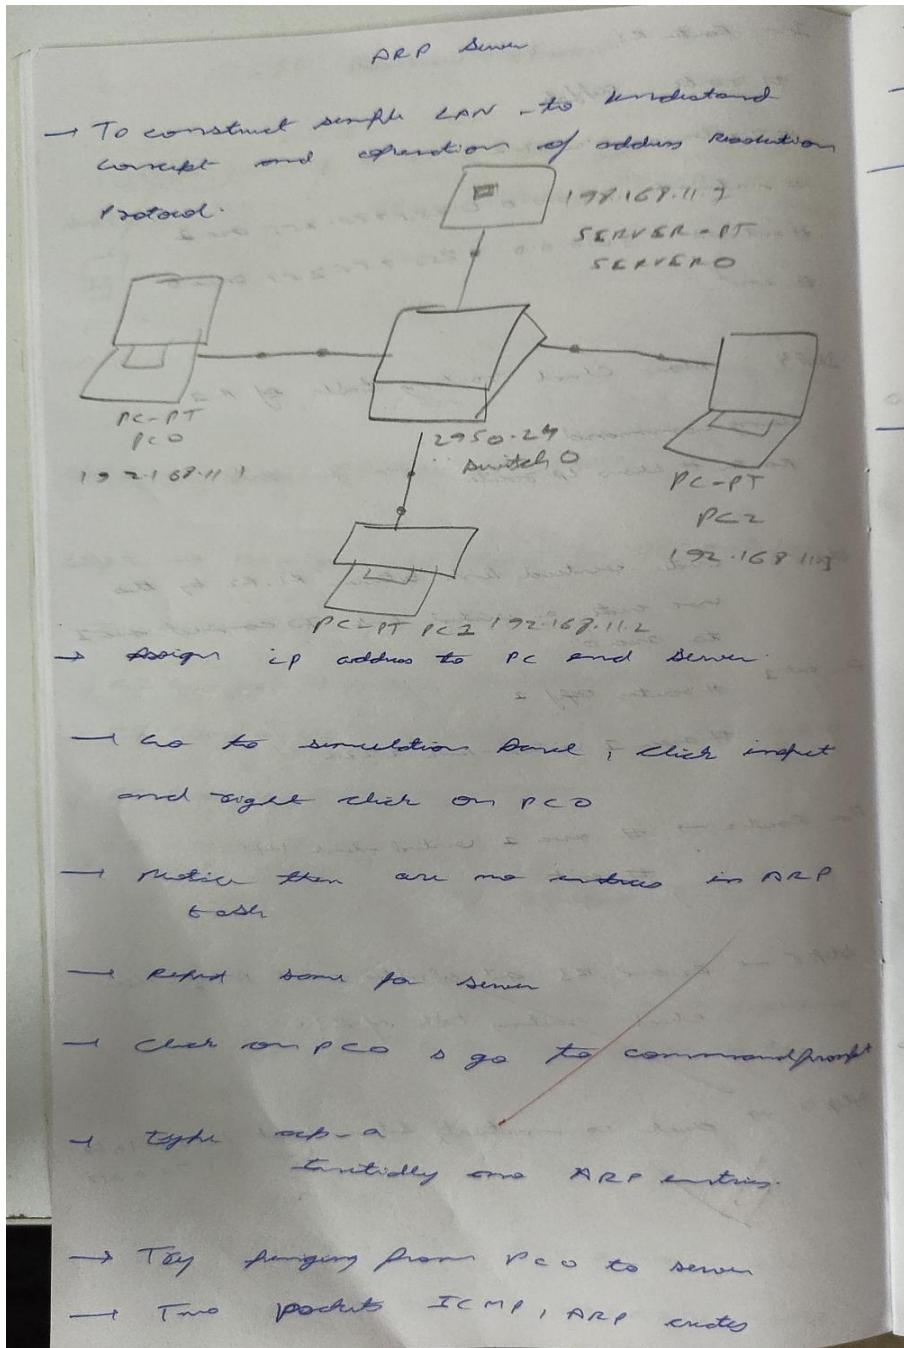

Program 10

- i. To understand the operation of TELNET by accessing the router in server room from a PC in IT office.
- ii. Procedure along with the topology

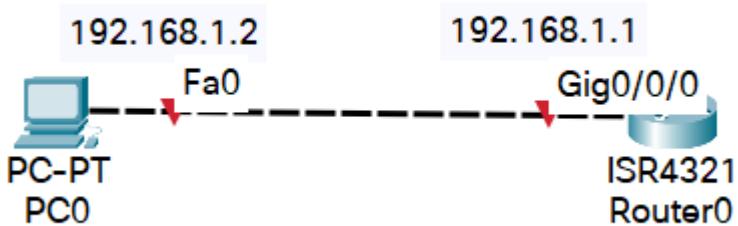

- iii. Screen shots/ output

Router

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R1
R1(config)#enable secret hello
R1(config)#interface g0/0/0
R1(config-if)#ip address 192.168.1.1 255.255.255.0
R1(config-if)#no shutdown


R1(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0/0, changed state to up

R1(config-if)#line vty 0 5
R1(config-line)#login
% Login disabled on line 2, until 'password' is set
% Login disabled on line 3, until 'password' is set
% Login disabled on line 4, until 'password' is set
% Login disabled on line 5, until 'password' is set
% Login disabled on line 6, until 'password' is set
% Login disabled on line 7, until 'password' is set
R1(config-line)#password pass
R1(config-line)#end
R1#
%SYS-5-CONFIG_I: Configured from console by console


R1#wr
Building configuration...
[OK]
R1#
```

PC

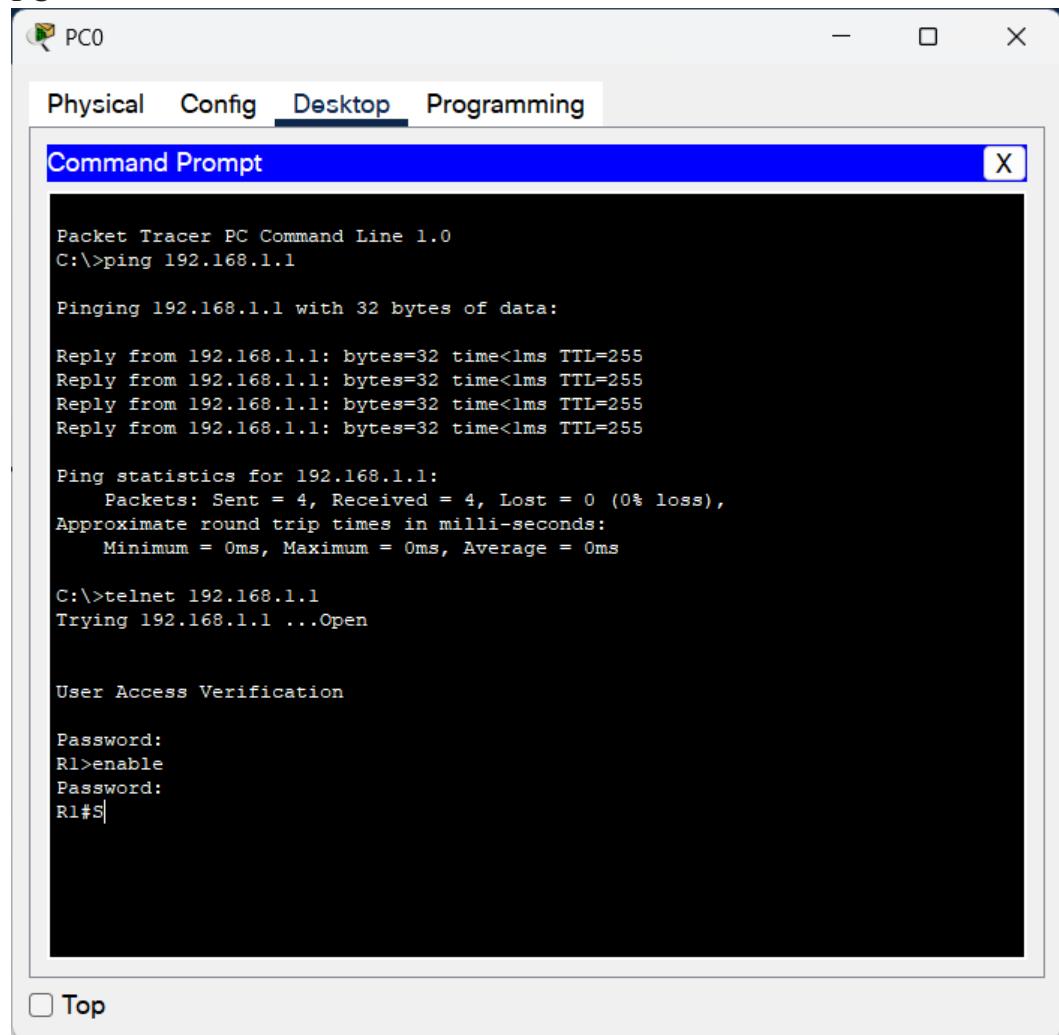


Top

iv. Observation

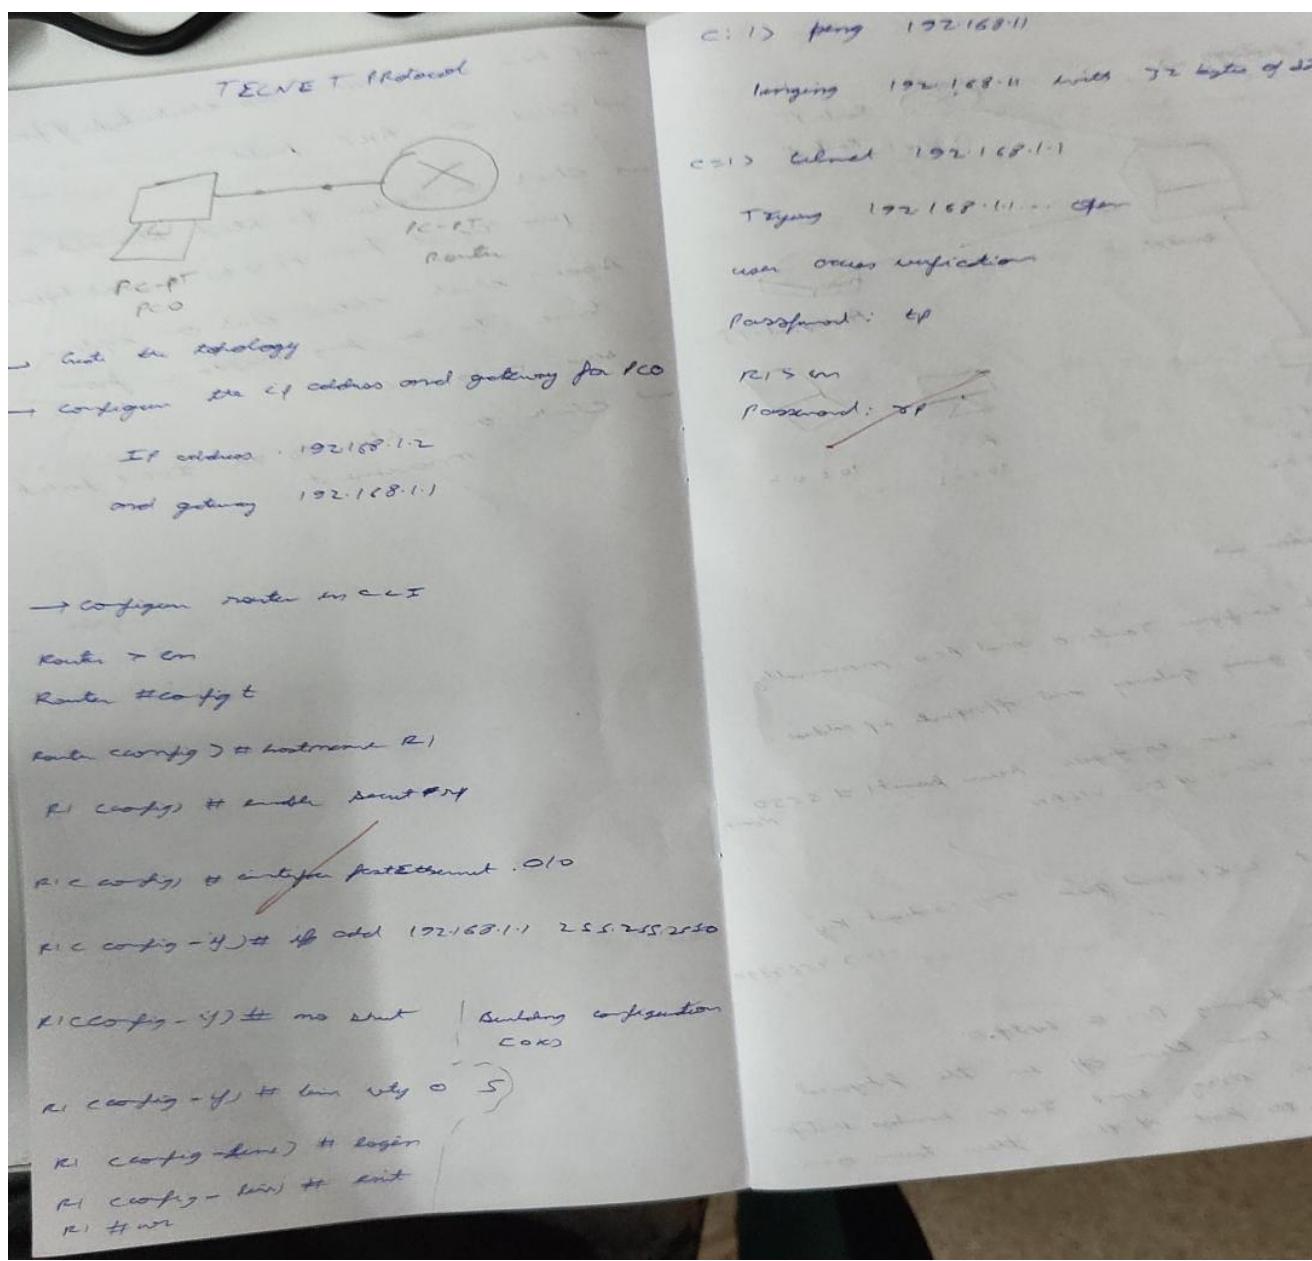


Program 11

- i. To construct a VLAN and make the PC's communicate among a VLAN
- ii. Procedure along with the topology

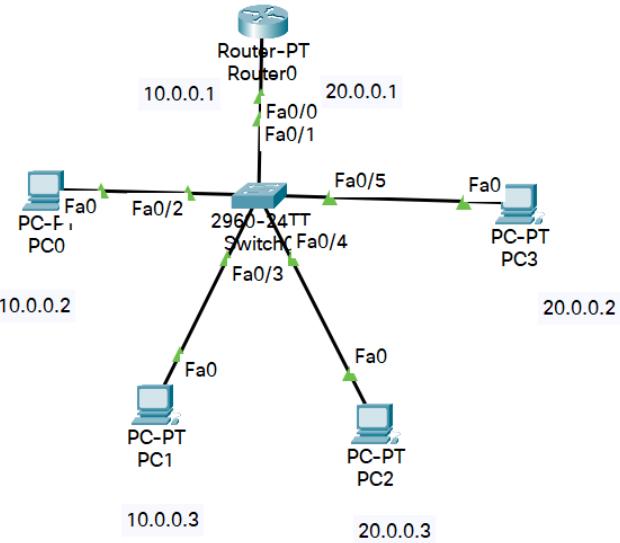


- iii. Screen shots/ output

Switch Configuration

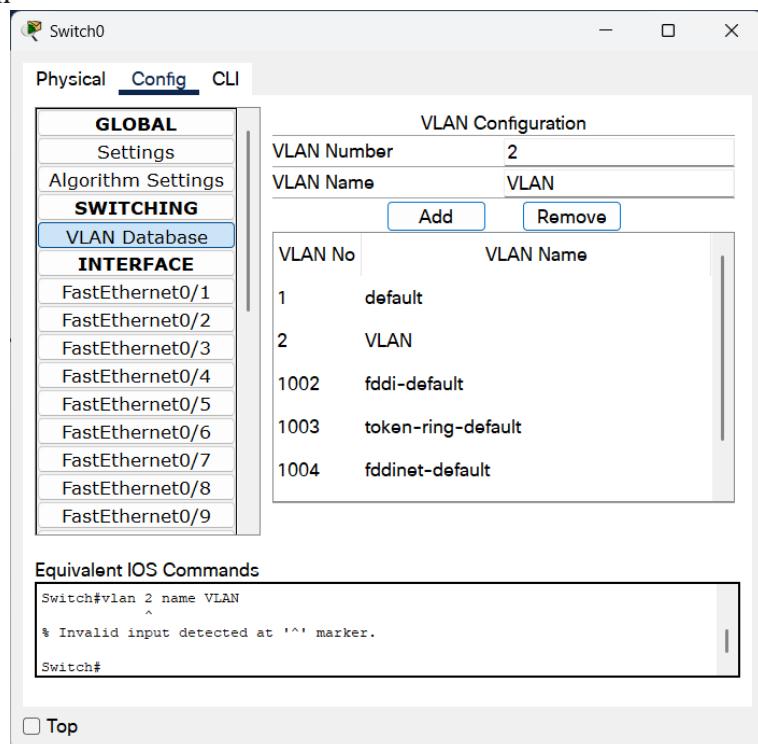

Configuration of port connected to router

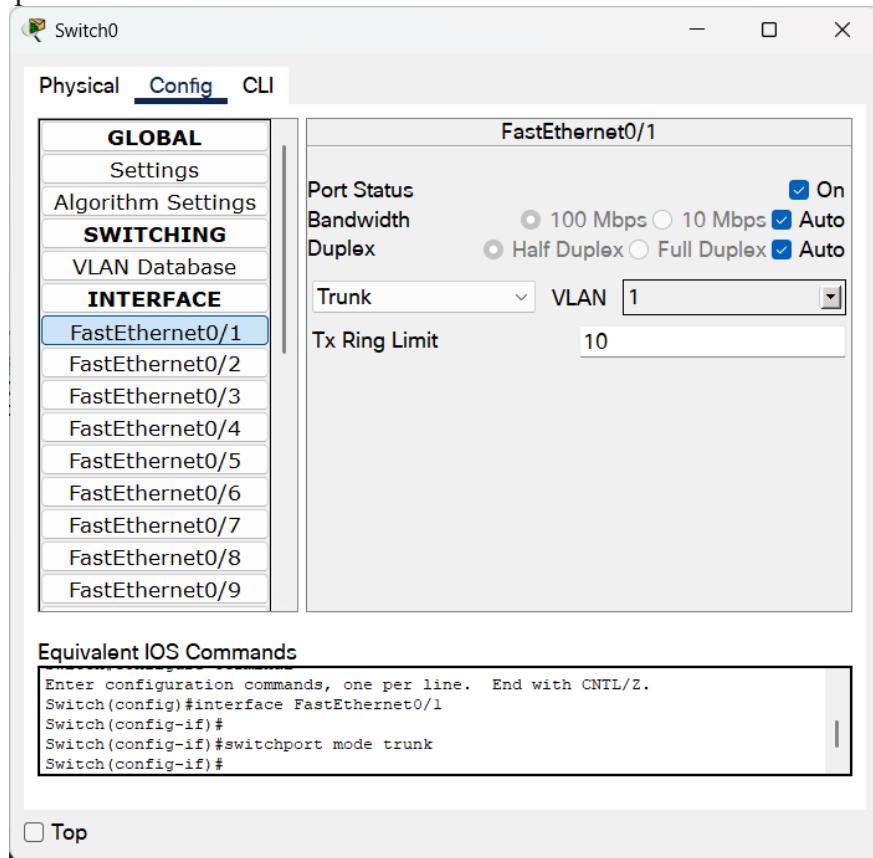

Configuration of ports connected to other networks

This screenshot shows two side-by-side configuration windows for "Switch0".

Left Window (FastEthernet0/4 Configuration):

- Port Status:** On (checked).
- Bandwidth:** 100 Mbps (radio button selected).
- Duplex:** Auto (radio button selected).
- Access:** VLAN 2 (selected from dropdown).
- Tx Ring Limit:** 10.

Right Window (FastEthernet0/5 Configuration):

- Port Status:** On (checked).
- Bandwidth:** 100 Mbps (radio button selected).
- Duplex:** Auto (radio button selected).
- Access:** VLAN 2 (selected from dropdown).
- Tx Ring Limit:** 10.

Both windows have an "Equivalent IOS Commands" section at the bottom containing the following commands:

```

Switch(config)#interface FastEthernet0/4
Switch(config-if)#
Switch(config-if)#switchport access vlan 2
Switch(config-if)#

```

and

```

Switch(config)#interface FastEthernet0/5
Switch(config-if)#
Switch(config-if)#switchport access vlan 2
Switch(config-if)#

```

A "Top" button is located at the bottom left of each interface window.

Configuartion of Router

Router0

Physical Config **CLI**

IOS Command Line Interface

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Fa0/0
Router(config-if)#ip address 10.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed
state to up

Router(config-if)#exit
Router(config)#interface Fa0/0.1
Router(config-subif)#
%LINK-5-CHANGED: Interface FastEthernet0/0.1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0.1, changed
state to up


Router(config-subif)#encapsulation dot1q 2
Router(config-subif)#ip address 20.0.0.1 255.0.0.0
Router(config-subif)#no shutdown
Router(config-subif)#exit
Router(config)#

Ctrl+F6 to exit CLI focus
```

Top


Copy **Paste**

iv. Observation

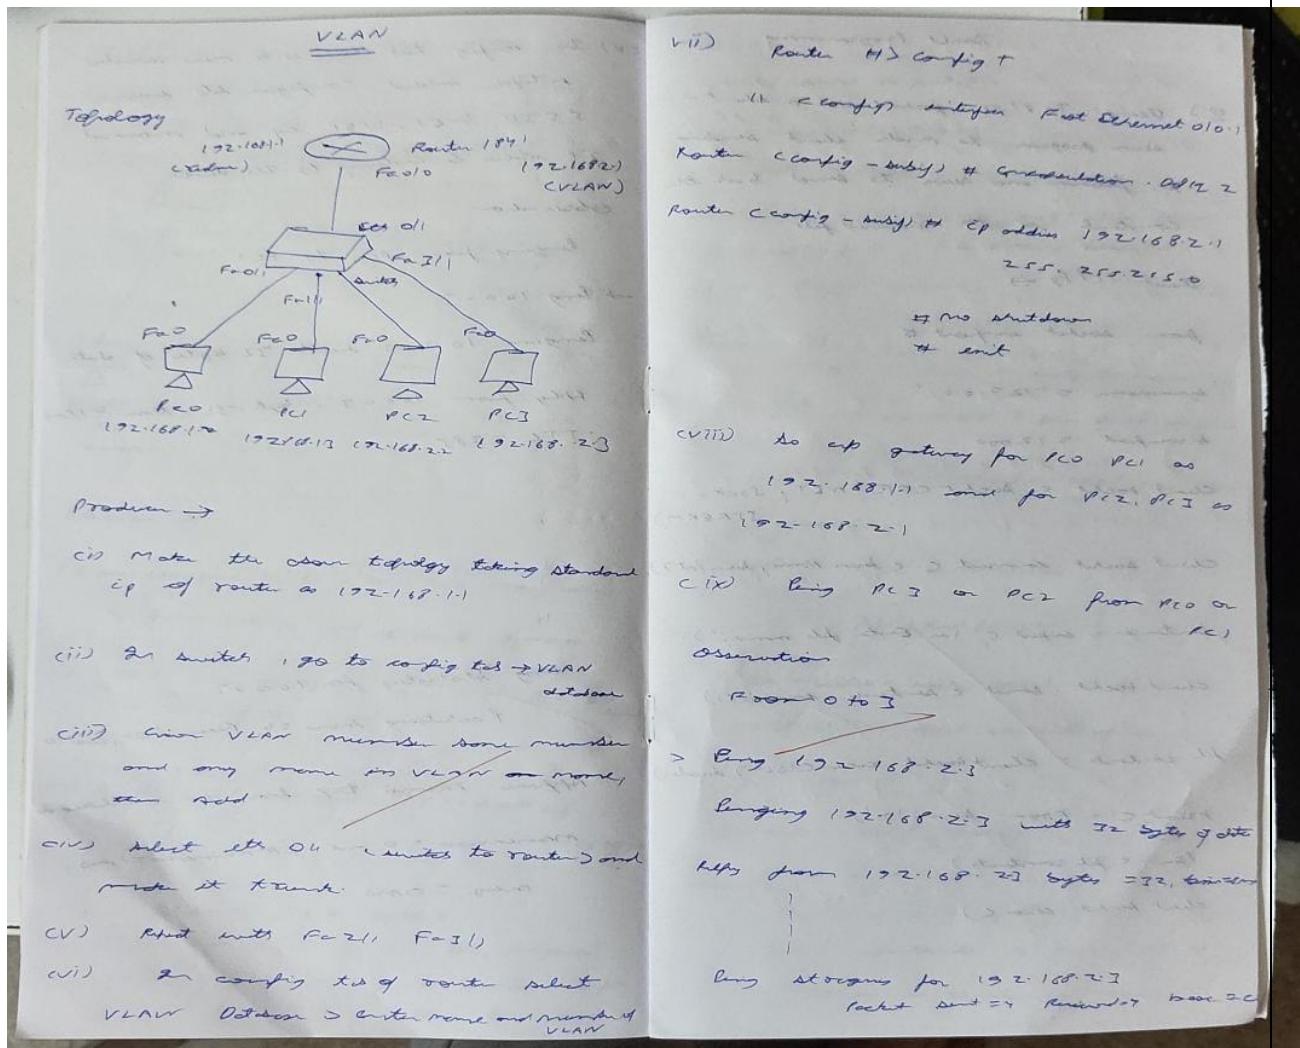


Program 12

- i. To construct a WLAN and make the nodes communicate wirelessly.
- ii. Procedure along with the topology

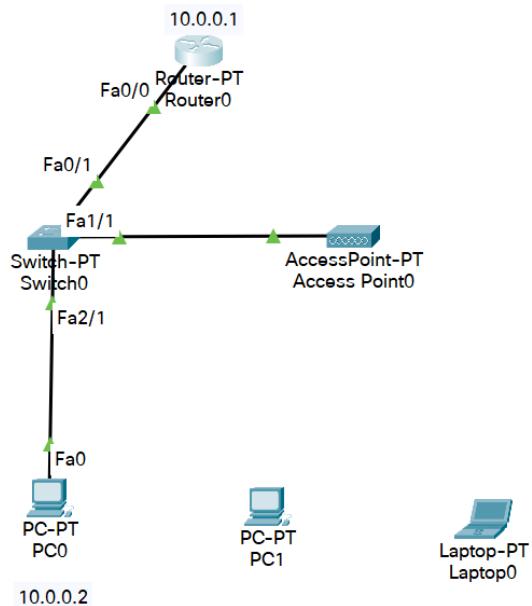

- iii. Screen shots/ output

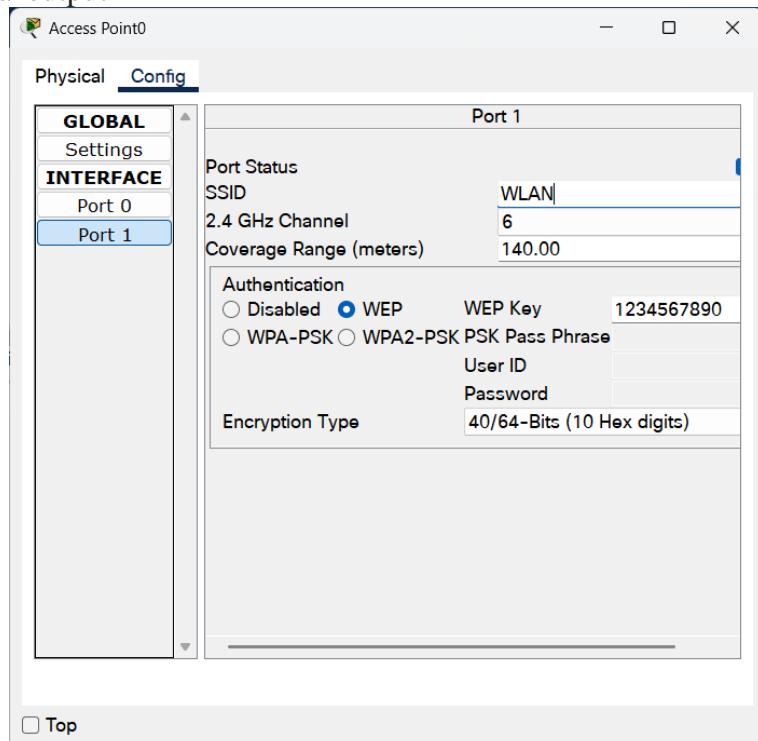

PC1

- Physical**
- Config
- Desktop
- Programming

MODULES
WMP300N
PT-HOST-NM-1AM
PT-HOST-NM-1CE
PT-HOST-NM-1CFE
PT-HOST-NM-1CGE
PT-HOST-NM-1FFE
PT-HOST-NM-1FGE
PT-HOST-NM-1W
PT-HOST-NM-1W-A
PT-HOST-NM-1W-AC
PT-HOST-NM-3G/4G
PT-HOST-NM-COVER
PT-HEADPHONE
PT-MICROPHONE



Physical Device View

Zoom In Original Size Zoom Out

Customize Icon in Physical View



Customize Icon in Logical View



The WMP300N module provides one 2.4GHz wireless interface suitable for connection to wireless networks. The module supports protocols that use Ethernet for...

Top

Laptop0

- Physical**
- Config
- Desktop
- Programming

MODULES
WPC300N
PT-LAPTOP-NM-1AM
PT-LAPTOP-NM-1CE
PT-LAPTOP-NM-1CFE
PT-LAPTOP-NM-1CGE
PT-LAPTOP-NM-1FFE
PT-LAPTOP-NM-1FGE
PT-LAPTOP-NM-1W
PT-LAPTOP-NM-1W-A
PT-LAPTOP-NM-1W-AC
PT-LAPTOP-NM-3G/4G
PT-HEADPHONE
PT-MICROPHONE



Physical Device View

Zoom In Original Size Zoom Out

Customize Icon in Physical View




Customize Icon in Logical View



The Linksys-WPC300N module provides one 2.4GHz wireless interface suitable for connection to wireless...

Top

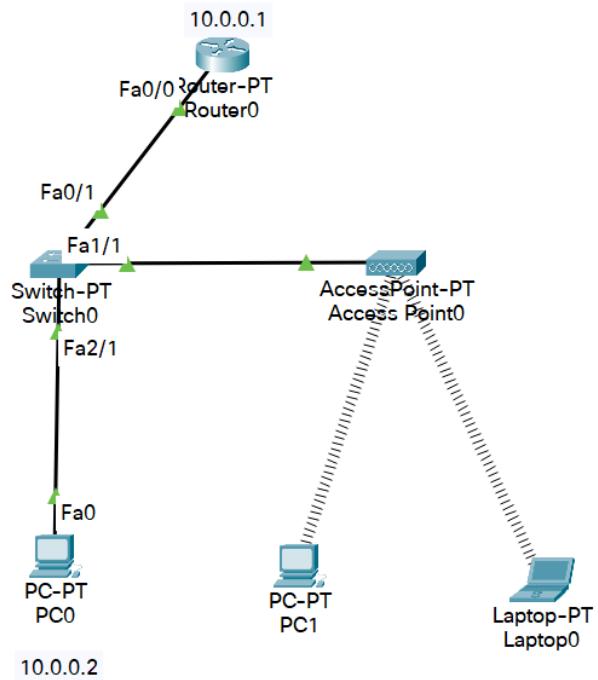

Ping:

Screenshot of the Packet Tracer Command Prompt window titled "Laptop0". The window shows the following command and its output:

```

Physical Config Desktop Programming
Command Prompt X
Packet Tracer PC Command Line 1.0
C:\>

C:\>ping 10.0.0.3


Pinging 10.0.0.3 with 32 bytes of data:
Reply from 10.0.0.3: bytes=32 time=40ms TTL=128
Reply from 10.0.0.3: bytes=32 time=25ms TTL=128
Reply from 10.0.0.3: bytes=32 time=26ms TTL=128
Reply from 10.0.0.3: bytes=32 time=24ms TTL=128

Ping statistics for 10.0.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 24ms, Maximum = 40ms, Average = 28ms
C:\>

```

Top

iv. Observation

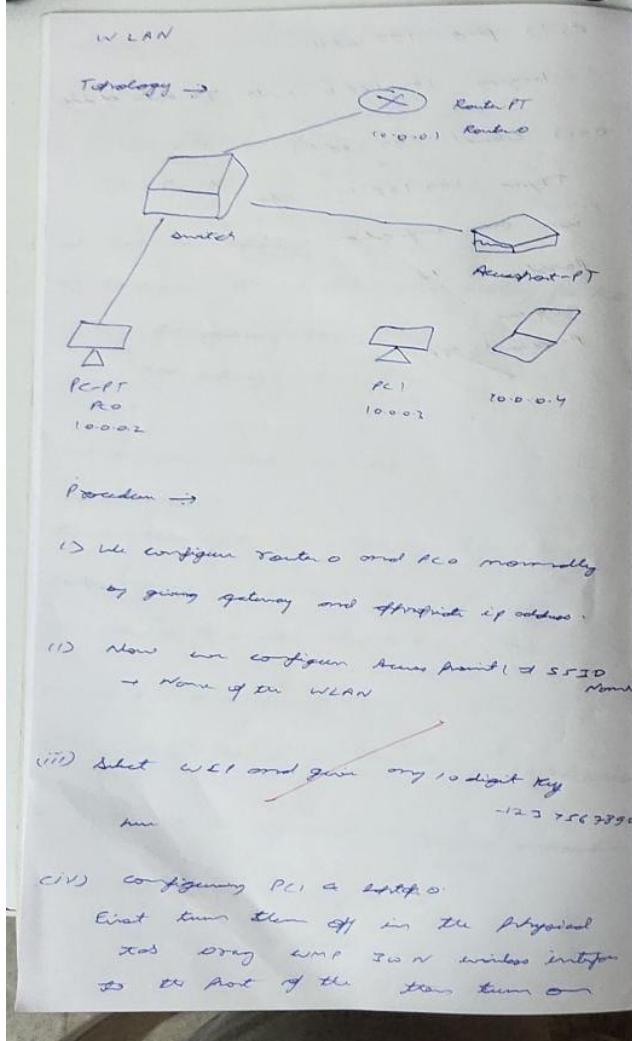

(v) In config tab there is a new window interface added. Configure its wireless SSID, WCI, WEP key and manual IP address & Gateway to the device.

Observation

- Link from PC0 to PC1
- Link 10.0.0.7
- Length 10.0.0.7 with 32 bytes of data
- Reply from 10.0.0.7: length=32 time = 18ms
TTL = 255

Cycle-II

Program 1

- i. Write a program for error detecting code using CRC-CCITT (16-bits).
- ii. Procedure

```
def crc_ccitt_16_bitstream(bitstream: str, poly: int = 0x1021, init_crc: int = 0xFFFF) -> int:  
    crc = init_crc  
    for bit in bitstream:  
        crc ^= int(bit) << 15 # Align the bit with CRC's uppermost bit  
        for _ in range(1): # Process the single bit  
            if crc & 0x8000: # Check if the leftmost bit is set  
                crc = (crc << 1) ^ poly  
            else:  
                crc <<= 1  
            crc &= 0xFFFF # Ensure CRC remains 16-bit  
    return crc  
  
def append_crc_to_bitstream(bitstream: str) -> str:  
    crc = crc_ccitt_16_bitstream(bitstream)  
    crc_bits = f'{crc:016b}' # Convert CRC to a 16-bit binary string  
    return bitstream + crc_bits  
  
def verify_crc_bitstream(bitstream_with_crc: str) -> bool:  
    if len(bitstream_with_crc) < 16:  
        return False # Not enough bits to contain CRC  
    data, received_crc = bitstream_with_crc[:-16], bitstream_with_crc[-16:]  
    calculated_crc = crc_ccitt_16_bitstream(data)  
    return calculated_crc == int(received_crc, 2)  
  
# Example usage:  
if __name__ == "__main__":  
    # User input for original bitstream  
    message_bits = input("Enter the original bitstream (e.g., 11010011101100): ")  
  
    # Calculate and append CRC  
    bitstream_with_crc = append_crc_to_bitstream(message_bits)
```

```

print(f"Bitstream with CRC: {bitstream_with_crc}")

# User input for verification
user_bitstream = input(
    "Enter the received bitstream for verification (e.g., 11010011101100110110110111000011): "
)

# Verify CRC
is_valid = verify_crc_bitstream(user_bitstream)
print(f"CRC valid: {is_valid}")

```

iii. Screen shots/ output

```

In [1]: runcell(0, 'E:/python_files/untitled2.py')

Enter the original bitstream (e.g., 11010011101100): 11111
Bitstream with CRC: 111111111111111100000

Enter the received bitstream for verification (e.g., 11010011101100110110110111000011): 111111111111111100000
CRC valid: True

In [2]: runcell(0, 'E:/python_files/untitled2.py')

Enter the original bitstream (e.g., 11010011101100): 11111
Bitstream with CRC: 111111111111111100000

Enter the received bitstream for verification (e.g., 11010011101100110110110111000011): 111111111111111100001
CRC valid: False

```

g. Write a program for Error Detection using CRC-
CCITT (16 bits) $\xrightarrow{\text{CAB-6}}$

Program \rightarrow

#include <iostream>

#include <cstring>

using namespace std;

int main(char *ip, char *op, char *poly, int mode)

strcpy(op, ip); // copy ip to op

if (mode) { // mode = 00000001 = 1

for (int i=1; i<strlen(poly); i++) {

strcat(op, "0");

}

}

// perform xor on the message with the selected polynomial

for (int i=0; i<strlen(ip); i++) {

if (op[i] == '1') {

for (int j=0; j<strlen(poly); j++) {

op[i+j] = op[i+j] ^ poly[j]; // '0' ^ '1' = '1'

}

}

// check for errors return 0 if error detected

iv. Observation

```

for (int i = 0; i < str.length(); i++) {
    if (str[i] == '1') {
        return 0;
    }
}

if (c == 0) {
    cout << "Enter the input message in binary:" << endl;
    cin >> str;
    cout << "The transmitted message is:" << endl;
    cout << str;
    cout << endl;
}

cout << "Enter the second message in binary:" << endl;
cin >> str2;
if (c == 1) {
    cout << "no error in data" << endl;
}
else {
    cout << "Error in data transmission has occurred" << endl;
}

return 0;
}

```

Output →
 Enter the input message in binary:
 11111

The transmitted message is: 1111110001110110
 Enter the received message in binary:
 11111

no error in data

✓

Program 2

- i. Write a program for congestion control using Leaky bucket algorithm
- ii. Procedure

```
def main():
    # Initial packets in the bucket
    storage = 0

    # Total number of times bucket content is checked
    no_of_queries = 4

    # Total number of packets that can be accommodated in the bucket
    bucket_size = 10

    # Number of packets that enter the bucket at a time
    input_pkt_size = 4

    # Number of packets that exit the bucket at a time
    output_pkt_size = 1

    for _ in range(no_of_queries):
        # Space left in the bucket
        size_left = bucket_size - storage

        if input_pkt_size <= size_left:
            # Update storage
            storage += input_pkt_size
        else:
            print(f"Packet loss = {input_pkt_size}")

        print(f"Buffer size = {storage} out of bucket size = {bucket_size}")

        # Remove packets from storage
        storage -= output_pkt_size

if __name__ == "__main__":
    main()
```

- iii. Screen shots/ output

```
In [3]: runcell(0, 'E:/Engineering/5Sem/CN/Experiments/untitled3.py')
Buffer size = 4 out of bucket size = 10
Buffer size = 7 out of bucket size = 10
Buffer size = 10 out of bucket size = 10
Packet loss = 4
Buffer size = 9 out of bucket size = 10
```

iv. Observation

Wiley bucket Algorithm →

Program →

```
#include <iostream.h>
using namespace std;
int main()
{
    int no_of_gens, storage, output_pkt_size;
    int input_pkt_size, bucket_size, size_left;
    //initial buckets in the bucket
    storage = 0;
    //total no. of times bucket content is checked
    no_of_gens = 4;
    //total no. of packets that can be accommodated in the
    //bucket_size = 10;
    //no. of packets that enter the bucket at a time
    input_pkt_size = 4;
    //no. of packets that enter the bucket at a time
    output_pkt_size = 2;
    for (int i = 0; i < no_of_gens; i++)
    {
        size_left = bucket_size - storage;
        if (input_pkt_size <= size_left)
            storage += input_pkt_size;
    }
}
```

else if

```
priority C "Packet loss = 1.0 / n", input_pkt_size);
```

priority C "Buffer size + 1.0 out of bucket size = 1.0 / n",
storage, bucket_size);
storage -= output_pkt_size;

if

```
return 0;
```

else

```
Output →
```

Buffer size = 4 out of bucket size = 10
Buffer size = 7 out of bucket size = 10
Buffer size = 10 out of bucket size = 10
Packet loss = 4
Buffer size = 9 out of bucket size = 10

W

Program 3

- i. Using TCP/IP sockets, write a client-server program to make client sending the file name and the server to send back the contents of the requested file if present.

- ii. Procedure

```
clientTCP.py
from socket import *
serverName = '127.0.0.1'
serverPort = 12000
clientSocket = socket(AF_INET, SOCK_STREAM)
clientSocket.connect((serverName,serverPort))
sentence = input("\nEnter file name: ")

clientSocket.send(sentence.encode())
filecontents = clientSocket.recv(1024).decode()
print ('\nFrom Server:\n')
print(filecontents)
clientSocket.close()
```

```
serverTCP.py
from socket import *
serverName="127.0.0.1"
serverPort = 12000
serverSocket = socket(AF_INET,SOCK_STREAM)
serverSocket.bind((serverName,serverPort))
serverSocket.listen(1)
while 1:
    print ("The server is ready to receive")
    connectionSocket, addr = serverSocket.accept()
    sentence = connectionSocket.recv(1024).decode()

    file=open(sentence,"r")
    l=file.read(1024)

    connectionSocket.send(l.encode())
    print ('\nSent contents of ' + sentence)
    file.close()
    connectionSocket.close()
```

iii. Screen shots/ output

Client



```
IDLE Shell 3.12.6
File Edit Shell Debug Options Window Help
Python 3.12.6 (tags/v3.12.6:a4a2d2b, Sep 6 2024, 20:11:23) [MSC v.1940 64 bit (AMD64)] on win32
Type "help", "copyright", "credits" or "license()" for more information.

>>> ===== RESTART: E:\Engineering\5Sem\CN\Experiments\clientTCP.py =====

Enter file name: serverTCP.py

From Server:


from socket import *
serverName="127.0.0.1"
serverPort = 12000
serverSocket = socket(AF_INET,SOCK_STREAM)
serverSocket.bind((serverName,serverPort))
serverSocket.listen(1)
while 1:
    print ("The server is ready to receive")
    connectionSocket, addr = serverSocket.accept()
    sentence = connectionSocket.recv(1024).decode()

    file=open(sentence,"r")
    l=file.read(1024)

    connectionSocket.send(l.encode())
    print ('\nSent contents of ' + sentence)
    file.close()
    connectionSocket.close()

>>>
```

Server

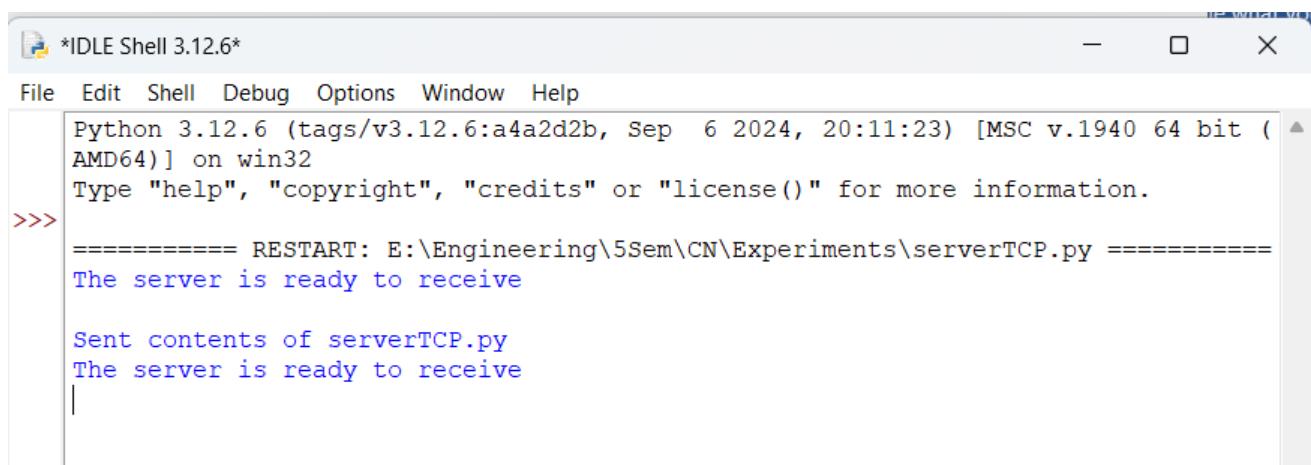

```
*IDLE Shell 3.12.6*
File Edit Shell Debug Options Window Help
Python 3.12.6 (tags/v3.12.6:a4a2d2b, Sep 6 2024, 20:11:23) [MSC v.1940 64 bit (AMD64)] on win32
Type "help", "copyright", "credits" or "license()" for more information.

>>> ===== RESTART: E:\Engineering\5Sem\CN\Experiments\serverTCP.py =====
The server is ready to receive

Sent contents of serverTCP.py
The server is ready to receive
```

iv. Observation

Socket Programming

(a) Using TCP/IP socket and a client server program to make client sending the file from and server to send back the content of the required file

Client TCP-By →

```

from socket import *
serverName = "127.0.0.1"
serverPort = 12000
clientSocket = socket(AF_INET, SOCK_STREAM)
clientSocket.connect((serverName, serverPort))
sentence = input("Input file name:")
clientSocket.send(sentence.encode())
fileContent = clientSocket.recv(1024).decode()
print(fileContent)
clientSocket.close()

```

Server TCP-By →

```

from socket import *
serverName = "127.0.0.1"
serverPort = 12000
serverSocket = socket(AF_INET, SOCK_STREAM)
serverSocket.bind((serverName, serverPort))
serverSocket.listen(1)
while True:
    print("Server is ready to receive")
    connectionSocket, addr = serverSocket.accept()
    sentence = connectionSocket.recv(1024).decode()
    print("Received file name: " + sentence)
    f = open(sentence, "r")
    fileContent = f.read()
    f.close()
    connectionSocket.send(fileContent.encode())
    connectionSocket.close()

```

Output →

The server is ready to receive
Received file name: abc.txt
The server is ready to receive

Program 4

- i. Using UDP sockets, write a client-server program to make client sending the file name and the server to send back the contents of the requested file if present.

- ii. Procedure

clientUDP.py

```
from socket import *
serverName = "127.0.0.1"
serverPort = 12000
clientSocket = socket(AF_INET, SOCK_DGRAM)

sentence = input("\nEnter file name: ")

clientSocket.sendto(sentence.encode("utf-8"),(serverName, serverPort))
```

```
filecontents,serverAddress = clientSocket.recvfrom(2048)
```

```
print ('\nReply from Server:\n')
print (filecontents.decode("utf-8"))
# for i in filecontents:
#     print(str(i), end = '')
clientSocket.close()
clientSocket.close()
```

serverUDP.py

```
from socket import *
serverPort = 12000
serverSocket = socket(AF_INET, SOCK_DGRAM)
serverSocket.bind(("127.0.0.1", serverPort))
print ("The server is ready to receive")
while 1:
    sentence, clientAddress = serverSocket.recvfrom(2048)
    sentence = sentence.decode("utf-8")
    file=open(sentence, "r")
    con=file.read(2048)
```


```
serverSocket.sendto(bytes(con,"utf-8"),clientAddress)
```

```
print ('\nSent contents of ', end = ' ')
print (sentence)
# for i in sentence:
```

```
# print (str(i), end = ")
file.close()
```

iii. Screen shots/ output

Client

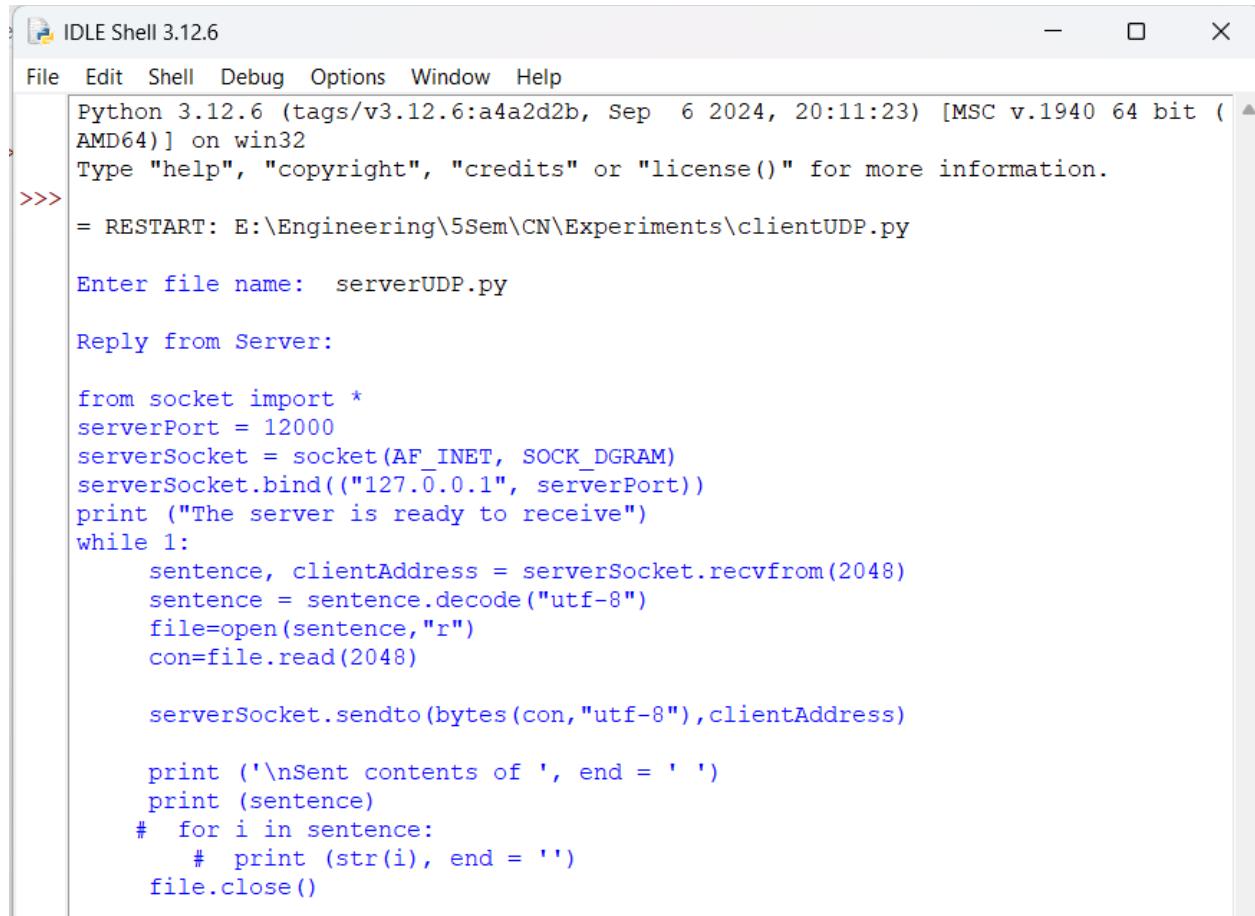

```
IDLE Shell 3.12.6
File Edit Shell Debug Options Window Help
Python 3.12.6 (tags/v3.12.6:a4a2d2b, Sep  6 2024, 20:11:23) [MSC v.1940 64 bit (AMD64)] on win32
Type "help", "copyright", "credits" or "license()" for more information.
>>> = RESTART: E:\Engineering\5Sem\CN\Experiments\clientUDP.py

Enter file name: serverUDP.py


Reply from Server:

from socket import *
serverPort = 12000
serverSocket = socket(AF_INET, SOCK_DGRAM)
serverSocket.bind(("127.0.0.1", serverPort))
print ("The server is ready to receive")
while 1:
    sentence, clientAddress = serverSocket.recvfrom(2048)
    sentence = sentence.decode("utf-8")
    file=open(sentence,"r")
    con=file.read(2048)

    serverSocket.sendto(bytes(con,"utf-8"),clientAddress)

    print ('\nSent contents of ', end = ' ')
    print (sentence)
#   for i in sentence:
#       # print (str(i), end = '')
    file.close()
```

Server

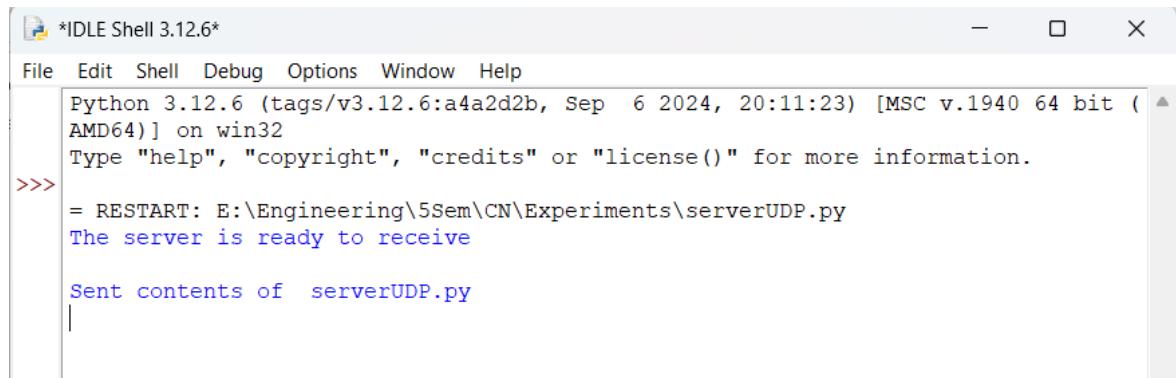

```
*IDLE Shell 3.12.6*
File Edit Shell Debug Options Window Help
Python 3.12.6 (tags/v3.12.6:a4a2d2b, Sep  6 2024, 20:11:23) [MSC v.1940 64 bit (AMD64)] on win32
Type "help", "copyright", "credits" or "license()" for more information.
>>> = RESTART: E:\Engineering\5Sem\CN\Experiments\serverUDP.py
The server is ready to receive

Sent contents of  serverUDP.py
```

iv. Observation

A using UDP socket, with a client-server program - to make client sending the file name and the server to send back the content of the requested file of present
Client UDP . Py
 from socket import *
 sum Port = 12000
 sum Socket = socket(AF_INET, SOCK_DGRAM)
 sum . Socket . bind(("127.0.0.1", sum Port))
 print("The server is ready to receive")
 word = ""
 sentence : ClientAddress = sum Socket . recvfrom(2048)
 sentence = sentence[0].decode("utf-8")
 file = open(sentence, "r")
 content = file.read(2048)
 sum Socket . sendto(content, ("127.0.0.1", sum Port))
 file.close()

sum UDP . Py
 from socket import *
 sum Port = 12000
 sum Socket = socket(AF_INET, SOCK_DGRAM)
 sum . Socket . bind(("127.0.0.1", sum Port))
 print("The server is ready to receive")
 word = ""
 sentence : ClientAddress = sum Socket . recvfrom(2048)
 sentence = sentence[0].decode("utf-8")
 file = open(sentence, "r")
 content = file.read(2048)
 sum Socket . sendto(content, ("127.0.0.1", sum Port))