


Program 6

- i. Configure OSPF routing protocol
- ii. Procedure along with the topology

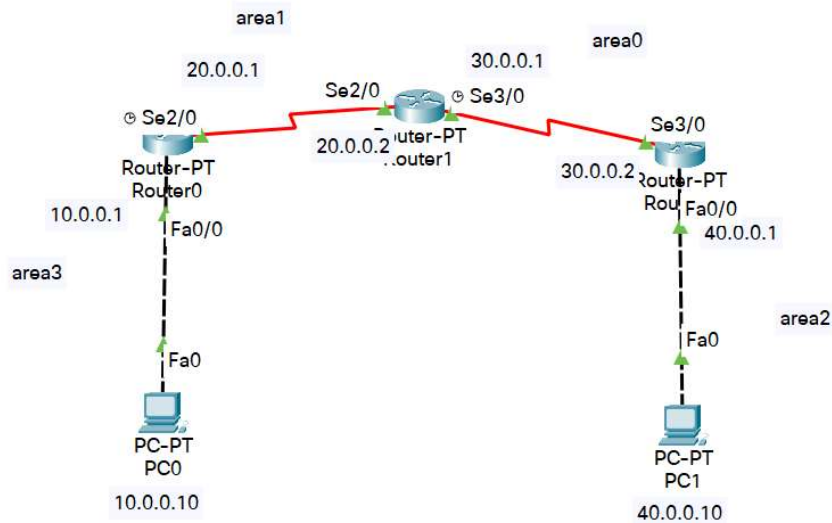

- iii. Screen shots/ output

Encapsulation:

Router0

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Fa0/0
Router(config-if)#ip address 10.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed
state to up

Router(config-if)#exit
Router(config)#interface Se2/0
Router(config-if)#ip address 20.0.0.1 255.0.0.0
Router(config-if)#encapsulation ppp
Router(config-if)#clock rate 64000
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#exit
Router(config)#
```

Router1

```

Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Se2/0
Router(config-if)#ip address 20.0.0.2 255.0.0.0
Router(config-if)#encapsulation ppp
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to
up

Router(config-if)#exit
Router(config)#interface Se3/0
Router(config-if)#ip address 30.0.0.1 255.0.0.0
Router(config-if)#encapsulation ppp
Router(config-if)#clock rate 64000
Router(config-if)#no dhutdown
                        ^
% Invalid input detected at '^' marker.

Router(config-if)#no shutdown

```

Router2

```

Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Fa0/0
Router(config-if)#ip address 40.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed
state to up
%IP-4-DUPADDR: Duplicate address 40.0.0.1 on FastEthernet0/0, sourced by
000D.BDDA.0123

Router(config-if)#exit
Router(config)#interface Se3/0
Router(config-if)#ip address 30.0.0.2 255.0.0.0
Router(config-if)#encapsulation ppp
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to
up

```

OSPF Routing Protocol

Router0

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#router-id 1.1.1.1
Router(config-router)#network 10.0.0.0 0.255.255.255 area 3
Router(config-router)#network 20.0.0.0 0.255.255.255 area 1
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#sho
00:27:19: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on Serial2/0 from LOADING to FULL, Loading Done
w ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, FastEthernet0/0
    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Serial2/0
C    20.0.0.2/32 is directly connected, Serial2/0
O IA 30.0.0.0/8 [110/128] via 20.0.0.2, 00:00:02, Serial2/0
O IA 40.0.0.0/8 [110/129] via 20.0.0.2, 00:00:02, Serial2/0
```

Router1

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#router-id 2.2.2.2
Router(config-router)#network 20.0.0.0 0.255.255.255 area 1
Router(config-router)#network 30.0.0.0 0.255.255.255 area 0
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

00:26:21: %OSPF-5-ADJCHG: Process 1, Nbr 3.3.3.3 on Serial3/0 from LOADING to FULL, Loading Done

00:27:18: %OSPF-5-ADJCHG: Process 1, Nbr 1.1.1.1 on Serial2/0 from LOADING to FULL, Loading Done

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is not set

    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Serial2/0
C    20.0.0.1/32 is directly connected, Serial2/0
    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Serial3/0
C    30.0.0.2/32 is directly connected, Serial3/0
O IA 40.0.0.0/8 [110/65] via 30.0.0.2, 00:02:00, Serial3/0
```

Router2

```
Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#router-id 3.3.3.3
Router(config-router)#network 40.0.0.0 0.255.255.255 area 2
Router(config-router)#network 30.0.0.0 0.255.255.255 area 0
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#
00:26:19: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on Serial3/0 from LOADING to FULL, Loading Done

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

O IA 20.0.0.0/8 [110/128] via 30.0.0.1, 00:02:45, Serial3/0
    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     30.0.0.0/8 is directly connected, Serial3/0
C     30.0.0.1/32 is directly connected, Serial3/0
C     40.0.0.0/8 is directly connected, FastEthernet0/0
```

Configure Loopback address

Router0

```
Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface loopback 0

Router(config-if)#
%LINK-5-CHANGED: Interface Loopback0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to
up

Router(config-if)#ip address 172.16.1.252 255.255.0.0
Router(config-if)#no shutdown
```

Router1

```
Router>enable
Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface loopback 0

Router(config-if)#
%LINK-5-CHANGED: Interface Loopback0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to
up

Router(config-if)#ip address 172.16.1.253 255.255.0.0
Router(config-if)#no shutdown
Router(config-if)#
```


Router2

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface loopback 0

Router(config-if)#
%LINK-5-CHANGED: Interface Loopback0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to
up

Router(config-if)#ip address 172.16.1.254 255.255.0.0
Router(config-if)#no shutdown
Router(config-if)#
```

Create Virtual Link

Router0

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#area 1 virtual-link 2.2.2.2
Router(config-router)#
```

Router1

```
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
01:11:01: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from
backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0

01:11:11: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from
backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0

Router(config)#route
01:11:21: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from
backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
r ospf 1
Router(config-router)#
01:11:31: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from
backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0

Router(config-router)#area 1 v
01:11:41: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from
backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
irtual-link 1.1.1.1
Router(config-router)#
01:11:56: %OSPF-5-ADJCHG: Process 1, Nbr 1.1.1.1 on OSPF_VL0 from LOADING to
FULL, Loading Done
```

Pinging

```
C:\>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time=24ms TTL=125
Reply from 40.0.0.10: bytes=32 time=18ms TTL=125
Reply from 40.0.0.10: bytes=32 time=18ms TTL=125
Reply from 40.0.0.10: bytes=32 time=20ms TTL=125

Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 18ms, Maximum = 24ms, Average = 20ms
```