№3

Markdown

1

1

1

Markdown 1

Markdown 3

4

5

— Markdown.

- Markdown.
- : `pdf`, `docx` `md`.

Markdown

, (`#`), :

```
# This is heading 1
## This is heading 2
### This is heading 3
#### This is heading 4
```

, :

```
This text is **bold**.
```

, :

```
This text is *italic*.
```

, :

```
This is text is both ***bold and italic***.
```

>:

```
> The drought had lasted now for ten million years, and the reign of
the terrible lizards had long since ended. Here on the Equator, in
the continent which would one day be known as Africa, the battle
for existence had reached a new climax of ferocity, and the victor
was not yet in sight. In this barren and desiccated land, only the
small or the swift or the fierce could flourish, or even hope to
survive.
```

( ) :

```
- List item 1
- List item 2
- List item 3
```

, :

```
- List item 1
    - List item A
    - List item B
- List item 2
```

:

```
1. First instruction
1. Second instruction
1. Third instruction
```

, :

```
1. First instruction
    1. Sub-instruction
    1. Sub-instruction
1. Second instruction
```

Markdown [link text], , (file-name.md) – URL- , :

```
[link text](file-name.md)
```

Markdown ,
. — .
:

```
your code goes in here
```

: H_20

```
H~2~0
```

2^{10} LaTeX. , $\sin^2(x) + \cos^2(x) = 1$

```
$\sin^2 (x) + \cos^2 (x) = 1$
```

:

$$\sin^2(x) + \cos^2(x) = 1$$

{#eq:eq:sin2+cos2} « ([-@eq:eq:sin2+cos2]).»

```
$$
\sin^2 (x) + \cos^2 (x) = 1
$$ {#eq:eq:sin2+cos2}

([-@eq:eq:sin2+cos2]).
```

Markdown

Markdown Pandoc https://pandoc.org/. ,
`pandoc`, `pandoc-citeproc` https://github.com/jgm/pandoc/releases,
`pandoc-crossref` https://github.com/lierdakil/pandoc-crossref/releases. -
`README.md` :

```
pandoc README.md -o README.pdf


pandoc README.md -o README.docx
```

`Makefile`

```
FILES = $(patsubst %.md, %.docx, $(wildcard *.md))
FILES += $(patsubst %.md, %.pdf, $(wildcard *.md))

LATEX_FORMAT =

FILTER = --filter pandoc-crossref

%.docx: %.md
    -pandoc "$<" $(FILTER) -o "$@"

%.pdf: %.md
```

```
    -pandoc "$<" $(LATEX_FORMAT) $(FILTER) -o "$@"

all: $(FILES)
    @echo $(FILES)

clean:
    -rm $(FILES) *~
```

(. .1).

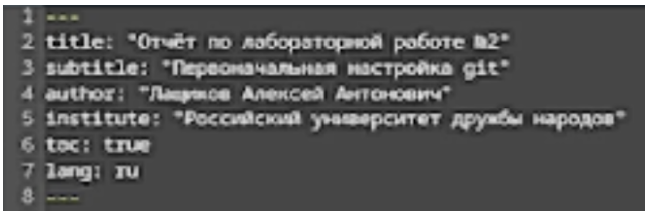

. 1:

, (. .2).

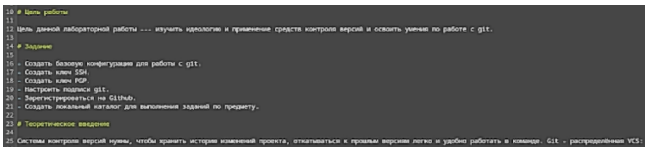

. 2: ,

(. .3).

. 3:

(. .5).

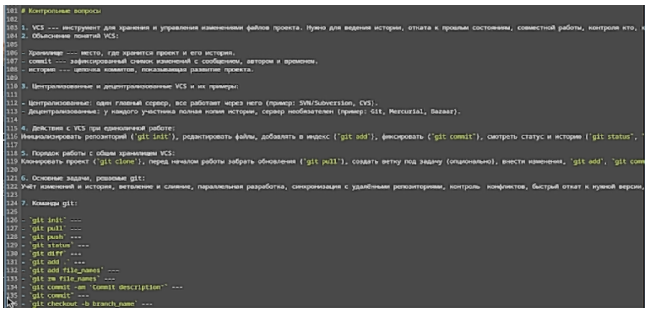

. 4:

(. .6).

. 5:

pdf (. .4).

. 6: pdf

Markdown.