

Login to VPR

Logging In Through the Mini USB Port

If no serial port is available on your PC, connect the USB port of the PC to the Mini USB port of a device that is powered on for the first time. After logging in to the device through the Mini USB/Micro USB port, you can configure and manage the device.

Pre-configuration Tasks

 **NOTE**

Only CE8868EI, CE8861EI, CE8850-64CQ-EI, CE6856-48T6Q-HI support login through the Mini USB port.

Before logging in to a device through the Mini USB port, complete the following tasks:

- Prepare a Mini USB cable.
- Obtain the Mini USB driver that is compatible with the PC's operating system.

<https://support.huawei.com/enterprise/en/doc/EDOC1100389628/8f6d9efc/logging-in-through-the-mini-usb-port>

3.3 Login to Network Devices

Configuring a Huawei network device can be done using the Console (control) port, Telnet (remote login system), SSH (Secure Shell), or Web methods. This section introduces the various ways to configure the user interface and log in to the device.

Different view of VPR

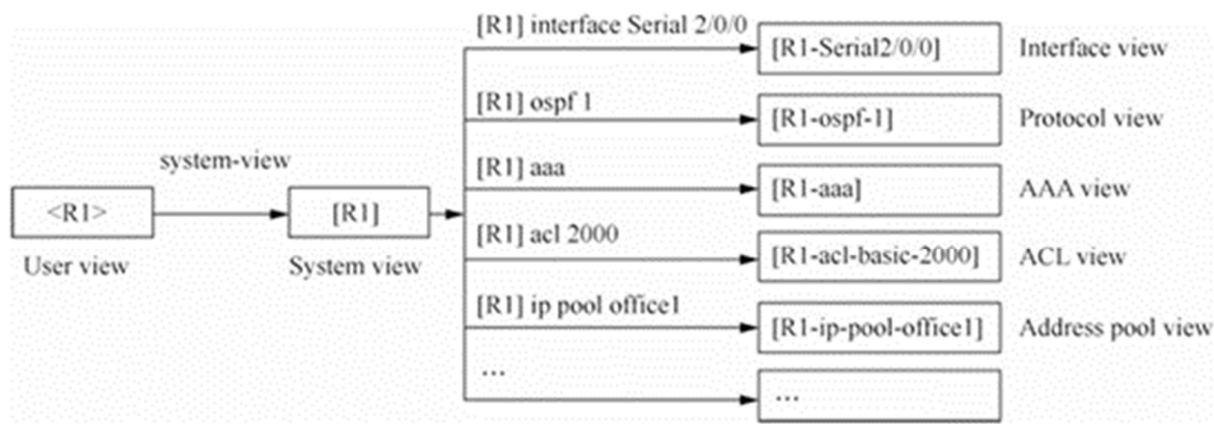


Fig. 3.3 The command line views

```
[Huawei-GigabitEthernet1/0/0] quit      --Exit to system view  
[Huawei]
```

If you wish to continue exiting to the user view, you can execute the quit command for another time.

```
[Huawei] quit      --Exit to user view  
<Huawei>
```

Some command views are in such a high level that you need to execute the quit command several times in order to exit from the current view to the user view. In this case, you can use the return command to directly exit from the current view to the user view.

```
[Huawei-GigabitEthernet 1/0/0] return    -- Exit to user view  
<Huawei>
```

Table 3.2 Functions of function keys

Function keys	Functions
BackSpace	Delete the previous character at the cursor position, the cursor moves to the left and it stops if it has reached the start of the command
Left cursor key ← or “Ctrl+B”	The cursor moves one character to the left and it stops if it has reached the start of the command
Right cursor key → or “Ctrl+F”	The cursor moves one character to the right and it stops if it has reached the end of the command
Delete	Delete a character at the cursor position; the cursor position remains unmoved, and the character behind the cursor moves one character to the left, and it stops if it has reached the end of the command
Up cursor key ↑ or “Ctrl+P”	Display the previous history command. If you need to display an earlier history command, the function key can be repeatedly used
Lower cursor key ↓ or “Ctrl+N”	Display the next history command, and the function key can be repeatedly used

Table 3.3 Common VRP system-defined shortcut (combination) keys

Shortcut (combination) keys	Functions
Ctrl+A	Move the cursor to the beginning of the current line
Ctrl+E	Move the cursor to the end of the current line
ESC+N	Move the cursor downward a line
ESC+P	Move the cursor upward a line
Ctrl+C	Stops performing current functions
Ctrl+Z	Returns to the user view, which is equivalent to the return command
Tab	Partial help function; enter incomplete keywords and press “Tab”, and then the system automatically completes the keywords