



SAPIENZA  
UNIVERSITÀ DI ROMA

Faculty of Information Engineering, Informatics and  
Statistics  
Department of Computer Science

# Concurrent Systems

**Author:**  
Simone Lidonnici

23 may 2026

# Contents

|          |                                              |           |
|----------|----------------------------------------------|-----------|
| <b>1</b> | <b>Mutual Exclusion</b>                      | <b>1</b>  |
| 1.1      | Concurrency . . . . .                        | 1         |
| 1.2      | Mutex definition . . . . .                   | 1         |
| 1.3      | Atomic Read/Write registers . . . . .        | 2         |
| 1.3.1    | Peterson algorithm . . . . .                 | 3         |
| 1.3.2    | Tournament based algorithm . . . . .         | 5         |
| 1.3.3    | Fast mutex algorithm . . . . .               | 6         |
| 1.3.4    | Deadlock freedom to Bounded bypass . . . . . | 7         |
| 1.4      | Special HW primitives . . . . .              | 9         |
| 1.4.1    | Test&Set . . . . .                           | 9         |
| 1.4.2    | Swap . . . . .                               | 9         |
| 1.4.3    | Compare&Swap . . . . .                       | 10        |
| 1.4.4    | Fetch&Add . . . . .                          | 10        |
| 1.5      | Safe registers . . . . .                     | 11        |
| 1.5.1    | Bakery algorithm . . . . .                   | 11        |
| 1.5.2    | Aravind algorithm . . . . .                  | 12        |
| 1.6      | Semaphores . . . . .                         | 14        |
| 1.6.1    | Semaphor definition . . . . .                | 14        |
| 1.6.2    | Example: Producer-Customer . . . . .         | 15        |
| 1.6.3    | Example: Reader-Writer . . . . .             | 16        |
| 1.7      | Monitors . . . . .                           | 19        |
| 1.7.1    | Example: Barrier . . . . .                   | 20        |
| 1.7.2    | Example: Reader-Writer . . . . .             | 21        |
| 1.7.3    | Dining Philosopher problem . . . . .         | 24        |
| 1.8      | Software Transactional Memory . . . . .      | 25        |
| 1.8.1    | Logical clock based STM system . . . . .     | 25        |
| 1.8.2    | Vector clock based STM system . . . . .      | 27        |
| 1.9      | Linearizability . . . . .                    | 28        |
| 1.9.1    | Compositionality . . . . .                   | 29        |
| 1.9.2    | Sequential consistency . . . . .             | 31        |
| 1.9.3    | Serializability . . . . .                    | 32        |
| <b>2</b> | <b>Concurrency without Mutex</b>             | <b>33</b> |
| 2.1      | Mutex-free property . . . . .                | 33        |
| 2.2      | Example of mutex-free . . . . .              | 33        |
| 2.2.1    | Splitter . . . . .                           | 33        |
| 2.2.2    | Timestamp generator . . . . .                | 35        |
| 2.2.3    | Stack . . . . .                              | 36        |

|          |                                                          |           |
|----------|----------------------------------------------------------|-----------|
| 2.3      | Obstruction freedom to wait freedom . . . . .            | 38        |
| 2.3.1    | From obstruction freedom to non-blocking . . . . .       | 38        |
| 2.3.2    | From obstruction freedom to wait freedom . . . . .       | 39        |
| 2.4      | Consensus object . . . . .                               | 41        |
| 2.4.1    | Binary and Multivalued consensus . . . . .               | 43        |
| 2.5      | Consensus number . . . . .                               | 44        |
| 2.5.1    | Atomic R/W registers . . . . .                           | 45        |
| 2.5.2    | Consensus number of 2 with primitives . . . . .          | 45        |
| 2.5.3    | Consensus number of $\infty$ with Compare&Swap . . . . . | 46        |
| <b>3</b> | <b>Bisimilarity</b>                                      | <b>47</b> |
| 3.1      | Labeled Transition System . . . . .                      | 47        |
| 3.1.1    | Definition of LTS . . . . .                              | 48        |
| 3.1.2    | Syntax for non deterministic processes . . . . .         | 50        |
| 3.2      | CCS . . . . .                                            | 51        |
| 3.2.1    | Semaphor . . . . .                                       | 53        |
| 3.2.2    | Image Finiteness . . . . .                               | 54        |
| 3.2.3    | Properties of bisimilarity . . . . .                     | 55        |
| 3.2.4    | Congruence . . . . .                                     | 56        |
| 3.3      | Weak bisimilarity . . . . .                              | 57        |
| 3.4      | Inference system . . . . .                               | 60        |
| 3.4.1    | Strong bisimilarity . . . . .                            | 60        |
| 3.4.2    | Weak bisimilarity . . . . .                              | 63        |
| 3.5      | Logic formulas . . . . .                                 | 64        |
| 3.5.1    | Sub-logics . . . . .                                     | 66        |
| 3.5.2    | Logic for weak bisimilarity . . . . .                    | 67        |
| 3.6      | Algorithm for bisimilarity . . . . .                     | 67        |
| 3.6.1    | Complexity of the algorithm . . . . .                    | 70        |
| <b>4</b> | <b><math>\pi</math>-calculus</b>                         | <b>72</b> |
| 4.1      | vpCCS and $\pi$ -calculus . . . . .                      | 72        |
| 4.2      | Syntax . . . . .                                         | 73        |
| 4.3      | Semantics for $\pi$ -calculus . . . . .                  | 73        |
| 4.3.1    | Reduction . . . . .                                      | 74        |
| 4.3.2    | LTS for $\pi$ -calculus . . . . .                        | 75        |
| 4.3.3    | Equivalence of the two methods . . . . .                 | 76        |
| 4.4      | Bisimulation in $\pi$ -calculus . . . . .                | 76        |
| 4.5      | Different types of $\pi$ -calculus . . . . .             | 77        |
| 4.5.1    | Polyadic $\pi$ -calculus . . . . .                       | 77        |
| 4.5.2    | Asynchronous $\pi$ -calculus . . . . .                   | 79        |
| 4.5.3    | Higher Order $\pi$ -calculus . . . . .                   | 79        |
| 4.5.4    | Encoding a Object-Oriented Language . . . . .            | 80        |

|          |                                   |           |
|----------|-----------------------------------|-----------|
| <b>5</b> | <b>Temporal Logic</b>             | <b>81</b> |
| 5.1      | Kripke structure . . . . .        | 81        |
| 5.2      | Reactive Temporal Logic . . . . . | 82        |
| 5.3      | Completeness criteria . . . . .   | 83        |

# 1

## Mutual Exclusion

### 1.1 Concurrency

A Concurrent System is a set of sequential state machines that run simultaneously and interact through a shared medium. The goal is to combine the work of different processes, that solve different tasks in parallel.

We will focus on concurrent systems that have 3 main properties:

- **Reliable:** every process correctly executes its program.
- **Asynchronous:** each process has its own clock.
- **Shared memory:** every process has a local memory but there are some registers that can be accessed by every process.

The number of processors that we have is not relevant so we will assume we have one for every process.

Synchronization of a concurrent systems means that the behaviour of one process depends on the behaviour of the other processes. There are two principal interactions:

- **Cooperation:** different processes work to make all succeed in their task.
- **Competition:** different processes aim to execute the same action, but only some of them succeed. This usually happens when trying to access a shared resource.

### 1.2 Mutex definition

A mutex ensures that a part of the code is executed as if it was atomic, so without other processes running in between. The mutex is needed only in code parts that interact with shared data.

#### Critical section

A **critical section (CS)** is a set of code parts that must be executed without interferences. When a process is in a CS, no other process can be in a CS for the same shared object.

The mutex problem is designing an entry protocol **lock** and an exit protocol **unlock**, such that the code encapsulated between these two protocols can be run by at most one process at a time.

Every mutex should satisfy 2 properties:

- **Safety**: there is at most one process in a CS.
- **Liveness**: something good eventually happens. This property has various options:
  - **Deadlock freedom**: if there is at least one invocation of lock, eventually after at least one process enters a CS.
  - **Starvation freedom**: every invocation of lock eventually grants access to the associated CS.
  - **Bounded bypass**: with  $n$  processes, there exists  $f : N \rightarrow N$  such that every lock enters the CS after at most  $f(n)$  other CS (processes).

The liveness properties have a hierarchy such that Bounded bypass implies Starvation freedom that also implies Deadlock freedom.

## 1.3 Atomic Read/Write registers

Atomic Read/Write registers are storage units that can be accessed through two operations (READ and WRITE) such that:

1. Each invocation of an operation:
  - looks instantaneous and can be considered as a single point on the timeline (there exists a function  $t : OpInv \rightarrow \mathbb{R}^+$ )
  - may be located in any point between its starting and ending time (we have that  $t(opInv) \in [t_{start}(opInv), t_{end}(opInv)]$ )
  - does not happen together with any other operation ( $t(opInv) \neq t(opInv')$ )
2. Every READ returns the preceeding value written in the register.

There are different types of registers based on whether they can be read and written by one or many different processes:

- single-read/single-write (SRSW)
- single-read/multiple-write (SRMW)
- multiple-read/single-write (MRSW)
- multiple-read/multiple-write (MRMW)

### 1.3.1 Peterson algorithm

The Peterson algorithm designs a mutex for 2 processes:

---

**Algorithm:** Peterson algorithm (2 processes)

---

```
// Initialize FLAG[i] as false
def lock(i):
    FLAG[i] = true
    LAST = i
    wait (FLAG[i-1] = false or LAST != i)
    return

def unlock(i):
    FLAG[i] = false
    return
```

---

This algorithm requires 2 one-bit MRSW registers for the FLAG and 1 one-bit MRMW register for LAST. Every lock-unlock requires 5 accesses to the registers.

#### Peterson algorithm properties (2 processes)

The Peterson algorithm designs a working mutex and has the bounded bypass property with bound 1.

#### Proof of safety:

We can prove that the algorithm works by contraddiction, assuming that the two processes  $p_0$  and  $p_1$  are inside the CS. How has  $p_0$  entered the CS:

1. If FLAG[i]=false that is possible with this sequence:

|       |                                                                     |
|-------|---------------------------------------------------------------------|
| $p_0$ | $\underline{\text{F}[0]=t \quad \text{LAST}=0 \quad \text{F}[1]=f}$ |
| $p_1$ | $\underline{\hspace{10em} \text{F}[1]=t \quad \text{LAST}=1}$       |

With this sequence  $p_1$  cannot be in the CS because LAST=1 and FLAG[0]=true.

2. If LAST=1 that is possible with this sequence:

|       |                                                                                       |
|-------|---------------------------------------------------------------------------------------|
| $p_0$ | $\underline{\hspace{5em} \text{F}[0]=t \quad \text{LAST}=0 \quad \text{LAST} \neq 0}$ |
| $p_1$ | $\underline{\text{F}[1]=t \hspace{10em} \text{LAST}=1}$                               |

With this sequence  $p_1$  cannot be in the CS because LAST=1 and FLAG[0]=true.

**Proof of liveness:**

Let  $p_0$  invoke lock, if it wins waits 0, otherwise must be  $\text{FLAG}[1]=\text{true}$  and  $\text{LAST}=0$ .

$\text{FLAG}[1]=\text{true}$  means that  $p_1$  has invoked the lock and will eventually enter the CS and unlock, putting the flag down. Now  $p_1$  could invoke the lock again:

- If it never locks again  $p_0$  will eventually read the flag down and enter the CS, waiting 1.
- If  $p_1$  locks again:
  - If  $p_0$  reads  $\text{FLAG}[1]$  before  $p_1$  locks again, then  $p_0$  enters the CS, waiting 1.
  - If  $p_0$  doesn't read before  $p_1$  locks again, then  $p_1$  will set  $\text{LAST}=1$  and will wait, so  $p_0$  will eventually read  $\text{LAST}$  and enter the CS, waiting 1.

There is also a Peterson algorithm for an arbitrary number of processes  $n$ , using levels:

**Algorithm:** Peterson algorithm ( $n$  processes)

```
// Initialize FLAG[i] as false
def lock(i):
    for lev in [1,n-1] :
        FLAG[i] = lev
        LAST[lev] = i
        wait ( $\forall k$  FLAG[k] < lev or LAST[lev] != i)
    return

def unlock(i):
    FLAG[i] = 0
    return
```

This algorithm require  $n$  MRSW registers with  $\lceil \log n \rceil$  bits for **FLAG** and  $n - 1$  MRSW registers with  $\lceil \log n \rceil$  bits for **LAST**. Every lock-unlock requires  $(n - 1)(n + 2)$  accesses to the registers, so has a cost  $O(n^2)$ .

**Peterson algorithm properties ( $n$  processes)**

For every level  $l \in [0, n - 1]$ , there are at most  $n - l$  processes in the level  $l$ . This implies the mutex works for  $l = n - 1$ .

The algorithm has a starvation freedom property such that every process that invokes lock and is at level  $l \leq n - 1$  eventually wins and enters the CS.

**Proof of safety:**

Proof by induction on the level  $l$ :

1. Base case:  $l = 0$
2. Induction: a process  $p$  can increase its level by writing its **FLAG** at  $l + 1$  and its index in **LAST**[ $l+1$ ]. Let  $p_x$  be the last one that writes **LAST**[ $l+1$ ]= $x$ , for  $p_x$  to pass at level  $l + 1$ , it must be that  $\forall k$  **FLAG**[ $k$ ] <  $l+1$ . So,  $p_x$  is the only proc at level  $l + 1$ .

Otherwise,  $p_x$  is blocked in the wait and so we have at most  $n - l - 1$  processes at level  $l + 1$ , those at level  $l$ , that by induction are at most  $n - l$ , except for  $p_x$  that is blocked in its  $(l + 1)$ -th wait.



**Proof of liveness:**

Proof by reverse induction on the level  $l$ :


1. Base case:  $l = n - 1$
2. Induction: assume a  $p_x$  is blocked at level  $l$ , so  $\exists k \text{ FLAG}[k] \geq l+1 \wedge \text{LAST}[l+1] = x$ . If some  $p_y$  sets  $\text{LAST}[l+1] = y$   $p_x$  will exit from its wait and pass to level  $l + 1$ .

Otherwise, let  $G = \{p_i \mid \text{FLAG}[i] \geq l+1\}$  and  $L = \{p_i \mid \text{FLAG}[i] < l+1\}$ . Every  $p \in L$  will never enter its  $(l + 1)$ -th loop and every  $p \in G$  will eventually win and move into  $L$ . Eventually,  $p_x$  will be the only one in its  $(l + 1)$ -th loop, with all other processes at level  $l' < l + 1$  and  $p_x$  will eventually pass to level  $l + 1$  and win.

The algorithm doesn't satisfy bounded bypass because if a process is sleeping the other can enter the CS an unbounded number of times.

**1.3.2 Tournament based algorithm**

To reduce the cost of a mutex we can use a tournament between pairs of processes:

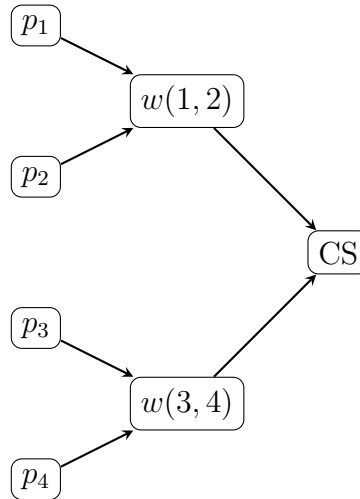

For the competition between two processes the Peterson algorithm is used and this means that a process enters the CS after  $\lceil \log 2 \rceil$  competitions, each of constant cost for a total cost of  $O(\log n)$ . This algorithm has also a bounded bypass with bound  $\lceil \log n \rceil$ .

### 1.3.3 Fast mutex algorithm

Is it possible to reduce the cost to  $O(1)$ , using the **Fast mutex** algorithm by Lamport:

---

**Algorithm:** Fast mutex

---

```
// Initialize Y as  $\perp$ , X as 0
def lock(i):
    FLAG[i]=true // *
    X=i
    if Y!= $\perp$  :
        FLAG[i]=false
        wait Y =  $\perp$ 
        goto *
    else :
        Y=i
        if X=i :
            return
        else :
            FLAG[i]=false
            wait  $\forall j$  FLAG[j]=false
            if Y=i :
                return
            else :
                wait Y= $\perp$ 
                goto *

def unlock(i):
    Y= $\perp$ 
    FLAG[i] = 0
    return
```

---

This algorithm require 5 accesses to the registers if there is no contention.

#### Fast mutex properties

The algorithm designs a correct mutex with the deadlock freedom property.

#### Proof of safety:

Proof by contraddiction, assuming two processes  $p_i$  and  $p_j$  are inside the CS. How can  $p_i$  enter the CS:

1. In the first if  $X=i$ :

$p_i$   $\xrightarrow{F[i]=t}$   $\xrightarrow{X=i}$   $\xrightarrow{Y=\perp}$   $\xrightarrow{Y=i}$   $\xrightarrow{X=i}$

For  $p_j$  to enter the CS, it must read  $Y=\perp$ , so it must read  $Y$  before  $p_i$  writes it equal to  $i$ . Also  $p_j$  must write  $X=j$  and it must have done it before  $p_i$  writes it equal to  $i$ , otherwise

$p_i$  couldn't have read the value of  $X$  equal to  $i$ . So, when  $p_j$  reads  $X$ , it finds it different from  $j$  and cannot enter the CS.

2. In the second if  $Y=i$ :

$$p_0 \quad \frac{F[i]=t \quad X=i \quad Y=\perp \quad Y=i \quad X \neq i \quad F[i]=f \quad \forall k \quad F[k]=f \quad Y=i}{\quad}$$

For  $p_j$  to enter the CS, it must read  $Y=\perp$ , so it must read  $Y$  before  $p_i$  writes it equal to  $i$ . Also  $p_j$  must write  $X=j$ , if it has done it before  $p_i$  writes it equal to  $i$ , then is the same case as before. If  $p_j$  writes  $X=j$  after and finds it at  $j$  then it enters its CS and  $p_i$  is blocked. If  $p_j$  doesn't find  $X$  equal to  $j$  then it must have written  $Y$  before  $p_i$  and is blocked until  $p_i$  finishes the CS.

### Proof of liveness:

Let  $p_i$  invoke lock, where it can be blocked forever:

1. In the second wait  $Y=\perp$ : In this case there is a process  $p_j$  that wrote  $Y=j$  the last and it will eventually win, freeing  $p_i$ .
2. In the wait  $\forall k \text{ FLAG}[k]=\text{false}$ : This wait cannot block a process forever because every process that doesn't enter the CS puts its flag down and the one that enters the CS puts its flag down after exiting.
3. The first wait  $Y=\perp$ : In this case there is a process  $p_j$  that wrote  $Y=j$  before and it must eventually win because unless it must be blocked as well, but we already proved that this is not possible.

### 1.3.4 Deadlock freedom to Bounded bypass

Let DFL be a deadlock free protocol for mutex, we can turn it in a bounded bypass protocol using the **Round Robin** algorithm:

---

**Algorithm:** Round Robin

---

```
// Initialize FLAG[i]=false, TURN as a random process id
def lock(i):
    FLAG[i]=true
    wait (TURN=i OR FLAG[TURN]=false)
    DFL.lock(i)
    return

def unlock(i):
    FLAG[i] = 0
    if FLAG[TURN]=false :
        | TURN=(TURN+1)% n
    DFL.unlock(i)
    return
```

---

**Deadlock freedom of RR**

If at least one process invokes lock, then at least one process enters the CS.

**Proof:**

The only way to that being false is if every process is locked in the wait before invoking `DFL.lock(i)`. If `TURN=k` and  $p_k$  invokes the lock then it exit the wait, otherwise its flag is down and the other processes can exit their wait.

**Maximum number of iterations**

If `TURN=i` and `FLAG[i]=true`, then  $p_i$  enters the CS in at most  $n - 1$  iterations.

**Proof:**

The turn changes only when `FLAG[i]` is down, if `FLAG[i]` is up it means that  $p_i$  is in its CS or  $p_i$  is competing for its CS and will eventually invokes `DLF.lock`. If  $p_j$  invokes lock after that `FLAG[i]` is set,  $p_j$  blocks in its wait.

Let  $Y$  be the set of processes competing for the CS (suspended on `DLF.lock`). We have that  $i \in Y$  and  $Y$  can't grow anymore. DLF is deadlock free so eventually some process must win and exit from  $Y$ , in the worst case all process are in  $Y$  and  $p_i$  enters the CS after all of them ( $n - 1$  processes).

**Maximum number of turns**

If `FLAG[i]` is up, then `TURN` is set to  $i$  in at most  $(n - 1)^2$  iterations.

**Proof:**

Given a random process  $p_i$  that invokes lock, when `FLAG[i]` is set the turn is of another process  $p_j$ . By the previous lemma  $p_j$  wins after at most  $n - 1$  iterations and the turn is increased. The worst case scenario is if the the index of  $p_j$  is equal to  $i + 1$ , so  $p_i$  needs to wait at most  $(n - 1)$  turns, each with at most  $(n - 1)$  iterations, for a total of  $(n - 1)^2$  iterations. This means that in total the bound of this algorithm is  $n(n - 1)$ .

## 1.4 Special HW primitives

Operating systems usually provides specialized HW primitives, that perform in an atomic way the combination of some instructions. Using this primitives is very easy to solve the mutex problem.

### 1.4.1 Test&Set

Let  $X$  be a boolean register, the **Test&Set** read the register and sets it to 1. Is implemented as follows:

---

**Algorithm:** Test&Set

---

```
def X.Test&Set():
    tmp = X
    X = 1
    return tmp
```

---

Using this algorithm the mutex can be implemented using a simple protocol:

---

**Algorithm:** Mutex with Test&Set

---

```
// Inizialize X at 0
def lock(i):
    wait (X.Test&Set = 0)
    return

def unlock(i):
    X = 0
    return
```

---

### 1.4.2 Swap

Let  $X$  be a register, the **Swap** read the register and sets it to an input value  $v$ . Is implemented as follows:

---

**Algorithm:** Swap

---

```
def X.Swap(v):
    tmp = X
    X = v
    return tmp
```

---

Using this algorithm the mutex can be implemented using a simple protocol:

---

**Algorithm:** Mutex with Swap

---

```
// Inizialize X at 0
def lock(i):
    wait (X.Swap(1) = 0)
    return

def unlock(i):
    X = 0
    return
```

---

### 1.4.3 Compare&Swap

Let  $X$  be a register, the **Compare&Swap** check if the register is equal to an input value  $old$  and sets it to an input value  $new$ . Is implemented as follows:

---

**Algorithm:** Compare&Swap

---

```
def X.Compare&Swap(old, new):
    if X = old :
        X = new
    return true
    return false
```

---

Using this algorithm the mutex can be implemented using a simple protocol:

---

**Algorithm:** Mutex with Compare&Swap

---

```
// Inizialize X at 0
def lock(i):
    wait (X.Compare&Swap(0, 1) = True)
    return

def unlock(i):
    X = 0
    return
```

---

### 1.4.4 Fetch&Add

Let  $X$  be a register, the **Fetch&Add** read the register and to it an input value  $v$ . Is implemented as follows:

---

**Algorithm:** Fetch&Add

---

```
def X.Fetch&Add(v):
    tmp = X
    X = X+v
    return tmp
```

---

Using this algorithm the mutex can be implemented using a simple protocol:

---

**Algorithm:** Mutex with Swap

---

```
// Inizialize TICKET and NEXT at 0
def lock(i):
    my_tick = TICKET.Fetch&Add(1)
    wait (my_tick = NEXT)
    return

def unlock(i):
    NEXT = NEXT+1
    return
```

---

## 1.5 Safe registers

Atomic Read/Write registers and HW primitives provide a form of atomicity. From now we will consider registers with no atomicity, the Safe registers. A safe register provides read and write in such a way:

- Every read that does not overlap with a write returns the value stored in the register.
- A read that overlaps with a write returns any value.
- In a MRMW register when two writes overlap the register can contain any value.

This is the weakest type of registers useful for concurrency.

### 1.5.1 Bakery algorithm

A simple protocol that works with safe registers is the Bakery algorithm by Lamport:

---

**Algorithm:** Bakery algorithm

---

```
// Initialize FLAG[i] = false and MY_TURN[i] to 0
def lock(i):
    // Start doorway
    FLAG[i] = true
    MY_TURN[i] = max(MY_TURN[0], ..., MY_TURN[n]) + 1
    FLAG[i] = false
    // End doorway
    // Start bakery
    for j ≠ i :
        wait FLAG[j] = false
        wait (MY_TURN[j] = 0 or [MY_TURN[i], i] < [MY_TURN[j], j])
    // End bakery
    return

def unlock(i):
    MY_TURN[i] = 0
    return
```

---

#### Turn order

Let  $p_i$  be in the CS and  $p_j$  in the doorway or the bakery, then:

$$[\text{MY\_TURN}[i], i] < [\text{MY\_TURN}[j], j]$$

This means that the mutex works as intended.

Also the algorithm has the bounded bypass property with bound  $n - 1$ .

**Proof of safety:**

If  $p_i$  is in the CS it has passed the waits for  $j$ , the read of  $\text{FLAG}[j]$  done by  $p_i$  in respect to the execution of  $p_j$  can be:

- The read overlaps with  $\text{FLAG}[j] = \text{t}$ , then  $p_j$  will read the value written in  $\text{MY\_TURN}[i]$  and will take an higher number.
- The read overlaps with  $p_j$  being in the bakery, so the value for  $\text{MY\_TURN}[j]$  has been set and  $p_i$  has evaluated that  $[\text{MY\_TURN}[i], i] < [\text{MY\_TURN}[j], j]$ .

**Proof of liveness:**

By contraddiction, assume that there is a lock but no process enters the CS. Where all the process are blocked:

- The doorway cannot block a process forever, so the first wait cannot block forever aswell.
- For the second wait the turn are totally ordered, so there is a process  $p_i$  for which the turn is the minimum that will enter the CS.

The ticket ordered means that a process cannot surpass another process 2 times, so at most a process could wait  $n - 1$  processes before entering the CS.

**1.5.2 Aravind algorithm**

In the Lamport algorithm the registers are unbounded and this could be a problem. So, another algorithm was proposed with a reset method for the tickets:

---

**Algorithm:** Aravind algorithm

---

```
// Initialize FLAG[i] = false, STAGE[i] to 0 and DATE[i] to i
def lock(i):
    FLAG[i] = true
    do:
        STAGE[i] = 0
        wait ( $\forall j \neq i$  FLAG[j] = false or DATE[i] < DATE[j])
        STAGE[i] = 1
    while  $\forall j \neq i$  STAGE[j]=0
    return

def unlock(i):
    tmp = max(DATE)+1
    if tmp  $\geq$  2n :
        for  $\forall j$  :
            DATE[j] = j
    else :
        DATE[i] = tmp
    STAGE[i] = 0
    FLAG[i] = false
    return
```

---



**Aravind algorithm properties**

Two processes cannot be in the CS simultaneously, ensuring that the mutex works. Also the algorithm has the bounded bypass property with bound  $2n - 2$ .

**Proof of safety:**

Let us consider the execution of  $p_i$  leading to its CS. There is another process  $p_j$  for which  $p_i$  has done the last read of  $\text{STAGE}[j]=0$  before entering the CS. To enter the CS  $p_j$  has to write  $\text{STAGE}[j]=1$ , so its write must overlap with the read of  $p_i$ . Then  $p_j$  will read  $\text{STAGE}[i]$  and found it at 1, so it will not enter the CS.

**Proof of liveness:**

Let  $p_i$  invoke the lock and let us consider the moment after the reset of  $\text{DATE}$  occurs. Another process  $p_j$  that enters the CS before  $p_i$  cannot surpass it again because  $\text{DATE}[j]$  will be higher than  $\text{DATE}[i]$ . In the worst case  $p_i$  could be the  $n$ -th process to enter the CS after the reset, but cannot experience two resets during its lock.

If  $p_n$  invokes the lock alone and sets  $\text{DATE}[i]$  to  $n + 1$  and then all process lock simultaneously, there will be a reset done by  $p_{n-1}$  after  $p_n$  has waited  $n - 1$  processes. After the reset it will wait the other  $n - 1$  processes to enter the CS (because it has the higher  $\text{DATE}$  after the reset), making the bound  $2n - 2$ .

The algorithm could be revisioned changing the unlock function as follows:

**Algorithm:** Aravind unlock revisioned

---

```
def unlock(i):
    for  $\forall j$  :
        if  $\text{DATE}[j] > \text{DATE}[i]$  :
             $\text{DATE}[j] = \text{DATE}[j] - 1$ 
     $\text{DATE}[i] = n$ 
     $\text{STAGE}[i] = 0$ 
     $\text{FLAG}[i] = \text{false}$ 
    return
```

---

This new version lowers the bound to  $n - 1$ .

## 1.6 Semaphores

### 1.6.1 Semaphor definition

A semaphor is a shared counter  $S$ , accessed with two primitives **up** and **down** such that:

1.  $S$  is initialized at a value  $s_0 \geq 0$
2.  $S$  is always  $\geq 0$
3. The primitive **up** atomically increases  $S$
4. The primitive **down** atomically decreases  $S$  if it's not 0, otherwise the process calling the primitive is blocked

The semaphores are made of a counter, initialized at  $s_0$  that can become negative. Stated that the value of the semaphor cannot be negative, when the value is positive represents the value of the semaphor otherwise counts how many process are suspended. The semaphor has also a queue to store suspended processes.

The implementation of a semaphor, defining the two primitives is:

---

**Algorithm:** Semaphor

---

```
// Initialize t to 0
def S.down():
    Disable interrupts
    wait S.t.test&set()==0
    S.counter--
    if S.counter<0 :
        Enter into S.queue
        S.t=0
        Enable interrupts
        SUSPEND
    else :
        S.t=0
        Enable interrupts
    return

def S.up():
    Disable interrupts
    wait S.t.test&set()==0
    S.counter++
    if S.counter≤0 :
        Activate process in S.queue
    S.t=0
    Enable interrupts
    return
```

---

### 1.6.2 Example: Producer-Customer

We have a shared FIFO buffer of size  $k$  and two function, one to insert (produce) a value and one to remove (consume) a value.

In the internal representation we have:

1. A set of register BUF[k] not even safe accessed in Mutex.
2. Two semaphores FREE and BUSY that count the number of free cells in the buffer, initialized at  $k$  and 0.
3. Two arrays FULL and EMPTY of atomic boolean registers to track which cell are empty, initialized to false and true.
4. Two semaphores SP and SC, initialized at 1.

The implementation of the two functions with semaphores is:

---

**Algorithm:** Producer-Customer

---

```
def B.produce(v):
    FREE.down()
    SP.down()
    while not EMPTY[IN] :
        | IN = (IN+1)% k
    i = IN
    EMPTY[IN] = false
    SP.up()
    BUF[i] = v
    FULL[i] = true
    BUSY.up()
    return
```

```
def B.consume():
    BUSY.down()
    SC.down()
    while FULL[OUT] :
        | OUT = (OUT+1)% k
    o = OUT
    FULL[OUT] = false
    SC.up()
    tmp = BUF[o]
    EMPTY[o] = true
    FREE.up()
    return tmp
```

---

### 1.6.3 Example: Reader-Writer

We have several processes that want to access a file, with reader processes that can access simultaneously and writer that must be one at time. Also readers and writers are mutually exclusive.

The operations will have this shape:

---

**Algorithm: Reader-Writer**


---

```
def conc_read():
    begin_read()
    read()
    end_read()
```

```
def conc_write():
    begin_write()
    write()
    end_write()
```

---

Based on the priority that we want readers and writers to have different implementation of the read and write function can be done.

The first case is with weak priority to readers, means that if a reader arrives during a read it surpass the writers suspended. When a writer terminates it activate the first suspended process, irrespectively of wheter it is a reader or a writer.

---

**Algorithm: Reader-Writer (Weak priority to readers)**


---

```
// GLOB_MUTEX and R_MUTEX initialized to 1, R initialized to 0.
```

```
def begin_read():
    R_MUTEX.down()
    R++
    if R=1 :
        | GLOB_MUTEX.down()
    R_MUTEX.up()
    return
```

```
def end_read():
    R_MUTEX.down()
    R--
    if R=0 :
        | GLOB_MUTEX.up()
    R_MUTEX.up()
    return
```

```
def begin_write():
    GLOB_MUTEX.down()
    return
```

```
def end_write():
    GLOB_MUTEX.up()
    return
```

---

We could also give strong priority to readers, means that when a writer terminates it activates the first reader and only if there aren't readers it activates the writer.

---

**Algorithm:** Reader-Writer (Strong priority to readers)

---

```
// GLOB_MUTEX, R_MUTEX and W_MUTEX initialized to 1, R initialized to 0.
def begin_read():
    | // Same as before

def end_read():
    | // Same as before

def begin_write():
    | W_MUTEX.down()
    | GLOB_MUTEX.down()
    | return

def end_write():
    | GLOB_MUTEX.up()
    | W_MUTEX.up()
    | return
```

---

The last case is with weak priority to writers, means that when a writer terminates it activates the first writer and only if there aren't writers it activates the reader.

---

**Algorithm:** Reader-Writer (Weak priority to writers)

---

```
// All MUTEX initialized to 1, R initialized to 0.
```

```
def begin_read():
```

```
    PRIO_MUTEX.down()
```

```
    R_MUTEX.down()
```

```
    R++
```

```
    if R=1 :
```

```
        | GLOB_MUTEX.down()
```

```
    R_MUTEX.up()
```

```
    PRIO_MUTEX.up()
```

```
    return
```

```
def end_read():
```

```
    | // Same as before
```

```
def begin_write():
```

```
    W_MUTEX.down()
```

```
    W++
```

```
    if W=1 :
```

```
        | PRIO_MUTEX.down()
```

```
    W_MUTEX.up()
```

```
    GLOB_MUTEX.down()
```

```
    return
```

```
def end_write():
```

```
    GLOB_MUTEX.up()
```

```
    W_MUTEXdown()
```

```
    W--
```

```
    if W=0 :
```

```
        | PRIO_MUTEX.up()
```

```
    W_MUTEX.up()
```

```
    return
```

---

## 1.7 Monitors

Monitors are concurrent objects that guarantee that at most one operation invocation is active inside it at the same time. The inter-process organization is done by conditions, objects that provide two operations:

- wait: the invoking process suspends, releasing the mutex on the monitor.
- signal: based on the semantics that we want to use there are two possible implementations:
  - Hoare semantics: reactivates the first process suspended and suspends the invoking process, that however has priority to reenter.
  - Mesa semantics: the invoking process completes its task and the first process suspended has the priority to enter after.

In both cases if there are no process suspended nothing happens.

The implementation of a monitor with Hoare semantics is done by using semaphors, in particular:

- A semaphore MUTEX that guarantee mutex for the monitor.
- A semaphore PRIO and a value  $N_{PR}$  to count the number of process that have priority.
- For every condition  $C$  a semaphore  $SEM_C$  and a value  $N_C$  to count the number of suspended process for the condition.

Every monitor operation start with `MUTEX.down()` and ends with:

if  $N_{PR} > 0$ : `PRIO.up()` else: `MUTEX.up()`

The two operation of a condition are implemented as follows:

---

**Algorithm:** Condition

---

*//  $SEM_C$ ,  $PRIO$ ,  $N_C$ ,  $N_{PR}$  initialized to 0 and MUTEX initialized to 1.*

**def C.wait():**

```

     $N_C++$ 
    if  $N_{PR} > 0$  :
        PRIO.up()
    else :
        MUTEX.up()
     $SEM_C.down()$ 
     $N_C--$ 
    return

```

**def C.signal():**

```

    if  $N_C > 0$  :
         $N_{PR}++$ 
         $SEM_C.up()$ 
        PRIO.down()
         $N_{PR}--$ 
    return

```

---

### 1.7.1 Example: Barrier

Rendez-vous is a concurrent object associated with  $m$  control points, one for every process, each that can be passed when all processes are in their control points. The set of all control points is a barrier.

---

**Algorithm:** Barrier with monitor

---

```
def monitor RNDV:
    c=0
    condition B

    def barrier():
        c++
        if c<m :
            B.wait()
        else :
            c=0
            B.signal()
        return
```

---



### 1.7.2 Example: Reader-Writer

We can rewrite the reader-writer problem in a simpler way with a monitor. The case of strong priority to readers is now implemented as follows:

---

**Algorithm:** Reader-Writer (Strong priority to readers)

---

```
def monitor RW_READERS:
    AR, WR, AW, WW = 0, 0, 0, 0
    condition CR, CW

    def begin_read():
        WR++
        if AW≠0 :
            CR.wait()
            CR.signal()
        AR++
        WR--

    def end_read():
        AR--
        if AR+WR=0 :
            CW.signal()

    def begin_write():
        if AR+WR≠0 or AW≠0 :
            CW.wait()
        AW++

    def end_write():
        AW--
        if WR>0 :
            CR.signal()
        else :
            CW.signal()
```

---

We can also now implement a case with strong priority to writers:

---

**Algorithm:** Reader-Writer (Strong priority to writers)

---

```
def monitor RW_WRITERS:
    AR, WR, AW, WW = 0, 0, 0, 0
    condition CR, CW

    def begin_read():
        if WW+AW≠0 :
            CR.wait()
            CR.signal()
        AR++

    def end_read():
        AR--
        if AR=0 :
            CW.signal()

    def begin_write():
        WW++
        if AR+AW≠0 :
            CW.wait()
        AW++
        WW--

    def end_write():
        AW--
        if WW>0 :
            CW.signal()
        else :
            CR.signal()
```

---

Both this solutions suffer from starvation of one of the two type of processes, readers or writers. So, we can implement a fair solution to solve this problem:

---

**Algorithm:** Reader-Writer (Fair)

---

```
def monitor RW_FAIR:
    AR, WR, AW, WW = 0, 0, 0, 0
    condition CR, CW

    def begin_read():
        WR++
        if WW+AW≠0 :
            CR.wait()
            CR.signal()
        AR++
        WR--

    def end_read():
        AR--
        if AR=0 :
            CW.signal()

    def begin_write():
        WW++
        if AR+AW≠0 :
            CW.wait()
        AW++
        WW--

    def end_write():
        AW--
        if WR>0 :
            CR.signal()
        else :
            CW.signal()
```

---

### 1.7.3 Dining Philosopher problem

The dining philosopher problem is a famous problem of concurrency in which there are  $n$  philosopher seated around a circular table with a fork in between each pair of philosophers. To eat a philosopher must take the two nearest fork and it can't pick up both simultaneously, but only one at a time.

To solve this problem with a deadlock-free solution there are different methods. Some solutions break the simmetry of the system:

1. All philosophers first pick the right fork except one that first pick the left one.
2. Odd philosophers pick the left first and even philosophers pick the right first.
3. Allow at most  $n - 1$  philosophers with  $n$  forks.

Another solution where simmetry is not broken is to check if both forks are free before taking them. This can be implemented through a monitor.

The solution follows this steps:

- A philosopher moves into eating state only if his neighbors are both not in their eating state (the fork are both free).
- If a neighbor of a philosopher is eating, it will signal when it finishes (the fork is again free).

This solution is perfect to be implemented with monitors:

---

**Algorithm:** Dining Philosophers

---

```
def monitor DP:
    state[n] = thinking // for each n
    condition self[n] // n conditions

    def Pickup(i):
        state[i] = hungry
        test(i)
        if state[i] != eating :
            self[i].wait()

    def Putdown(i):
        state[i] = thinking
        test((i+1)%n)
        test((i-1)%n)

    def test(i):
        if state[(i+1)%n] != eating and state[(i-1)%n] != eating and
            state[i] = hungry :
                state[i] = eating
                self[i].signal()
```

---

## 1.8 Software Transactional Memory

Software Transactional Memory groups parts of the code that must look like atomic and easy to use for the programmer. The part of the code to group is not defined by the object but is application dependent.

### Transaction

A transaction is an atomic unit of computation that can access atomic objects and doesn't overlap with other transactions.

An STM system is an online algorithm that ensures that the transactional code of the program is executed as atomic.

Different transaction are executed simultaneously, with the **optimistic execution** approach, to guarantee efficiency. Each transaction is composed by 3 parts:

1. Read of atomic registers
2. Local computation
3. Write into shared memory

The shared memory must remain consistent and when an inconsistency is discovered, the transaction is aborted.

### 1.8.1 Logical clock based STM system

For a transaction  $T$  the read prefix is the set of all the successful read before its possible abortion. An execution is **opaque** if there is a total order between committed transaction and read prefixes of aborted transaction.

An atomic STM system is the **Transactional Locking 2**, in which there are:

- CLOCK is a READ/FETCH&ADD register
- Every MRMW register is implemented as pair  $XX$ , where:
  - $XX.val$  contains the value of  $X$
  - $XX.date$  contains the date of last update in terms of CLOCK
- For every transaction  $T$ , the invoking process has:
  - $lc(XX)$ , a local copy of the register  $X$
  - $read\_set(T)$ , the set of all register read by  $T$
  - $write\_set(T)$ , the set of all registers written by  $T$
  - $birthdate(T)$ , the value of CLOCK at the start of  $T$

We want to commit a transaction as if it was all executed at its birthdate and is consistent. So, every register read and written must be modified before the transaction starts.

The implementation of this system through four functions is:

---

**Algorithm:** Logical Clock system

---

```
def begin_T():
    read_set(T) = {}
    write_set(T) = {}
    birthdate = CLOCK+1

def X.read_T():
    if lc(XX)≠None :
        | return lc(XX).val
    lc(XX) = XX
    if lc(XX).date ≥ birthdate(T) :
        | ABORT
    read_set(T).add(X)
    return lc(XX).val

def X.write_T(v):
    lc(XX).val = v
    write_set(T).add(X)


def try_to_commit_T():
    // lock all registers in read_set(T) and write_set(T)
    for X in read_set(T) :
        | if XX.date ≥ birthdate(T) :
        | | // release all locks
        | | ABORT
    tmp = CLOCK.fetch&add(1)+1
    for X in write_set(T) :
        | XX = (lc(XX).val, tmp)
    // release all locks
    COMMIT
```

---

For every register the first read copies the values from the register and the successive ones read it from the local copy. For the write they all modify the local copy and the value is written only at the end of the transaction.

### 1.8.2 Vector clock based STM system

The opacity property used in the logical clock system is a very strict property that could abort a transaction based on a already aborted one. For example in this case:

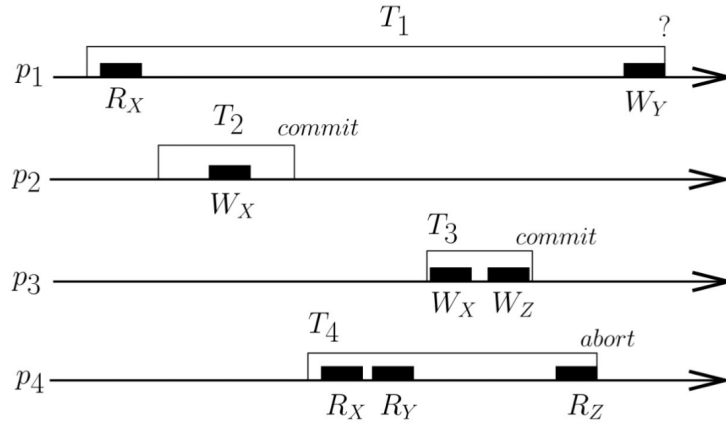

T4 must be aborted because it read Z after it is modified by T3 and X before it is modified by T3, so it cannot be placed before or after. With the opacity property the read prefix of T4 (X,Y) also cannot be placed in any point in the middle of T1 because reads X modified by T1 but Y before the write of T1, so T1 is aborted and an aborted transaction (T4) lead T1 to abort.

We define a less strict property called **Virtual World Consistency** in which the committed transaction have a total order like before, but aborted transaction read prefixes have a partial order with committed transaction.

With this property in the example before the transaction would be committed with order  $T1 < T2 < T3$  and there would be a partial order  $T2 < \text{read}_p(T4)$ .

An SMT system with the VWC property is the vector clock system, in which:

- Every MRMW register is implemented as a pair  $XX$ , with:
  - $XX.val$  contains the value of  $X$
  - $XX.depend[m]$  is a vector clock such that:
    - \*  $XX.depend[X]$  is the sequence number associated with the current value of  $X$
    - \*  $XX.depend[Y]$  is the sequence number associated with the value of  $Y$  from which the current value of  $X$  depends
- Every process  $p_i$  has:
  - For every register  $X$  a local copy  $lc(XX)$
  - $p_i.depend[m]$  a vector of all sequence number such that  $p_i.depend[X]$  is the last value of  $X$  that  $p_i$  knows
- As before every transaction has a `read_set` and a `write_set` but also:
  - $t.depend[m]$ , a local copy of  $p_i.depend[m]$  to not change it if the transaction is aborted

The sequence number is the date of update of  $X$  in relation to the vector clock.

The implementation of the 4 functions is:

---

**Algorithm:** Vector Clock system

---

```

def begin_T():
    read_set(T) = {}
    write_set(T) = {}
    t_depend = pi_depend

def X.read_T():
    if lc(XX)=None :
        lc(XX) = X
        read_set(T).add(X)
        t_depend[X] = lc(XX).depend[X]
        if ∃ Y ∈ read_set(T) | t_depend[Y] < lc(XX).depend[Y] :
            ABORT
        for Y not in read_set(T) :
            t_depend[Y] = max(t_depend[Y], lc(XX).depend[Y])
    return lc(XX)

def X.write_T(v):
    lc(XX).val = v
    write_set(T).add(X)

def try_to_commit_T():
    // lock all registers in read_set(T) and write_set(T)
    if ∃ Y ∈ read_set(T) | t_depend[Y] < YY.depend[Y] :
        // release all locks
        ABORT
    for X in read_set(T) :
        t_depend[X] = XX.depend[X]+1
    for X in write_set(T) :
        XX = (lc(XX).val, t_depend)
    // release all locks
    pi_depend = t_depend
    COMMIT

```

---

## 1.9 Linearizability

We have a set of processes  $p_1, \dots, p_n$  that access a set of concurrent objects  $X_1, \dots, X_m$  by invoking operations in the form  $X_i.op(args)(ret)$ . An operation invoked is modeled by two events  $inv[X_i.op(args)]$  and  $res[X_i.op(ret)]$ .

### History

A history (or trace) is a pair  $\hat{H} = (H, <_H)$  where  $H$  is a set of events and  $<_H$  is the total order of the events such that every  $res$  follows the corresponding  $inv$ .



An history is sequential if every res is the return operation of the previous inv. Its complete if every inv has a res.

### Linearizability

A complete history  $\hat{H}$  is linearizable if exists a sequential history  $\hat{S}$  such that:

1.  $\forall X \hat{S}|_X \in \text{semantics}(X)$

The semantics means how the object works, for example in a queue you must enqueue an item before dequeing it.

2.  $\forall p \hat{H}|_p = \hat{S}|_p$

The code of a process must be executed in the correct order.

3. If  $\text{res}[\text{op}] <_H \text{inv}[\text{op}'] \implies \text{res}[\text{op}] <_S \text{inv}[\text{op}']$

It means only overlapping operations can be rearranged.

Given an history  $\hat{H}$  we define a binary relation  $\rightarrow_H$  such that:

$$\text{op} \rightarrow_H \text{op}' \iff \text{res}[\text{op}] <_H \text{inv}[\text{op}']$$

So, for the condition 3 we have that  $\rightarrow_H \subseteq \rightarrow_S$ .

### 1.9.1 Compositionality

#### Compositionality

An history  $\hat{H}$  is linearizable if  $\hat{H}|_X$  is linearizable for every  $X$  involved in  $\hat{H}$ .

#### Proof:

Let  $\hat{S}_X$  be the linearization of  $\hat{H}|_X$  with the total order  $\rightarrow_X$ .

Let  $\rightarrow$  be the set of pairs created by:

$$\rightarrow = \rightarrow_H \cup \bigcup_{\forall X \in \hat{H}} \rightarrow_X$$

The relation  $\rightarrow$  is acyclic, because:

1. Cannot have cycle of 1 edge, because it means that  $\text{res}[\text{op}] < \text{inv}[\text{op}]$  that is impossible.
2. Cannot have cycles of 2 edges,  $\text{op} \rightarrow \text{op}' \rightarrow \text{op}$ , because:
  - The two relation cannot be of the same type ( $\rightarrow_H$  or  $\rightarrow_X$ ) otherwise the relation would be cyclic in the beginning.
  - The relation cannot also be on two different object  $\text{op} \rightarrow_X \text{op}' \rightarrow_Y \text{op}$  otherwise an operation would be on two objects at the same time.
  - The two relation must be  $\text{op} \rightarrow_X \text{op}' \rightarrow_H \text{op}$  (or vice versa) and  $\text{op}' \rightarrow_H \text{op}$  implies that  $\text{res}[\text{op}'] <_H \text{inv}[\text{op}]$  but  $\hat{S}_X$  is the linearization of  $\hat{H}|_X$  so  $\text{res}[\text{op}'] <_X \text{inv}[\text{op}]$ . So, the relation  $\text{op} \rightarrow_X \text{op}'$  cannot exists if  $\rightarrow_X$  is acyclic.

3. Cannot have cycles of more than 2 edges, let consider the shortest cycle, that has the form:

$$\text{op1} \rightarrow_H \text{op2} \rightarrow_X \text{op3} \rightarrow_H \text{op4}$$

This means that:

- The relation  $\text{op1} \rightarrow_H \text{op2}$  means that  $\text{res}[\text{op1}] <_H \text{inv}[\text{op2}]$ .
- The relation  $\text{op2} \rightarrow_X \text{op3}$  implies  $\text{inv}[\text{op2}] <_H \text{res}[\text{op3}]$  (they overlap or  $\text{op2}$  is before  $\text{op3}$ ).
- The relation  $\text{op3} \rightarrow_H \text{op4}$  means  $\text{res}[\text{op3}] <_H \text{inv}[\text{op4}]$ .

By transitivity on  $<_H$  we have that  $\text{res}[\text{op1}] <_H \text{inv}[\text{op4}]$  then  $\text{op1} \rightarrow_H \text{op4}$  and by contradiction this is not the shortest cycle.

### Topological order of $\rightarrow$

The relation  $\rightarrow$  is an acyclic graph, so it admits a topological order  $\rightarrow'$ . Then exists  $\hat{S}$ , the linearization of  $\hat{H}$  defined as follows:

$$\hat{S} = \text{inv}(\text{op1})\text{res}(\text{op1})\text{inv}(\text{op2})\text{res}(\text{op2}) \dots \quad \text{where } \text{op1} \rightarrow' \text{op2} \rightarrow' \dots$$

#### Proof:

We need to prove the 3 property of the linearization:

1.  $\forall X \hat{S}|_X = \hat{S}_X \in \text{semantics}(X)$ :

We have that:

$$<_{\hat{S}_X} = \rightarrow_X \subseteq \rightarrow|_X \subseteq \rightarrow'|_X = \rightarrow_{\hat{S}_X} = <_{\hat{S}|_X}$$

The two orders  $<_{\hat{S}_X}$  and  $<_{\hat{S}|_X}$  are total orders on the same events, so they must coincide.

2.  $\forall p \hat{H}|_p = \hat{S}|_p$ :

A process is sequential so:

$$\hat{H}|_p = \text{inv}(\text{op1})\text{res}(\text{op1}) \dots = \hat{S}|_p$$


because  $\text{op1} \rightarrow_H \text{op2} \rightarrow_H \dots$  and  $\rightarrow_H \subseteq \rightarrow'$ .

3. If  $\text{res}[\text{op}] <_H \text{inv}[\text{op}'] \implies \text{res}[\text{op}] <_S \text{inv}[\text{op}']$ :


By definition  $\rightarrow_H \subseteq \rightarrow \subseteq \rightarrow' = \rightarrow_S$ .

**Example:**

Given this execution:

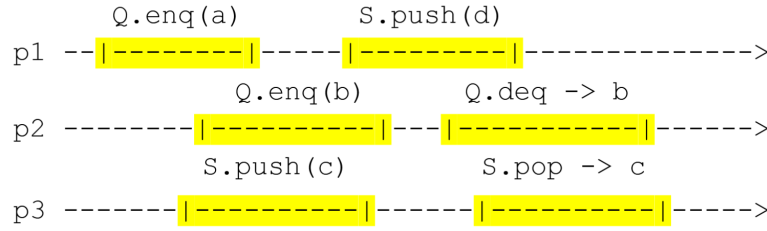

This execution generates this graph:

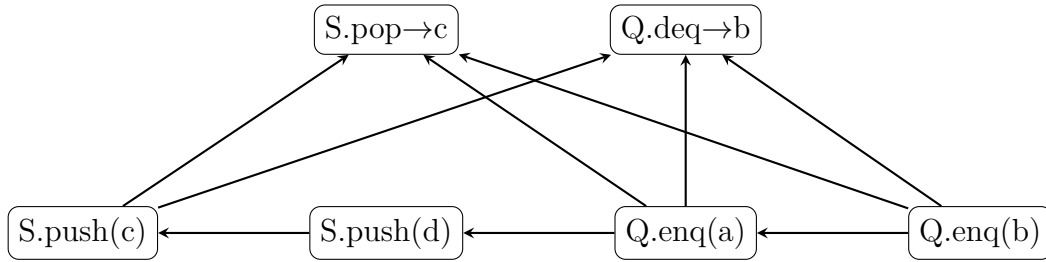

That has two possible linearizations:

1. Q.enqueue(b), Q.enqueue(a), S.push(c), S.push(d), Q.dequeue -> b, S.pop -> c
2. Q.enqueue(b), Q.enqueue(a), S.push(c), S.push(d), S.pop -> c, Q.dequeue -> b

### 1.9.2 Sequential consistency

We define the relation  $op \rightarrow_{proc} op'$  such that if a process invokes both  $op$  and  $op'$  we have that  $res[op] < inv[op']$ .

#### Sequential consistency

A complete history  $\hat{H}$  is sequential consistent if exists a sequential history  $\hat{S}$  such that:

1.  $\forall X \hat{S}|_X \in \text{semantics}(X)$
2.  $\forall p \hat{H}|_p = \hat{S}|_p$
3.  $\rightarrow_{proc} \subseteq \rightarrow_S$

This property is a more generous notion than linearizability.

Sequential consistency however is not compositional, for example with two processes:

1. Q.enqueue(a), Q'.enqueue(b'), Q'.dequeue -> b'
2. Q'.enqueue(a'), Q.enqueue(b), Q.dequeue -> b

The two processes are both sequentially consistent but there is no way to put them together and have an history sequentially consistent.

### 1.9.3 Serializability

Instead of processes we consider transactions (defining  $\rightarrow_{trans}$  in the same way as  $\rightarrow_{proc}$ ), where each transaction  $t$  has either  $abort(t)$  or  $commit(t)$  as event. A sequential history is formed by committed transactions only.

#### Serializability

A complete history  $\hat{H}$  is serializable if exists a sequential history  $\hat{S}$  such that:

1.  $\forall X \hat{S}|_X \in \text{semantics}(X)$
2.  $S = \{e \in H | e \in t \in \text{committedT}(\hat{H})\}$
3.  $\rightarrow_{trans} \subseteq \rightarrow_S$

Like sequential consistency this property is more generous than linearizability but is not compositional.

# 2

## Concurrency without Mutex

### 2.1 Mutex-free property

The critical section used in mutual exclusion have drawbacks, like having to choose the right level of granularity and the fact that a crash during a CS could block the entire system.

With a Mutex-free approach the only atomicity provided is the atomicity of primitives.

We have to define new liveness properties, because the old ones rely on CS:

1. **Obstruction freedom:** every time an operation on an object is run in isolation, it terminates.
2. **Non-blocking:** when an operation is invoked on an object, eventually one operation on that object terminates.
3. **Wait freedom:** whenever an operation is invoked, it eventually terminates.
4. **Bounded wait freedom:** wait freedom with a bound on the number of steps needed to terminate.

All this properties cope with crashes and there is no way in an asynchronous system to distinguish a failure from an arbitrary long sleep.

### 2.2 Example of mutex-free

#### 2.2.1 Splitter

A splitter is a concurrent object that provide a single operation `dir` such that:

1. Validity: it returns L, R or S (left, right or stop).
2. Concurrency: with  $n$  simultaneous invocations of `dir`:
  - At most  $n - 1$  return L
  - At most  $n - 1$  return R
  - At most 1 return S
3. Wait freedom: it eventually terminates.

To implement the splitter we use:

- DOOR: MRMW boolean register
- LAST: MRMW register

---

**Algorithm: Splitter**


---

```
// DOOR initialized at 1 and LAST to a random process id
def dir(i):
    LAST=i
    if DOOR=0 :
        | return R
    else :
        DOOR=0
        if LAST=i :
            | return S
        else :
            | return L
```

---

**Soundness of splitter**

The implementation satisfied the 3 requirements for the splitter.

**Proof:**

The validity and wait freedom are trivial.

For concurrency we have that:

- Not all processes can obtain R because the process that sets DOOR=0 cannot obtain R.
- Not all processes can obtain L because the last process that writes LAST=i, even if it finds the DOOR to 1, it cannot receive L.
- For the S, let  $p_i$  be the first process that receives S, so LAST=i, so no other process  $p_j$  have written it between the writing and reading of  $p_i$ . So, the other process can't find LAST=j and the door to 1, not receiving S.

### 2.2.2 Timestamp generator

A timestamp generator is a concurrent object with an operation `get_ts` such that:

1. Validity: every invocation returns different values.
2. Concurrency: if one process terminates the invocation of `get_ts` before another process starts it, then the first process has a timestamp smaller than the second one.
3. Obstruction freedom: it eventually terminates if run in isolation.

To implement the timestamp generator we use:

- `DOOR[i]`: MRMW boolean registers
- `LAST[i]`: MRMW registers
- `NEXT`: integer

---

#### Algorithm: Timestamp generator

---

```
// DOOR[i] initialized at 1, LAST[i] to a random process id and NEXT
// initialized to 1
def get_ts(i):
    k=NEXT
    while true :
        LAST[k]=i
        if DOOR[k]=1 :
            DOOR[k]=0
            if LAST[k]=1 :
                NEXT++
            return k
        k++
```

---

This timestamp generator suffer from deadlock if every time a process  $p_i$  set `DOOR[k]=0` it doesn't find `LAST[k]=i` because another process  $p_j$  has written it. The process  $p_j$  also cannot obtain its timestamp because the door is set to 0.

#### Soundness of timestamp generator

The implementation satisfied the 3 requirement for the timestamp generator.

#### Proof:

Validity and obstruction freedom are trivial.

For consistency, a process increase the value of `NEXT` when it terminates so every process that starts after it finds `NEXT` to an higher value and its value never decreases.

### 2.2.3 Stack

To implement a stack we use:

- REG[i]: an unbounded array of atomic registers that can be:
  - Written
  - Read with `swap(v)` primitive
- NEXT: register that points the next free location of the stack, that can be:
  - Read
  - Written with `fetch&add()` primitive

---

**Algorithm:** Unbounded stack

---

```
// REG[i] initialized at  $\perp$  and NEXT initialized to 1
def push(v):
    i=NEXT.fetch&add(1)
    REG[i]=v

def pop():
    k=NEXT-1
    for i in [k,1] :
        tmp=REG[i].swap( $\perp$ )
        if tmp  $\neq$   $\perp$  :
            return tmp
    return  $\perp$ 
```

---

This implementation of the stack is wait free, but the unbounded register REG is not realistic.



We have another implementation that uses an array of register `STACK[k]` that can be read or `compare&set()`. Each value in the stack is a pair `(val, seq_num)`. Another register `TOP` is used that contains a triple `(id, val, seq_num)` that represent where in the stack the pair has to be put.

---

**Algorithm:** Bounded stack
 

---

```
// STACK[i] initialized at ( $\perp$ ,0) and TOP initialized to (0, $\perp$ ,0)
def conclude(i,v,s):
    tmp = STACK[i].val
    STACK[i].compare&set((tmp,s-1),(v,s))

def push(w):
    (i,v,s) = TOP
    conclude(i,v,s)
    if i=k :
        | return FULL
    newtop = (i+1,w,STACK[i+1].seq_num+1)
    if TOP.compare&set((i,v,s),newtop) :
        | return OK

def pop():
    while true :
        (i,v,s) = TOP
        conclude(i,v,s)
        if i=0 :
            | return EMPTY
        newtop = (i-1,STACK[i-1].val,STACK[i-1].seq_num)
        if TOP.compare&set((i,v,s),newtop) :
            | return v
```

---

The fact that an operation is concluded by the next process ensure correctness even with crashes.

### Liveness of stack

The implementation of the stack is non-blocking.

**Proof:**

Let consider the invocation performed by a process  $p$ , if it not terminates it implies that the `TOP` has been changed, but the only time the `TOP` is changed is when another operation terminates.

## 2.3 Obstruction freedom to wait freedom

Like in mutex, we can enhance the liveness properties of a mutex free concurrent algorithm. We define a contention manager, an object that provides 2 operations:

- `need_help(i)`: invoked by a process  $p_i$  when it discovers that there is contention
- `stop_help(i)`: invoked by  $p_i$  when it terminates the current invocation

In mutex free concurrency we allow process to fail, so we need to take in account that failing without invoking `stop_help(i)` shouldn't be a problem.

### 2.3.1 From obstruction freedom to non-blocking

To distinguish a long delay from a fail we use a **failure detector**  $\Omega_X$ . Given a set of processes id  $X$ , the failure detector provide a local variable `ev_leader(X)` such that:

1. Validity: it always contain a process id.
2. Eventual leadership: eventually all the local `ev_leader(X)` of non failed processes will contain the same process id, that is not crashed.

The two operation are implemented as:

---

**Algorithm:** Non-blocking contention manager

---

```
// HELP[i] initialized at false
def need_help(i):
    HELP[i]=true
    do:
        | X = {j|HELP[j]}
        while ev_leader(X)≠i

def stop_help(i):
    | HELP[i]=false
```

---

#### Obstruction free to non-blocking

The contention manager transforms an obstruction free algorithm to a non-blocking one.

#### Proof:

By contradiction exists  $t$  such that many operations are invoked that never terminate. Let  $Q$  be the set of processes that invoked this operations, eventually every process  $p_i \in Q$  will set `HELP[i]=t` and will never be modified again (the operation doesn't terminate so it doesn't perform `stop_help(i)`). So, there is a time  $t' > t$  for which all processes in  $Q$  compute the same set  $X$ .

By the definition of  $\Omega_X$  eventually all process will have the same `ev_leader(X)`, that is the only process allowed to proceed and terminate (obstruction freedom).

Is proved that no wait free implementation of  $\Omega_X$  exists in an asynchronous system and any number of crashes. To make it possible we need to add constraint:

1. Exists a time  $t$ , a time interval  $\Delta$  and a process  $p_L$  such that after  $t$  two consecutive writes to a specific register by  $p_L$  are at most  $\Delta$  time apart.
2. Let  $t$  be an upper bound on the number of possible crashes. With  $f$  real crashes there are at least  $t - f$  processes different from  $p_L$  with a timer that behaves correctly after  $t_2$ . Means that if the timer is set to  $\delta$  after  $t_2$  it expires at least after  $\delta$ . This is done because if the processes check to quickly they will wrongly think that  $p_L$  is crashed.

The implementation uses an array **PROGRESS** to signal that processes are alive, so every process  $p_i$  increases **PROGRESS**[ $i$ ]. A process  $p_i$  suspect  $p_j$  if it doesn't see progress after a time interval guessed. The leader becomes the least suspected process.

To guess the correct time interval we use a matrix **SUSPECT** such that **SUSPECT**[ $i, j$ ] is the number of times that  $p_i$  suspected  $p_j$ . For all process  $p_k$  take the sum of the  $t + 1$  minimum values in **SUSPECT**[ $:, k$ ] and sum them. The time interval guessed is the minimum sum for a  $p_k$ .

### 2.3.2 From obstruction freedom to wait freedom

If we define another failure detector  $\diamond P$  that provides each process  $p_i$  with a local variable **suspected**( $i$ ) such that:

1. Eventual completeness: eventually **suspected**( $i$ ) contains all the id of crashed processes.
2. Eventual accuracy: eventually **suspected**( $i$ ) contains only id of crashed processes.

#### Failure detectors hierarchy

A failure detector FD1 is stronger than another FD2 if there exists an algorithm that builds FD2 from instances of FD1.

This means that  $\diamond P$  is strictly stronger than  $\Omega_X$ .

**Proof:**

For every process  $p_i$ :

- If  $i \notin X$  then **ev\_leader**( $X$ ) is any id.
- If  $i \in X$  then **ev\_leader**( $X$ ) =  $\min_{id}((\Pi - \text{suspected}(i)) \cap X)$  where  $\Pi$  is the set of all process id.

This proves  $\diamond P \geq \Omega_X$ . Is not possible that  $\Omega_X$  is stronger than  $\diamond P$  because if it was than consensus will be possible in an asynchronous system.

To implement a contention manager for wait free algorithm we assume a weak timestamp generator, which returns a positive value  $t$  and only a finite number of processes can have a timestamp smaller or equal to  $t$ .

**Algorithm:** Wait free contention manager

---

```

// TS[i] initialized at 0
def need_help(i):
    TS[i]=get_ts()
    do:
        competing = {j|TS[j] ≠ 0 ∧ j ∉ suspected(i)}
        (t,j) = min({(TS[x],x)|x ∈ competing})
    while j≠i

def stop_help(i):
    TS[i]=0

```

---

**Obstruction free to wait free**

The contention manager transforms an obstruction free algorithm to a wait free one.

**Proof:**

By contradiction exists an invocation of  $p_i$  that never terminates, let  $t_i$  be the timestamp and choose the minimum  $(t_i, i)$ . The set of invocations smaller  $I$  is finite (weak ts). For every invocation from a process  $p_j$  that crashes, then  $p_i$  will forever suspect  $p_j$  and will not be in  $\text{competing}(i)$ . So, eventually  $I$  will get emptied and for every non crashed process  $p_k$ :

- $i \notin \text{suspected}(k)$
- $(t_i, i) = \min(\{(TS[x], x) | x \in \text{competing}\})$

And the invocation of  $p_i$  will be executed alone and terminate (obstruction freedom).

To implement  $\diamond P$  we need another two constraint:

1. Every non crashed process has eventually an upper bound on write delay.
2. By setting timers, the crashed processes are distinguished from non crashed one.

## 2.4 Consensus object

### Type of an object

The type of an object is:

1. The set of all possible values for states of objects of that type.
2. A set of operation for manipulating the object, each with a specification, description of the conditions under which the operation can be invoked and the effect of the invocation.

An object is universal if every other object can be wait-free implemented by using only object of that type and atomic R/W registers.

The universal object is the consensus object, a one-shot object (any process can access at most once) with only one operation **propose**(*v*) such that:

1. Validity: the returned value is one of the values proposed by the processes (participants).
2. Integrity: every process decides at most once.
3. Agreement: the decided value is the same for all processes.
4. Wait-freedom: every invocation terminates.

A consensus object by a register *X* is implemented as:

---

#### Algorithm: Consensus

---

```
// X initialized at  $\perp$ 
def propose(v):
    if X =  $\perp$  :
        | X = v
    return X
```

---

The universality of consensus works as follows:

- Given an object *O* of type *Z*, each participant runs a local copy of *O*.
- Create a total order of operation on *O*.
- All processes follows the order to simulate *O* locally.

The wait-free construction for deterministic operations uses:

- An unbounded array of consensus objects **CONS**.
- An array **LAST\_OP[n]** containing pairs  $(\perp, 0)$ .
- A local array **last\_sn\_i[n]** containing the last operation by  $p_j$  executed by  $p_i$ . This array represent what the process  $p_i$  knows of the operations done by other processes.

---

**Algorithm:** Wait-free consensus object

---

```
// executed by  $p_i$ 
def Z.op(args):
    result_i =  $\perp$ 
    LAST_OP[i] = (op(args), last_sn_i[i] + 1)
    wait result_i  $\neq \perp$ 
    return result_i

def Z.simulate():
    k = 0
    zi = Z.init()
    while true:
        invoc_i =  $\epsilon$ 
        for  $\forall j$ :
            if LAST_OP[j][2] > last_sn_i[j]:
                | invoc_i.append((LAST_OP[j][1], j))
        if invoc_i  $\neq \epsilon$ :
            k++
            exec_i = CONS[k].propose(invoc_i)
            for r in [1, |exec_i|]:
                (zi, res) =  $\delta$ (zi, exec_i[r][1]) // executes the operation
                j = exec_i[r][2]
                last_sn_i[j]++
                if i == j:
                    | result_i = res
```

---

### Correctness of consensus object

To prove that the implementation works we need to prove 3 things:

1. The algorithm is wait free.
2. All operation invoked are executed exactly once.
3. The local copies of  $z_i$  behave the same as  $Z$ .

#### Proof 1:

To make a process finish, its result must change, so a consensus object must return a list that contains  $(\text{op}(\text{args}), i)$ . The process increases **LAST\_OP[i]**, so all lists proposed will contain that element forever. So, eventually the process will execute its operation and change its result.

**Proof 2:**

After  $p_i$  has inserted its operation in `LAST_OP[i]` it stops until that operation is executed, so it cannot invoke another operation. Let `CONS[k]` be the consensus object that contains `(op(args), i)`, every other  $p_j$  that participate in the  $k$ -th consensus increase the value in `last_sn_j[i]` and in the next cycle they will not propose the operation again. So, the operation can only be executed once.

**Proof 3:**

Each consensus object returns the same list to all processes and the processes use `CONS` in the same order. Given that the operations are deterministic each local copy of  $Z$  will behave the same.

In the case of non-deterministic operations we can use 3 solutions:

1. For every pair `(s, op(args))` fix a priori a result.
2. Use additional consensus objects, one for every element of the list.
3. Make the consensus object not only choose the list of invocation but also the state after every the invocation.

### 2.4.1 Binary and Multivalued consensus

The binary consensus means that there are only two possible proposals, 0 or 1. Multivalued consensus means that the proposals can be arbitrary complex.

A multivalued consensus object can be implemented using binary consensus object as follows:

- We have  $n$  processes and  $n$  binary consensus rounds.
- At round  $k$ , all processes propose 1 if  $p_k$  proposed something and 0 otherwise.
- If the consensus object decides 1, all process executes  $p_k$  proposal.

---

**Algorithm:** Multivalued consensus object (unbounded)

---

```
// PROP initialized at  $\perp$ 
def mv_propose(i, v):
    PROP[i] = v
    for k in [1, n] :
        if PROP[k]  $\neq \perp$  :
            res = BC[k].propose(1)
        else :
            res = BC[k].propose(0)
        if res = 1 :
            return PROP[k]
    wait forever
```

---

We can prove that the algorithm works in a simple way:

Let  $p_x$  be the first process that writes a proposal, every  $p_i$  that participates write its proposal and finds `PROP[x]  $\neq \perp$` , so `BC[x]` only receives proposals equal to 1 and returns 1. So, each process receives 1 and terminates after at most  $x$  cycles.

Let  $k$  be the number of possible proposals and  $h = \lceil \log k \rceil$  the number of bits needed to binary represent them. There exists an algorithm that decides bit by bit the final outcome creating a multivalued consensus object with bounded values.

---

**Algorithm:** Multivalued consensus object (bounded)

---

```
// PROP initialized at  $\perp$ 
def bmv_propose(i,v):
    PROP[i]=binary_repr(v)
    for k in [1,h] :
        P = {PROP[j][k] | PROP[j]  $\neq \perp \wedge$  PROP[j][1:k-1]=res[1:k-1]}
        b=P.choose() // a random element of P
        res[k]=BC[k].propose(b)
    return value(res)
```

---

We only need to prove validity because the other 3 properties (wait freedom, integrity and agreement) are trivial:

By construction of  $P$ , for a cycle  $k$ , it contains only proposals for which the first  $k - 1$  bits are equal to the bits decided so far. For whatever  $b \in P$  is selected there exists a  $j$  that proposed a value that has the  $k$  bits equal to the one decided. When  $k = h$  the algorithm is concluded.

## 2.5 Consensus number

### Consensus number

The consensus number of an object of type  $T$  is the maximum number of process  $n$  for which is possible to wait free implement a consensus object using objects of type  $T$ .

We define **schedule** the sequence of operation invocation issued by processes and **configuration** the global state of the system at a given execution time. We denote  $S(C)$  the configuration obtained starting from configuration  $C$  and applying schedule  $S$ .

A configuration  $C$  is called:

- $v$ -valent: if  $S(C)$  decides  $v$  for every  $S$ .
- monovalent: if exists  $v \in \{0, 1\}$  such that  $C$  is  $v$ -valent.
- bivalent: otherwise.

### Fundamental theorem of configuration

Any object that implements binary consensus for  $n$  processes must have a bivalent initial configuration.

**Proof:**

Let  $C_i$  be the initial configuration where all  $p_j$  with  $j \leq i$  propose 1 and the others propose 0. So,  $C_0$  is 0-valent and  $C_n$  is 1-valent.

If all starting configuration  $C_i$  are monovalent, that means that there is a value  $i$  for which  $C_{i-1}$  is 0-valent and  $C_i$  is 1-valent. The two configuration differ only in the value proposed by  $p_i$ .

If  $p_i$  is sleeping during  $C_{i-1}$  the other processes will decide 0, but the same happens in  $C_i$  (the only difference is  $p_i$  so they are now equal). So,  $C_i$  cannot be 1-valent.



### 2.5.1 Atomic R/W registers

#### Consensus number with atomic R/W registers

There exists no way to wait free implement binary consensus with only atomic R/W registers.

#### Proof:

We have an initial configuration  $C$  (bivalent) and let  $C'$  be the last bivalent configuration, the one such that  $p(C')$  is 0-valent and  $q(C')$  is 1-valent (or viceversa).

We have to consider all the possible combination of operation that  $p$  and  $q$  can issue and prove that we cannot have the 2 monovalent configuration:

1. Operation on different registers:

We have that  $p(q(C')) = q(p(C'))$  but  $p(q(C'))$  is 1-valent and  $q(p(C'))$  is 0-valent.

2. Both read the same register:

Works the same as 1.

3. A process  $p$  reads and  $q$  writes on the same register:

Only  $p$  can distinguish between  $C'$  and  $p(C')$  so  $q$  will behave in the same way both cases, so  $q$  will decide 1 even in the configuration  $q(p(C'))$ . If  $p$  was sleeping when it reactivates it decide 1, so  $p(C')$  is not 0-valent.

4. Both processes write the same register:

We have that  $p(q(C')) = p(C')$  because the value written by  $q$  is lost when  $p$  writes after. So, the situation is the same as point 3.

### 2.5.2 Consensus number of 2 with primitives

With the primitive Test&Set we can implement a consensus object for 2 processes:

---

#### Algorithm: Consensus with Test&Set

---

```
def propose(i,v):
    PROP[i]=v
    if TS.Test&Set()==0 :
        | return PROP[i]
    else :
        | return PROP[1-i]
```

---

The algorithm works similarly with the primitives Swap and Fetch&Add.

#### Consensus number with Test&Set

There exists no way to wait free implement binary consensus for 3 processes with Test&Set registers.

**Proof:**

Like before let consider  $C'$  such that  $p(C')$  is 0-valent,  $q(C')$  is 1-valent and  $r(C')$  is monovalent (0 or 1 is equal).

We have to consider all the possible combination of operation that  $p, q$  and  $r$  can issue and prove that we cannot have the 3 monovalent configuration:

1. The operation are R/W:

Works the same as the proof for R/W registers.

2. A process  $p$  reads and  $q$  test&set on the same register:

It works the same because only  $p$  can distinguish between  $C'$  and  $p(C')$ .

3. Both  $p$  and  $q$  test&set the same object:

We have that  $p(C')$  is 0-valent and  $q(C')$  is 1-valent but the result from the  $r$  point of view is that  $p(q(C')) = q(p(C'))$  so it will behave in the same way both cases violating the monovalence of one case ( $p(C')$  or  $q(C')$ ).

### 2.5.3 Consensus number of $\infty$ with Compare&Swap

A consensus object for an arbitrary number of process can be implemented using the Compare&Swap primitive:

---

**Algorithm:** Consensus with Compare&Swap

---

```
def propose(v):
    tmp=CS.compare&swap( $\perp$ ,v)
    if tmp= $\perp$  :
        | return v
    else :
        | return tmp
```

---

# 3

## Bisimilarity

### 3.1 Labeled Transition System

#### Non deterministic Automaton


A finite non deterministic automaton is quintuple  $M = (Q, A, q_0, F, T)$ , where:

- $Q$  is the set of states
- $A$  is the set of actions
- $q_0$  is the starting state
- $F$  is the set of final states
- $T$  is the transition relation ( $T \subseteq Q \times A \times Q$ )

The language of an automata  $L(M)$  is the set of all the inputs that take  $M$  from the starting state  $q_0$  to a final state. Two automaton are equal if their languages are equal.

#### Example:


Given this two automaton:

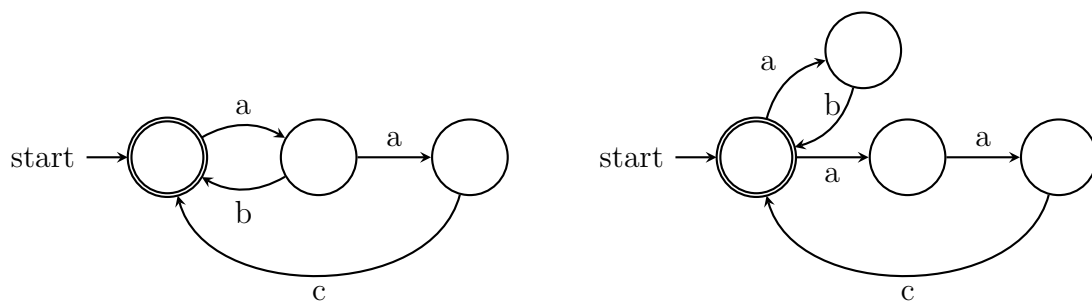

This two automaton has the same language:

$$(a(b + ac))^* = (ab + aac)^*$$

From an outside observer they behave in this way. The difference is when the decision to branch is taken and the language equivalence gets rid of that. For concurrent systems this is important, so we need to use something else.

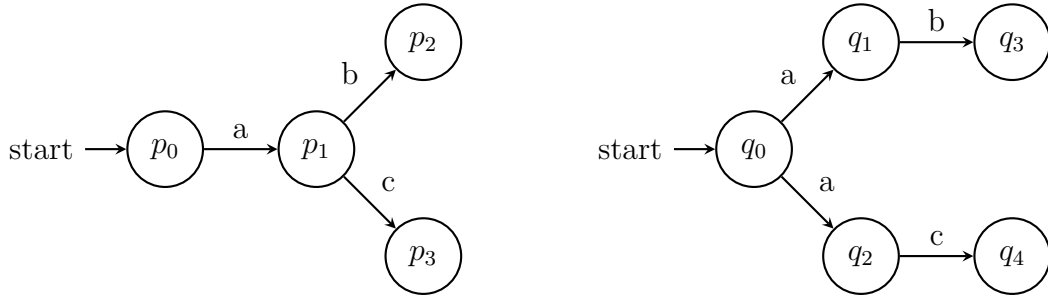

### 3.1.1 Definition of LTS

**Labeled Transition System (LTS)** have some main differences from automata:

1. The states of an LTS can be infinite.
2. In an LTS each state can be initial (this corresponds to different possible behaviors of the process).
3. The notion of final states is not informative in LTS.

#### Labeled Transition System

Given a set of action  $N$  an LTS is a pair  $(Q, T)$ , where:

- $Q$  is the set of states
- $T$  is the transition relation ( $T \subseteq Q \times N \times Q$ )

We write  $s \xrightarrow{a} s'$  instead of  $(s, a, s') \in T$ .

Two states of LTS will be equivalent if they can perform the same action that lead them in states where this property still holds.

#### Bisimilarity

Given an LTS  $(Q, T)$ , a binary relation  $S \subseteq Q \times Q$  is a **simulation** if and only if:

$$\forall (p, q) \in S \quad \forall p \xrightarrow{a} p' \quad \exists q \xrightarrow{a} q' \mid (p', q') \in S$$

If  $(p, q) \in S$  we say that  $p$  is simulated by  $q$ .

The relation  $S$  is a **bisimulation** if also  $S^{-1}$  is a simulation, where:

$$S^{-1} = \{(q, p) \mid (p, q) \in S\}$$

If exists a bisimulation  $S$  we say that  $p$  and  $q$  are **bisimilar** (written  $p \sim q$ ).

**Example:**

Given this two LTS:



To prove that  $p_0 \sim q_0$  we need to check that the following relations are simulations:

$$S = \{(p_0, q_0), (p_1, q_1), (p_2, q_2), (p_0, q_2)\}$$

$$S^{-1} = \{(q_0, p_0), (q_1, p_1), (q_1, p_2), (q_2, p_0)\}$$

**Bisimilarity as equivalence**

Bisimilarity is an equivalence relation

**Proof:**

## 1. Reflexivity:

The relation  $S = \{(p, p) | p \in Q\}$  is a bisimulation, because  $S$  is a simulation and also  $S^{-1} = S$  is a simulation.

## 2. Symmetry:

For every pair  $(p, q) \in S$ , by definition of bisimulation also  $S^{-1}$  is a simulation and  $(q, p) \in S^{-1}$ , so  $q \sim p$ .

## 3. Transitivity:

Consider the following relation:

$$S = \{(x, z) | \exists y (x, y) \in S_1 \wedge (y, z) \in S_2\}$$

where  $S_1$  and  $S_2$  are bisimulations.


For every  $x \xrightarrow{a} x'$  there exists an  $y \xrightarrow{a} y'$  such that  $(x', y') \in S_1$  and also  $z \xrightarrow{a} z'$  such that  $(y', z') \in S_2$ . So, from  $x \xrightarrow{a} x'$  we found  $z \xrightarrow{a} z'$  such that  $(x', z') \in S$ .

### 3.1.2 Syntax for non deterministic processes

If the number of states grows, we need to find another way to write down LTS in a more readable way. We can describe an LTS by a system of equations and obtain a recursive definition of the machine behaviour.

**Example:**

Given the LTS:

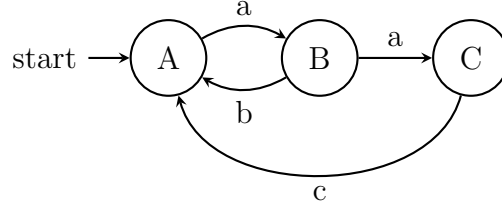

We can write the behaviour by a system of equations:

$$\begin{cases} A = a.B \\ B = b.A + a.C \\ C = c.A \end{cases}$$

where  $.$  is the sequential composition and  $+$  the non deterministic choice. We can obtain the recursive definition of the machine behaviour:

$$A(a, b, c) = a.(b.A(a, b, c) + a.c.A(a, b, c))$$

This machine definition is parametric in  $a, b, c$ .

#### Set of non deterministic processes

The set of non deterministic processes is given by the following grammar:

$$P = \sum_{i \in I} \alpha_i.P_i | A(a_1, \dots, a_n)$$


where  $I$  is the finite set of indices and  $\alpha_i \in \mathcal{A}$ , for every  $i \in I$ .

**Example:**

Take as example a counter, starting from 0. With the actions *inc* and *dec*, this can be modeled:

$$\begin{cases} C_0 = inc.C_1 \\ C_i = inc.C_{i+1} + dec.C_{i-1} \quad i > 0 \end{cases}$$

The resulting LTS is:

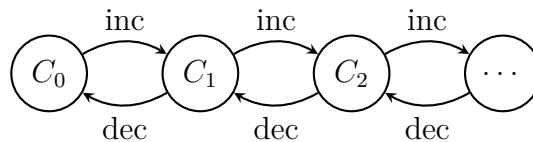

## 3.2 CCS

To model a concurrent system correctly we need to model two main features:

1. Simultaneous execution of different processes
2. Interaction between processes

Given a set of events, we denote:

- $a$  the consumption of event  $a$
- $\bar{a}$  the production of event  $a$

The actions  $a$  and  $\bar{a}$  are complementary and let two processes synchronize on event  $a$ . The synchronization is not observable from outside, but produce a silent event  $\tau$ .

The set of actions that we consider is  $\mathcal{A} = \mathcal{N} \cup \bar{\mathcal{N}} \cup \tau$ .

### Set of CCS processes

The set of CCS processes is defined by the following grammar:

$$P = \left( \sum_{i \in I} \alpha_i . P_i \mid A(a_1, \dots, a_n) \right) P \mid Q \mid P \backslash a$$

where  $I$  is the finite set of indices and  $\alpha_i \in \mathcal{A}$ , for every  $i \in I$ .  $P \mid Q$  means the parallel execution of  $P$  and  $Q$  and  $P \backslash a$  means that  $a$  is visible only from within  $P$ .

### Inference rules

There are two equal definitions of the inference rules:

1.

$$\sum_{i \in I} \alpha_i . P_i \xrightarrow{\alpha_j} P_j \quad \forall i \in I$$


2.

$$\frac{P\{a_1/x_1, \dots, a_n/x_n\} \xrightarrow{\alpha} P'}{A(a_1, \dots, a_n) \xrightarrow{\alpha} P'} A(x_1, \dots, x_n) \triangleq P$$

If two processes work in parallel they must synchronize, so one must do  $a$  and the other  $\bar{a}$  for some  $a \in \mathcal{A}$ .

**Example:**

Given this:

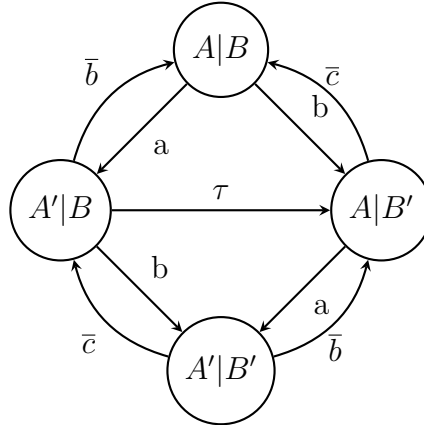

The processes definitions are:

$$\begin{cases} A \triangleq a.A' \\ A' \triangleq \bar{b}.A \\ B \triangleq b.B' \\ B' \triangleq \bar{c}.B \end{cases}$$

There are 3 possibilities:

1. Only  $A$  does something:

$$\frac{\frac{a.A' \xrightarrow{a} A'}{A \xrightarrow{a} A'}}{A|B \xrightarrow{a} A'|B}$$

2. Only  $B$  does something:

$$\frac{\frac{b.B' \xrightarrow{b} B'}{B \xrightarrow{b} B'}}{A|B \xrightarrow{b} A|B'}$$

3. They both work in parallel and synchronize ( $\bar{a}$  and  $c$  don't exist, so they must synchronize with  $b$  and  $\bar{b}$ ):

$$\frac{\frac{\bar{b}.A \xrightarrow{\bar{b}} A}{A' \xrightarrow{\bar{b}} A} \quad \frac{b.B' \xrightarrow{b} B'}{B \xrightarrow{b} B'}}{A'|B \xrightarrow{\tau} A|B'}$$

In the construction of the LTS we loose the consciousness of the parallel.


The usefulness of the parallel is two-fold:

- it is the fundamental operator in concurrency theory
- it allows for a compact and intuitive writing of processes



**Example:**

Given the previous example, we restrict  $b$  and so we remove the transitions involving  $b$  or  $\bar{b}$ . The transition  $\tau$  remains because it signal that the synchronization has happened even if the events that cause the synchronization are hide. The LTS is changed, becoming:

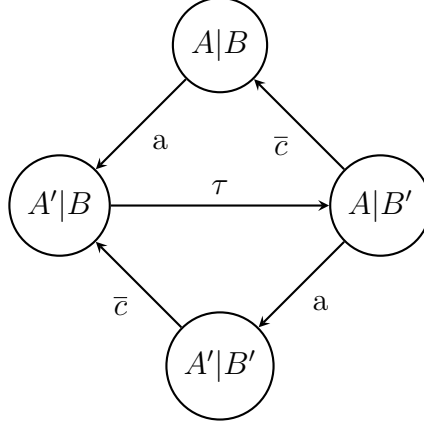

Now we can pass from  $A|B$  to  $A'|B$  performing  $a$  but we can't pass from  $A|B$  to  $A|B'$  performing  $b$ .

**3.2.1 Semaphore**

An  $n$ -ary semaphore (denoted as  $S^{(n)}(p, v)$ ) is a process used to ensure that at most  $n$  instances of the same activity are in execution. An activity is started by an action  $p$  (down) and terminated by an action  $v$  (up).

The definition of a unary semaphore is:

$$\begin{cases} S^{(1)} \triangleq p.S_1^{(1)} \\ S_1^{(1)} \triangleq v.S^{(1)} \end{cases}$$

The definition of a binary semaphore is:

$$\begin{cases} S^{(2)} \triangleq p.S_1^{(2)} \\ S_1^{(2)} \triangleq p.S_2^{(2)} + v.S^{(2)} \\ S_2^{(2)} \triangleq v.S_1^{(2)} \end{cases}$$

We can show that there is a bisimulation between  $S^{(2)}$  and the implementation with two processes  $S^{(1)}$ :

$$S^{(1)}|S^{(1)} \sim S^{(2)}$$

To show the equivalence, we can show that this relation is a bisimulation:

$$R = \{(S^{(1)}|S^{(1)}, S^{(2)}), (S_1^{(1)}|S^{(1)}, S_1^{(2)}), (S^{(1)}|S_1^{(1)}, S_1^{(2)}), (S_1^{(1)}|S_1^{(1)}, S_2^{(2)})\}$$

But there is no synchronization between the two  $S^{(1)}$  so they cannot work in parallel.

### 3.2.2 Image Finiteness

#### Image Finiteness

For a state of a process  $P$ , the number of outgoing arrows is finite:

$$|\{P' | \exists \alpha \ P \xrightarrow{\alpha} P'\}| < \infty$$

#### Proof:

For every process  $P$ , let  $\mathcal{T}(P)$  be the set of derivation trees generated from any transition  $P \xrightarrow{\alpha} P'$ . We denote  $k_P$  the maximum height of a tree in  $\mathcal{T}(P)$ . We do the proof by induction of  $k_P$ :

- Base case:

In this case we simply have that:

$$|\{P' | \exists \alpha \ P \xrightarrow{\alpha} P'\}| = |\{P_i | i \in I\}| \leq |I| < \infty$$

- Inductive step:

We need to consider 3 cases:

1.  $P \triangleq Q \setminus a$ : all inferences for a reduction from  $P$  must have as last rule the restriction one:

$$\frac{Q \xrightarrow{\alpha} Q'}{Q \setminus a \xrightarrow{\alpha} Q' \setminus a} \alpha \notin \{a, \bar{a}\}$$

Since  $k_Q < k_P$  we know that:

$$|\{Q' | \exists \alpha \ Q \xrightarrow{\alpha} Q'\}| < \infty$$

And we have that:

$$\{P' | \exists \alpha \ P \xrightarrow{\alpha} P'\} \subseteq \{Q' \setminus a | \exists \alpha \ Q \xrightarrow{\alpha} Q'\}$$

The right set is finite, so also the left one is finite.

2.  $P \triangleq A(a_1, \dots, a_n)$ : all inferences of  $P$  will be in the form:

$$\frac{Q\{a_1/x_1, \dots, a_n/x_n\} \xrightarrow{\alpha} Q'}{A(a_1, \dots, a_n) \xrightarrow{\alpha} Q'} A(x_1, \dots, x_n) \triangleq Q$$

Since  $k_Q < k_P$  we know that:

$$|\{R | \exists \alpha \ Q\{a_1/x_1, \dots, a_n/x_n\} \xrightarrow{\alpha} R\}| < \infty$$

And we have that:

$$\{P' | \exists \alpha \ P \xrightarrow{\alpha} P'\} = \{R | \exists \alpha \ Q\{a_1/x_1, \dots, a_n/x_n\} \xrightarrow{\alpha} R\}$$

The right set is finite, so also the left one is finite.

3.  $P \triangleq P_1|P_2$ : we have 4 possible inference trees, one where  $P_1$  continue, one where  $P_2$  continue and the last two where they synchronize:

$$\begin{aligned} \{P'|\exists\alpha P \xrightarrow{\alpha} P'\} = & \{P'_1|P_2|\exists\alpha P_1 \xrightarrow{\alpha} P'_1\} \cup \\ & \{P_1|P'_2|\exists\alpha P_2 \xrightarrow{\alpha} P'_2\} \cup \\ & \{P'_1|P'_2|\exists\alpha P_1 \xrightarrow{\alpha} P'_1 \wedge P_2 \xrightarrow{\bar{\alpha}} P'_2\} \cup \\ & \{P'_1|P'_2|\exists\alpha P_1 \xrightarrow{\bar{\alpha}} P'_1 \wedge P_2 \xrightarrow{\alpha} P'_2\} \end{aligned}$$

All the sets are finite, so also the left one is finite.

### 3.2.3 Properties of bisimilarity

Let us consider a renaming function  $\sigma : \mathcal{N} \rightarrow \mathcal{N}$  and we define the result of applying  $\sigma$ :

1.  $\sigma(\bar{a}) = \overline{\sigma(a)}$
2.  $\sigma(\sum_{i \in I} \alpha_i.P_i) = \sum_{i \in I} \sigma(\alpha_i).\sigma(P_i)$
3.  $\sigma(P \setminus a) = \sigma(P) \setminus \sigma(a)$
4.  $\sigma(P_1|P_2) = \sigma(P_1)|\sigma(P_2)$
5.  $\sigma(A(a_1, \dots, a_n)) = A^\sigma(\sigma(a_1), \dots, \sigma(a_n))$

And for every definition  $A(x_1, \dots, x_n) \triangleq P$  we assume the definition:

$$A^\sigma(\sigma(x_1), \dots, \sigma(x_n)) \triangleq \sigma(P)$$

#### Injective renaming working

For every injective renaming  $\sigma : \mathcal{N} \rightarrow \mathcal{N}$ , if  $P \xrightarrow{\alpha} P'$  then  $\sigma(P) \xrightarrow{\sigma(\alpha)} \sigma(P')$

#### Proof:

The proof is done by induction on the height of the inference  $P \xrightarrow{\alpha} P'$ .

- Base case:

The base case is  $P = \sum_{i \in I} \alpha_i.P_i \xrightarrow{\alpha_j} P_j$ . We have that  $\sigma(P) = \sum_{i \in I} \sigma(\alpha_i).\sigma(P_i)$  and then  $\sigma(P) \xrightarrow{\sigma(\alpha_j)} \sigma(P_j)$  for every  $j \in I$ .

- Inductive step:

We have to consider 3 cases:

1.  $P \triangleq A(a_1, \dots, a_n), Q \triangleq A(x_1, \dots, x_n)$  and  $Q\{a_1/x_1, \dots, a_n/x_n\} \xrightarrow{\alpha} P'$ : by definition we have that  $\sigma(P) = A^\sigma(\sigma(a_1), \dots, \sigma(a_n))$  and by inductive hypothesis we have that:

$$\sigma(Q)\{\sigma(a_1)/\sigma(x_1), \dots, \sigma(a_n)/\sigma(x_n)\} \xrightarrow{\sigma(\alpha)} \sigma(P')$$

2.  $P \triangleq Q \setminus a, Q \xrightarrow{\alpha} Q'$  and  $\alpha \notin \{a, \bar{a}\}$ : by definition we have  $\sigma(Q \setminus a) = \sigma(Q) \setminus \sigma(a)$  and since  $\sigma(\alpha) \notin \{\sigma(a), \overline{\sigma(a)}\}$  we have that  $\sigma(P) \xrightarrow{\sigma(\alpha)} \sigma(P')$ .

3.  $P \triangleq P_1|P_2$ : we have that  $\sigma(P) \triangleq \sigma(P_1)|\sigma(P_2)$  so it works the same as before.

We can see that a process  $a.P \setminus a \sim 0$  because they both don't have outgoing arrows. The same works for  $\bar{a}.P \setminus a \sim 0$ .

### Idempotency of sum

Given a process  $P$ , we have that:

$$a.P + a.P + M \sim a.P + M$$

where  $M$  is a sum  $\sum_{i \in I} \beta_i.P_i$ .

### Proof:

The two definitions have the same outgoing arrows, so the set:

$$S = \{(a.P + a.P + M, a.P + M)\} \cup Id$$

is a bisimulation.

## 3.2.4 Congruence

We define an execution context as a process with a hole ( $\square$ ) that can be filled by a process  $P$ . This filling is denoted by  $C[P]$ . Intuitively if two processes  $P$  and  $Q$  are equivalent they can be interchangeably used in any execution context.

### Set of CCS context

The set  $C$  of CCS contexts is given by the following grammar:

$$C = \square \mid C|P \mid C \setminus a \mid \alpha.C + M$$

### Bisimilarity as congruence

An equivalence relation  $\mathcal{R}$  is a congruence if and only if:

$$\forall (P, Q) \in \mathcal{R}, \forall C (C[P], C[Q]) \in \mathcal{R}$$

So for bisimilarity, we have that:

$$\forall P \sim Q, \forall C C[P] \sim C[Q]$$

### Proof:

To prove this we need to prove all the possibilities for a context:

- If  $P \sim Q$ , then  $\alpha.P + M \sim \alpha.Q + M$  for all  $\alpha$  and  $M$ :

We need to show that:

$$S = \left\{ (\alpha.P + M, \alpha.Q + M) \mid P \sim Q, \alpha \in \mathcal{A}, M = \sum_{i \in I} \alpha_i.P_i \right\} \cup \sim$$

is a simulation. We have two cases:

1.  $\alpha.P + M \xrightarrow{\alpha} P$ : also  $\alpha.Q + M$  with action  $\alpha$  will become  $Q$  that is bisimilar to  $P$ .
2.  $\alpha.P + M \xrightarrow{\alpha_j} P_j$ : also  $\alpha.Q + M$  can reply with the same action and by reducing to the same process  $P_j$ .

- If  $P \sim Q$ , then  $P \setminus a \sim Q \setminus a$  for all  $a$ :

We need to show that:

$$S = \{(P \setminus a, Q \setminus a) \mid \forall P \sim Q, \forall a \in \mathcal{N}\}$$

is a simulation. We have that  $P \setminus a \xrightarrow{\alpha} P'$  where  $\alpha \notin \{a, \bar{a}\}$ , so  $Q$  can also perform the same action  $\alpha$  and reduce to the process  $Q'$ . Since  $P \sim Q$  we have that  $P' \sim Q'$ .

- If  $P \sim Q$ , then  $P|R \sim Q|R$  for all  $R$ :

We need to show that:

$$S = \{(P|R, Q|R) \mid P \sim Q\}$$

is a simulation. We have 3 cases:

1. Only  $P$  evolves, so  $P|R \xrightarrow{\alpha} P'|R$ : since  $P \sim Q$  we have that  $Q \xrightarrow{\alpha} Q'$  and  $P' \sim Q'$ , so also  $P'|R \sim Q'|R$ .
2. Only  $R$  evolves, so  $P|R \xrightarrow{\alpha} P|R'$ : trivially  $Q|R \xrightarrow{\alpha} Q|R'$  and  $P|R' \sim Q|R'$ .
3. They both evolve and synchronize, so  $P \xrightarrow{a} P', R \xrightarrow{\bar{a}} R'$  (or viceversa) and  $P|R \xrightarrow{\tau} P'|R'$ : since  $P \sim Q$  we have that  $Q \xrightarrow{a} Q'$  and  $P' \sim Q'$ , so  $Q|R \xrightarrow{\tau} Q'|R'$  and  $P'|R' \sim Q'|R'$ .

After proving that the bisimilarity is propagated by the context we can prove the starting lemma by induction on the structure of  $C$ :

- Base case:

$C = \square$  and  $C[P] = P \forall P$ , so trivially  $C[P] \sim C[Q]$ .

- Inductive step:

Using the previous lemmata every structure of  $C$  contains another context  $C'$  that is smaller than  $C$  and so  $C'[P] \sim C'[Q]$ .

### 3.3 Weak bisimilarity

We define a less stringent definition of bisimilarity, that does not take account for non observable internal actions.

The idea of this new equivalence is:

- A visible action must be replied with the same action and some internal action.
- An internal action must be replied with 0 or more internal actions.

We define that  $P \Longrightarrow P'$  if and only if there exist  $P_0, \dots, P_k$  such that  $P \xrightarrow{\tau} P_0 \xrightarrow{\tau} \dots \xrightarrow{\tau} P_k \xrightarrow{\tau} P'$ .

We define the relation  $\xRightarrow{\hat{\alpha}}$  such that:

- If  $\alpha = \tau$  then  $\xRightarrow{\hat{\alpha}} = \Rightarrow$ .
- Otherwise  $\xRightarrow{\hat{\alpha}} \triangleq \Rightarrow \xrightarrow{\alpha} \Rightarrow$ . This means some  $\tau$  followed by  $\alpha$  and followed by some  $\tau$  again.

### Weak bisimilarity

$S$  is a weak simulation if and only if:

$$\forall (p, q) \in S \forall p \xrightarrow{p'} \exists q \xRightarrow{\hat{\alpha}} q' | (p', q') \in S$$

The relation  $S$  is a weak bisimulation if also  $S^{-1}$  is a weak simulation.


If exists a bisimulation  $S$  we say that  $p$  and  $q$  are weakly bisimilar (written  $p \approx q$ ).

We can say that  $\approx$ :

1. Is an equivalence.
2. Is a weak bisimulation.
3. Is a congruence.
4.  $\sim \subset \approx$ .

### Example:

The following LTS are weak bisimilar:

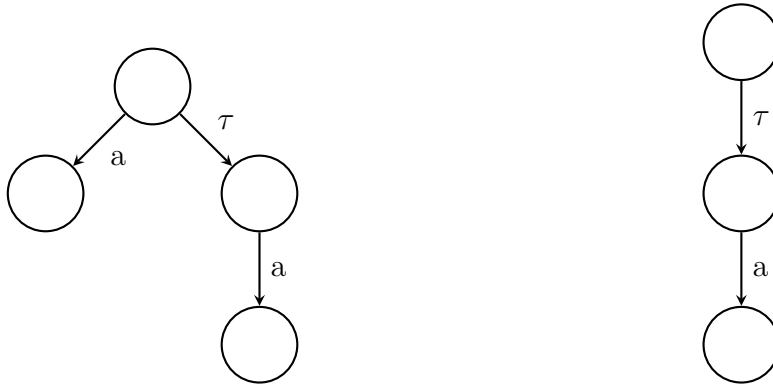

### Types of weak bisimulation

Given a process  $P$  and any sum  $M$  and  $N$ :

1.  $P \approx \tau.P$
2.  $M + N + \tau.N \approx M + \tau.N$
3.  $M + \alpha.P + \alpha(N + \tau.P) \approx M + \alpha(N + \tau.P)$

**Proof:**

Is easy to show that exists a weak simulation for each of the 3 types:

1.  $S = \{(P, \tau.P)\} \cup Id$
2.  $S = \{(M + N + \tau.N, M + \tau.N)\} \cup Id$
3.  $S = \{(M + \alpha.P + \alpha(N + \tau.P), M + \alpha(N + \tau.P))\} \cup Id$

**Example:**

A factory can handle 3 kinds of works: easy (E), medium (M) and difficult (D). An activity consist in recieving an input and producing an output, so the specification are the following:

$$\begin{cases} A \triangleq i_E.A' + i_M.A' + i_D.A' \\ A' \triangleq \bar{o}.A \end{cases}$$

A factory is the parallel composition of two activities:

$$Factory \triangleq A|A$$

A possible implementation is done by using two workers that work in parallel and use machine based on the kind of work:

- Easy work: no machine.
- Medium work: general or special machine.
- Difficult work: special machine.

The specification of a worker is:

$$\begin{cases} W \triangleq i_E.W_E + i_M.W_M + i_D.W_D \\ W_E \triangleq \bar{o}.W \\ W_M \triangleq \bar{r}g.\bar{l}g.W_E + \bar{r}s.\bar{l}s.W_E \\ W_D \triangleq \bar{r}s.\bar{l}s.W_E \end{cases}$$

Where  $rg, rs$  are used to request a machine and  $lg, ls$  to leave the machine. The specification of the machines are:

$$\begin{cases} S \triangleq rs.S' \\ S' \triangleq ls.S \\ G \triangleq rg.G' \\ G' \triangleq lg.G \end{cases}$$

The system is given by:

$$Workers \triangleq (W|W|G|S) \setminus \{rg, rs, lg, ls\}$$

We can show the following weak bisimilarity:

$$Factory \approx Workers$$

## 3.4 Inference system

To check bisimilarity for processes without recursion we can use an inference system made up of axioms and inference rules. This inference system has 2 properties:

- Soundness: whatever I infer is bisimilar
- Completeness: whatever is bisimilar, can be inferred

### 3.4.1 Strong bisimilarity

The axioms that make up this inference systems for bisimilarity are:

- Axioms for sum:
  1.  $\vdash M + 0 = M$
  2.  $\vdash M_1 + M_2 = M_2 + M_1$
  3.  $\vdash M_1 + (M_2 + M_3) = M_1 + M_2 + M_3$
  4.  $\vdash M + M = M$
- Axioms for parallel composition:
  1.  $\vdash \sum_i \alpha_i.P_i \mid \sum_j \beta_j.Q_j = \sum_i \alpha(P_i \mid \sum_j \beta_j.Q_j) + \sum_j \beta_j(\sum_i \alpha_i.P_i \mid Q_j) + \sum_{\alpha_i = \bar{\beta}_j} \tau(P_i \mid Q_j)$
- Axioms for restriction:
  1.  $\vdash 0 \backslash a = 0$
  2.  $\vdash (\sum_i \alpha_i.P_i) \backslash a = \sum_i (\alpha_i.P_i) \backslash a$
  3.  $\vdash (\alpha.P) \backslash a = \begin{cases} 0 & \alpha \in \{a, \bar{a}\} \\ \alpha.(P \backslash a) & \text{otherwise} \end{cases}$

The inference rules are the one to make this system an equivalence and a congruence:

1. Reflexivity:

$$\vdash P = P$$

2. Symmetry:

$$\frac{\vdash P = Q}{\vdash Q = P}$$

3. Transitivity:

$$\frac{\vdash P = Q \quad \vdash Q = R}{\vdash P = R}$$

4. Congruence:

$$\frac{\vdash P = Q}{\vdash C[P] = C[Q]}$$



**Soundness**

This inference system has the soundness property, so:

$$\vdash P = Q \implies P \sim Q$$

**Proof:**

For every axiom in the form  $\vdash X = Y$ , we can consider the relation  $\{(X, Y)\} \cup Id$  and prove that is a bisimulation. The system is an equivalence and a congruence so the inference rules hold for bisimilarity.

**Standard form of a process**

A process  $P$  is in standard form if and only if:

$$P \triangleq \sum_i \alpha_i.P_i$$

And each  $P_i$  is in standard form.

For every process  $P$  exists another process  $P'$  in standard form, such that  $\vdash P = P'$ .  
So, every  $P$  is representable in standard form.

**Proof:**

We prove the existence of  $P'$  by induction on the structure of  $P$ :

- Base case:

$P \triangleq 0$  is already in standard form.

- Inductive step: We have to consider 3 cases:

1.  $P \triangleq P_1 | P_2$

By induction we have  $P'_1, P'_2$  in standard form such that  $\vdash P_1 = P'_1$  and  $\vdash P_2 = P'_2$ , where  $P'_1 = \sum_i \alpha_i.R_i$  and  $P'_2 = \sum_j \beta_j.Q_j$ .

By transitivity we have that:

$$\begin{aligned} \overbrace{P_1 | P_2}^P &= \sum_i \alpha_i.R_i | \sum_j \beta_j.Q_j \\ &= \sum_i \alpha(R_i | \sum_j \beta_j.Q_j) + \sum_j \beta_j(\sum_i \alpha_i.R_i | Q_j) + \sum_{\alpha_i = \overline{\beta_j}} \tau(R_i | Q_j) = \dots = P' \end{aligned}$$

where the elimination of the parallel is repeated until there are no more parallel in the process.

2.  $P \triangleq \sum_i \alpha_i.P_i$

By induction we have that  $\forall P_i \exists P'_i$  in standard form such that  $\vdash P_i = P'_i$ . From  $\vdash P_1 = P'_1$  with the context:

$$\alpha_1.\square + \sum_{i \in I \setminus \{1\}} \alpha_i.P_i$$

we have that:

$$\vdash \alpha_1.P_1 + \sum_{i \in I \setminus \{1\}} \alpha_i.P_i = \alpha_1.P'_1 + \sum_{i \in I \setminus \{1\}} \alpha_i.P_i$$

We can repeat this process for each  $P_i$  and we have that:

$$\underbrace{\sum_{i \in I} \alpha_i.P_i}_P = \underbrace{\sum_{i \in I} \alpha_i.P'_i}_{P'}$$

### 3. $P \triangleq Q \setminus a$

By induction we have a  $Q'$  in standard form such that  $\vdash Q = Q'$ . From this and by congruence, we have that:

$$\overbrace{Q \setminus a}^P = Q' \setminus a = \sum_i (\alpha_i.R_i) \setminus a = \sum_{i \in I} \alpha_i(R_i \setminus a)$$

where  $I' = \{i \in I \mid \alpha_i \notin \{a, \bar{a}\}\}$  and the elimination of restriction is repeated until the operator is removed.

### Completeness

This inference system has the soundness property, so:

$$P \sim Q \implies \vdash P = Q$$

#### Proof:

By the previous definition we have that  $\vdash P = P'$  and  $\vdash Q = Q'$  where:

$$P' = \sum_i \alpha_i.P_i \quad Q' = \sum_j \beta_j.Q_j$$

So, we have to prove that  $\vdash P' = Q'$  and we do that by induction on the maximum height of the syntactic tree that describes  $P'$  and  $Q'$ :

- Base case:

$P' = Q' = 0$  is trivial.

- Induction:

For an action  $\alpha_1$  we have that:

$$\begin{aligned} P' \xrightarrow{\alpha_1} P_1 &\implies P \xrightarrow{\alpha_1} \hat{P} \text{ and } P_1 \sim \hat{P} \implies Q \xrightarrow{\alpha_1} \hat{Q} \text{ and } \hat{P} \sim \hat{Q} \\ &\implies Q' \xrightarrow{\alpha_1} Q'' \text{ and } \hat{Q} \sim Q'' \end{aligned}$$

By definition of  $Q'$  must exists  $\beta_{j_1} = \alpha_1$  and  $Q'' = Q_{j_1}$  and by induction  $P_1 \sim Q_{j_1} \implies \vdash P_1 = Q_{j_1}$ .

We now consider the context:

$$C = \alpha_1.\square + \sum_{i \in I \setminus \{1\}} \alpha_i.P_i$$

And we can say that:

$$\underbrace{\alpha_1.P_1 + \sum_{i \in I \setminus \{1\}} \alpha_i.P_i}_{P'} = \beta_{j_1}.Q_{j_1} + \sum_{i \in I \setminus \{1\}} \alpha_i.P_i$$

Doing the same for every  $P_i$  we can prove that:

$$\vdash P' = \sum_i \beta_{j_i}.Q_{j_i}$$

In the same way we can prove that:

$$\vdash Q' = \sum_j \alpha_{i_j}.P_{i_j}$$

And from summing the equalities:

$$\vdash P' + \sum_j \alpha_{i_j}.P_{i_j} = Q' + \sum_i \beta_{j_i}.P_{j_i}$$

By idempotency we have  $\vdash P' = Q'$  and consequently  $\vdash P = Q$ .

### 3.4.2 Weak bisimilarity

We can create an inference system also for weak bisimilarity, in which all the rules of the previous inference systems hold and adding the axioms for  $\tau$ :

1.  $\vdash \alpha.P = \alpha.\tau.P$
2.  $P + \tau.P = P$
3.  $\alpha.(P + \tau.Q) = \alpha.(P + \tau.Q) + \alpha.Q$

#### Example:

Consider a server that receives a request for sending a message and delivers a confirm of the reception. The specification of the server is:

$$Spec = send.\overline{rcv}$$

The server can be implemented by 3 process in parallel:

$$\left. \begin{array}{l} S = send.\overline{put} \\ M = put.\overline{go} \\ R = go.\overline{rcv} \end{array} \right\} Impl = (S|M|R) \setminus \{put, go\}$$

To prove that the specification and the implementation are weakly bisimilar we need to apply the axioms and inference rules of the system:

1. Axiom of parallel:

$$\vdash (S|M|R) = send.(\overline{put}|M|R) + put.(S|\overline{go}|R) + go.(S|M|\overline{rcv})$$

2. Axiom 2 of restriction:

$$\vdash Impl = (send.(\overline{put}|M|R) + put.(S|\overline{go}|R) + go.(S|M|\overline{rcv})) \setminus \{put, go\}$$

3. Axiom 3 of restriction:

$$\vdash Impl = send.(\overline{put}|M|R) \setminus \{put, go\} + 0 + 0$$

4. Using a similar way:

$$\vdash Impl = send.\tau.(\overline{go}|R) \setminus \{put, go\}$$

5. Axiom 1 of  $\tau$ :

$$\vdash Impl = send.(\overline{go}|R) \setminus \{put, go\} = send.\tau.(\overline{rcv}) \setminus \{put, go\}$$

6. Axiom 1 of  $\tau$ :

$$\vdash Impl = send.(\overline{rcv}) \setminus \{put, go\} = send.\overline{rcv}$$

So the specification and implementation are weakly bisimilar.

## 3.5 Logic formulas

To check if two processes are not bisimilar we use formulas and satisfiability to prove that one process can satisfy at least one formula that the other process cannot satisfy.

### Logic for strong bisimilarity

The formulas that can be written with this logic are in the form:

$$\varphi = True \mid \neg\varphi \mid \varphi \wedge \varphi \mid \diamond a\varphi$$

A process  $P$  satisfies a formula  $\varphi$  written as  $P \models \varphi$  if and only if  $(P, \varphi) \in \models$ .

The relation  $\models$  can be inductively defined:

- $P \models True$
- $P \models \neg\varphi \iff P \not\models \varphi$
- $P \models \varphi_1 \wedge \varphi_2 \iff P \models \varphi_1 \wedge P \models \varphi_2$
- $P \models \diamond a\varphi \iff \exists P' | P \xrightarrow{a} P' \wedge P' \models \varphi$

We consider also the possibility to have infinite many conjunction with the operator:

$$\bigwedge_{i \in I} \varphi_i$$

From the operators before we can simply derive also *False* and logical operator such as  $\vee$  and  $\implies$ .

Another important operator is the box (representing the for each) that can define:


$$\neg \diamond a\varphi = \Box a\neg\varphi$$

The box operator means that:

- $P \models \Box a\varphi \iff \forall P' | P \xrightarrow{a} P' \implies P' \models \varphi$ , so every  $P'$  reached performing  $a$  satisfy  $\varphi$
- $P \models \Box aF \iff \nexists P' | P \xrightarrow{a} P'$ , so  $P$  cannot perform  $a$

**Example:**

Given the following processes:

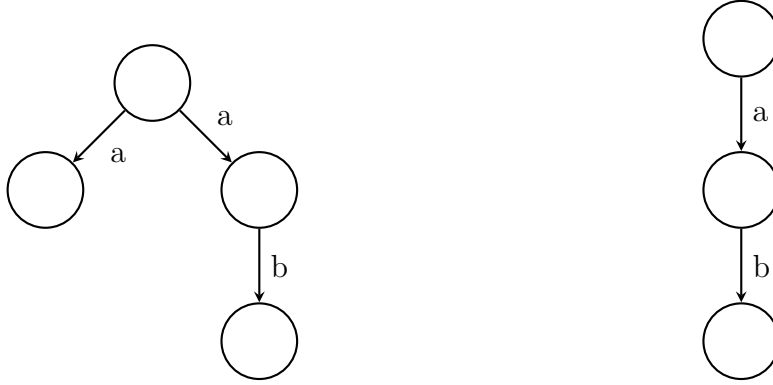

We can see that using the formula:

$$\varphi = \Diamond a \Box bF$$

we have that  $P_1 \models \varphi$  and  $P_2 \not\models \varphi$ , so the two processes does not satisfy the same formulas.

### Bisimilarity on set of formulas

Given the set of fomulas satisfied by a process defined as:

$$L(P) = \{\varphi | P \models \varphi\}$$

We have that:

$$P \sim Q \iff L(P) = L(Q)$$

**Proof:**

$$1. P \sim Q \implies L(P) = L(Q)$$

We prove this by induction on the syntax tree of the formula, showing that  $\varphi \in L(P) \iff \varphi \in L(Q)$ :

- Base case:

The base case is  $\varphi = T$  and it belongs to  $L(P)$  and  $L(Q)$ .

- Inductive step:

We assume the thesis for every syntax tree of height  $h$  and we consider the possible cases for the  $h + 1$ -th operator:

$$1.1 \varphi = \bigwedge_{i \in I} \varphi_i:$$

Let assume  $\varphi \in L(P)$ , it means that  $\forall i \varphi_i \in L(P)$ . Every formula has a syntax tree with height  $h$ , so by ipothesis  $\forall i \varphi_i \in L(Q)$ , so  $\varphi \in L(Q)$ .

1.2  $\varphi = \neg\varphi'$ :

In this case  $\varphi' \notin L(P)$  and the height of its syntax tree is  $h$ , so  $\varphi' \notin L(Q)$  and  $\varphi \in L(Q)$ .

1.3  $\varphi = \diamond a\varphi'$ :

In this case  $\exists P' | P \xrightarrow{a} P'$  and  $\varphi' \in L(P')$ . If  $P \sim Q$  means that  $\exists Q' | Q \xrightarrow{a} Q'$  and  $P' \sim Q'$ . The height of  $\varphi'$  is  $h$  so  $\varphi' \in L(Q')$  and by definition  $Q \models \diamond a\varphi' = \varphi$ .

2.  $P \sim Q \iff L(P) = L(Q)$ :

We can prove that the relation:

$$R = \{(P, Q) | L(P) = L(Q)\}$$

is a simulation.

Let  $P \xrightarrow{a} P'$  and consider the formula:

$$\varphi = \diamond a\varphi' \quad \varphi' = \bigwedge_{\varphi'' \in L(P')} \varphi''$$

By construction  $P \models \varphi$  and also  $Q \models \varphi$  because  $L(P) = L(Q)$ . It means that  $\exists Q' | Q \xrightarrow{a} Q'$  and  $Q' \models \varphi'$ . So, we have that:

$$\forall \varphi'' \in L(P') \quad \varphi'' \in L(Q') \implies L(P') \subseteq L(Q')$$

The inclusion cannot be proper ( $L(P') \subset L(Q')$ ) because for every formula  $\neg\varphi \in L(P')$  its not possible that  $\varphi \in L(Q')$  because  $Q'$  cannot satisfy both  $\varphi$  and  $\neg\varphi$ .

### 3.5.1 Sub-logics

#### Negation-free logic

The formulas that can be written with this logic are in the form:

$$\varphi = \text{True} \mid \varphi \wedge \varphi \mid \diamond a\varphi$$

We write  $L_{\neg}(P)$  the set of formulas satisfied by  $P$ .

We can prove that:

$$P \text{ simulates } Q \iff L_{\neg}(P) = L_{\neg}(Q)$$

This can be done similarly to the previous proof with the difference that without  $\neg$  we don't have  $L(P') = L(Q')$  but only  $L(P') \subseteq L(Q')$  because we cannot prove that the inclusion cannot be proper.

#### Negation-free and conjunction-free logic

The formulas that can be written with this logic are in the form:

$$\varphi = \text{True} \mid \diamond a\varphi$$

We write  $L_{\neg, \wedge}(P)$  the set of formulas satisfied by  $P$ . Let also call  $Lang(P)$  the set of strings accepted by the automaton isomorphic to the LTS of  $P$  where every state is final.

We can prove that:

$$L_{\neg, \wedge}(P) = L_{\neg, \wedge}(Q) \iff \text{Lang}(P) = \text{Lang}(Q)$$

**Proof:**

Let  $\varphi = \diamond a_1, \dots, \diamond a_n T$  and  $\varphi \in L_{\neg, \wedge}(P)$ . This means that:

$$\exists P_1, \dots, P_n | P \xrightarrow{a_1} P_1 \dots \xrightarrow{a_n} P_n$$

So, only if  $a_1 \dots a_n \in \text{Lang}(P)$ .

Two processes with the same language are called **trace equivalent**, where a trace is every sequence of actions performed by the process.

### 3.5.2 Logic for weak bisimilarity

#### Logic for weak bisimilarity

The formulas that can be written with this logic are in the form:

$$\varphi = \text{True} \mid \neg\varphi \mid \varphi \wedge \varphi \mid \ll\gg a\varphi$$

The difference with the logic for strong bisimilarity is the  $\diamond$  turned into  $\ll\gg$ . This is the same difference between strong and weak bisimilarity, so:

$$P \models \ll\gg a\varphi \iff \exists P' | P \xrightarrow{a} P' \wedge P' \models \varphi$$

## 3.6 Algorithm for bisimilarity

Bisimilarity is a special case of a more general problem, called **Relational Coarest Partition Problem (RCPP)**.

The algorithm partitions the set of states of an LTS into blocks where all the states in the same block are bisimilarity. Given a block  $B$  and two states  $s, t \in B$ , the two states are splitted if and only if:

$$\exists s \xrightarrow{\alpha} s' | \forall t' (t \not\xrightarrow{\alpha} t' \vee t' \notin \text{block}(s'))$$

So, they are splitted if  $s$  has an outgoing edge performing  $\alpha$  and  $t$  can't perform  $\alpha$  or the state  $t'$  reached by performing  $\alpha$  is not bisimilar to  $s'$  (they are not in the same block).

We define a set of blocks reached by a state  $s$  when performing  $\alpha$  (If  $s$  cannot perform  $\alpha$  the set is empty):

$$\text{tgt}_\alpha(s) = \{B | \exists s' \xrightarrow{\alpha} s' \wedge s' \in B\}$$

This change the splitting condition to:

$$\exists \alpha | \text{tgt}_\alpha(s) \neq \text{tgt}_\alpha(t)$$

The algorithm takes as input the LTS and two states for whom we want to check the bisimilarity and works as follows:

---

**Algorithm:** Bisimilarity algorithm

---

```

// LTS=(S,Λ,→)
def bisimilarity_check(LTS,s,t):
    P = {S}
    // LOOP
    for B in P :
        for α in Λ :
            I = split(B,α,P)
            if I ≠ {B} :
                P = P\{B}∪I
                goto LOOP
    for B in P :
        if {s,t}⊆B :
            return True
    return False


def split(B,α,P):
    s∈B // random
    B1 = ∅
    B2 = ∅
    for t in B :
        if tgt_α(s) ≠ tgt_α(t) :
            B1 = B1 ∪ {t}
        else :
            B2 = B2 ∪ {t}
    if B2 = ∅ :
        return {B}
    return {B1,B2}

```

---

**Example:**

Given the LTS:

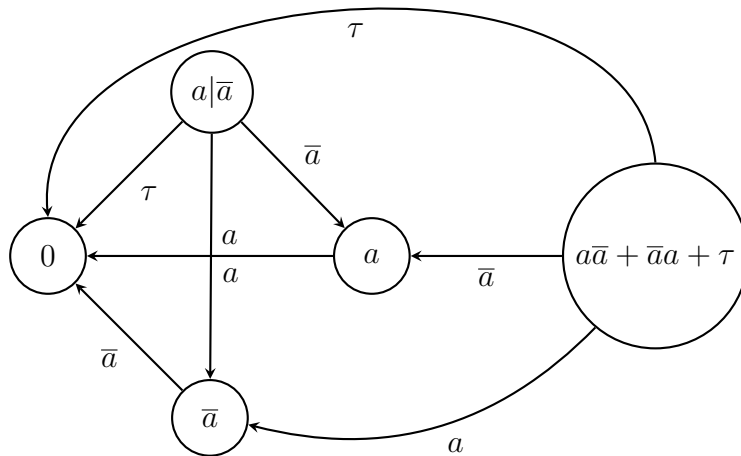



For simplicity we assign a value to each state:

| Value | State                        |
|-------|------------------------------|
| 1     | $a \bar{a}$                  |
| 2     | $a\bar{a} + \bar{a}a + \tau$ |
| 3     | $\bar{a}$                    |
| 4     | $a$                          |
| 4     | $0$                          |

If we run the algorithm to know if the states 1 and 2 are bisimilar it will behave in this way:

1.  $P = \{\{1, 2, 3, 4, 5\}\}$ 
  - Choose  $B = \{1, 2, 3, 4, 5\}$  and  $\alpha = a$ :
    - $tgt_a(1) = tgt_a(2) = tgt_a(4) = \{\{1, 2, 3, 4, 5\}\} = \{B\}$
    - $tgt_a(3) = tgt_a(5) = \emptyset$
2.  $P = \{\{1, 2, 4\}, \{3, 5\}\}$ 
  - Choose  $B = \{1, 2, 4\}$  and  $\alpha = \bar{a}$ :
    - $tgt_{\bar{a}}(1) = tgt_{\bar{a}}(2) = \{\{1, 2, 4\}\} = \{B_1\}$
    - $tgt_{\bar{a}}(4) = \emptyset$
3.  $P = \{\{1, 2\}, \{3, 5\}, \{4\}\}$ 
  - Choose  $B = \{3, 5\}$  and  $\alpha = \bar{a}$ :
    - $tgt_{\bar{a}}(3) = \{\{3, 5\}\} = \{B_2\}$
    - $tgt_{\bar{a}}(5) = \emptyset$
4.  $P = \{\{1, 2\}, \{3\}, \{4\}, \{5\}\}$ 
  - No more split are possible because 1 and 2 behave in the same way for  $a, \bar{a}$  and  $\tau$ .

The state 1 and 2 are in the same block at the end of the algorithm so they are bisimilar.

#### Bisimilarity algorithm correctness

The algorithm to check bisimilarity always terminates and works, so we have that:

$$s \sim t \iff \exists B \in P | \{s, t\} \subseteq B$$

**Proof:**

1.  $s \sim t \implies \exists B \in P | \{s, t\} \subseteq B$ :

At the beginning of the algorithm the two states are in the same block, if they are splitted when the algorithm terminates it means that  $tgt_\alpha(s) \neq tgt_\alpha(t)$  for an  $\alpha$ . This can happen in two ways:

- $\exists s \xrightarrow{\alpha} s' | \forall t' (t \not\xrightarrow{\alpha} t' \vee block(s') \neq block(t'))$
- $\exists t \xrightarrow{\alpha} t' | \forall s' (s \not\xrightarrow{\alpha} s' \vee block(s') \neq block(t'))$

Both of this cases contradict the  $s \sim t$ , so the two states must be in the same block.

2.  $s \sim t \iff \exists B \in P | \{s, t\} \subseteq B$ :

We define a relation  $R$  and prove that is a bisimulation:

$$R = \{(x, y) | \text{block}(x) = \text{block}(y)\}$$

For every  $x \xrightarrow{\alpha} x'$  must exists a  $y \xrightarrow{y'} y'$  such that  $\text{block}(x') = \text{block}(y')$  and so  $(x', y') \in R$ .

### 3.6.1 Complexity of the algorithm

We consider the number of states of the LTS  $|S| = n$  and the number of action performed  $|\rightarrow| = m$ .

The algorithm returns to the LOOP every time there is a split, so at most  $O(n)$  times.

The split function is executed for every  $B \in P$  and for every  $\alpha \in \Lambda$ . The split function has a loop for each state  $t \in B$  and checks if  $\text{tgt}_\alpha(s) = \text{tgt}_\alpha(t)$ . This check can be done by checking each  $\alpha$ -trans from states belonging to  $B$  only once (explanation after).

So the cost of the algorithm is:

$$\begin{aligned} n \cdot \sum_{B \in P} \underbrace{\sum_{\alpha \in \Lambda} \sum_{t \in B}}_{\text{we can swap}} |\{t' | t \xrightarrow{\alpha} t'\}| &= n \cdot \underbrace{\sum_{B \in P} \sum_{t \in B}}_{\forall t \in S} \sum_{\alpha \in \Lambda} |\{t' | t \xrightarrow{\alpha} t'\}| \\ &= n \cdot \sum_{t \in S} \sum_{\alpha \in \Lambda} |\{t' | t \xrightarrow{\alpha} t'\}| = n \cdot |\rightarrow| = O(nm) \end{aligned}$$

To make possible checking  $\text{tgt}_\alpha(s) = \text{tgt}_\alpha(t)$  by only checking each  $\alpha$ -trans only once we need to handle the blocks in a specific way. We associate each block with a binary string that can be ordered lexicographically. The starting block has index 0 and each time there is a split the sub blocks created have index equal to the original block but with a 0 or 1 respectively as last bit. We consider the transition relation as triple  $(s, \alpha, \sigma)$  where  $s \xrightarrow{\alpha} s'$  and  $\sigma$  is the index of the block  $B$  such that  $s' \in B$ . We obtain a matrix in the form:

$$\begin{bmatrix} s_1 & \alpha_{1,1} & \sigma_{1,1} \\ & \vdots & \\ s_1 & \alpha_{1,k_1} & \sigma_{1,k_1} \\ & \vdots & \\ s_n & \alpha_{n,1} & \sigma_{n,1} \\ & \vdots & \\ s_n & \alpha_{n,k_n} & \sigma_{n,k_n} \end{bmatrix}$$

This means that if a block is split the order of the indexes will not change and we will only add a bit at the end based on if the transaction goes in the new block ending in 0 or 1. For example if we have a row like  $(s_1, \alpha_1, 01)$  and the block 01 is split, then we only update the matrix by writing  $(s_1, \alpha_1, 01b)$  where  $b$  is 0 or 1.

With this representation of blocks the split function checks if  $tgt_\alpha(s) = tgt_\alpha(t)$  as follows:

1. Let  $k$  be the number of  $\alpha$ -transition from  $s$

2. If  $k = 0$  then:

- If  $t$  has no  $\alpha$ -trans:

$$B1 = B1 \cup \{t\}$$

- Otherwise:

$$B2 = B2 \cup \{t\}$$

3. If  $k > 0$  let  $\sigma$  be the index of the first  $\alpha$ -trans of  $s$ :

- If  $t$  has index  $\sigma$  for its first  $\alpha$ -trans:

$$B1 = B1 \cup \{t\}$$

- Otherwise:

$$B2 = B2 \cup \{t\}$$

4. For every other  $k$ -th  $\alpha$ -trans of  $s$  and their index  $\sigma$ :

- If  $t$  has index  $\sigma' \neq \sigma$  for its  $k$ -th  $\alpha$ -trans:

$$B1 = B1 \setminus \{t\} \quad B2 = B2 \cup \{t\}$$

5. When the  $\alpha$ -trans of  $s$  are finished:

- If  $t$  has other  $\alpha$ -trans:

$$B1 = B1 \setminus \{t\} \quad B2 = B2 \cup \{t\}$$

# 4

## $\pi$ -calculus

### 4.1 vpCCS and $\pi$ -calculus

Other than what is modeled with CCS we want also to model the message exchange between processes. A message can be used in two sense:

- vpCSS (value passing): we use the message for its value, alpha-numeric data used in logical or arithmetic operations.
- $\pi$ -calculus: the message given a functionality to the reciever. A new functionality is the possibility to be involved in a communication that was not possible before. Channels are both the communication medium and the communication object and are called **names**.

#### Example:

We want to model a scenario of a client buying a pizza. We can model this scenario in 3 different way based on the model that we want to use:

- CCS:

$$\begin{cases} A \triangleq \overline{askPizza}.\overline{pay}.pizza.eat \\ B \triangleq askPizza.pay.\overline{pizza} \end{cases}$$

- vpCSS:

$$\begin{cases} A \triangleq \overline{askPizza}\langle margherita \rangle.\overline{pay}\langle 4 \text{ euro} \rangle.pizza.eat \\ B \triangleq askPizza(x).pay(y).if\ y = price(x)\ \text{then}\ \overline{pizza} \text{ else} \\ \quad if\ y < price(x)\ \text{then}\ \overline{askMoney} \text{ else}\ \overline{pizza.output}\langle y - price(x) \rangle \end{cases}$$

- $\pi$ -calculus:

$$\begin{cases} A \triangleq \overline{askPizza}\langle margherita, 4 \text{ euro}, myHome \rangle.myHome(x, n).eat(x) \\ B \triangleq askPizza(x, y, z).if\ y < price(x)\ \text{then}\ \overline{askMoney} \text{ else}\ \overline{z}\langle x, y - price(x) \rangle \end{cases}$$

## 4.2 Syntax

Names can also be created by processes and they can be seen as local channels. They can be communicated to other processes and when they are communicated their scope changes accordingly.

The syntax for the channels is the following:

- Creation: the creation of a name  $a$  is done with the syntax  $(\nu a)$
- Send message: to send a message on a channel  $a$  the syntax is  $a\langle x \rangle$
- Recieve message: to recieve a message on a channel  $a$  the syntax is  $a(x)$

In both send and recieve  $x$  is the name of the variable that is sent/recieved.

### Syntax of process in $\pi$ -calculus

A process in  $\pi$ -calculus is defined with the syntax:

$$P = 0 \mid a(x).P \mid \bar{a}\langle b \rangle.P \mid P_1 \mid P_2 \mid (\nu a)P \mid [a = b]P \mid !P$$

In the syntax  $[a = b]P$  is a compact way to write:

$$\text{if } a = b \text{ then } P$$

Also  $!P$  denotes an arbitrary number of parallel copies of  $P$ .

In a process  $a(x).P$  and  $(\nu a)P$  the names  $a$  and  $x$  are **bound**, with scope only  $P$ . If a name is not bound is called **free**.

We define  $fn(P)$  and  $bn(P)$  the sets of free and bound names of  $P$ , so that the set of all names of  $P$  is defined  $n(P) = bn(P) \cup fn(P)$ .

Bound names can be remaned with arbitrary other that are not used in the same process  $P$ . This is called alpha-conversion, denoted  $=_\alpha$ .

**Example:**

$$(\nu d)a\langle d \rangle.a(y).y(z) =_\alpha (\nu c)a\langle c \rangle.a(x).x(z)$$

Renaming  $d$  to  $c$  and  $y$  to  $z$  doesn't change the behaviour of the process.

## 4.3 Semantics for $\pi$ -calculus

We have two possibility to define an operational semantics for  $\pi$ -calculus:

1. Using LTS: describes all the possible actions a process can perform, both visible and invisible.
2. Using reduction semantics: describes the actual computation of a term. Some information are lost but is much simpler.

### 4.3.1 Reduction

A system can be written in different ways that are equivalent, so we need to define a structural congruence for equivalent systems.

The structural congruence says that:

1.  $P|0 \equiv P$
2.  $P|Q \equiv Q|P$
3.  $P|(Q|R) \equiv (P|Q)|R$
4.  $[a = a]P \equiv P$
5.  $(\nu a)(\nu b)P \equiv (\nu b)(\nu a)P$
6.  $(\nu a)0 \equiv 0$
7.  $!P \equiv P|!P$
8.  $P|(\nu a)Q \equiv (\nu a)(P|Q)$  if  $a \notin fn(P)$

The reduction rules are:

- Communication:

$$a(x).P|\bar{a}\langle b \rangle.Q \mapsto P[b/x]|Q$$

Where  $[b/x]$  means that  $x$  in the computation takes the value of  $b$ .

- Parallel:

$$\frac{P \mapsto P'}{P|Q \mapsto P'|Q}$$

- Restriction:

$$\frac{P \mapsto P'}{(\nu a)P \mapsto (\nu a)P'}$$

- Struct:

$$\frac{P \equiv Q \quad Q \mapsto P' \quad Q' \equiv P'}{P \mapsto P'}$$

**Example:**

Given the system:

$$a(x).P|(\nu b)\bar{a}\langle b \rangle.Q \quad b \notin fn(P)$$

We can reduce the system to:

1.  $a(x).P|(\nu b)\bar{a}\langle b \rangle.Q \equiv (\nu b)(a(x).P|\bar{a}\langle b \rangle.Q)$
2.  $(\nu b)(a(x).P|\bar{a}\langle b \rangle.Q) \mapsto (\nu b)(P[b/x]|Q)$

We can translate a recursive process definition like:

$$Snd(x_1, x_2, x_3) \triangleq \overline{x_1}\langle x_2 \rangle. \overline{x_1}\langle x_3 \rangle. Snd\langle x_1, x_2, x_3 \rangle$$

To a process defined:

$$P = !c_{Snd}(x_1, x_2, x_3). \overline{x_1}\langle x_2 \rangle. \overline{x_1}\langle x_3 \rangle. \overline{c_{Snd}}\langle x_1, x_2, x_3 \rangle$$

If we put  $P$  in parallel to a process that sends on  $c_{Snd}$  the values the first time we have a system that behave like the recursive one defined:

$$P | \overline{b}\langle c \rangle. \overline{b}\langle d \rangle. \overline{c_{Snd}}\langle b, c, d \rangle$$

This behave exactly equal to  $Snd\langle b, c, d \rangle$ .

### 4.3.2 LTS for $\pi$ -calculus

We define the rules for the LTS as:

1.  $\overline{a}\langle b \rangle. P \xrightarrow{\overline{ab}} P$
2.  $a(x). P \xrightarrow{ab} P[b/x]$
3.  $\frac{P \xrightarrow{ab} P' \quad Q \xrightarrow{\overline{ab}} Q'}{P|Q \xrightarrow{\tau} P'|Q'}$
4.  $\frac{P \xrightarrow{\alpha} P'}{[a = a]P \xrightarrow{\alpha} P'}$
5.  $\frac{P | !P \xrightarrow{\alpha} P'}{!P \xrightarrow{\alpha} P'}$

This rules don't handle restriction and also don't handle the parallel when only one process advance.

To handle the restriction we need to consider the different cases based on the names. Consider the basic rules for CCS:

$$\frac{P \xrightarrow{\alpha} P'}{(\nu b)P \xrightarrow{\alpha} (\nu b)P'}$$

Based on how  $\alpha$  is we can say that:

- If  $b \notin \alpha$ : the rule can be used freely and remains the same
- If  $\alpha \in \{bc, \overline{bc}\}$ : we can't use the rule because  $P$  is sending or receiving on a channel created by  $P$  that no other process know
- If  $\alpha = ab$ : we can't use the rule because  $P$  receives a name that is only known by  $P$
- If  $\alpha = \overline{ab}$  and  $a \neq b$ : we can use the rule but the restriction must be removed from  $P'$  and we need to specify that  $b$  is restricted ( we write  $(b)$ )

So, the rules for handling restriction are:

$$\left\{ \begin{array}{l} \frac{P \xrightarrow{\alpha} P'}{(\nu b)P \xrightarrow{\alpha} (\nu b)P'} \quad b \notin \alpha \\ \frac{P \xrightarrow{\bar{a}b} P'}{(\nu b)P \xrightarrow{\bar{a}(b)} P'} \quad a \neq b \\ \frac{P \xrightarrow{ab} P' \quad Q \xrightarrow{\bar{a}(b)} Q'}{P|Q \xrightarrow{\tau} (\nu b)(P'|Q')} \quad b \notin fn(P) \end{array} \right.$$

To handle parallel when only a process  $P$  advance, we need to apply condition on names:

$$\frac{P \xrightarrow{\alpha} P'}{P|Q \xrightarrow{\alpha} P'|Q} \quad bn(\alpha) \cap fn(Q) = \emptyset$$

### 4.3.3 Equivalence of the two methods

Reduction express computation, that is the result of communication, expressed as  $\tau$  in an LTS. We can prove that:

$$P \xrightarrow{\tau} P' \implies P \longmapsto P'$$

Also the converse holds, considering the structural congruence:

$$P \longmapsto P' \implies P \xrightarrow{\tau} P_i \equiv P'$$

## 4.4 Bisimulation in $\pi$ -calculus

### Strong bisimulation in $\pi$ -calculus

A symmetric relation  $\mathcal{R}$  is a strong bisimulation if, for every  $(P, Q) \in \mathcal{R}$  and  $P \xrightarrow{\alpha} P'$  with  $bn(\alpha) \cap fn(P, Q) = \emptyset$ , there exists  $Q \xrightarrow{\alpha} Q'$  and  $(P', Q') \in \mathcal{R}$ .

The added constraint  $bn(\alpha) \cap fn(P, Q) = \emptyset$  is needed to not differentiate process that behave equally except for bound outputs.

### Context in $\pi$ -calculus

A context in  $\pi$ -calculus is defined as:

$$C[] = [] \mid a(x).C[] \mid \bar{a}\langle b \rangle.C[] \mid C[]|P \mid (\nu a)C[] \mid [a = b]C[] \mid !C[]$$

The congruence does not hold with respect to inputs names, for example if we have:

$$[x = a]\bar{x}\langle b \rangle \sim 0 \quad x \neq a$$

But if we add  $c(x)$  before each:

$$c(x).[x = a]\bar{x}\langle b \rangle \not\sim c(x).0$$

They are not bisimilar in the case of  $x = a$ .



We can then define a renaming function  $\sigma$  and a relation  $\sim^c$  such that:

$$P \sim^c Q \iff \forall \sigma P\sigma \sim Q\sigma$$

The relation  $\sim^c$  is a congruence.

### Weak bisimulation in $\pi$ -calculus

A symmetric relation  $\mathcal{R}$  is a weak bisimulation if, for every  $(P, Q) \in \mathcal{R}$  and  $P \xrightarrow{\alpha} P'$  with  $bn(\alpha) \cap fn(P, Q) = \emptyset$ , there exists  $Q \xRightarrow{\hat{\alpha}} Q'$  and  $(P', Q') \in \mathcal{R}$ .

## 4.5 Different types of $\pi$ -calculus

### 4.5.1 Polyadic $\pi$ -calculus

We consider a  $\pi$ -calculus where we can send more than one name in a communication. This changes a communication to:

$$a(\tilde{x}).P \mid \bar{a}(\tilde{b}).P$$

Where  $\tilde{x}/\tilde{b}$  denote a sequence of names (possibly empty).

This raises a new error when the sending and receiving have different number of names, a type error (denoted with  $\uparrow$ ). Formally a system that catches these errors has the following rules:

- $(a(\tilde{x}).P \mid \bar{a}(\tilde{b}).Q) \uparrow \quad |\tilde{x}| \neq |\tilde{b}|$
- $\frac{P \uparrow}{(P \mid Q) \uparrow}$
- $\frac{P \uparrow}{(\nu a)P \uparrow}$
- $\frac{P \uparrow \quad P \equiv Q}{Q \uparrow}$

We associate every channel  $a$  with a type  $\Gamma(a)$  that describes the number of names that can be passed through the channel  $a$ .

The typing rules for the messages are:

$$\frac{\Gamma(a) = |\tilde{b}| \quad \Gamma \vdash P}{\Gamma \vdash \bar{a}(\tilde{b}).P} \quad \frac{\Gamma(a) = |\tilde{x}| \quad \Gamma \vdash P}{\Gamma \vdash a(\tilde{x}).P}$$

This typing system has a problem if there is a type error on a channel that is defined as a variable. For example in the case:

$$a(x).x(z) \mid \bar{a}(c).\bar{c}(b, b)$$

If we define  $\Gamma(a) = 1, \Gamma(x) = 1$  and  $\Gamma(c) = 2$  the typing system cannot find the type error on the channel  $c$ .

To solve this we need to model the types as recursively defined sets of other types and ensure that when a communication happens also the subtypes are correct. This changes the typing system:

- $\Gamma \vdash 0$
- $\frac{\Gamma \vdash P \quad \Gamma \vdash Q}{\Gamma \vdash (P|Q)}$
- $\frac{\Gamma \vdash P}{\Gamma \vdash !P}$
- $\frac{\Gamma \vdash P}{\Gamma \vdash [q = b]P}$
- $\frac{\exists T \in \Gamma | T \vdash P}{\Gamma \vdash (\nu a)P} \quad a \notin \text{dom}(\Gamma)$
- All values of a send must be correctly typed:

$$\frac{\Gamma(a) = [T_1, \dots, T_k] \quad \forall i \Gamma(b_i) = T_i \quad \Gamma \vdash P}{\Gamma \vdash \bar{a}\langle b_1, \dots, b_k \rangle.P}$$

- All values of a receive must be correctly typed:

$$\frac{\Gamma(a) = [T_1, \dots, T_k] \quad \forall i \Gamma(x_i) = T_i \vdash P}{\Gamma \vdash a(x_1, \dots, x_k).P} \quad \{x_1, \dots, x_n\} \cap \text{dom}(\Gamma) = \emptyset$$

### Soundness of the type system

The rules create a system in which we have that:

$$\Gamma \vdash P \wedge P \mapsto P' \implies \Gamma \vdash P'$$

Also we have that:

$$\exists \Gamma \vdash P \implies P \nrightarrow$$

Where  $\nrightarrow$  means that it doesn't generate a type error.

If a process  $P$  is typable then  $P' \nrightarrow$  for every  $P \implies P'$ .

To transform a polyadic process definition to a monadic (base  $\pi$ -calculus) definition we can create a new channel and send it first and then use it to communicate the other names one by one.

### Example:

Given two processes:

$$\bar{a}\langle b_1, \dots, b_n \rangle.P | a(x_1, \dots, x_n).P$$

We can encode them in monadic  $\pi$ -calculus:

$$\begin{cases} (\nu d)\bar{a}\langle d \rangle.\bar{d}\langle b_1 \rangle \dots \bar{d}\langle b_n \rangle.P & d \notin \text{fn}(a, b_1, \dots, b_n, P) \\ a(z).z(x_1) \dots z(x_n).P & d \notin \text{fn}(a, x_1, \dots, x_n, P) \end{cases}$$

### 4.5.2 Asynchronous $\pi$ -calculus

To model an asynchronous  $\pi$ -calculus we need to change the way in which communication works. The process that receives the message must block because it needs the value, but the process that sends a message can continue its computation.

We can model asynchrony in two ways:

1. Replacing the communication rule of reduction with two rules:

$$\bar{a}\langle b \rangle.P \mapsto \bar{a}\langle b \rangle | P \quad a(x).P | \bar{a}\langle b \rangle \mapsto P[b/x]$$

2. Modify the syntax of processes in a way:

$$P = 0 \mid \overbrace{a(x).P | \bar{a}\langle b \rangle}^{\text{asynchronous}} \mid P_1 | P_2 \mid (\nu n)P \mid !P \mid [a = b]P$$

This makes possible to use only one axiom for communication:

$$a(x).P | \bar{a}\langle b \rangle \mapsto P[b/x]$$

We can encode the asynchronous  $\pi$ -calculus into the synchronous one by using a 3-way handshake for communication:

$$\begin{cases} \bar{a}\langle b \rangle.P = (\nu c)(\bar{a}\langle c \rangle | c(y).(\bar{y}\langle b \rangle | P)) & c, y \notin fn(P) \\ a(x).P = a(z).(\nu d)(\bar{z}\langle d \rangle | d(x).P) & d, z \notin fn(P) \end{cases}$$

### 4.5.3 Higher Order $\pi$ -calculus

Higher Order  $\pi$ -calculus permits to send not only names through a communication but also processes. The syntax is defined as:

$$\begin{cases} P = 0 \mid a(\theta).P \mid \bar{a}\langle \eta \rangle.P \mid P_1 | P_2 \mid (\nu n)P \mid !P \mid [a = b]P \mid X \\ \eta = b \mid P \\ \theta = x \mid X \end{cases}$$

Where  $X$  is a generic process.

Also in this case we need a type system to check the errors when a channel wants a name but receives a process and vice versa.

We can encode the higher order  $\pi$ -calculus into the basic one by doing:

$$\begin{cases} a(X).P = a(x).P & x \notin \varphi(X) \\ \bar{a}\langle P \rangle.Q = (\nu n)\bar{a}\langle n \rangle.(Q | !n().P) & n \notin fn(P, Q) \cup im(\varphi) \\ X = \bar{x}\langle \rangle & x = \varphi(X) \end{cases}$$

Where  $\varphi$  is a partial function  $\varphi : V \rightarrow N$  such that  $im(\varphi) \cap n(P) = \emptyset$  and  $n()$  and  $x\langle \rangle$  denote a message with useless argument.

This means that to send a process  $P$  a channel is sent (that works as a pointer) and a process is spawned that every time receives a message on that channel  $!n()$  creates a copy of the process  $P$ .

#### 4.5.4 Encoding a Object-Oriented Language

Several features of the OO paradigm can be modeled in  $\pi$ -calculus:

1. Object can be modeled as parallel processes.
2. Object creation and destruction can be modeled with  $(\nu n)!n().P \sim 0$ .
3. We can use replication  $!P$  to spawn instances of an object.
4. Restriction can be used to simulate private fields.
5. Input and outputs can model method declaration and activation.
6. Process can send a message to another only if it knows a channel in which the other is waiting. This models the fact that an object can send a message to another only if it has a reference.
7. Communication arguments model the information passed to methods when invoked.

We can define an abstract OO language:

- Types:

$$T = \text{void} | \text{int} | \text{ref}(A)$$

- Expressions:

$$E = X | \text{op}(E_1, \dots, E_n) | \text{new}(A) | E.m(E_1, \dots, E_n) | \text{input} | \text{null}$$

- Commands:

$$c = E | X = E | c_1; c_2 | \text{return } E | \text{output } E | \underbrace{\dots}_{\text{if, while, ...}}$$

- Field declaration:

$$V = \text{vars } X_1 : T_1, \dots, X_n : T_n$$

- Method declaration:

$$M = \text{method } m(X_1 : T_1, \dots, X_n : T_n) : T \{c\}$$

- Class declaration:

$$C = \text{class } A \{V; M_1; \dots; M_n\}$$

- Program:

$$P = C_1 \dots C_n E$$

# 5

## Temporal Logic

### 5.1 Kripke structure

Given an LTS we can use **Linear-time Temporal Logic (LTL)** to formalize some properties of the system. This logic tells what should happen in the system but not when.

Let  $AP$  be a set of atomic predicates, a **Kripke structure** over  $AP$  is a tuple  $(S, \rightarrow, \models)$ , where:

1.  $S$  is the set of states
2.  $\rightarrow \subseteq S \times S$  is the transition relation
3.  $\models \subseteq S \times AP$  tells what predicates holds in which states.

In a Kripke structure we define a path as a sequence of states that follow the transition relation. The length of a path  $\pi$  is the number of transition (so, the number of states minus 1). Given a prefix  $\rho$  of  $\pi$  we write  $\pi \upharpoonright \rho$  to define the path of  $\pi$  that remains after removing  $\rho$ , but not the last state of  $\rho$ .

We define a subset of paths, called **complete paths** that model the actual runs possible of the represented system.

#### Progress

The default completeness criterion is progress. Progress classifies a path as complete if is infinite or ends in a deadlock state (state with no transition outside).

#### LTL

A formula in LTL has syntax:

$$\varphi, \psi = p \mid \neg\varphi \mid \varphi \wedge \psi \mid X\varphi \mid F\varphi \mid G\varphi \mid \psi U \varphi$$

This syntax is inductively defined by:

- $\pi \models p$ : means that  $s \models p$  where  $s$  is the first state of  $\pi$
- $\pi \models \neg\varphi$ : means obviously that  $\pi \not\models \varphi$
- $\pi \models \varphi \wedge \psi$ : means that  $\pi \models \varphi$  and  $\pi \models \psi$
- $\pi \models X\varphi$ : means that  $|\pi| > 0$  and  $\pi_{+1} \models \varphi$ , so  $\varphi$  holds in the state after  $\pi$
- $\pi \models F\varphi$ : means that exists a prefix  $\rho$  of  $\pi$  such that  $\pi \upharpoonright \rho \models \varphi$ , so eventually  $\varphi$  will hold

- $\pi \models G\varphi$ : means that in every prefix  $\rho$  of  $\pi$  we have that  $\pi \upharpoonright \rho \models \varphi$ , so  $\varphi$  holds in every state
- $\pi \models \psi U \varphi$ : means that exists a prefix  $\pi$  such that  $\pi \upharpoonright \rho \models \varphi$ , but also that for every prefix  $\zeta$  of  $\rho$  we have that  $\pi \upharpoonright \zeta \models \psi$ . So, eventually  $\varphi$  will hold but before  $\psi$  holds at least until  $\varphi$  start holding ( $\psi$  can continue to hold also after)

We can also add two operators to shorten some common formulas:

- $\pi \models Y\varphi$ : means that  $|\pi| = 0$  or  $\pi_{+1} \models \varphi$ . Is equivalent to write  $\pi \models \neg X \neg \varphi$ . Taking infinite paths  $X$  and  $Y$  coincide.
- $\pi \models \psi W \varphi$ : is equivalent to write  $(\psi U \varphi) \vee G\psi$

Let  $CC$  be a completeness criteria. For a state  $s$  in a Kripke structure, we write that  $P \models^{CC} \varphi$  if  $\pi \models \varphi$  for all complete paths  $\pi$  starting from  $s$ .

We can transform an LTS into a Kripke structure creating a new state in the middle of every transition and moving the label from the transition to the new state. This means that we have:


$$P \models \varphi \iff P \mapsto s \wedge s \models \varphi$$

### Example:

Given a process definition:

$$VM = c.p.VM$$

The corresponding LTS and Kripke structure are:

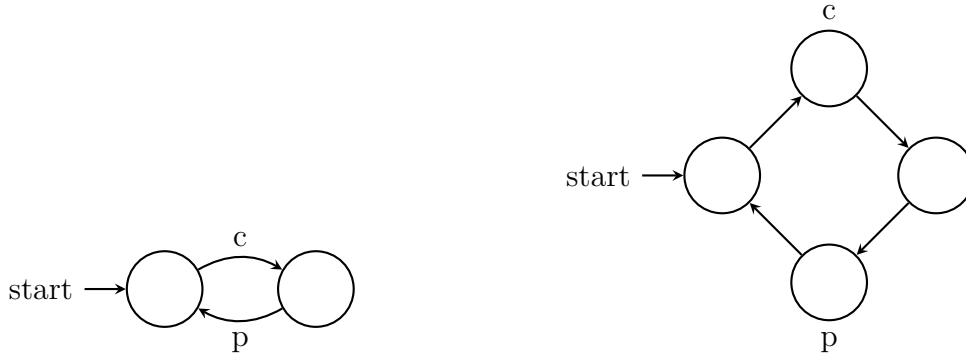

In LTL we have  $VM \models G(c \implies Fp)$ , so every time  $c$  holds eventually  $p$  will hold. We have also that  $VM \models G(p \implies Fc)$ , so every time  $p$  holds eventually  $c$  will hold.

## 5.2 Reactive Temporal Logic

We define a temporal judgement:

$$P \models_B^{CC} \varphi$$

where:

- $P$  is a process
- $\varphi$  is a temporal formula


- $B$  is a set of actions that may be blocked by the environment, in practise it means that the paths must start from a state that has outgoing transition with labels from  $B$  only
- $CC$  is a completeness criterion

**Example:**

Given a process definition:

$$VM = c.p.VM$$

The corresponding LTS and Kripke structure are:

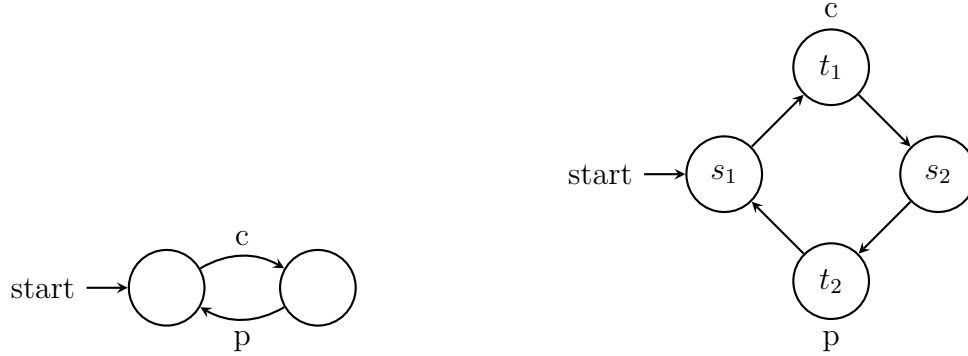

In this case with  $B = \{c\}$  we have that:

- $s_1 t_1 s_2 t_2 s_1 \dots \models G(p \implies Fc)$  and is a complete path
- $s_1 t_1 s_2 t_2 s_1 \not\models G(p \implies Fc)$  and is a complete path
- $s_1 t_1 s_2 t_2 s_1 \not\models G(c \implies Fp)$  and is a complete path
- $s_1 t_1 s_2 t_2 s_1 t_1$  is not a complete path

Given a set  $B$  a path is complete if is infinite or its last state has outgoing transitions with labels from  $B$  only.


## 5.3 Completeness criteria

### Weak fairness

A path  $\pi$  is weakly fair if for any suffix  $\pi'$  of  $\pi$ , every action that is always enabled in  $\pi'$  will occur in  $\pi'$ .

**Example:**

Given the Kripke structure:

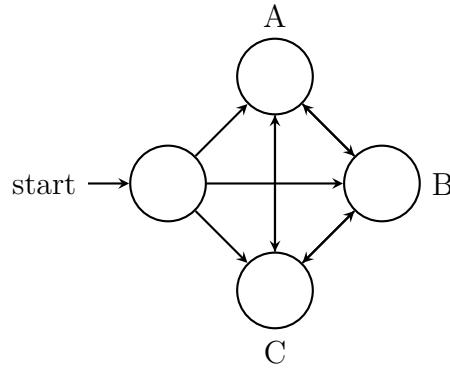

With the progress as completeness criteria we will have:

$$P \not\models FB$$

Considering weak fairness we have that:


$$P \models^{WF} FB$$

### Justness

A path  $\pi$  is just if each transition that is at some point enabled will eventually occur, unless one of its necessary resources is used for another transition.

### Example:

Given the Kripke structure:



With progress as completeness criteria we will have:

$$P \not\models FB$$

Considering justness we have that:

$$P \models^J FB$$