

ALEXIS YAHIR ALVAREZ LEON

Se esta utilizando el comando `systemctl | grep running` y es para ver cuales están corriendo

```
Ubuntu
root@DESKTOP-I6U7L83: /usr

● zfs-mount.service                                not-found inactive dead    zfs-mount.service

Legend: LOAD   + Reflects whether the unit definition was properly loaded.
              ACTIVE + The high-level unit activation state, i.e. generalization of SUB.
              SUB   + The low-level unit activation state, values depend on unit type.

119 loaded units listed.
To show all installed unit files use 'systemctl list-unit-files'.
root@DESKTOP-I6U7L83: /usr/bin# man systemctl
root@DESKTOP-I6U7L83: /usr/bin# systemctl | grep running
init.scope                                loaded active running System and Service Manager
session-1.scope                           loaded active running Session 1 of User axel2
rescue.service                            loaded active running Rescue Shell
systemd-journald.service                  loaded active running Journal Service
systemd-resolved.service                  loaded active running Network Name Resolution
systemd-timesyncd.service                  loaded active running Network Time Synchronization
systemd-udevd.service                     loaded active running Rule-based Manager for Device Events and Files
user@1000.service                         loaded active running User Manager for UID 1000
systemd-journald-dev-log.socket            loaded active running Journal Socket (/dev/log)
systemd-journald.socket                    loaded active running Journal Socket
systemd-udevd-control.socket               loaded active running udev Control Socket
systemd-udevd-kernel.socket                loaded active running udev Kernel Socket
root@DESKTOP-I6U7L83: /usr/bin#
```

Comando `systemctl` en mi usuario `axel2` lo mismo están corriendo los archivos

```
Ubuntu
root@DESKTOP-I6U7L83: /usr

Available target unit substates:
dead
active

Available timer unit substates:
dead
waiting
running
elapsed
failed

axel2@DESKTOP-I6U7L83: $ systemctl | grep running
Failed to connect to bus: Connection refused
axel2@DESKTOP-I6U7L83: $ sudo systemctl | grep running
[sudo] password for axel2:
init.scope                                loaded active running System and Service Manager
session-1.scope                           loaded active running Session 1 of User axel2
rescue.service                            loaded active running Rescue Shell
systemd-journald.service                  loaded active running Journal Service
systemd-resolved.service                  loaded active running Network Name Resolution
systemd-timesyncd.service                  loaded active running Network Time Synchronization
systemd-udevd.service                     loaded active running Rule-based Manager for Device Events and Files
user@1000.service                         loaded active running User Manager for UID 1000
systemd-journald-dev-log.socket            loaded active running Journal Socket (/dev/log)
systemd-journald.socket                    loaded active running Journal Socket
systemd-udevd-control.socket               loaded active running udev Control Socket
systemd-udevd-kernel.socket                loaded active running udev Kernel Socket
axel2@DESKTOP-I6U7L83: $
```

Aquí se utiliza el comando `systemctl | grep exited` en root los que existen pero igualmente están en rojo

```
systemd-udevd-control.socket    loaded active running Journal Socket
systemd-udevd-kernel.socket    loaded active running udev Control Socket
root@DESKTOP-I6U7L83:/usr/bin# systemctl | grep exited
keyboard-setup.service        loaded active exited Set the console Keyboard layout
kmod-static-nodes.service     loaded active exited Create List of Static Device Nodes
setvtrgb.service             loaded active exited Set console scheme
systemd-binfmt.service        loaded active exited Set Up Additional Binary Formats
systemd-journal-flush.service loaded active exited Flush Journal to Persistent Storage
systemd-modules-load.service   loaded active exited Load Kernel Modules
systemd-remount-fs.service     loaded active exited Remount Root and Kernel File Systems
systemd-sysctl.service        loaded active exited Apply Kernel Variables
systemd-tmpfiles-setup-dev-early.service loaded active exited Create Static Device Nodes in /dev gracefully
systemd-tmpfiles-setup-dev.service loaded active exited Create Static Device Nodes in /dev
systemd-tmpfiles-setup.service loaded active exited Create Volatile Files and Directories
systemd-udev-trigger.service   loaded active exited Coldplug All udev Devices
systemd-update-utmp.service    loaded active exited Record System Boot/Shutdown in UTMP
user-runtime-dir@1000.service loaded active exited User Runtime Directory /run/user/1000
root@DESKTOP-I6U7L83:/usr/bin#
```

Aquí se utiliza el comando `per` en mi usuario y los mismos los existentes de rojo

```
systemd-journald-dev-log.socket loaded active running Journal Socket (/dev/log)
systemd-journald.socket        loaded active running Journal Socket
systemd-udevd-control.socket    loaded active running udev Control Socket
systemd-udevd-kernel.socket    loaded active running udev Kernel Socket
axe12@DESKTOP-I6U7L83:~$ systemctl | grep exited
Failed to connect to bus: Connection refused
axe12@DESKTOP-I6U7L83:~$ sudo systemctl | grep exited
keyboard-setup.service        loaded active exited Set the console keyboard layout
kmod-static-nodes.service     loaded active exited Create List of Static Device Nodes
setvtrgb.service             loaded active exited Set console scheme
systemd-binfmt.service        loaded active exited Set Up Additional Binary Formats
systemd-journal-flush.service loaded active exited Flush Journal to Persistent Storage
systemd-modules-load.service   loaded active exited Load Kernel Modules
systemd-remount-fs.service     loaded active exited Remount Root and Kernel File Systems
systemd-sysctl.service        loaded active exited Apply Kernel Variables
systemd-tmpfiles-setup-dev-early.service loaded active exited Create Static Device Nodes in /dev gracefully
systemd-tmpfiles-setup-dev.service loaded active exited Create Static Device Nodes in /dev
systemd-tmpfiles-setup.service loaded active exited Create Volatile Files and Directories
systemd-udev-trigger.service   loaded active exited Coldplug All udev Devices
systemd-update-utmp.service    loaded active exited Record System Boot/Shutdown in UTMP
user-runtime-dir@1000.service loaded active exited User Runtime Directory /run/user/1000
axe12@DESKTOP-I6U7L83:~$
```

Con el comando `systemctl list-units --type=service --all` para poder cuales están en dead en el usuario root

```
root@DESKTOP-IGU7L83:/usr/bin# systemctl | grep dead
root@DESKTOP-IGU7L83:/usr/bin# systemctl list-units --type=service --all
```

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
apparmor.service	loaded	inactive	dead	Load AppArmor profiles
apport-autoreport.service	loaded	inactive	dead	Process error reports when automatic reporting is enabled
apport.service	loaded	inactive	dead	automatic crash report generation
apt-daily-upgrade.service	loaded	inactive	dead	Daily apt upgrade and clean activities
apt-daily.service	loaded	inactive	dead	Daily apt download activities
auditd.service	not-found	inactive	dead	auditd.service
connman.service	not-found	inactive	dead	connman.service
apt-daily-upgrade.service	loaded	inactive	dead	Daily apt upgrade and clean activities
apt-daily.service	loaded	inactive	dead	Daily apt download activities
auditd.service	not-found	inactive	dead	auditd.service
connman.service	not-found	inactive	dead	connman.service
console-getty.service	masked	inactive	dead	console-getty.service
console-screen.service	not-found	inactive	dead	console-screen.service
console-setup.service	loaded	inactive	dead	Set console font and keymap
cron.service	loaded	inactive	dead	Regular background program processing daemon
dbus.service	loaded	inactive	dead	D-Bus System Message Bus
display-manager.service	not-found	inactive	dead	display-manager.service
dmesg.service	loaded	inactive	dead	Save initial kernel messages after boot
dpkg-db-backup.service	loaded	inactive	dead	Daily dpkg database backup service
e2scrub_all.service	loaded	inactive	dead	Online ext4 Metadata Check for All Filesystems
e2scrub_reap.service	loaded	inactive	dead	Remove Stale Online ext4 Metadata Check Snapshots
emergency.service	loaded	inactive	dead	Emergency Shell
fstrim.service	loaded	inactive	dead	Discard unused blocks on filesystems from /etc/fstab
getty-static.service	loaded	inactive	dead	getty on tty2-tty6 if dbus and logind are not available
getty@tty1.service	loaded	inactive	dead	Getty on tty1
initrd-cleanup.service	loaded	inactive	dead	Cleaning Up and Shutting Down Daemons
initrd-parse-etc.service	loaded	inactive	dead	Mountpoints Configured in the Real Root
initrd-switch-root.service	loaded	inactive	dead	Switch Root
initrd-udevadm-cleanup-db.service	loaded	inactive	dead	Cleanup udev Database
kbd.service	not-found	inactive	dead	kbd.service
keyboard-setup.service	loaded	active	exited	Set the console keyboard layout
kmodes-static-nodes.service	loaded	active	exited	Create List of Static Device Nodes

Con el comando el mismo ahora em mi usuario axel2 para ver los dead

```
axel2@DESKTOP-IGU7L83:~$ sudo systemctl | grep dead
axel2@DESKTOP-IGU7L83:~$ sudo systemctl list-units --type=service --all
```

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
apparmor.service	loaded	inactive	dead	Load AppArmor profiles
apport-autoreport.service	loaded	inactive	dead	Process error reports when automatic reporting is enabled
apport.service	loaded	inactive	dead	automatic crash report generation
apt-daily-upgrade.service	loaded	inactive	dead	Daily apt upgrade and clean activities
apt-daily.service	loaded	inactive	dead	Daily apt download activities
auditd.service	not-found	inactive	dead	auditd.service
connman.service	not-found	inactive	dead	connman.service
console-getty.service	masked	inactive	dead	console-getty.service
console-screen.service	not-found	inactive	dead	console-screen.service
console-setup.service	loaded	inactive	dead	Set console font and keymap
cron.service	loaded	inactive	dead	Regular background program processing daemon
dbus.service	loaded	inactive	dead	D-Bus System Message Bus
display-manager.service	not-found	inactive	dead	display-manager.service
dmesg.service	loaded	inactive	dead	Save initial kernel messages after boot
dpkg-db-backup.service	loaded	inactive	dead	Daily dpkg database backup service
e2scrub_all.service	loaded	inactive	dead	Online ext4 Metadata Check for All Filesystems
e2scrub_reap.service	loaded	inactive	dead	Remove Stale Online ext4 Metadata Check Snapshots
emergency.service	loaded	inactive	dead	Emergency Shell
fstrim.service	loaded	inactive	dead	Discard unused blocks on filesystems from /etc/fstab
getty-static.service	loaded	inactive	dead	getty on tty2-tty6 if dbus and logind are not available
getty@tty1.service	loaded	inactive	dead	Getty on tty1
initrd-cleanup.service	loaded	inactive	dead	Cleaning Up and Shutting Down Daemons
initrd-parse-etc.service	loaded	inactive	dead	Mountpoints Configured in the Real Root
initrd-switch-root.service	loaded	inactive	dead	Switch Root
initrd-udevadm-cleanup-db.service	loaded	inactive	dead	Cleanup udev Database
kbd.service	not-found	inactive	dead	kbd.service
keyboard-setup.service	loaded	active	exited	Set the console keyboard layout
kmodes-static-nodes.service	loaded	active	exited	Create List of Static Device Nodes
landscape-client.service	loaded	inactive	dead	Landscape client daemons
ldconfig.service	loaded	inactive	dead	Rebuild Dynamic Linker Cache
logrotate.service	loaded	inactive	dead	Rotate log files
man-db.service	loaded	inactive	dead	Daily man-db regeneration
modprobe@configfs.service	loaded	inactive	dead	Load Kernel Module configfs
modprobe@dm_mod.service	loaded	inactive	dead	Load Kernel Module dm_mod
modprobe@drm.service	loaded	inactive	dead	Load Kernel Module drm
modprobe@efi_pstore.service	loaded	inactive	dead	Load Kernel Module efi_pstore
modprobe@fuse.service	loaded	inactive	dead	Load Kernel Module fuse

Con este comando de sudo se ven los estados de cuales están activos

```
systemd-hwdb-update.service static -
axel2@DESKTOP-I6U7L83: $ sudo systemctl list-unit-files --type service --all
UNIT FILE STATE PRESET
apparmor.service enabled enabled
apport-autoreport.service static -
apport-coredump-hook@.service static -
apport-forward@.service static -
apport.service enabled enabled
apt-daily-upgrade.service static -
apt-daily.service static -
apt-news.service static -
autovt@.service alias -
cloud-config.service enabled enabled
cloud-final.service enabled enabled
cloud-init-hotplugd.service static -
cloud-init-local.service enabled enabled
cloud-init.service enabled enabled
console-getty.service masked-runtime disabled
console-setup.service enabled enabled
container-getty@.service static -
cron.service enabled enabled
cryptdisks-early.service masked enabled
cryptdisks.service masked enabled
dbus-org.freedesktop.hostname1.service alias -
dbus-org.freedesktop.locale1.service alias -
dbus-org.freedesktop.login1.service alias -
dbus-org.freedesktop.resolve1.service alias -
dbus-org.freedesktop.timedate1.service alias -
dbus-org.freedesktop.timesync1.service alias -
dbus.service static -
debug-shell.service disabled disabled
dmesg.service enabled enabled
dpkg-db-backup.service static -
e2scrub@.service static -
e2scrub_all.service static -
e2scrub_fat@.service static -
e2scrub_reap.service enabled enabled
emergency.service static -
esm-cache.service static -
fstirm.service static -
```

Se ve que el ssh esta activado

```
ssh.service enabled enabled
sshd.service alias -
sudo.service masked enabled
syslog.service alias -
system-update-cleanup.service static -
systemd-ask-password-console.service static -
systemd-ask-password-wall.service static -
systemd-backlight@.service static -
systemd-battery-check.service static -
systemd-binfmt.service static -
systemd-boot-check-no-failures.service disabled disabled
systemd-bsood.service static -
systemd-confext.service disabled enabled
systemd-exit.service static -
systemd-firstboot.service static -
systemd-fsck-root.service static -
systemd-fsck@.service static -
systemd-fsckd.service static -
systemd-growfs-root.service static -
systemd-growfs@.service static -
systemd-halt.service static -
systemd-hibernate-resume.service static -
systemd-hibernate.service static -
systemd-hostnamed.service static -
systemd-hwdb-update.service static -
systemd-hybrid-sleep.service static -
systemd-initctl.service static -
systemd-journal-catalog-update.service static -
systemd-journal-flush.service static -
systemd-journald.service static -
systemd-journald@.service static -
systemd-kexec.service static -
systemd-locale@.service static -
systemd-logind.service static -
systemd-machine-id-commit.service static -
systemd-modules-load.service static -
systemd-network-generator.service disabled enabled
systemd-networkd-wait-online.service masked-runtime enabled
systemd-networkd-wait-online@.service disabled enabled
lines 80-116
```

Igual se muestra en el usuario root que el ssh ya esta activado

```
modprobe@.service      static      -
motd-news.service      static      -
mysql.service          enabled     enabled
netplan-ovs-cleanup.service enabled-runtime enabled
networkd-dispatcher.service enabled     enabled
NetworkManager-wait-online.service masked-runtime enabled
packagekit-offline-update.service static      -
packagekit.service    static      -
pam_namespace.service static      -
polkit.service         static      -
procps.service         alias       -
quotaon.service        static      -
rc-local.service       static      -
rescue.service         static      -
rsync.service          disabled    enabled
rsyslog.service        enabled     enabled
serial-getty@.service  disabled    enabled
setvtrgb.service       enabled     enabled
snapd.apparmor.service enabled     enabled
snapd.autoimport.service enabled     enabled
snapd.core-fixup.service enabled     enabled
snapd.failure.service  static      -
snapd.recovery-chooser-trigger.service enabled     enabled
snapd.seeded.service   enabled     enabled
snapd.service          enabled     enabled
snapd.snap-repair.service static      -
snapd.system-shutdown.service enabled     enabled
ssh.service            enabled     enabled
sshd.service           alias       -
sudo.service           masked      enabled
syslog.service         alias       -
systemd-update-cleanup.service static      -
systemd-ask-password-console.service static      -
systemd-ask-password-wall.service static      -
lines 53-86
```

systemctl status ssh aquí se muestra que esta activo el ssh

```
snapd.apparmor.service      enabled     enabled
snapd.autoimport.service    enabled     enabled
snapd.core-fixup.service    enabled     enabled
snapd.failure.service       static      -
snapd.recovery-chooser-trigger.service enabled     enabled
snapd.seeded.service        enabled     enabled
snapd.service               enabled     enabled
snapd.snap-repair.service   static      -
snapd.system-shutdown.service enabled     enabled
ssh.service                 enabled     enabled
sshd.service                alias       -
sudo.service                masked      enabled
syslog.service              alias       -
systemd-update-cleanup.service static      -
systemd-ask-password-console.service static      -
systemd-ask-password-wall.service static      -
root@DESKTOP-I6U7L83:/usr/bin# systemctl status ssh
● ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; preset: enabled)
   Active: active (running) since Fri 2026-09-04 16:31:36 CST; 7min ago
   TriggeredBy: ● ssh.socket
     Docs: man:sshd(8)
           man:sshd_config(5)
    Main PID: 4795 (sshd)
      Tasks: 1 (limit: 3441)
     Memory: 3.7M (peak: 3.7M)
        CPU: 140ms
     CGroup: /system.slice/ssh.service
            └─4795 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

Sep 04 16:31:36 DESKTOP-I6U7L83 systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
Sep 04 16:31:36 DESKTOP-I6U7L83 sshd[4795]: Server listening on 0.0.0.0 port 22.
Sep 04 16:31:36 DESKTOP-I6U7L83 sshd[4795]: Server listening on :: port 22.
Sep 04 16:31:36 DESKTOP-I6U7L83 systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
root@DESKTOP-I6U7L83:/usr/bin#
```

systemctl stop ssh es para detener el ssh

```
TriggeredBy: ● ssh.socket
Docs: man:sshd(8)
      man:sshd_config(5)
Main PID: 4795 (sshd)
Tasks: 1 (limit: 3441)
Memory: 3.7M (peak: 3.7M)
CPU: 140ms
CGroup: /system.slice/ssh.service
        └─4795 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

Sep 04 16:31:36 DESKTOP-I6U7L83 systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
Sep 04 16:31:36 DESKTOP-I6U7L83 sshd[4795]: Server listening on 0.0.0.0 port 22.
Sep 04 16:31:36 DESKTOP-I6U7L83 sshd[4795]: Server listening on :: port 22.
Sep 04 16:31:36 DESKTOP-I6U7L83 systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
root@DESKTOP-I6U7L83:/usr/bin# systemctl stop ssh
Stopping 'ssh.service', but its triggering units are still active:
ssh.socket
root@DESKTOP-I6U7L83:/usr/bin# systemctl status ssh
o ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; preset: enabled)
   Active: inactive (dead) since Fri 2026-09-04 16:40:10 CST; 10s ago
   Duration: 8min 33.836s
   TriggeredBy: ● ssh.socket
   Docs: man:sshd(8)
         man:sshd_config(5)
   Process: 4795 ExecStart=/usr/sbin/sshd -D $SSH_OPTS (code=exited, status=0/SUCCESS)
   Main PID: 4795 (code=exited, status=0/SUCCESS)
   CPU: 150ms

Sep 04 16:40:10 DESKTOP-I6U7L83 systemd[1]: Stopping ssh.service - OpenBSD Secure Shell server...
Sep 04 16:40:10 DESKTOP-I6U7L83 sshd[4795]: Received signal 15; terminating.
Sep 04 16:40:10 DESKTOP-I6U7L83 systemd[1]: ssh.service: Deactivated successfully.
Sep 04 16:40:10 DESKTOP-I6U7L83 systemd[1]: Stopped ssh.service - OpenBSD Secure Shell server.
Notice: journal has been rotated since unit was started, output may be incomplete.
root@DESKTOP-I6U7L83:/usr/bin#
```

systemctl status ssh e spara checar su status el cual es inactive


```
Ubuntu
root@DESKTOP-I6U7L83: /usr

Docs: man:sshd(8)
man:sshd_config(5)
Process: 4795 ExecStart=/usr/sbin/sshd -D $SSHD_OPTS (code=exited, status=0/SUCCESS)
Main PID: 4795 (code=exited, status=0/SUCCESS)
CPU: 150ms

Sep 04 16:40:10 DESKTOP-I6U7L83 systemd[1]: Stopping ssh.service - OpenBSD Secure Shell server...
Sep 04 16:40:10 DESKTOP-I6U7L83 sshd[4795]: Received signal 15; terminating.
Sep 04 16:40:10 DESKTOP-I6U7L83 systemd[1]: ssh.service: Deactivated successfully.
Sep 04 16:40:10 DESKTOP-I6U7L83 systemd[1]: Stopped ssh.service - OpenBSD Secure Shell server.
Notice: journal has been rotated since unit was started, output may be incomplete.
root@DESKTOP-I6U7L83:/usr/bin# systemctl disable ssh
Synchronizing state of ssh.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install disable ssh
Removed "/etc/systemd/system/multi-user.target.wants/ssh.service".
Disabling 'ssh.service', but its triggering units are still active:
ssh.socket
root@DESKTOP-I6U7L83:/usr/bin# systemctl status ssh
o ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; disabled; preset: enabled)
   Active: inactive (dead) since Fri 2026-09-04 16:40:10 CST; 1min 39s ago
 Duration: 8min 33.836s
 TriggeredBy: ● ssh.socket
           Docs: man:sshd(8)
                man:sshd_config(5)
 Main PID: 4795 (code=exited, status=0/SUCCESS)
    CPU: 150ms

Sep 04 16:40:10 DESKTOP-I6U7L83 systemd[1]: Stopping ssh.service - OpenBSD Secure Shell server...
Sep 04 16:40:10 DESKTOP-I6U7L83 sshd[4795]: Received signal 15; terminating.
Sep 04 16:40:10 DESKTOP-I6U7L83 systemd[1]: ssh.service: Deactivated successfully.
Sep 04 16:40:10 DESKTOP-I6U7L83 systemd[1]: Stopped ssh.service - OpenBSD Secure Shell server.
Notice: journal has been rotated since unit was started, output may be incomplete.
root@DESKTOP-I6U7L83:/usr/bin#
```

Todo lo anterior fue en el usuario de root ahora vamos con mi usuario axel2

Primero se observa el status que esta en inactivo

```
Ubuntu
root@DESKTOP-I6U7L83: /usr

systemd-fsck@.service          static -
systemd-fsckd.service         static -
systemd-growfs-root.service   static -
systemd-growfs@.service       static -
systemd-halt.service          static -
systemd-hibernate-resume.service static -
systemd-hibernate.service     static -
systemd-hostnamed.service     static -
systemd-hwdb-update.service   static -
systemd-hybrid-sleep.service  static -
systemd-initctl.service       static -
systemd-journal-catalog-update.service static -
systemd-journal-flush.service static -
systemd-journald.service      static -
systemd-journald@.service     static -
systemd-kexec.service         static -
systemd-located.service       static -
systemd-logind.service        static -
systemd-machine-id-commit.service static -
systemd-modules-load.service  static -
systemd-network-generator.service disabled enabled
systemd-networkd-wait-online.service masked-runtime enabled
systemd-networkd-wait-online@.service disabled enabled
axel2@DESKTOP-I6U7L83: $ sudo systemctl status ssh
O ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; disabled; preset: enabled)
   Active: inactive (dead) since Fri 2026-09-04 16:40:10 CST; 5min ago
 Duration: 8min 33.836s
 TriggeredBy: ● ssh.socket
           Docs: man:sshd(8)
                man:sshd_config(5)
 Main PID: 4795 (code=exited, status=0/SUCCESS)
    CPU: 150ms

Sep 04 16:40:10 DESKTOP-I6U7L83 systemd[1]: Stopping ssh.service - OpenBSD Secure Shell server...
Sep 04 16:40:10 DESKTOP-I6U7L83 sshd[4795]: Received signal 15; terminating.
Sep 04 16:40:10 DESKTOP-I6U7L83 systemd[1]: ssh.service: Deactivated successfully.
Sep 04 16:40:10 DESKTOP-I6U7L83 systemd[1]: Stopped ssh.service - OpenBSD Secure Shell server.
Notice: journal has been rotated since unit was started, output may be incomplete.
axel2@DESKTOP-I6U7L83: $
```

sudo systemctl stop ssh con ese comando mostramos que esta detendio y volvemos a ejecutar el status para ver como esta

```
systemd-modules-load.service          static -
systemd-network-generator.service      disabled enabled
systemd-networkd-wait-online.service   masked-runtime enabled
systemd-networkd-wait-online@.service  disabled enabled
axel2@DESKTOP-IGU7L83: $ sudo systemctl status ssh
O ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; disabled; preset: enabled)
   Active: inactive (dead) since Fri 2026-09-04 16:40:10 CST; 5min ago
   Duration: 8min 33.836s
   TriggeredBy: ● ssh.socket
   Docs: man:ssh(8)
         man:ssh_config(5)
   Main PID: 4795 (code=exited, status=0/SUCCESS)
   CPU: 150ms

Sep 04 16:40:10 DESKTOP-IGU7L83 systemd[1]: Stopping ssh.service - OpenBSD Secure Shell server...
Sep 04 16:40:10 DESKTOP-IGU7L83 sshd[4795]: Received signal 15; terminating.
Sep 04 16:40:10 DESKTOP-IGU7L83 systemd[1]: ssh.service: Deactivated successfully.
Sep 04 16:40:10 DESKTOP-IGU7L83 systemd[1]: Stopped ssh.service - OpenBSD Secure Shell server.
Notice: journal has been rotated since unit was started, output may be incomplete.
axel2@DESKTOP-IGU7L83: $ sudo systemctl stop ssh
Stopping 'ssh.service', but its triggering units are still active:
ssh.socket
axel2@DESKTOP-IGU7L83: $ sudo systemctl status ssh
O ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; disabled; preset: enabled)
   Active: inactive (dead) since Fri 2026-09-04 16:40:10 CST; 6min ago
   Duration: 8min 33.836s
   TriggeredBy: ● ssh.socket
   Docs: man:ssh(8)
         man:ssh_config(5)
   Main PID: 4795 (code=exited, status=0/SUCCESS)
   CPU: 150ms

Sep 04 16:40:10 DESKTOP-IGU7L83 systemd[1]: Stopping ssh.service - OpenBSD Secure Shell server...
Sep 04 16:40:10 DESKTOP-IGU7L83 sshd[4795]: Received signal 15; terminating.
Sep 04 16:40:10 DESKTOP-IGU7L83 systemd[1]: ssh.service: Deactivated successfully.
Sep 04 16:40:10 DESKTOP-IGU7L83 systemd[1]: Stopped ssh.service - OpenBSD Secure Shell server.
Notice: journal has been rotated since unit was started, output may be incomplete.
axel2@DESKTOP-IGU7L83: $
```

Y ahora con el comando `sudo systemctl start ssh` volvemos a activar en enable el ssh y para ver el status ponemos el comando de status

```
Executing: /usr/lib/systemd/systemd-sysv-install enable ssh
Created symlink /etc/systemd/system/ssh.service → /usr/lib/systemd/system/ssh.service.
Created symlink /etc/systemd/system/multi-user.target.wants/ssh.service → /usr/lib/systemd/system/ssh.service.
axel2@DESKTOP-IGU7L83: $ sudo systemctl status ssh
O ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; preset: enabled)
   Active: inactive (dead) since Fri 2026-09-04 16:40:10 CST; 7min ago
   Duration: 8min 33.836s
   TriggeredBy: ● ssh.socket
   Docs: man:ssh(8)
         man:ssh_config(5)
   Main PID: 4795 (code=exited, status=0/SUCCESS)
   CPU: 150ms

Sep 04 16:40:10 DESKTOP-IGU7L83 systemd[1]: Stopping ssh.service - OpenBSD Secure Shell server...
Sep 04 16:40:10 DESKTOP-IGU7L83 sshd[4795]: Received signal 15; terminating.
Sep 04 16:40:10 DESKTOP-IGU7L83 systemd[1]: ssh.service: Deactivated successfully.
Sep 04 16:40:10 DESKTOP-IGU7L83 systemd[1]: Stopped ssh.service - OpenBSD Secure Shell server.
Notice: journal has been rotated since unit was started, output may be incomplete.
axel2@DESKTOP-IGU7L83: $ sudo systemctl start ssh
axel2@DESKTOP-IGU7L83: $ sudo systemctl status ssh
● ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; preset: enabled)
   Active: active (running) since Fri 2026-09-04 16:48:48 CST; 2s ago
   TriggeredBy: ● ssh.socket
   Docs: man:ssh(8)
         man:ssh_config(5)
   Process: 5535 ExecStartPre=/usr/sbin/sshd -t (code=exited, status=0/SUCCESS)
   Main PID: 5537 (sshd)
   Tasks: 1 (limit: 3441)
   Memory: 1.2M (peak: 1.4M)
   CPU: 80ms
   CGroup: /system.slice/ssh.service
           └─5537 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

Sep 04 16:48:48 DESKTOP-IGU7L83 systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
Sep 04 16:48:48 DESKTOP-IGU7L83 sshd[5537]: Server listening on 0.0.0.0 port 22.
Sep 04 16:48:48 DESKTOP-IGU7L83 sshd[5537]: Server listening on :: port 22.
Sep 04 16:48:48 DESKTOP-IGU7L83 systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
axel2@DESKTOP-IGU7L83: $
```


Y regresando al usuario root también ya volvió a estar en enbale, activado en este caso

```
Ubuntu
root@DESKTOP-I6U7L83: /usr

o ssh.service - OpenBSD Secure Shell server
  Loaded: loaded (/usr/lib/systemd/system/ssh.service; disabled; preset: enabled)
  Active: inactive (dead) since Fri 2026-09-04 16:40:10 CST; 1min 39s ago
  Duration: 8min 33.836s
  TriggeredBy: ● ssh.socket
               Docs: man:sshd(8)
                  man:sshd_config(5)
  Main PID: 4795 (code=exited, status=0/SUCCESS)
  CPU: 150ms

Sep 04 16:40:10 DESKTOP-I6U7L83 systemd[1]: Stopping ssh.service - OpenBSD Secure Shell server...
Sep 04 16:40:10 DESKTOP-I6U7L83 sshd[4795]: Received signal 15; terminating.
Sep 04 16:40:10 DESKTOP-I6U7L83 systemd[1]: ssh.service: Deactivated successfully.
Sep 04 16:40:10 DESKTOP-I6U7L83 systemd[1]: Stopped ssh.service - OpenBSD Secure Shell server.
Notice: journal has been rotated since unit was started, output may be incomplete.
root@DESKTOP-I6U7L83: /usr/bin# systemctl status ssh
● ssh.service - OpenBSD Secure Shell server
  Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; preset: enabled)
  Active: active (running) since Fri 2026-09-04 16:48:48 CST; 1min 16s ago
  TriggeredBy: ● ssh.socket
               Docs: man:sshd(8)
                  man:sshd_config(5)
  Process: 5535 ExecStartPre=/usr/sbin/sshd -t (code=exited, status=0/SUCCESS)
  Main PID: 5537 (sshd)
  Tasks: 1 (limit: 3441)
  Memory: 1.2M (peak: 1.4M)
  CPU: 80ms
  CGroup: /system.slice/ssh.service
          └─5537 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

Sep 04 16:48:48 DESKTOP-I6U7L83 systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
Sep 04 16:48:48 DESKTOP-I6U7L83 sshd[5537]: Server listening on 0.0.0.0 port 22.
Sep 04 16:48:48 DESKTOP-I6U7L83 sshd[5537]: Server listening on :: port 22.
Sep 04 16:48:48 DESKTOP-I6U7L83 systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
root@DESKTOP-I6U7L83: /usr/bin#
```

Ahora en la presentación tenemos esta diapositiva

Servicios fallidos

Para obtener un listado de la totalidad de servicios que fallan al iniciar el sistema operativo hay que ejecutar el siguiente comando,

```
systemctl list-unit-files --state=failed
```

Apagar o reiniciar el sistema

```
systemctl halt
```


```
systemctl poweroff
```

```
systemctl reboot
```

HAR -AdmonSegSO 2022A 18


Cada uno sirve para apagar la consola y vamos a probar los 3

Primero probamos el de `systemctl halt` y si se ve en la imagen que sirvió para salir de la consola al final presionado `ctrl+D`

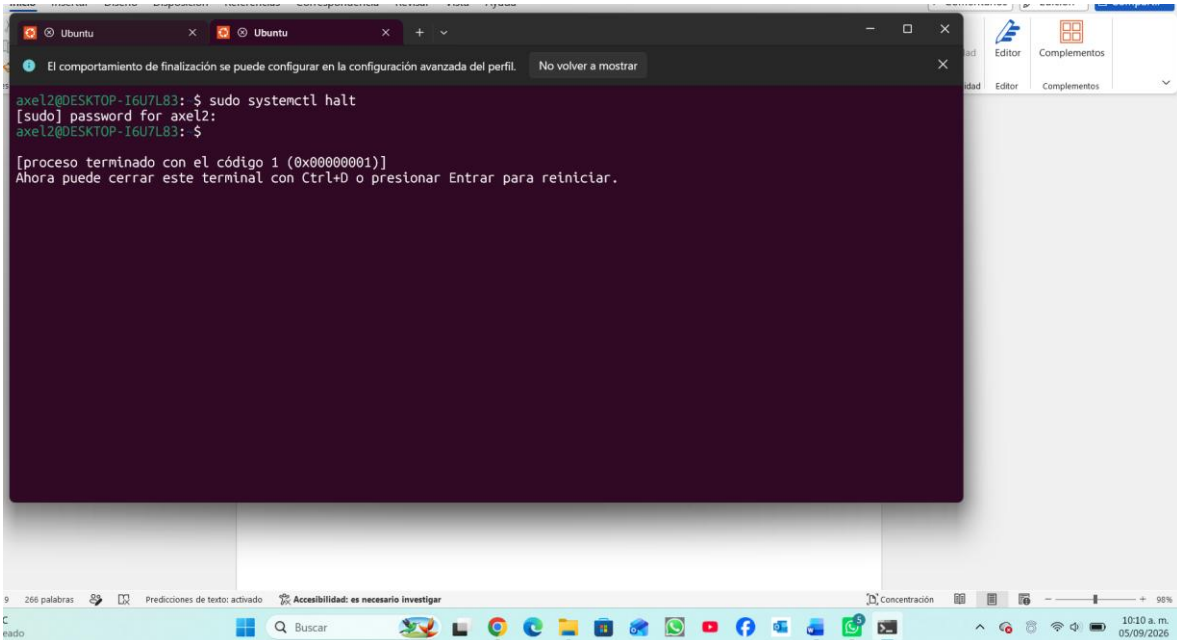


```
axel2@DESKTOP-I6U7L83: $ sudo systemctl halt
[sudo] password for axel2:
axel2@DESKTOP-I6U7L83: $


[proceso terminado con el código 1 (0x00000001)]
Ahora puede cerrar este terminal con Ctrl+D o presionar Entrar para reiniciar.
```

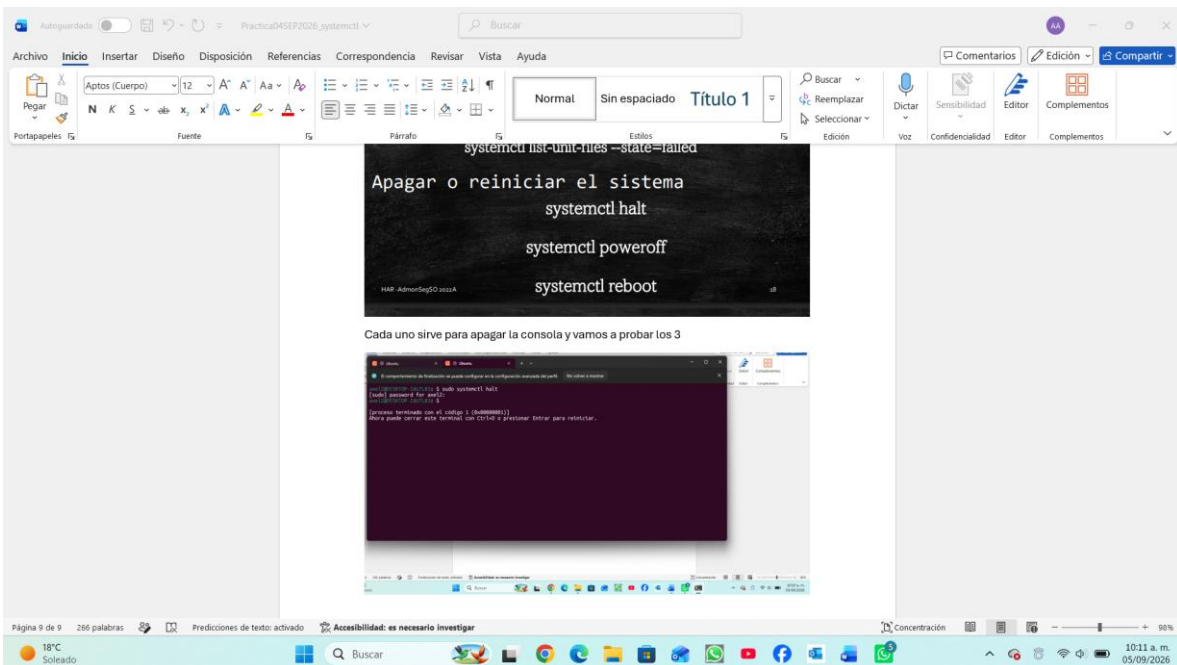


Ahora vamos con el de `systemctl poweroff` y funciona lo mismo para que todo salga de la consola

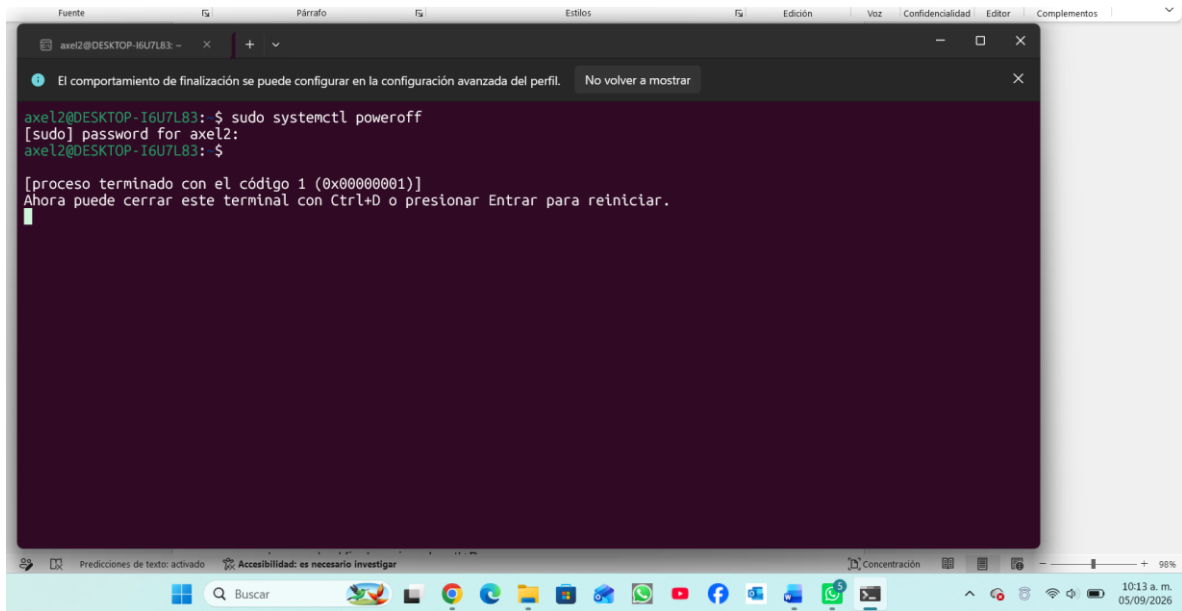

E igual con ctrl+d se sale de la consola

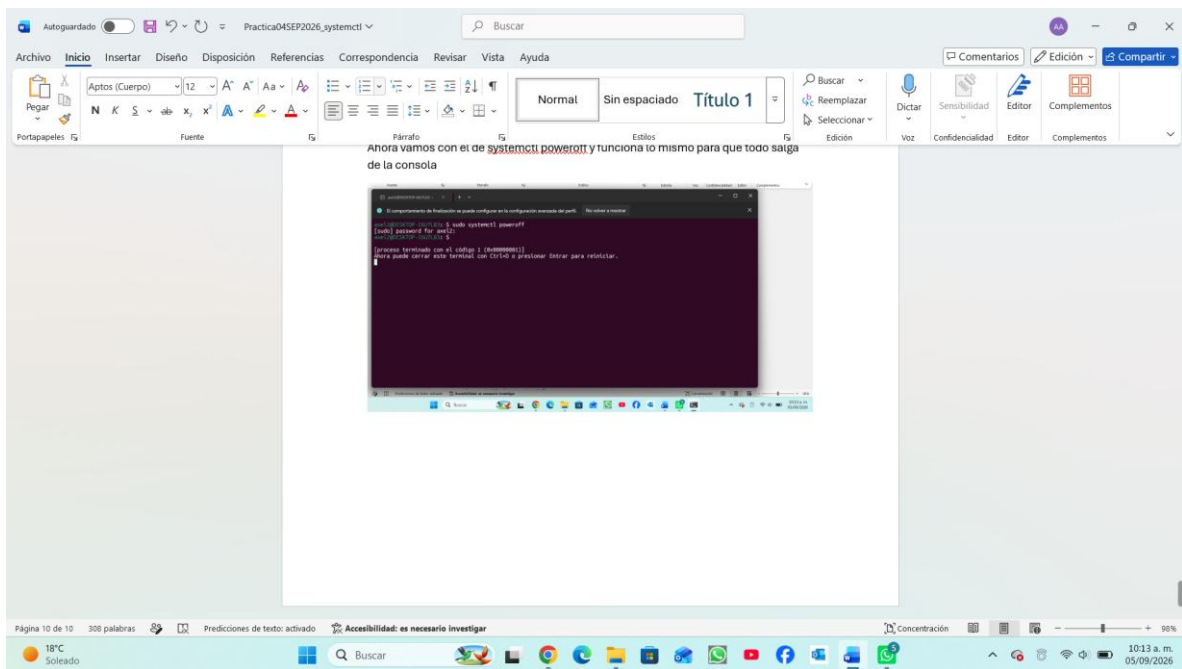

Ahora con el ultimo que es el de systemctl reboot para que funcione igual para sacra de la consola

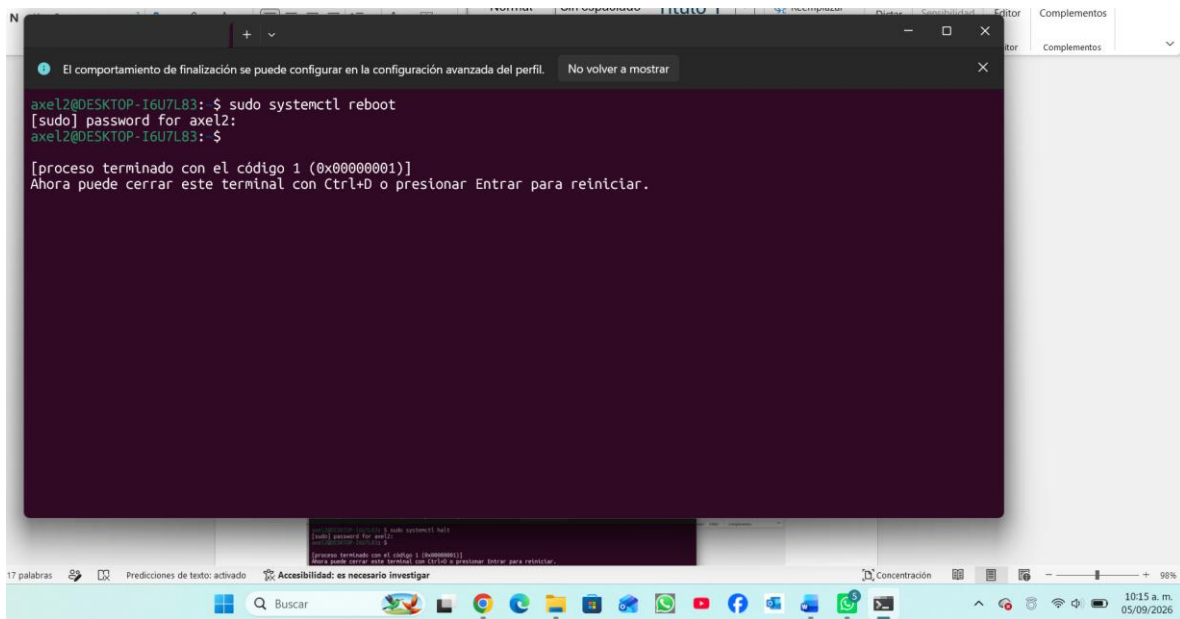


The screenshot shows a Windows desktop environment with a terminal window open. The terminal has a dark purple background and displays the following text:

```
axel2@DESKTOP-I6U7L83: $ sudo systemctl reboot
[sudo] password for axel2:
axel2@DESKTOP-I6U7L83: $

[proceso terminado con el código 1 (0x00000001)]
Ahora puede cerrar este terminal con Ctrl+D o presionar Entrar para reiniciar.
```

At the top of the terminal window, there is a notification bar that reads: "El comportamiento de finalización se puede configurar en la configuración avanzada del perfil. No volver a mostrar". The Windows taskbar is visible at the bottom, showing the search bar, task view button, and various application icons. The system tray on the right indicates the time as 10:15 a.m. on 05/09/2026 and shows icons for network, volume, and battery.

Igual al presionar el ctrl+d se sale de la consola la apaga para ya no poder seguir utilizando

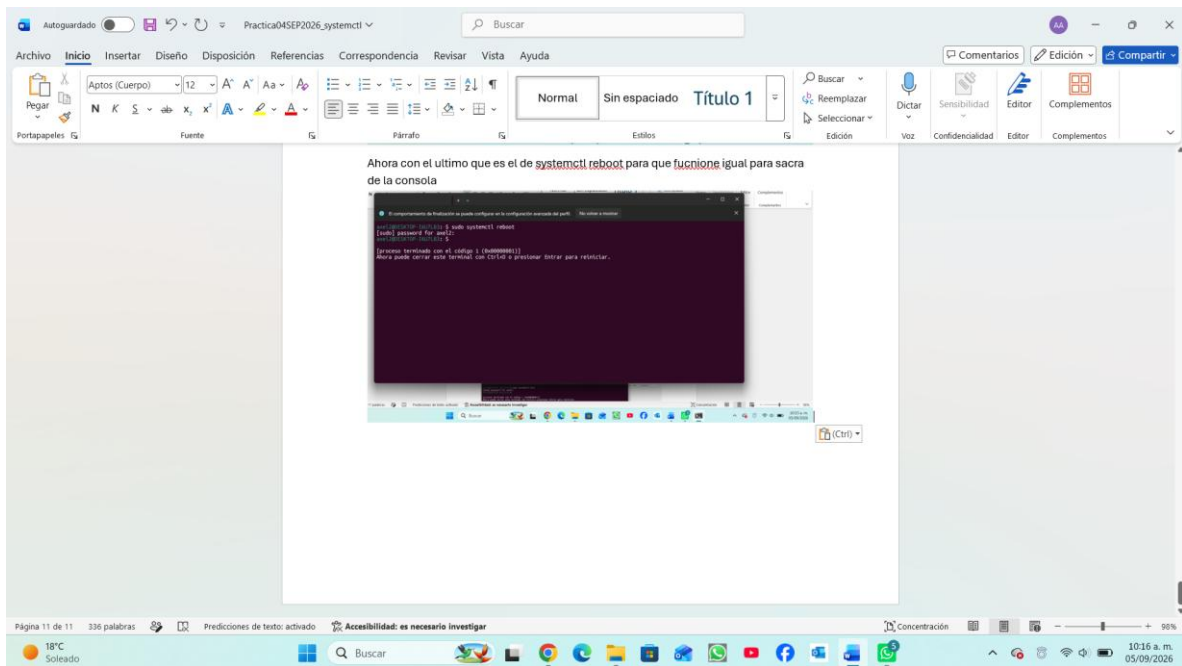

Y así concluimos este trabajo del mismo tema de los comandos de Linux y los ssh