

Sonix Firmware Update Manual


Date: 2016/05/25

Linux Version


1. Download "Linux_BurnerAp_1.0.2.tgz" from GitHub.
2. install libusb
`$sudo apt-get install libusb-dev`
3. build BurnerAP
`$cd <BurnerAp>`
`$make`
4. Connect your device
5. Specify fw path to update
`$sudo ./fw_update [fw_path]`

Windows Version

1. Download "Binary_SN9C2720M_Firmware_20160509v01.zip" from GitHub.
Extract the zip file. Password is "**sonix**".
2. The folder has 6 files that include firmware update tool and binary file.

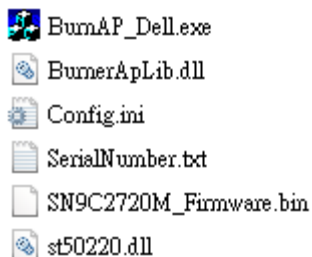

3. Run "BurnAP_Dell.exe". Below is software layout.

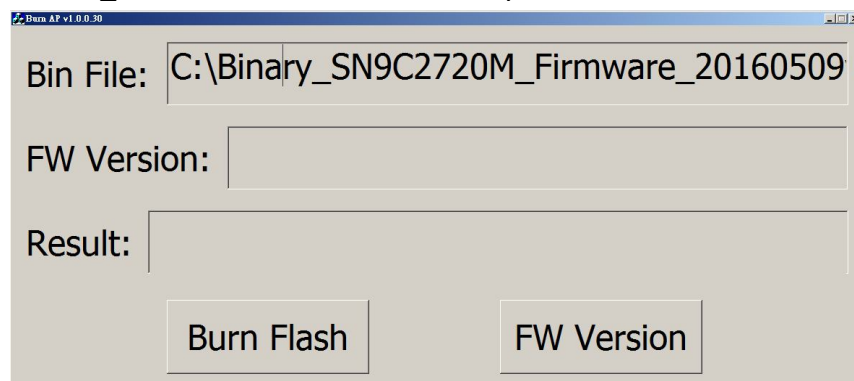

4. Show current firmware version in FW Version field after press “FW Version” button.
5. Press Burn Flash button to update firmware. Result and FW Version field will show “Burn File OK!” when update finish.

