


This procedure is intended to modify the config (Config_ESP32.yaml) of the **CN105-2HA** module.

Prerequisite :


ESPHome Device Builder add-on is installed on your Home Assistant :

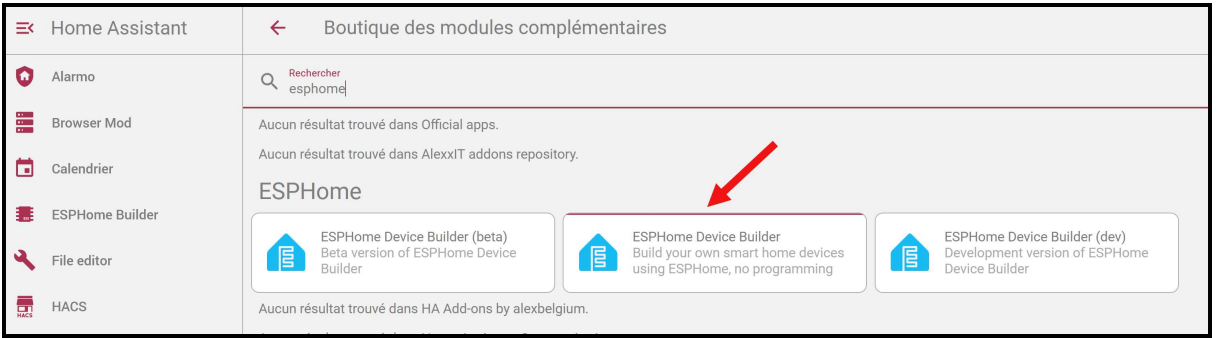

Operating Mode :

Connect the module you need to modify to a PC's USB port or a phone charger.

In **Home Assistant / ESPHome Builder** integration :

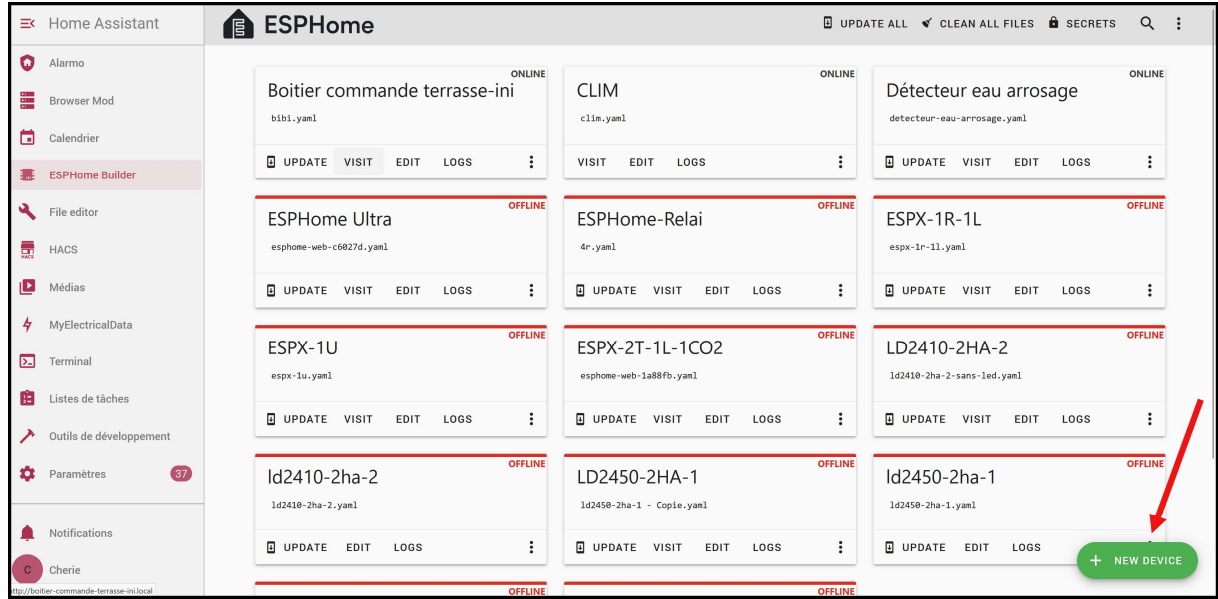

Click on **NEW DEVICE** :

New device

A device needs to be connected to a computer using a USB cable to be added to ESPHome. Once added, ESPHome will interact with the device wirelessly.

You are not browsing the ESPHome Device Builder over a secure connection (HTTPS). This prevents ESPHome from being able to install this on devices connected to this computer.

You will still be able to install ESPHome by connecting the device to the computer that runs the ESPHome Device Builder.

Alternatively, you can use ESPHome Web to prepare a device for being used with ESPHome using this computer.

[OPEN ESPHOME WEB](#) [CONTINUE](#)

Click on **CONTINUE** :

Create configuration

How would you like to create your configuration?

New Device Setup

A guided process to get you started.

>

Import from File

Use an existing ESPHome configuration (.yaml).

>

Empty Configuration

For manually writing or pasting a configuration.

>

You can also drag and drop your .yaml file here

Click on **New Device Setup** :

Create configuration

Name*

CLIM

This device will be configured to connect to the Wi-Fi network stored in your secrets.

CANCEL

NEXT

In the **Name** field, enter the **exact** name of the module you want to update: **CLIM** if you purchased a single module, or **CLIM_1**, **CLIM_2**, **CLIM_3**, etc., if you purchased multiple modules.

Click on **NEXT** :

Select your device type

Select the type of device that this configuration will be installed on.

ESP32

>

ESP32-C3

>

ESP32-C6

>

ESP32-S2

>

ESP32-S3

>

ESP8266

>

Raspberry Pi Pico W

>

BK72xx

>

LN882x

>


RTL87xx

>

☒ Use recommended settings

CANCEL

Click on **ESP32** :

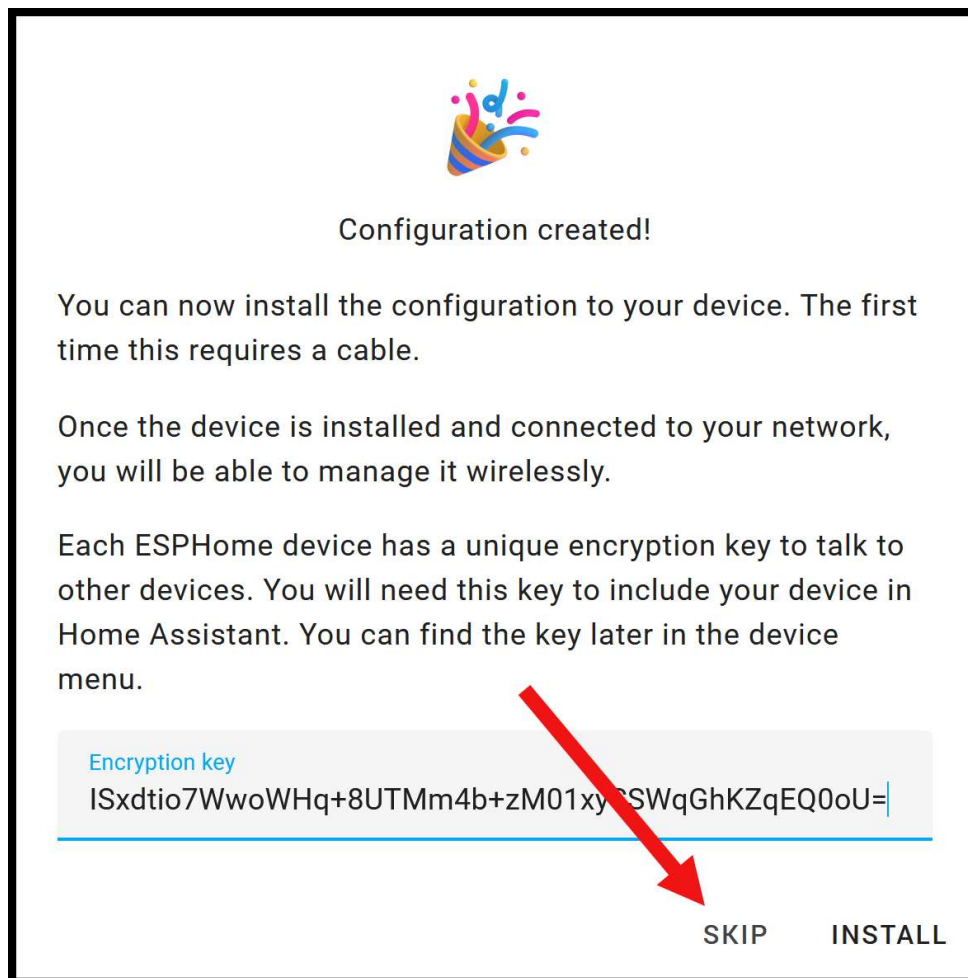

The image shows the ESPHome configuration creation screen. At the top is a colorful logo. Below it, the text "Configuration created!" is displayed. The main text explains that the configuration can now be installed on a device, which requires a cable the first time. It also states that once installed and connected to a network, the device can be managed wirelessly. Each ESPHome device has a unique encryption key, which is shown in a text box: "ISxdtio7WwoWHq+8UTMm4b+zM01xyCSWqGhKZqEQ0oU=". A red arrow points from the encryption key text box to the "SKIP" button at the bottom right. The "INSTALL" button is also visible next to it.

Configuration created!

You can now install the configuration to your device. The first time this requires a cable.

Once the device is installed and connected to your network, you will be able to manage it wirelessly.


Each ESPHome device has a unique encryption key to talk to other devices. You will need this key to include your device in Home Assistant. You can find the key later in the device menu.

Encryption key
ISxdtio7WwoWHq+8UTMm4b+zM01xyCSWqGhKZqEQ0oU=

SKIP INSTALL

Click on **SKIP** :

Your device is now created in **ESPHome Builder** and named **CLIM** (or CLIM_1, CLIM_2, etc.) :

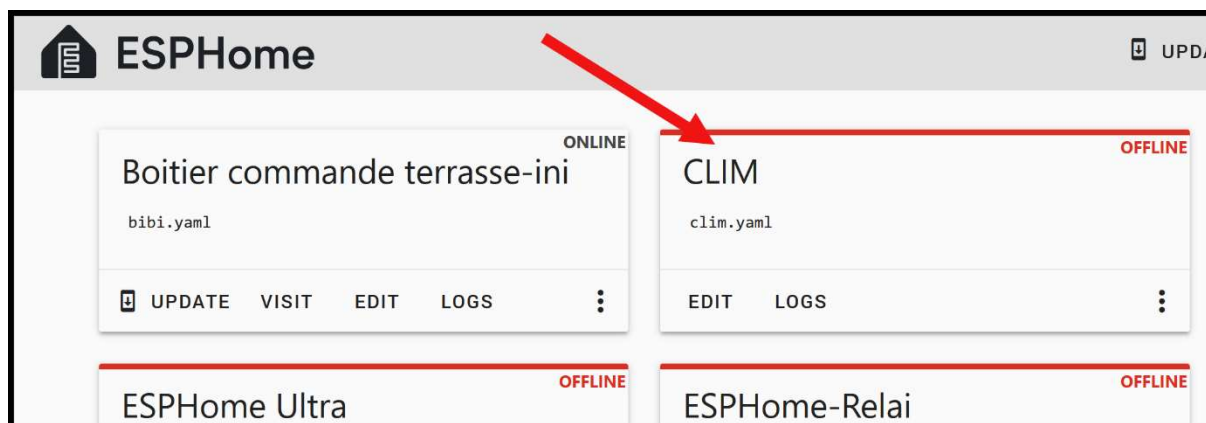

The image shows the ESPHome Builder interface. At the top is the "ESPHome" header with a logo and an "UPDATE" button. Below the header, there are four device cards. The first card is "Boitier commande terrasse-ini" with status "ONLINE" and file "bibi.yaml". The second card is "CLIM" with status "OFFLINE" and file "clim.yaml". A red arrow points from the "CLIM" card to the "SKIP" button in the previous image. The third card is "ESPHome Ultra" with status "OFFLINE". The fourth card is "ESPHome-Relai" with status "OFFLINE". Each card has buttons for "UPDATE", "VISIT", "EDIT", and "LOGS".

ESPHome


Boitier commande terrasse-ini ONLINE
bibi.yaml
UPDATE VISIT EDIT LOGS

CLIM OFFLINE
clim.yaml
EDIT LOGS

ESPHome Ultra OFFLINE

ESPHome-Relai OFFLINE

Click on **EDIT** on the card corresponding to your module :

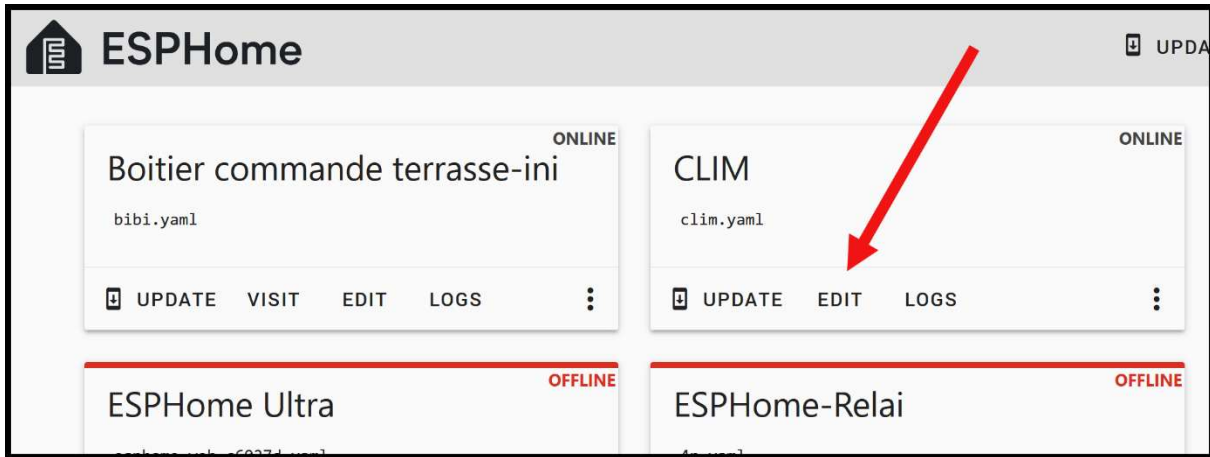

A window will open, delete all the lines in this window and replace them with the content of the following file:


```
× clim.yaml
1 esphome:
2   name: clim
3   friendly_name: CLIM
4
5 esp32:
6   board: esp32dev
7   framework:
8     type: esp-idf
9
10 # Enable logging
11 logger:
12
13 # Enable Home Assistant API
14 api:
15   encryption:
16     key: "ISxdtio7WwQhQ+8UTMm4b+zM01xySSWqGhKZqEQ0oU="
17
18 ota:
19   - platform: esphome
20     password: "a17415eb0734b6e216d55095d0f2501c"
21
22 wifi:
23   ssid: !secret wifi_ssid
24   password: !secret wifi_password
25
26 # Enable fallback hotspot (captive portal) in case wifi connection fails
27 ap:
28   ssid: "Clim Fallback Hotspot"
29   password: "HfHJfWB3MDQd"
30
31 captive_portal:
32
```

by **Config_ESP32.yaml**.

If you purchased a single module, its name is CLIM and you have no change to do in the script.


If you purchased multiple modules **CLIM_1**, **CLIM_2**, **CLIM_3**, etc., the following modifications must be done in the script :

Line 2 : change "" to "_1", to "_2", to "_3", ... depending of the name of your module.

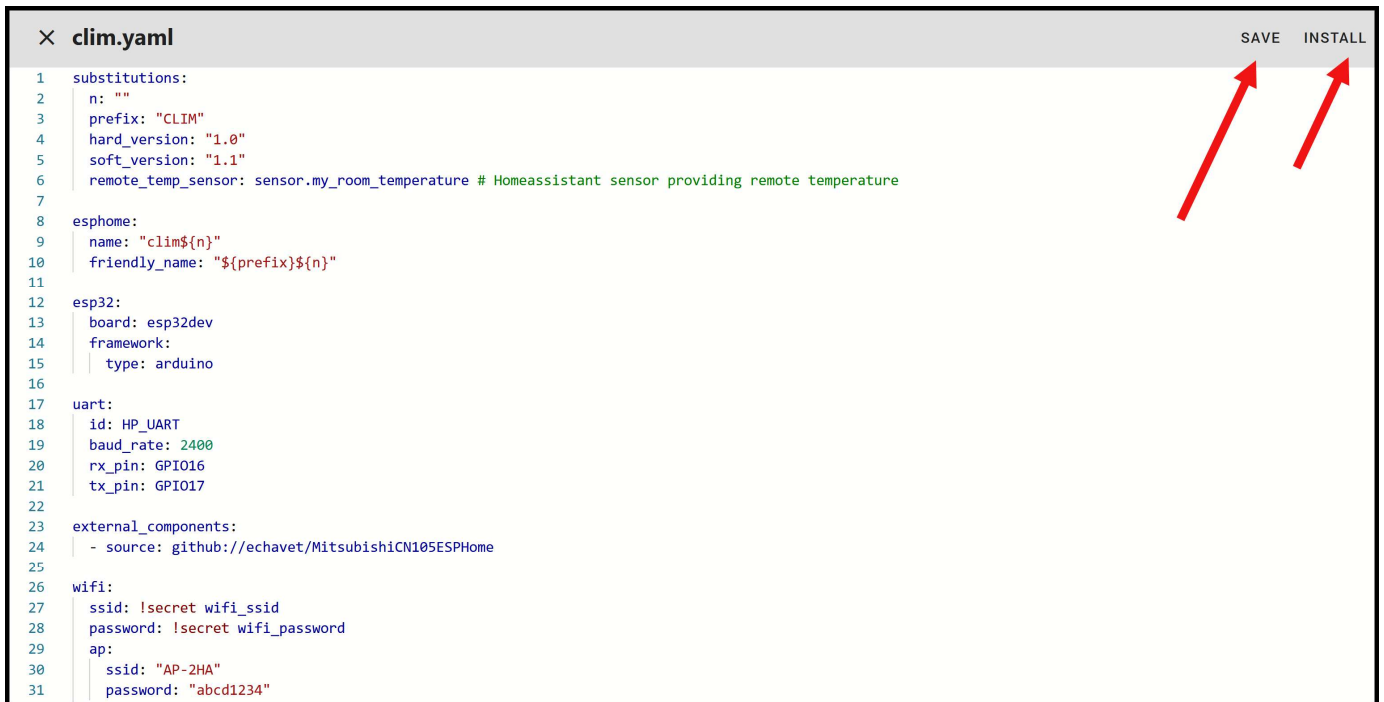

```
1 substitutions:
2   n: ""
3   prefix: "CLIM"
4   hard_version: "1.0"
5   soft_version: "1.1"
6   remote_temp_sensor: sensor.my_room_temperature # Homeassistant sensor providing remote temperature
7
8 esp8266:
9   name: "clim${n}"
10  friendly_name: "${prefix}${n}"
11
12 esp32:
13   board: esp32dev
14   framework:
15     type: arduino
16
17 uart:
18   id: HP_UART
19   baud_rate: 2400
20   rx_pin: GPIO16
21   tx_pin: GPIO17
22
23 external_components:
24   - source: github://echavet/MitsubishiCN105ESPHome
25
26 wifi:
27   ssid: !secret wifi_ssid
28   password: !secret wifi_password
29   ap:
30     ssid: "AP-2HA"
31     password: "abcd1234"
```

Click on **SAVE**, then click on **INSTALL** :

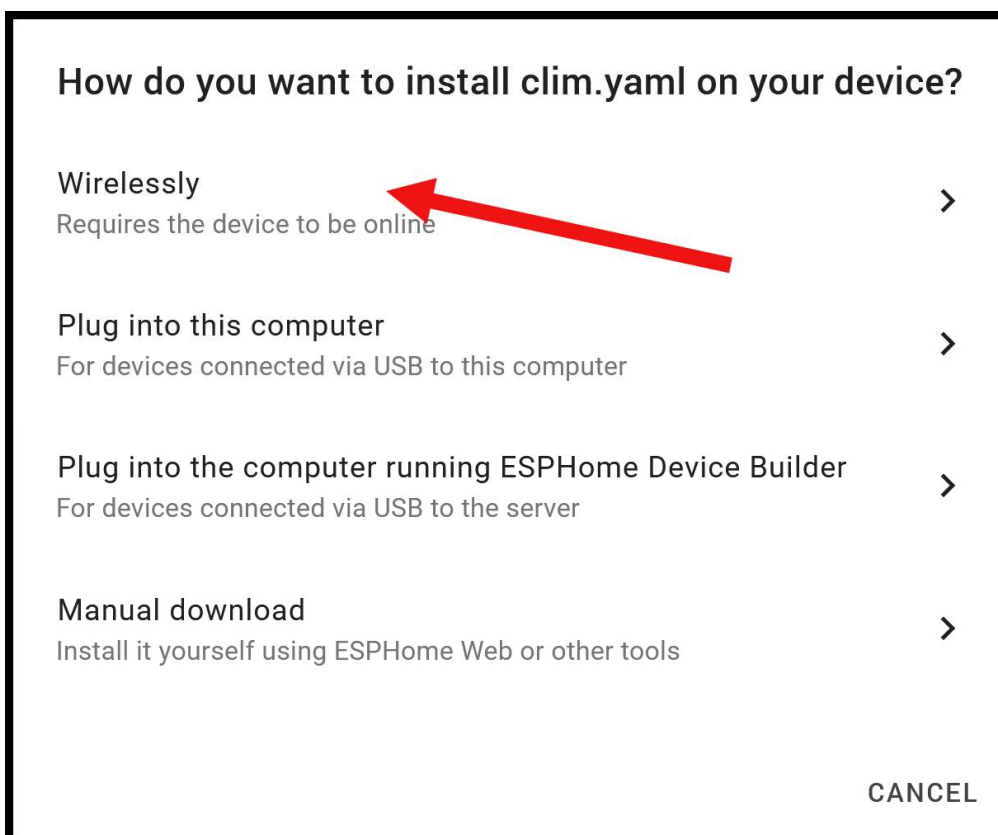

How do you want to install clim.yaml on your device?

- Wirelessly** >
Requires the device to be online
- Plug into this computer** >
For devices connected via USB to this computer
- Plug into the computer running ESPHome Device Builder** >
For devices connected via USB to the server
- Manual download** >
Install it yourself using ESPHome Web or other tools

CANCEL


Click on **Wirelessly** :

Install clim.yaml

```
INFO ESPHome 2026.2.1
INFO Reading configuration /config/esphome/clim.yaml...
INFO Detected timezone 'Europe/Paris'
INFO Generating C++ source...
INFO Setting CONFIG_LWIP_MAX_SOCKETS to 17 (registered: api=4, captive_portal=4, mdns=2, ota=1, web_server=6)
INFO Compiling app... Build path: /data/build/clim
Processing clim (board: esp32dev; framework: arduino, espidf; platform: https://github.com/pioarduino/platform-esp32/releases/download/55.03.37/platform-esp32.zip)
-----
Tool Manager: Installing file:///data/build/clim/arduino_libs_stub
INFO Installing file:///data/build/clim/arduino_libs_stub
Tool Manager: framework-arduinoespressif32-libs@5.5.2 has been installed!
INFO framework-arduinoespressif32-libs@5.5.2 has been installed!
HARDWARE: ESP32 240MHz, 320KB RAM, 4MB Flash
- contrib-pihome @ 3.4.4
- framework-arduinoespressif32 @ 3.3.7
- framework-arduinoespressif32-libs @ 5.5.2
- framework-espidf @ 3.50502.0 (5.5.2)
- tool-cmake @ 4.0.3
- tool-esp-rom-elfs @ 2024.10.11
- tool-esptoolpy @ 5.1.2
- tool-ninja @ 1.13.1
- tool-scons @ 4.40801.0 (4.8.1)
- toolchain-xtensa-esp-elf @ 14.2.0+20251107
Reading CMake configuration...
```

DOWNLOAD LOGS EDIT STOP

The new software version is installing, wait a few minutes, when the installation is finished, click on **STOP** :

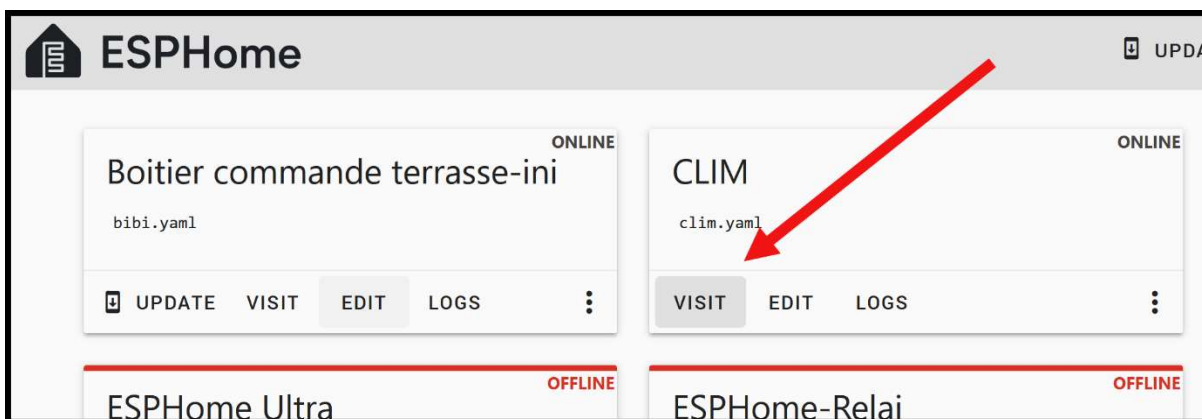

Click on **VISIT** :

CLIM

Name	State	Actions
CLIM	OFF	Current: NA, Target: nan 10  31 Mode: OFF
CLIM_Auto Sub Mode		
CLIM_BSSID	8C:97:EA:81:1F:08	
CLIM_Compressor Frequency	NA	
CLIM_ESPHome Version	2026.2.1 (config hash 0x6d353d5d, built 2026-03-30 16:04:56 +0200)	
CLIM_Energy Usage	NA	
CLIM_Hard Version	1.0	
CLIM_Horizontal Vane		←←
CLIM_IP	192.168.1.213	
CLIM_ISEE Sensor	OFF	
CLIM_Input Power	NA	
CLIM_Outside Air Temp	NA	
CLIM_Remote Temperature Sensor	NA	
CLIM_Restart		□
CLIM_Runtime Hours	NA	
CLIM_SSID	Freebox-C9DE33	
CLIM_Soft Version	1.1	
CLIM_Stage		
CLIM_Sub Mode		

Time

16:15

16:15

16:15

16:15

16:15

16:15



You can now modify the script within **ESPHOME Builder** via the **OTA** (WiFi).

CLIM

Name	State	Actions
CLIM	OFF	Current: NA, Target: nan 10  31 Mode: OFF
CLIM_Auto Sub Mode		
CLIM_BSSID	8C:97:EA:81:1F:08	
CLIM_Compressor Frequency	NA	
CLIM_ESPHome Version	2026.2.1 (config hash 0x6d353d5d, built 2026-03-30 16:04:56 +0200)	
CLIM_Energy Usage	NA	
CLIM_Hard Version	1.0	
CLIM_Horizontal Vane		←←
CLIM_IP	192.168.1.213	
CLIM_ISEE Sensor	OFF	
CLIM_Input Power	NA	
CLIM_Outside Air Temp	NA	
CLIM_Remote Temperature Sensor	NA	
CLIM_Restart		☐
CLIM_Runtime Hours	NA	
CLIM_SSID	Freebox-C9DE33	
CLIM_Soft Version	1.1	
CLIM_Stage		
CLIM_Sub Mode		

Time
16:15
16:15
16:15
16:15
16:15
16:15
16:15