

Advanced Techniques for Combinatorial Algorithms: Fixed-Parameter Algorithms

Gianluca Della Vedova

Univ. Milano–Bicocca
<https://gianluca.dellavedova.org>

April 24, 2020

Gianluca Della Vedova

- Advanced Techniques for Combinatorial Algorithms
- <https://gitlab.com/dellavg/advanced-algorithms>
- <https://gianluca.dellavedova.org>
- gianluca.dellavedova@unimib.it

Fixed-Parameter

- An **NP**-hard problem does not go away
- Vertex cover
- Clique
- Independent set
- Dominating set
- Hamiltonian cycle

Vertex Cover

Instance

Undirected graph $G = \langle V, E \rangle$, integer k .

Question

Find a set $C \subset V$ such that for each edge $e \in E$ at least one endpoint of e belongs to C , and $|C| \leq k$




Clique

Instance

Undirected graph $G = \langle V, E \rangle$, integer k .

Question

Find a set $C \subset V$ such that all pairs of vertices in C are connected by an edge, and $|C| \geq k$

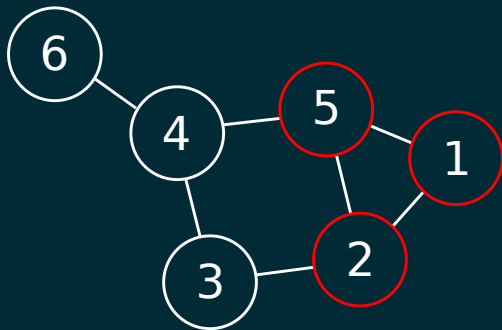

Independent Set

Instance

Undirected graph $G = \langle V, E \rangle$, integer k .

Question

Find a set $I \subset V$ such that no two vertices in I are connected by an edge, and $|I| \geq k$



Dominating Set

Instance

Undirected graph $G = \langle V, E \rangle$, integer k .

Question

Find a set $D \subset V$ such that for each vertex $v \notin D$, v is adjacent to some $d \in D$, and $|D| \leq k$




Hamiltonian cycle

Instance

Undirected graph $G = \langle V, E \rangle$.

Question

Find a cycle C that visits each vertex $v \in V$ exactly once.

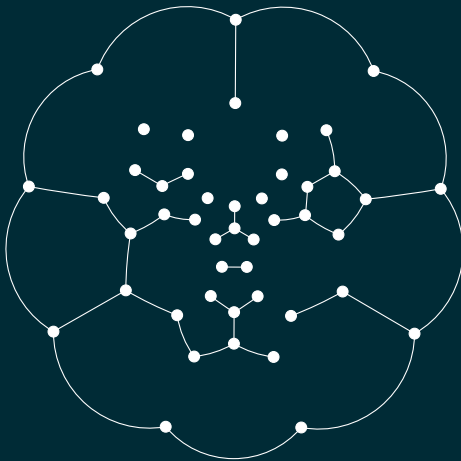


Longest Path

Instance

Undirected graph $G = \langle V, E \rangle$, integer k .

Question

Find a simple (no vertex is visited twice) path P of G , with P consisting of k vertices.

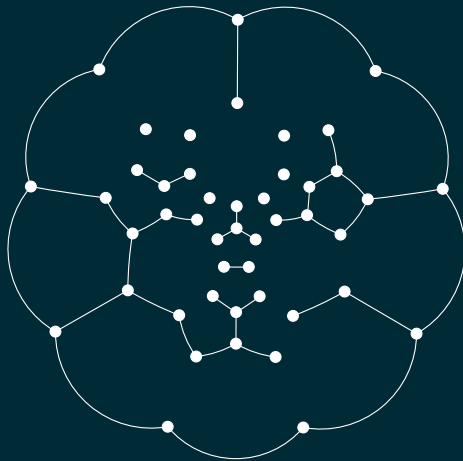

Fixed Parameter Tractable (FPT)

FPT

Parameterized problem: pair (I, k) . The problem is in FPT if there is an algorithm with time $f(k)n^\alpha$, with α a constant and f a function

Typical times

- $O(1.1^k)n^3$
- $O(2^k)n^3$
- $O(k^k)n^3$
- $O(2^k + n^3)$
- $(O(2^{2^{2^{\dots^2}}})n^3)$

Bounded Search Tree

The search tree has $O(f(k))n^\alpha$ nodes

Vertex Cover

Let $(u, v) \in E$. Then $u \in C$ or $v \in C$

- How is the search tree?
- $2^k n$ time

Smaller Search Tree

Proposition

Let v be a node, let $N(v)$ be its neighbors. Then $v \in C$ or $N(v) \subseteq C$

Proposition

No node has at least three neighbors. Then G consists of vertex-disjoint cycle, and its smallest cover is trivial

Corollary

Consider only vertices v with $|N(v)| \geq 3$

Smaller Search Tree

Two cases

- ① $v \in C$, then recurse on $G - v$ and height $k - 1$
 - ② $v \notin C$, then recurse on $G - N(v)$ and height at most $k - 3$
-
- ① Number of nodes $f(k) = f(k - 1) + f(k - 3) + 1$
 - ② $f(k) \leq 5^{\frac{k}{4}} < 1.5^k$

Reduction to a Kernel

- 1 Find all vertices L with degree $\geq k$. If $|L| > k$, then no cover of size k . Let $k_1 = k - |L|$
- 2 $G_1 = G - L$. If G_1 has more than $k_1(k + 1)$ vertices, then no cover of size k .
- 3 Find k_1 -cover of G_1 , time $O(n + k^{2k})$
- 4 Improve to $O(n + 2^k k^2)$

Color Coding

Colorful Path

- 1 Color each vertex with k colors
- 2 Colorful path: each vertex has a distinct color

Random coloring

Probability that a path is colorful: $\frac{k!}{k^k} \geq e^{-k}$

Dynamic programming

- Given a coloring, find a colorful path (if it exists)
- Keep only the colors
- Time $(2^{O(k)}|E|)$

Color Coding

Dynamic programming

i colors from v to w : $i - 1$ colors from v to z and the color from z to w

Time complexity

- At time i , there are $\binom{k}{i}$ sets
- $O(\sum_{i=1}^k i \binom{k}{i}) = O(k2^k)$

Derandomize

- k -perfect family H of hash functions $h : [1 : n] \mapsto [1 : k]$ is such that for each $S \subseteq [1 : n]$ with $|S| = k$, there exists h that is 1-to-1 on S
- Compute in linear time a k -perfect family H of $2^{O(k)} \log n$ functions

Closest string

Input

s_1, \dots, s_m : strings of length n . Integer k

Problem

Find a string $t = t[1] \cdots t[k]$ such that t has Hamming distance at most k with each s_i

Super-Sub sequence

Longest Subsequence

s_1, \dots, s_m : strings of length n . Does it exist $t = t[1] \cdots t[k]$ such that for each s_i , $s_i = w_0 t[1] w_1 \cdots t[k] w_k$, for some (possibly empty) strings w_j ?

Shortest Supersequence

s_1, \dots, s_m : strings of length n . Does it exist $t = t[1] \cdots t[k]$ such that for each s_i , $t_i = w_0 s_i[1] w_1 \cdots s_i[n] w_k$, for some (possibly empty) strings w_j ?

- Which problem is easier?

Attribution

- Vertex Cover figure: By Miym - Own work, CC BY-SA 3.0,
<https://commons.wikimedia.org/w/index.php?curid=6017739>
- Clique figure: Public Domain,
<https://commons.wikimedia.org/w/index.php?curid=1072101>
- Dominating Set figure: By Miym - Own work, CC BY-SA 3.0,
<https://commons.wikimedia.org/w/index.php?curid=6821042>