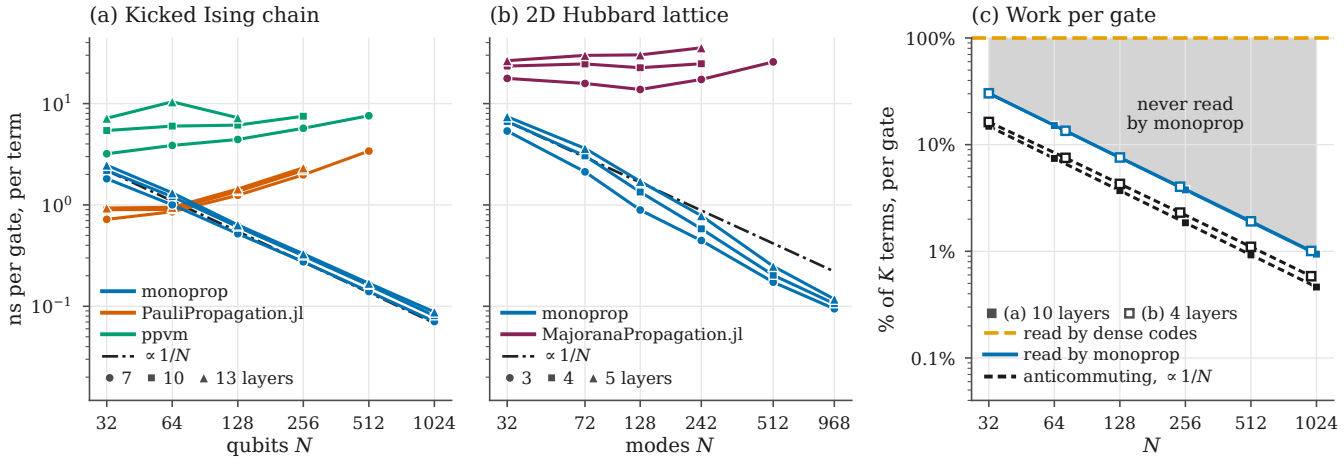
(a) Kicked Ising chain
ns per gate, per term
$10^1$
$10^0$
$10^{-1}$
monoprop
PauliPropagation.jl
ppvm
$\propto 1/N$
7
10
13 layers
32
64
128
256
512
1024
qubits $N$
(b) 2D Hubbard lattice
monoprop
MajoranaPropagation.jl
$\propto 1/N$
3
4
5 layers
32
72
128
242
512
968
modes $N$
(c) Work per gate
% of $K$ terms, per gate
100%
10%
1%
0.1%
never read
by monoprop
(a) 10 layers
(b) 4 layers
read by dense codes
read by monoprop
anticommuting, $\propto 1/N$
32
64
128
256
512
1024
$N$