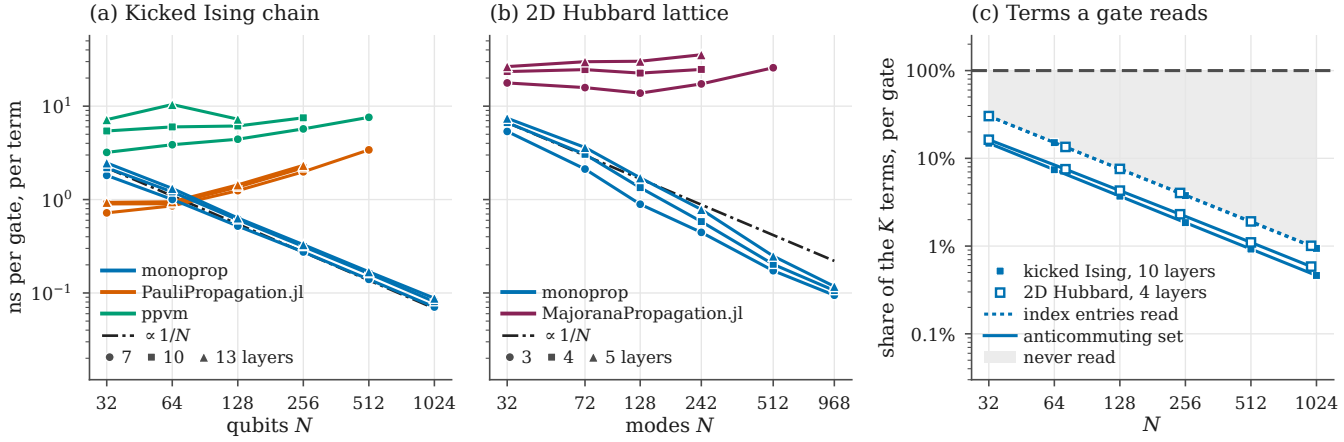
(a) Kicked Ising chain
ns per gate, per term
10^1
10^0
10^{-1}
monoprop
PauliPropagation.jl
ppvm
$\propto 1/N$
7 10 13 layers
32 64 128 256 512 1024
qubits N
(b) 2D Hubbard lattice
monoprop
MajoranaPropagation.jl
$\propto 1/N$
3 4 5 layers
32 72 128 242 512 968
modes N
(c) Terms a gate reads
share of the K terms, per gate
100%
10%
1%
0.1%
kicked Ising, 10 layers
2D Hubbard, 4 layers
index entries read
anticommuting set
never read
32 64 128 256 512 1024
N