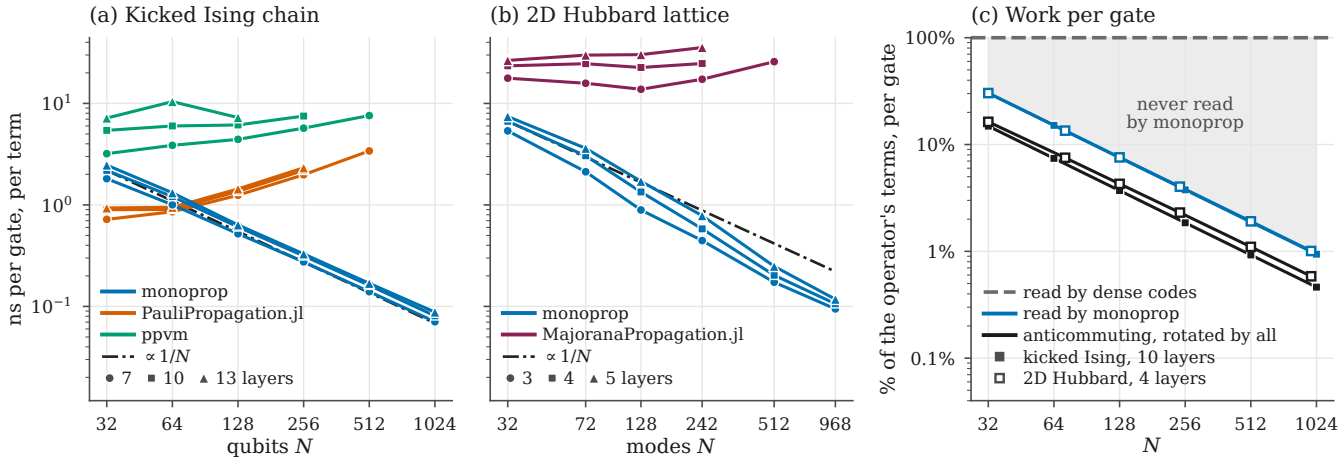
(a) Kicked Ising chain
ns per gate, per term
10^1
10^0
10^{-1}
monoprop
PauliPropagation.jl
ppvm
$\propto 1/N$
7
10
13 layers
32
64
128
256
512
1024
qubits N
(b) 2D Hubbard lattice
monoprop
MajoranaPropagation.jl
$\propto 1/N$
3
4
5 layers
32
72
128
242
512
968
modes N
(c) Work per gate
% of the operator's terms, per gate
100%
10%
1%
0.1%
never read
by monoprop
read by dense codes
read by monoprop
anticommuting, rotated by all
kicked Ising, 10 layers
2D Hubbard, 4 layers
32
64
128
256
512
1024
N