


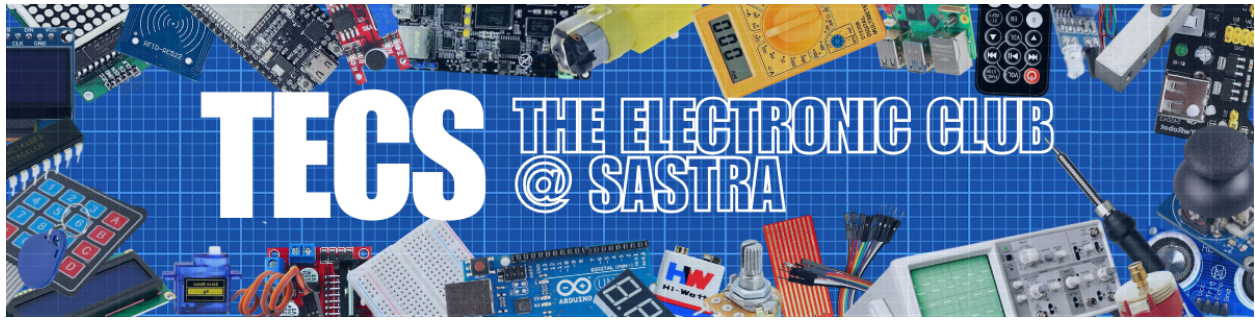


EDGE AI WORKSHOP


INSTALLATION GUIDE

Install Arduino IDE

1. Search for Arduino IDE Software in Google chrome and download the **1.8.19 version** with appropriate system information (Windows, Linux, MacOS etc.,)

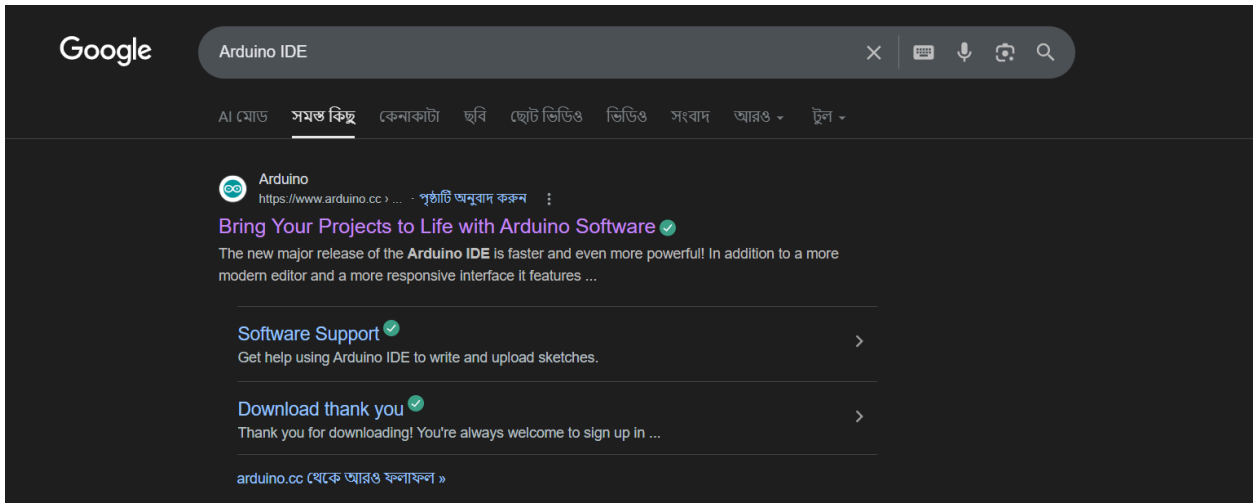

Scroll down to find Legacy IDE (1.8.19) and install it.

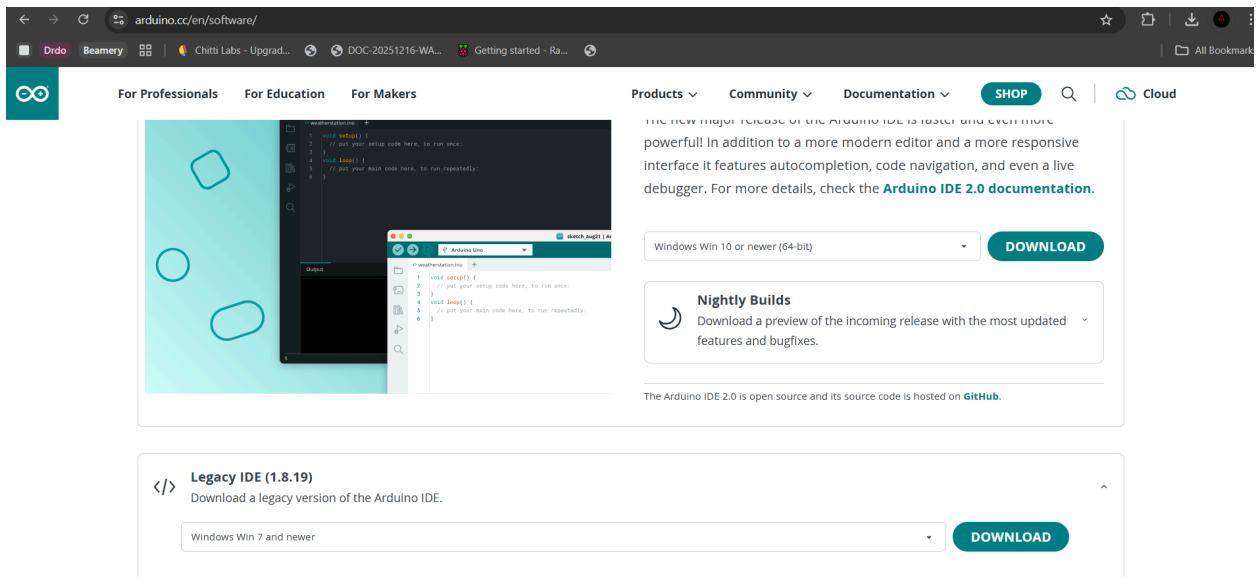


<https://www.arduino.cc/en/software/>

Install ESP32 Libraries


2. Install the ESP32 board package in the Arduino IDE via
Files > Preferences > Additional Board Manager URLs.
This will hold good for both Windows and MacOS.

Add “https://dl.espressif.com/dl/package_esp32_index.json”
to the URL List.

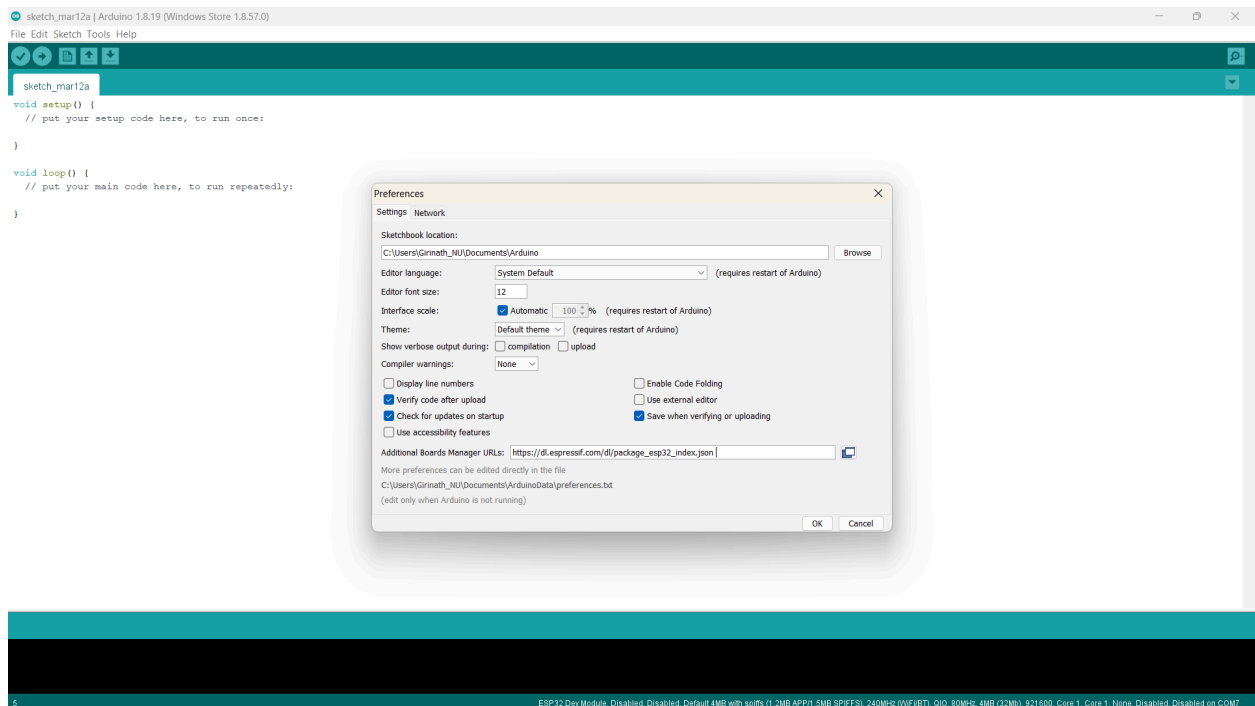

Install ESP32 Board Package

3. Open: Tools → Board → Boards Manager, search ESP32 then install “**esp32 by Espressif Systems**”. (This installs the ESP32 compiler, tools, and WiFi libraries.)

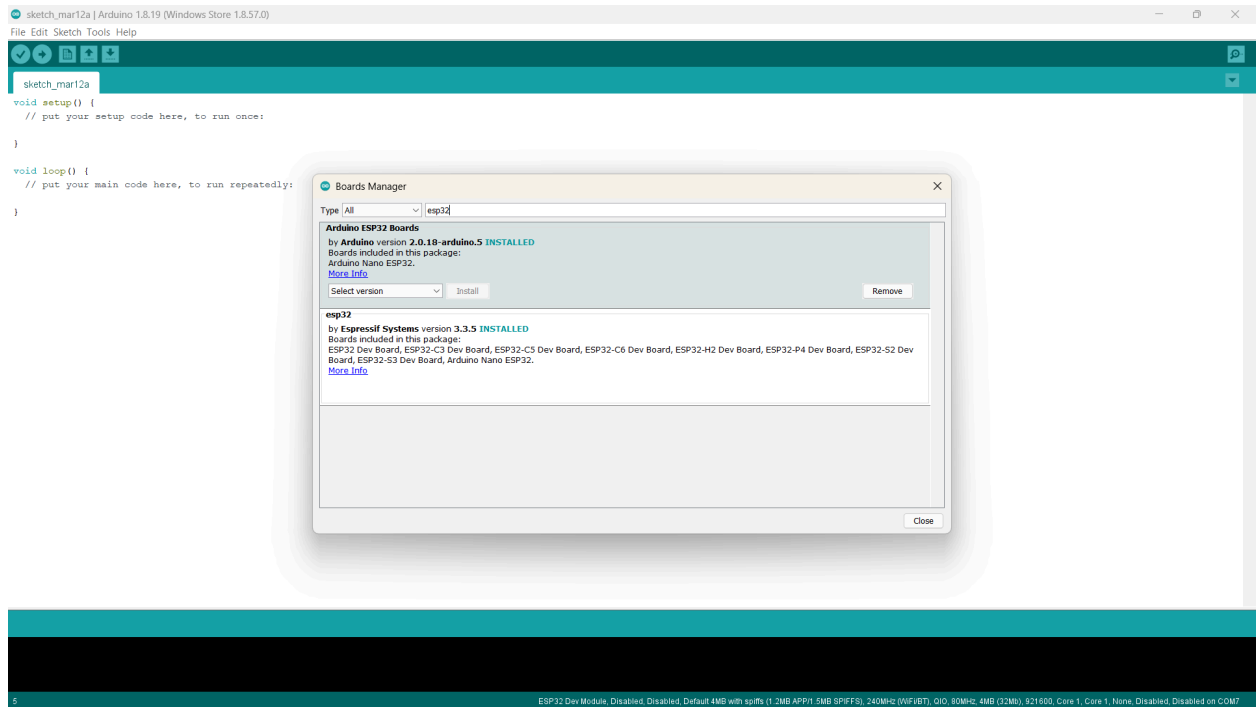

esp32

by **Espressif Systems** version **3.3.5** **INSTALLED**

Boards included in this package:

ESP32 Dev Board, ESP32-C3 Dev Board, ESP32-C5 Dev Board, ESP32-C6 Dev Board, ESP32-H2 Dev Board, ESP32-P4 Dev Board, ESP32-S2 Dev Board, ESP32-S3 Dev Board, Arduino Nano ESP32.

[More Info](#)


Select version ▾

Install


Update

Remove

4. After installation: Tools → Board → ESP32 Arduino → ESP32 Dev Module.

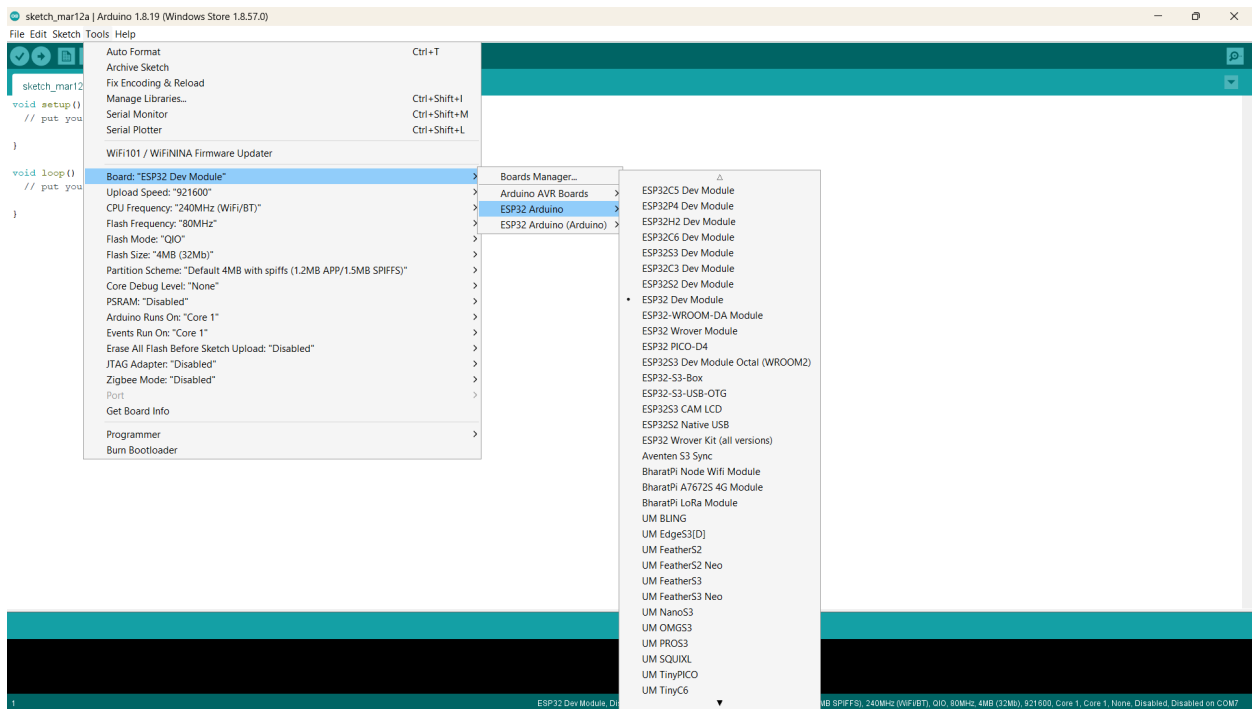


5. Install the USB Driver [CP210x](#).

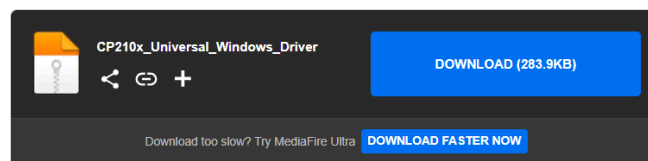

6. After downloading, extract it in the Downloads folder. Open the extracted folder:

Right click on: **silabser.inf** and click on **Install**.

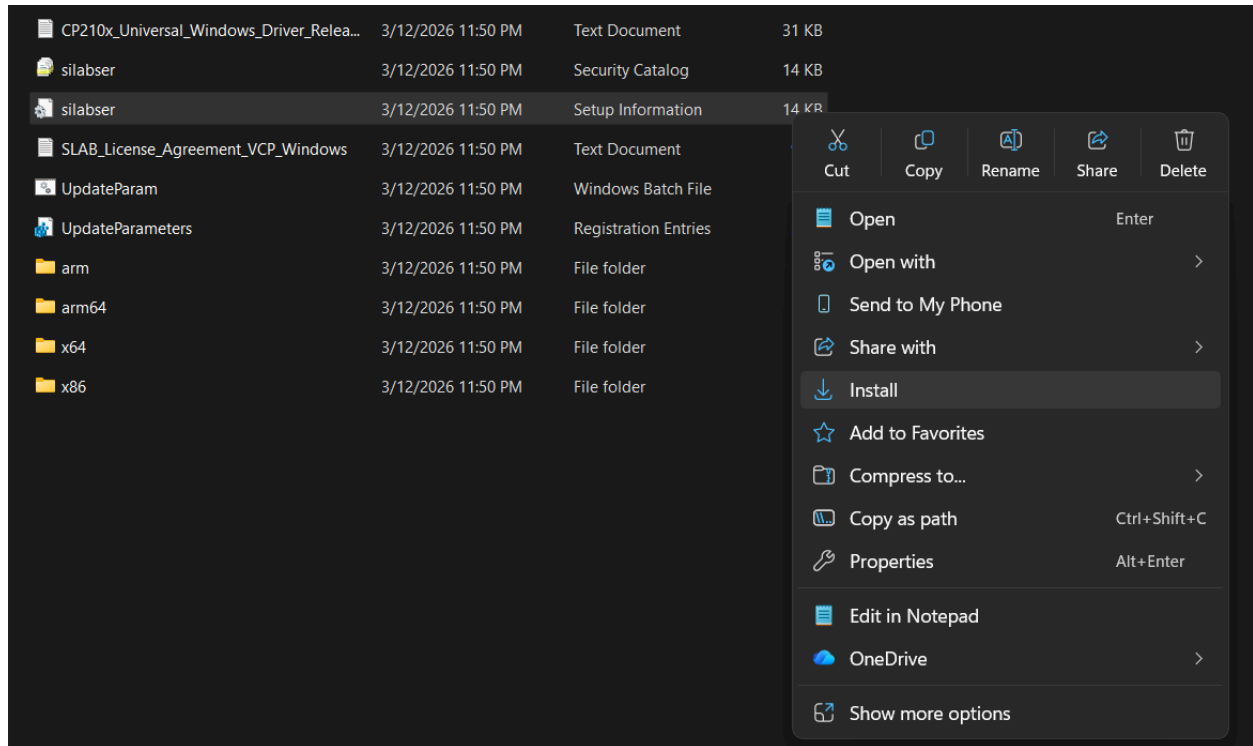

INSTALLATION OF PYTHON

IDLE 3.11.4

1. Open a browser window and navigate to the download page for Windows

<https://www.python.org/downloads/release/python-3114/>

Scroll to the bottom and select either Windows x86-64 executable installer for 64-bit or Windows x86 executable installer for 32-bit

For Windows, choose either the 32-bit / 64-bit installer

Files

macOS
Download macOS 64-bit universal2 installer

Windows
Download Python install manager

Source release
Download XZ compressed source tarball

Version	Operating system	Description	File size	Sigstore	GPG	MDS checksum
Gzipped source tarball	Source release		25.3 MB	.sigstore	SIG	bf6ec50f2f3bfa6ffbdb385286f2c628
XZ compressed source tarball	Source release		19.0 MB	.sigstore	SIG	fb7f7eae520285788449d569e45b6718
macOS 64-bit universal2 installer	macOS	for macOS 10.9 and later	41.1 MB	.sigstore	SIG	91498b67b9c4b5ef33d1b7327e401b17
Windows installer (64-bit)	Windows	Recommended	24.2 MB	.sigstore	SIG	e4413bb7448cd13b437dffffba294ca0
Windows installer (32-bit)	Windows		23.1 MB	.sigstore	SIG	9ec180db64c074e57bdcca8374e9ded6
Windows installer (ARM64)	Windows	Experimental	23.6 MB	.sigstore	SIG	60785673d37c754ddceb5788b5e5baa9
Windows embeddable package (64-bit)	Windows		10.1 MB	.sigstore	SIG	d0e85bf50d2adea597c40ee28e774081
Windows embeddable package (32-bit)	Windows		9.2 MB	.sigstore	SIG	81b0acfcdd31a73d1577d6e977acbcd6
Windows embeddable package (ARM64)	Windows		9.5 MB	.sigstore	SIG	bdce328de19973012123dc62c1cf7e9

2. Run the Installer.

Once you have chosen and downloaded an installer, simply run it by double-clicking on the downloaded file.


A dialog should appear that looks something like this:




Make sure you check this box: **Add python.exe to PATH**

Install Required Libraries

1. Sketch → Include Library → Manage Libraries.

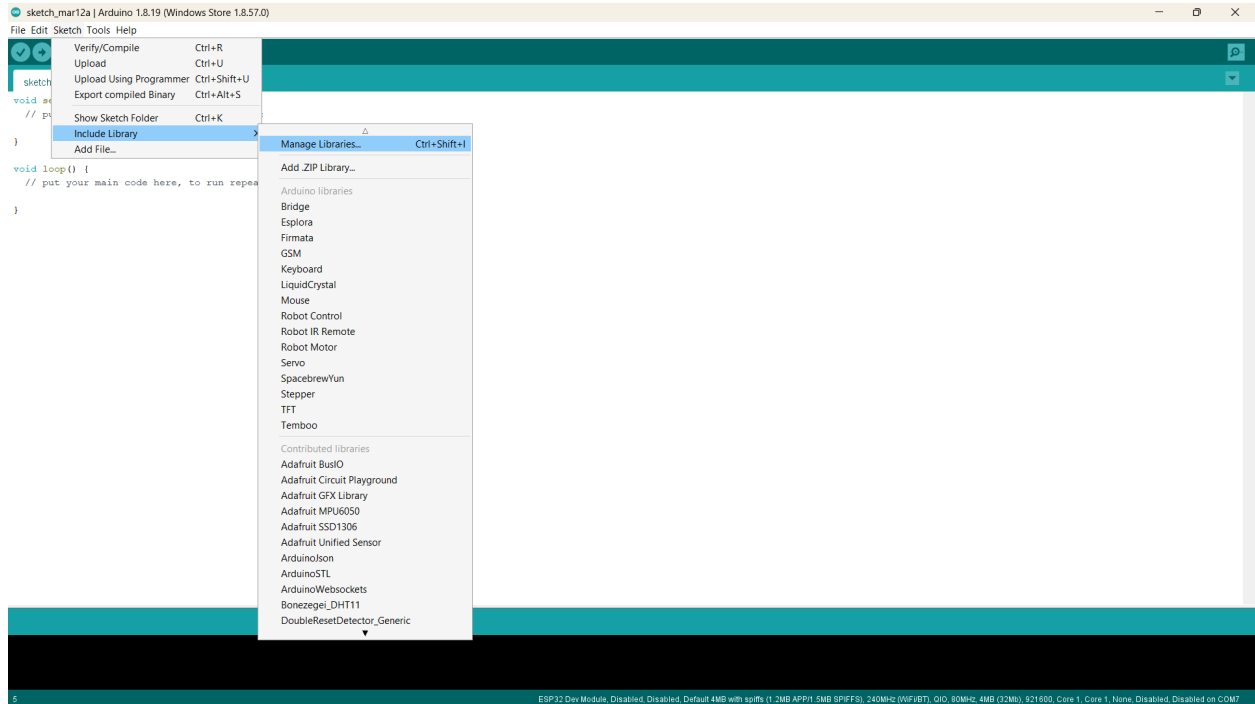

2. Search: MPU6050

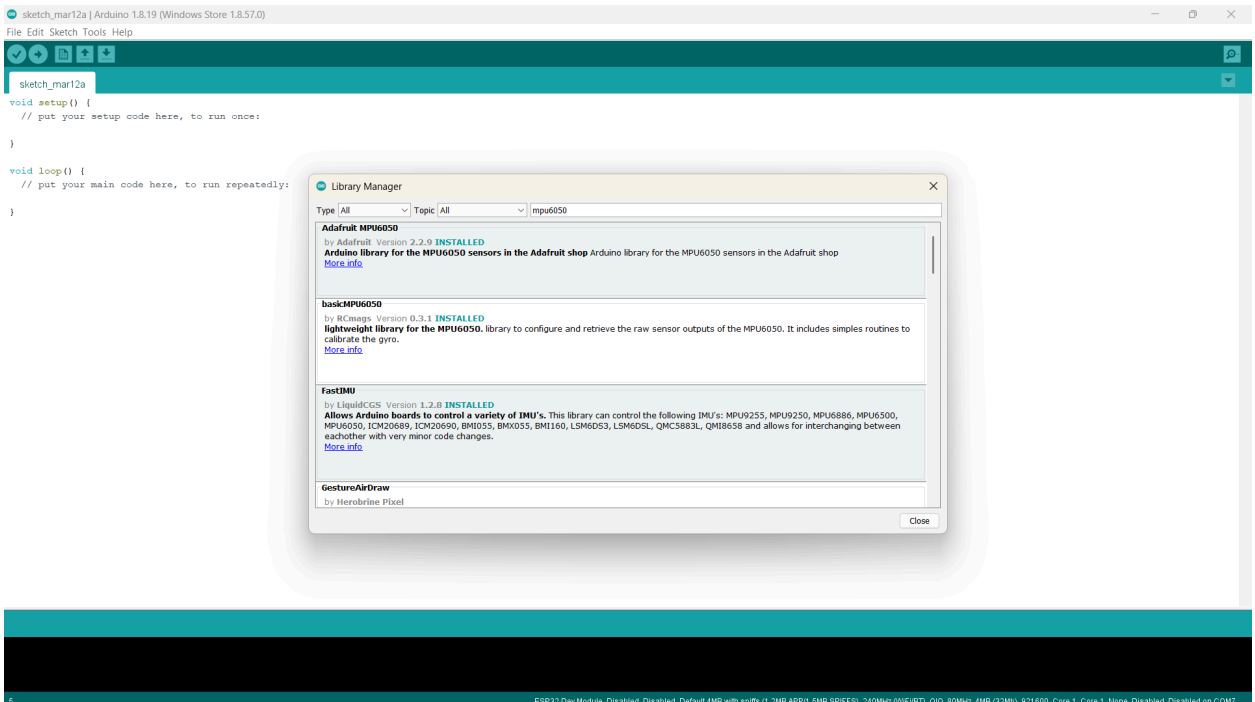

3. Install: **MPU6050** by **Electronic Cats**

MPU6050
by **Electronic Cats** Version **1.4.4** **INSTALLED**
MPU6050 Arduino Library. MPU-6050 6-axis accelerometer/gyroscope Arduino Library.
[More info](#)

Select version ▾

Install

4. Search: arduinoWebSockets

Install: **arduinoWebSockets** by **Markus Sattler**

WebSockets
by **Markus Sattler** Version **2.7.2** **INSTALLED**
WebSockets for Arduino (Server + Client) use 2.x.x for ESP and 1.3 for AVR
[More info](#)

yOU aRE dONE!!

SEE YOU AT WORKSHOP!!!