# Placing circuits without the calibration map: psf-os, a self-checking layer for IBM heavy-hex devices

Technical overview for a proof-of-concept evaluation (draft, November 2026)

The Architect

love.os.architect@proton.me

2 November 2026

**Abstract**

psf-os places a ring circuit on an IBM heavy-hex device without reading any calibration quality number. It tests the rings it would use with a short mirror echo read per site, keeps a dated list of the paths it found dead, places the user's ring around them, and attaches a four-circuit sentinel whose verdict travels with the result. On three devices (30 October to 1 November 2026) the 40-qubit ring placed around the list kept all 40 sites usable where the standard ring lost up to 18; the signal on sites that were already usable moved little, and fell in some rows. On a ring where nothing was dead, a forward computation gained $+0.040 \pm 0.002$ in mean site signal, all of it on the ten replaced qubits. This overview states the problem, the method, the device results with their limits, and how to try it. psf-os is pre-release.

## 1 The problem

On `ibm_kingston`, the same 18 qubits of a 40-qubit ring read near random or inverted in every run of a byte-identical echo circuit on 30 October, 31 October and 1 November 2026 (Figure 1, top). Seventeen of those 18 qubits were healthy on other rings the same day, and the calibration data showed nothing unusual there. So the defect belongs to a *path*, not to a qubit, and a layout chosen from calibration numbers cannot avoid what the calibration does not show. We make no claim about its physical cause.

## 2 The method

psf-os is a user-side layer. It reads only the device's coupling graph and its failed elements, never a quality number, and decides from its own runs.

**Scan.** One job of 24 circuits runs a mirror echo of depth $D = 24$ on the standard rings and reads a signal $a_j$ per site. A run of three or more sites below 0.12 is *dead*; a site below $\max(0.12, 0.5 \times \text{median})$ is *weak*.

**Registry.** Each dead run becomes a path entry. A path is *listed* once two jobs agree; an entry expires after seven days. A healthy ring that passes a listed path is reported as a contradiction (the entry stays). A weak run is kept as a gray mark, avoided on its own day only and never carried over.

**Avoid.** The allocator masks the middle coupler of each listed path and places the ring by the same fixed rule (no search, no seed choice, no selection by simulation). Avoiding is the default.

**Sentinel.** The user's job carries four extra echo circuits on the same ring. The result comes back with a verdict, CLEAN, WEAK or DEAD, and the sites concerned.

**Repair (narrow).** A local frame flip can lift a dead block, but only for mirror-type circuits (Section 4).

Jobs are submitted through the TOQB test bench with "stay": a job is never moved to another device. The same build gives byte-identical compiled circuits (fixed names, recorded SHA-256), so a run can be checked against its manifest. The time model is 0.036 s per circuit + 0.00027 s per shot + 3 s per job: about 10 s for the scan (9 s billed in our runs) and about 6.7 s for an 8-circuit job with its sentinel at 1,000 shots.

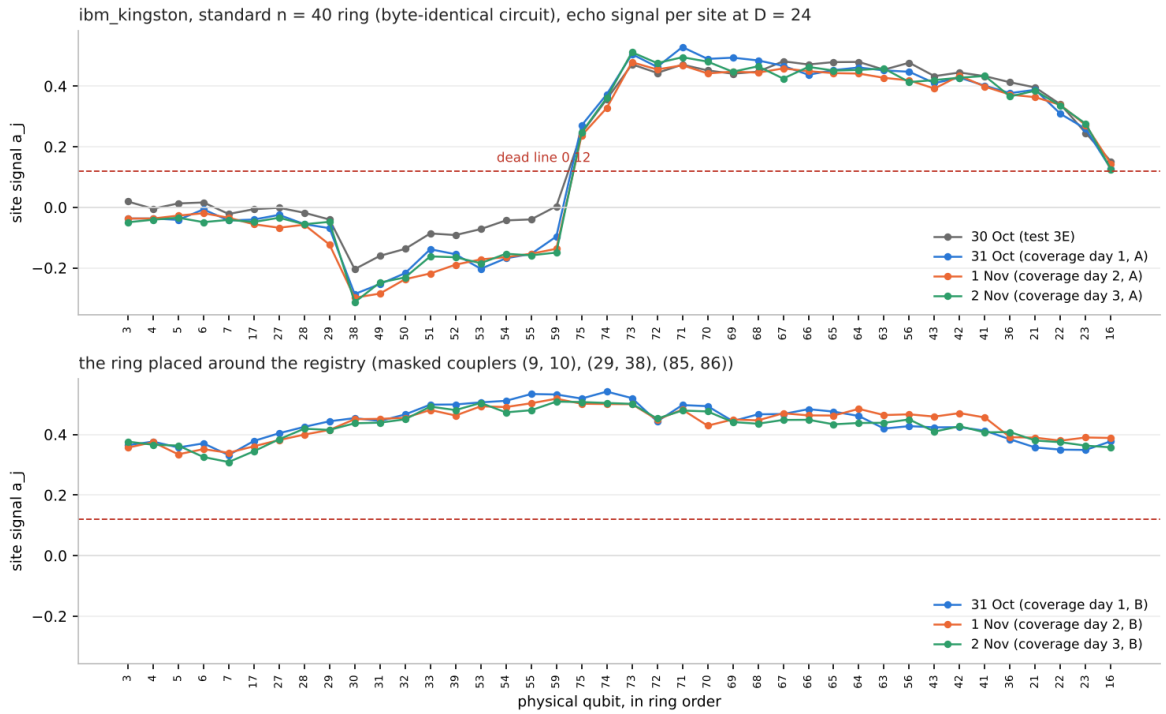



Figure 1: `ibm_kingston`, echo signal per site at $D = 24$. Top: the standard 40-qubit ring on three days; the same 18 sites sit below the dead line 0.12. Bottom: the ring placed around the list (masked couplers (9,10), (29,38), (85,86)); every site is above it.

# 3 Device results

**Width.** Every test below was declared before its run (SHA-256 and CET time fixed before the fetch).

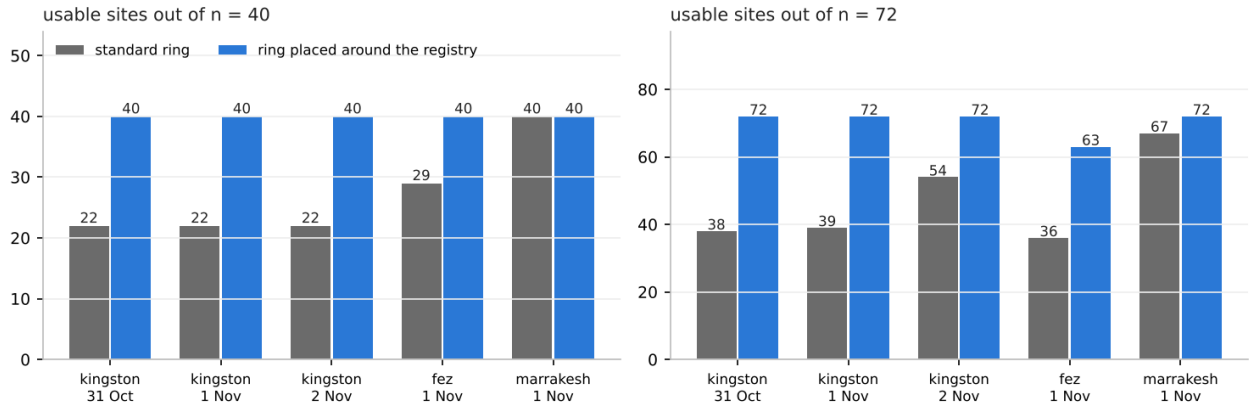



Figure 2: Usable sites (no dead run) on the standard ring and on the ring placed around the list.

The headline is "usable sites 22 → 40". The essential number is in the second column: on the sites that were already usable the mean signal moved from 0.41 to 0.44 on kingston, and in three rows it fell. The gain is in how much of the device can carry a computation, not a better signal everywhere. On fez the placed 72-qubit ring still had nine unusable sites.

**A forward computation.** On `ibm_marrakesh`, 72 qubits, 12 layers of a computation with a known answer (not a mirror), on a day when nothing was dead on the standard ring: mean site signal 0.776 on the standard ring and 0.816 on the ring placed around the list ($+0.040 \pm 0.002$; at 24 layers $+0.052 \pm 0.002$). The headline is "per-bit right 88.8 % → 90.8 %". The essential numbers: all of the gain sits in the ten qubits the placed ring replaced (0.615 → 0.866); on the 62 shared qubits the two rings read the same (0.802 against 0.808). The listed path was weak that day, not dead, so the gain is accuracy, not width.

| device, day | 40-qubit ring usable sites | 40-qubit ring mean $a_j$ on usable sites | 72-qubit ring usable sites | 72-qubit ring mean $a_j$ on usable sites |
|---|---|---|---|---|
| kingston, 31 Oct | 22 → 40 | 0.41 → 0.44 | 38 → 72 | 0.38 → 0.35 |
| kingston, 1 Nov | 22 → 40 | 0.39 → 0.44 | 39 → 72 | 0.38 → 0.42 |
| fez, 1 Nov | 29 → 40 | 0.16 → 0.20 | 36 → 63 | 0.27 → 0.22 |
| marrakesh, 1 Nov | 40 → 40 | 0.27 → 0.24 | 67 → 72 | 0.23 → 0.26 |

Table 1: Standard ring → ring placed around the list. The headline is the width; the signal on sites that were already usable moved little, and fell in three of the eight rows.

# 4 Limits

- Three devices over three days; one family of circuits (rings placed by one fixed rule, mirror echoes and one forward computation). Nothing here is a statement about other circuit families.
- A first forward test on `ibm_kingston` used 40 layers, beyond the readable depth of either ring (0.009 and 0.020, under the declared floor 0.05). It is reported as INCONCLUSIVE; the design error is ours.
- The frame-flip repair lifted kingston's dead block at 12 layers (block signal 0.27 → 0.56) but only to about 0.13 at 24 layers, and it applies only to mirror-type circuits.
- The listed defects are paths. We do not claim their cause. Some dead runs recur at the same ring positions on several chips with the same circuit, so part of what a scan sees may depend on the position in the circuit.
- The sentinel (M6) is a prototype checked in simulation; it has not yet run on a device.

# 5 How to try it

**Five minutes, no IBM account.** `POC/quickstart_os.py` plants a two-qubit depolarizing error ($p = 0.15$) on two couplers of IBM's FakeFez in an Aer simulation, scans twice, lists the planted paths, and solves two practice problems with exact answers on the standard ring and on the placed ring. It prints on its first and last line that it is a simulation with planted defects, not a device result. One run on a 2-core machine took 92 s: listed paths [14,15,19,35] and [74,75,59,55]; cluster-state parity ($n = 40$) 0.920 → 1.000 with sentinel CLEAN; a random Clifford circuit read through its stabilizers ($n = 40$) 0.980 → 1.000.

**On a device.** `psf-os fetch` → `psf-os plan` (a scan job first when there is no scan of the day) → TOQB `s2rc_device submit` (stay) → `psf-os scan-ingest` → `psf-os plan` again (placed ring with sentinel) → `psf-os result` (score and verdict).

**Evaluation.** The request form, the mutual NDA template and the report template for psf-os are in `POC/`. The test is fixed in writing before anything runs; the report gives the standard and the self-checked placement side by side.

**Records.** Paper 5, *Readable Depth Without the Calibration Map* (doi:10.5281/zenodo.23827536); Paper 4 (doi:10.5281/zenodo.23826764); Paper 3 (doi:10.5281/zenodo.23826596); Paper 6 (draft) collects the results above. psf-os: `https://github.com/TN-Holdings-LLC/psf-os` (pre-release, AGPL-3.0).