


Creating and Mounting Amazon EFS Across Multiple EC2 Instances


Learn how to provision an Amazon EFS file system and mount it across various EC2 instances in different availability zones. This guide demonstrates how to configure shared storage to enable seamless file access and synchronization between your cloud-based virtual machines.

1


Navigate to <https://eu-north-1.console.aws.amazon.com/console/home?nc2=hsi®ion=eu-north-1&src=header-signin#>

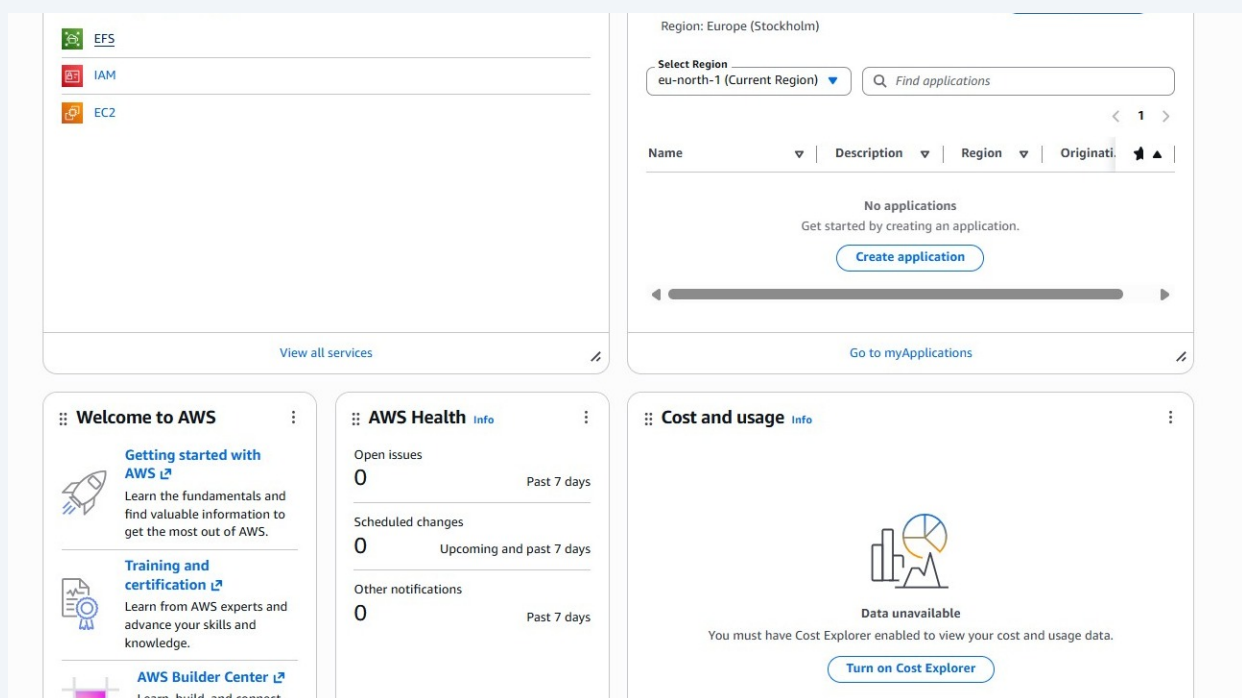

2 Click "EFS"

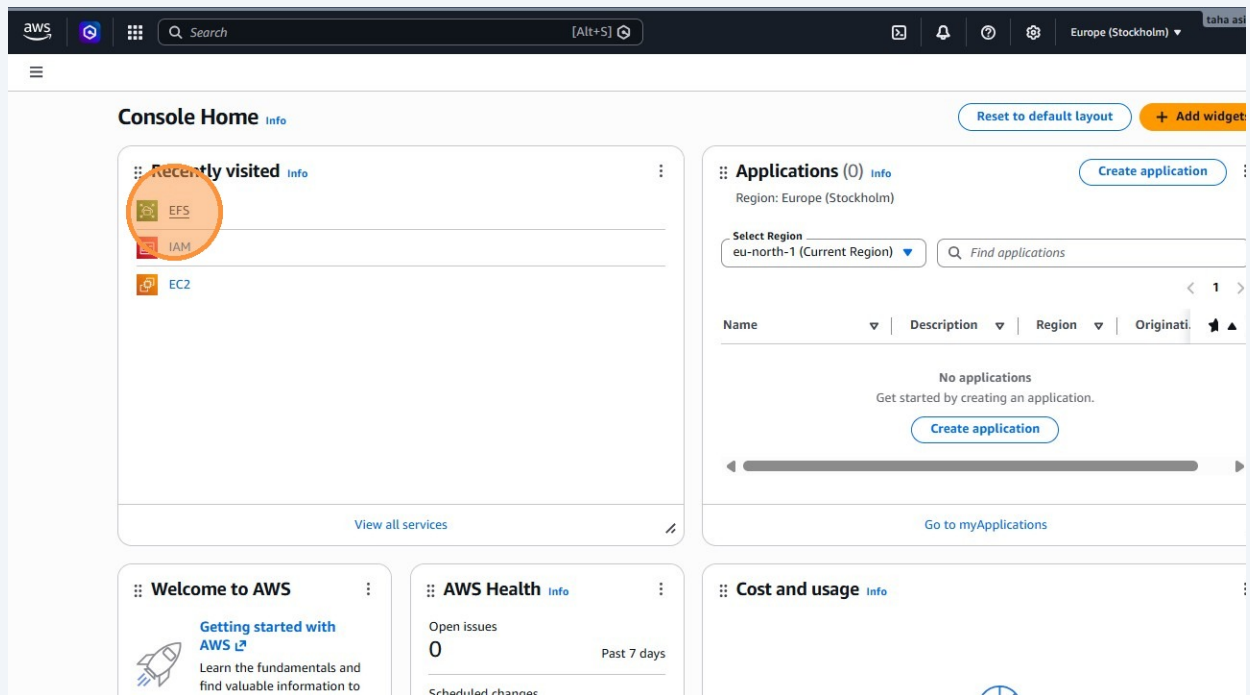

3 Click "Create file system"

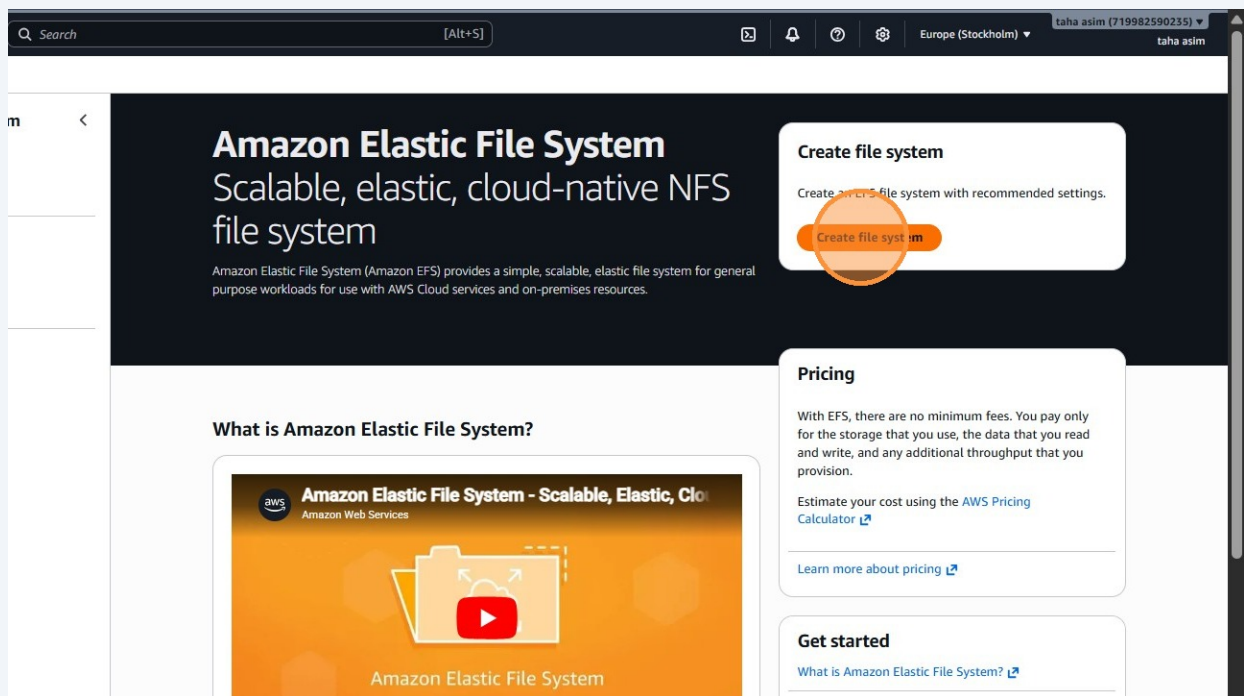

4 Click the "Name - optional" field.


The screenshot shows the Amazon Elastic File System (EFS) console. The 'Create file system' dialog is open, and the 'Name - optional' field is highlighted with an orange circle. The dialog contains the following sections:

- Create file system**: A section with a close button (X) and instructions to create a file system with recommended settings or customize it.
- Name - optional**: A section with the instruction 'Name your file system.' and a text input field. The input field contains the placeholder text 'Optional. Apply a name to your file system'. Below the input field, it states: 'Name can include letters, numbers, and +-=._:/ symbols, up to 256 characters.'
- Virtual Private Cloud (VPC)**: A section with the instruction 'Choose the VPC where you want EC2 instances to connect to your file system.' and a dropdown menu showing 'vpc-Oe34eae17f79b6fb5' with a 'default' label and a downward arrow.
- Recommended settings**: A section with the instruction 'Your file system is created with the following recommended settings unless you choose to customize the file system. You will be charged for storage and throughput. We recommend reviewing pricing for these features using the [AWS Pricing Calculator](#).' Below this is a table with the following data:


Setting	Value	Editable after creation
Throughput mode Learn more	Elastic	Yes
Transition into Infrequent Access (IA)	30 day(s) since last access	Yes

5 Type "filesystem-1"


6 Click "Create file system"

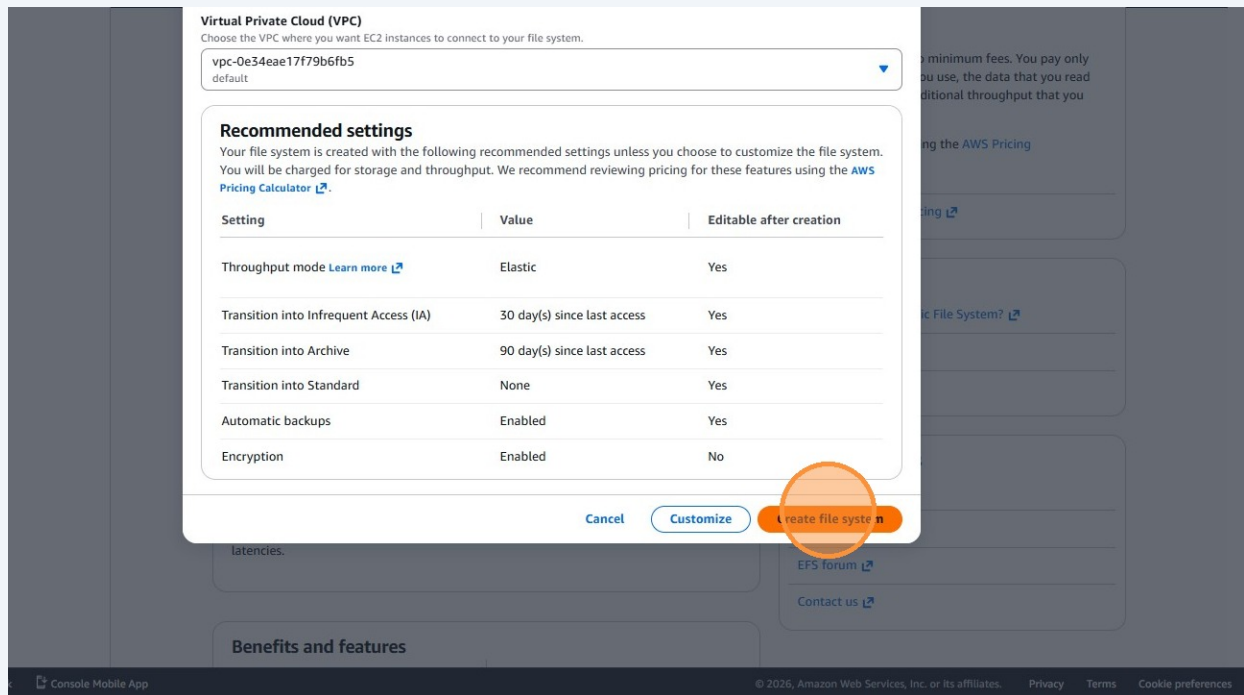

7 Click here.

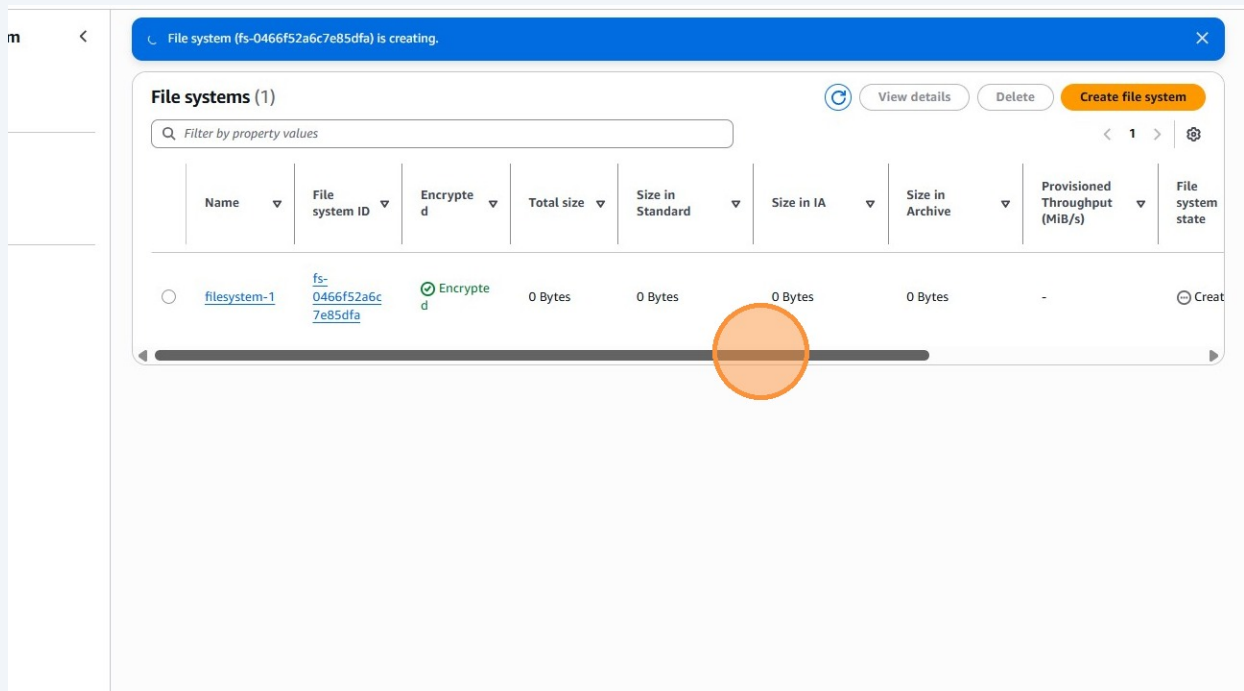


8 Click "Amazon EFS"

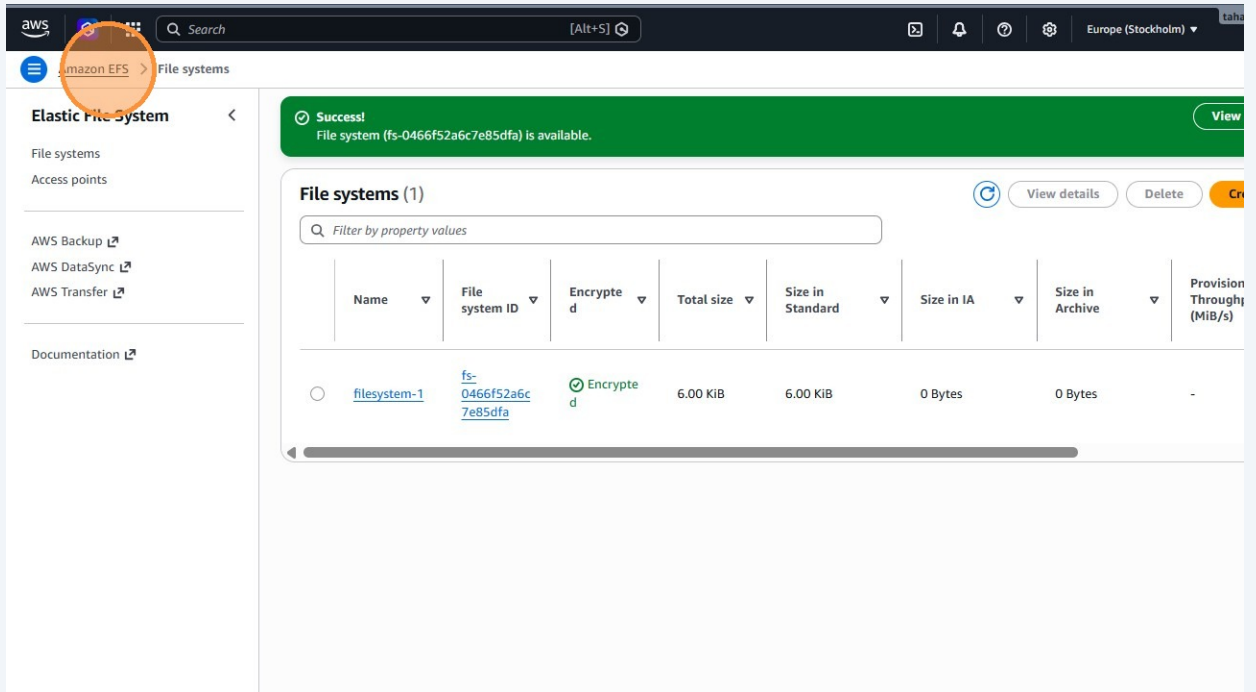

The screenshot shows the AWS Management Console interface. In the left-hand navigation menu, the 'Amazon EFS' link is highlighted with an orange circle. The main content area displays a green success banner at the top, followed by a section titled 'File systems (1)'. Below this is a table with columns for Name, File system ID, Encryption status, Total size, Size in Standard, Size in IA, Size in Archive, and Provision Throughput. The table contains one entry for 'filesystem-1' with a file system ID of 'fs-0466f52a6c7e85dfa' and an encryption status of 'Encrypted'.


Name	File system ID	Encryption status	Total size	Size in Standard	Size in IA	Size in Archive	Provision Throughput (MiB/s)
filesystem-1	fs-0466f52a6c7e85dfa	Encrypted	6.00 KiB	6.00 KiB	0 Bytes	0 Bytes	-

9 Click "EC2"

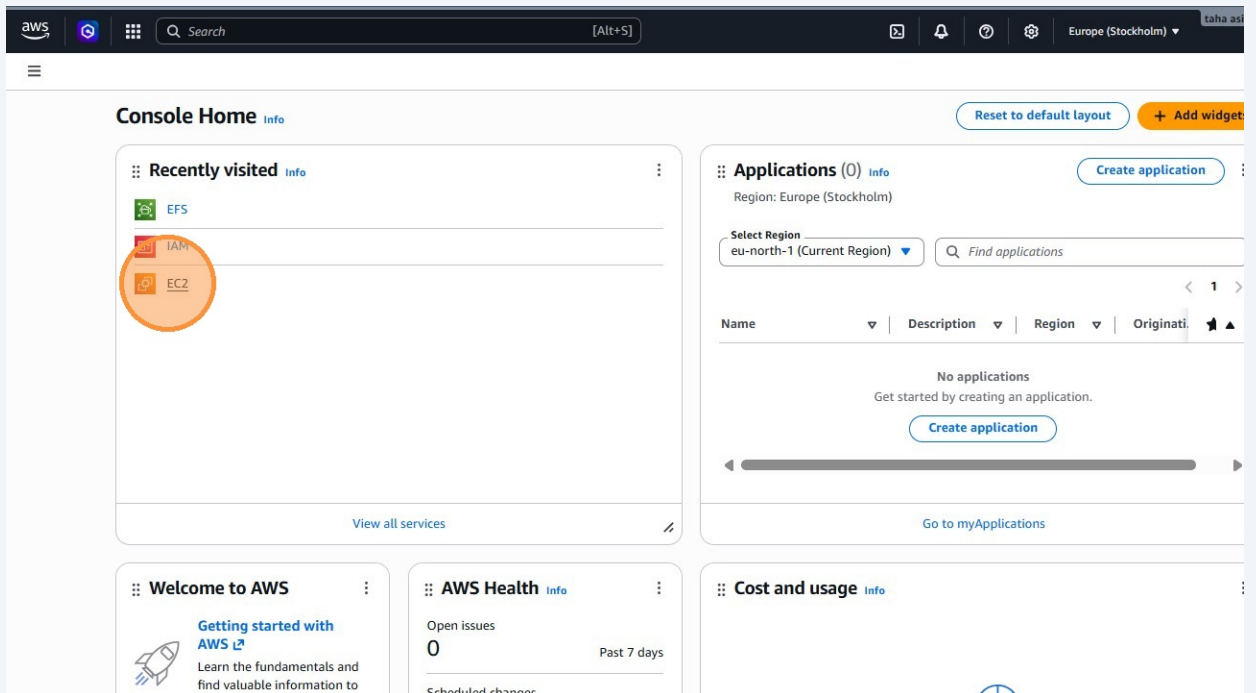


The screenshot shows the AWS Management Console interface. In the 'Recently visited' section, the 'EC2' link is highlighted with an orange circle. The main content area displays the 'Applications' section, which includes a 'Create application' button and a 'Go to myApplications' link. The 'Applications' section also shows a 'No applications' message and a 'Create application' button.

10 Click "Launch instance"

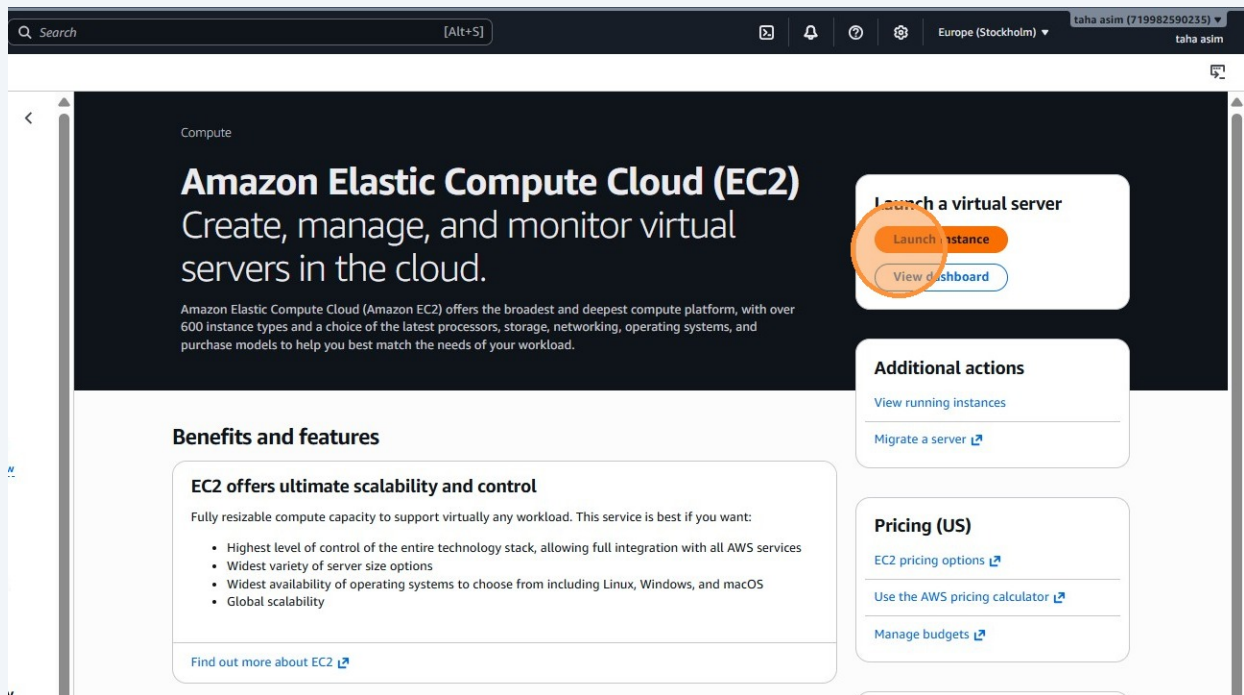

11 Click "Launch without a walkthrough"

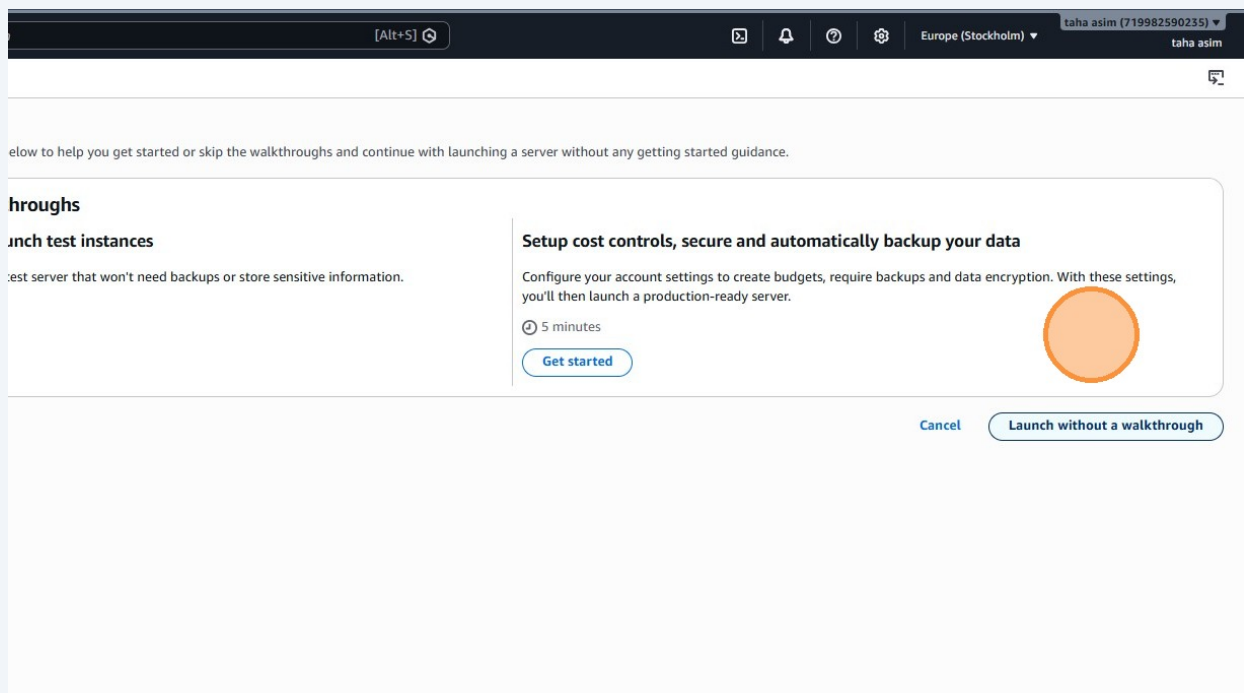

12 Click the "Name" field.

The screenshot shows the AWS Management Console interface for launching an EC2 instance. The breadcrumb navigation at the top reads 'EC2 > Instances > Launch an instance'. A blue banner at the top contains a message about a walkthrough for new users, with buttons for 'Take a walkthrough' and 'Do not show me this message again.'.

The main heading is 'Launch an instance' with an 'Info' link. Below it, a sub-header reads 'Name and tags' with an 'Info' link. The 'Name' field is a text input containing the placeholder text 'e.g. My Web Server'. An orange circle is drawn around this input field. To the right of the field is a button labeled 'Add additional tags'.

Below the 'Name and tags' section is a section titled 'Application and OS Images (Amazon Machine Image)' with an 'Info' link. It contains a loading spinner and text explaining that an AMI contains the operating system, application server, and applications for the instance.

Below that is the 'Instance type' section with an 'Info' link and a 'Get advice' link. It features a dropdown menu labeled 'Instance type' with 'Select' as the current value, and a toggle switch for 'All generations' which is currently turned off.

On the right side of the console, there is a 'Summary' panel. It lists various configuration options: 'Number of instances' (set to 1), 'Software Image (AMI)', 'Virtual server type (instance type)', 'Firewall (security group)', and 'Storage (volumes)'. At the bottom of the summary panel are 'Cancel' and 'Launch' buttons.

13 Type "vm-1-a"

14 Click "Select"

EC2 > Instances > Launch an instance

▼ Instance type [Info](#) | [Get advice](#)

Instance type

t3.micro Free tier eligible

Family: t3 2 vCPU 1 GiB Memory Current generation: true
On-Demand Linux base pricing: 0.0108 USD per Hour On-Demand Windows base pricing: 0.02 USD per Hour
On-Demand Ubuntu Pro base pricing: 0.0143 USD per Hour
On-Demand RHEL base pricing: 0.0396 USD per Hour On-Demand SUSE base pricing: 0.0108 USD per Hour

All generations

[Compare instance types](#)

Additional costs apply for AMIs with pre-installed software

▼ Key pair (login) [Info](#)

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - required

Select ▼

[Create new key pair](#)

▼ Network settings [Info](#) [Edit](#)

Network [Info](#)

vpc-0e34eae17f79b6fb5

Subnet [Info](#)

No preference (Default subnet in any availability zone)

Auto-assign public IP [Info](#)

Enable

Firewall (security groups) [Info](#)

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☒ Create security group

☐ Select existing security group

▼ Summary

Number of instances [Info](#)

1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.11....[read more](#)
ami-09e320d375d7b8d3e

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel

[Launch](#)

15 Click "Proceed without key pair"

▼ Instance type [Info](#) | [Get advice](#)

Instance type

t3.micro Free tier eligible

Family: t3 2 vCPU 1 GiB Memory Current generation: true
On-Demand Linux base pricing: 0.0108 USD per Hour On-Demand Windows base pricing: 0.02 USD per Hour
On-Demand Ubuntu Pro base pricing: 0.0143 USD per Hour
On-Demand RHEL base pricing: 0.0396 USD per Hour On-Demand SUSE base pricing: 0.0108 USD per Hour

All generations

[Compare instance types](#)

Additional costs apply for AMIs with pre-installed software

▼ Key pair (login) [Info](#)

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - required

Select ▼

[Create new key pair](#)

Q |

Proceed without a key pair (Not recommended) Default value

aws-key
Type: rsa

▼ Network settings [Info](#) [Edit](#)

Network [Info](#)

vpc-0e34eae17f79b6fb5

Subnet [Info](#)

No preference (Default subnet in any availability zone)

Auto-assign public IP [Info](#)

Enable

Firewall (security groups) [Info](#)

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☒ Create security group

☐ Select existing security group

We'll create a new security group called 'launch-wizard-13' with the following rules:

☒ Allow SSH traffic from

Anywhere

▼ Summary

Number of instances [Info](#)

1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.11....[read more](#)
ami-09e320d375d7b8d3e

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel

[Launch](#)

Made with Scribe - <https://scribehow.com>

8

16 Click "Edit"

The screenshot shows the AWS Management Console 'Launch instance' page. The 'Network settings' section is expanded, showing options for VPC, Subnet, and Availability Zone. An orange circle highlights the 'Edit' button in the 'Network settings' section. The 'Summary' section on the right shows the instance configuration, including the number of instances (1), software image (Amazon Linux 2023 AMI), virtual server type (t3.micro), firewall (New security group), and storage (1 volume - 8 GiB). The 'Launch instance' button is visible at the bottom right of the summary section.

17 Click "eun1-az1"

The screenshot shows the AWS Management Console 'Launch instance' page. The 'Network settings' section is expanded, showing options for VPC, Subnet, and Availability Zone. An orange circle highlights the 'eun1-az1' option in the 'Availability Zone' list. The 'Summary' section on the right shows the instance configuration, including the number of instances (1), software image (Amazon Linux 2023 AMI), virtual server type (t3.micro), firewall (New security group), and storage (1 volume - 8 GiB). The 'Launch instance' button is visible at the bottom right of the summary section.

18 Click "ssh"

Firewall (security groups) [Info](#)

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☒ Create security group

☐ Select existing security group

Security group name - *required*

launch-wizard-13

This security group will be added to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters: a-z, A-Z, 0-9, spaces, and _-./!@#%^&*(){}\$*

Description - *required* [Info](#)

launch-wizard-13 created 2026-05-03T14:26:42.751Z

Inbound Security Group Rules

▼ Security group rule 1 (TCP, 22, 0.0.0.0/0)

Type [Info](#)

ssh

Protocol [Info](#)

TCP

Port range [Info](#)

22

Source type [Info](#)

Anywhere

Source [Info](#)

Q

Add CIDR, prefix list or security group

0.0.0.0/0

×

Description - *optional* [Info](#)

e.g. SSH for admin desktop

⚠ Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

×

Add security group rule

Configure storage [Info](#)

Advanced

Software image (AMI)

Amazon Linux 2023 AMI 2023.11....[read more](#)

ami-09e320d575d7b8d5e

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel

Lau

⌵ p

19 Click "All traffic"

▼ Description - *required* | Info

launch-wizard-13 created 2026-05-03T14:26:42.751Z

Inbound Security Group Rules

▼ Security group rule 1 (TCP; 22, 0.0.0.0/0)

Type | Info

ssh

Custom TCP

Custom UDP

Custom ICMP - IPv4

Custom ICMP - IPv6

Custom Protocol

All TCP

All UDP

All ICMP - IPv4

All ICMP - IPv6

All traffic

ssh ✓

SMTP

DNS (UDP)

DNS (TCP)

HTTP

Protocol | Info

TCP

Source | Info

Q Add CIDR, prefix list or security group

0.0.0.0/0 ✕

Port range | Info

22

Description - *optional* | Info

e.g. SSH for admin desktop

Remove

addresses to access your instance. We recommend setting security group rules to allow

✕

Advanced

▼ Root volume, 3000 IOPS, Not encrypted

Click refresh to view backup information

↻

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel

Lau

🖨 P

20 Click "No preference"

The screenshot shows the AWS Management Console interface for launching an EC2 instance. The 'Network settings' section is expanded, and the 'Subnet' dropdown menu is open. The 'No preference' option is selected and highlighted with an orange circle. The 'Summary' panel on the right shows the instance configuration: 1 instance, Amazon Linux 2023 AMI, t3.micro instance type, New security group, and 1 volume (8 GiB).

Network settings

VPC - required | Info
vpc-0e34eae17f79b6fb5 (default) 172.31.0.0/16

Subnet | Info
No preference

Availability Zone | Info
eu-north-1a eun1-az1

Auto-assign public IP | Info
Enable

Firewall (security groups) | Info
A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.
☒ Create security group ☐ Select existing security group

Security group name - required
launch-wizard-13
This security group will be added to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters: a-z, A-Z, 0-9, spaces, and _-./[!@#%&*(){}~|:;"]

Description - required | Info
launch-wizard-13 created 2026-05-03T14:26:42.751Z

Inbound Security Group Rules

Summary

Number of instances | Info
1

Software Image (AMI)
Amazon Linux 2023 AMI 2023.11....read more
ami-09e320d375d7b8d3e

Virtual server type (instance type)
t3.micro

Firewall (security group)
New security group

Storage (volumes)
1 volume(s) - 8 GiB

Cancel Launch

21 Click "subnet 1c"

The screenshot shows the AWS Management Console interface for launching an EC2 instance. The 'Subnet' dropdown menu is open, and 'subnet-01d37b614e4c37ca5' is selected, highlighted with an orange circle. The 'Summary' panel on the right shows the instance configuration: 1 instance, Amazon Linux 2023 AMI, t3.micro instance type, New security group, and 1 volume (8 GiB).

Network settings

VPC - required | Info
vpc-0e34eae17f79b6fb5 (default) 172.31.0.0/16

Subnet | Info
No preference

Availability Zone | Info
eu-north-1a eun1-az1

Auto-assign public IP | Info
Enable

Firewall (security groups) | Info
A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.
☒ Create security group ☐ Select existing security group

Security group name - required
launch-wizard-13
This security group will be added to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters: a-z, A-Z, 0-9, spaces, and _-./[!@#%&*(){}~|:;"]

Description - required | Info
launch-wizard-13 created 2026-05-03T14:26:42.751Z

Inbound Security Group Rules

Summary

Number of instances | Info
1

Software Image (AMI)
Amazon Linux 2023 AMI 2023.11....read more
ami-09e320d375d7b8d3e

Virtual server type (instance type)
t3.micro

Firewall (security group)
New security group

Storage (volumes)
1 volume(s) - 8 GiB

Cancel Launch

22 Click "EFS"

0.0.0.0/0 X

Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only. X

Add security group rule

► Advanced network configuration

▼ Configure storage Info Advanced

1x 8 GiB gp3 Root volume, 3000 IOPS, Not encrypted

Add new volume

Click refresh to view backup information
The tags that you assign determine whether the instance will be backed up by any Data Lifecycle Manager policies.

File systems

☐ S3 Files - new ☒ EFS ☐ FSx

► Advanced details Info

New security group

Storage (volumes)
1 volume(s) - 8 GiB

Cancel Launch

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms

23 Click "Add shared file system"

Add security group rule

► Advanced network configuration

▼ Configure storage Info Advanced

1x 8 GiB gp3 Root volume, 3000 IOPS, Not encrypted

Add new volume

Click refresh to view backup information
The tags that you assign determine whether the instance will be backed up by any Data Lifecycle Manager policies.

File systems

☐ S3 Files - new ☒ EFS ☐ FSx

You currently have no file systems on this instance. To add a file system, choose Add shared file system.

Add shared file system Create new shared file system

5 remaining (a total of 5 file systems maximum).

► Advanced details Info

New security group

Storage (volumes)
1 volume(s) - 8 GiB

Cancel Launch

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms

24 Click the "Mount point" field.

Add new volume

Click refresh to view backup information
The tags that you assign determine whether the instance will be backed up by any Data Lifecycle Manager policies.

File systems

S3 Files - new

EFS

FSx

Shared file system 1

File system fs-0466f52a6c7e85dfa
Name: filesystem-1 Availability: Regional

Mount point /mnt/fs/fs1

Add shared file system

Create new shared file system

4 remaining (Up to 5 file systems maximum).

Automatically create and attach security groups

To enable access to the file system, the required security groups will be automatically created and attached to this instance and the selected file system. To manually manage the security groups, clear the checkbox. [Learn more.](#)

Automatically mount shared file system by attaching required user data script

Automatically mount your file system by updating your user data to install efs-utils. If you would like to manually mount your file system, clear the checkbox.

Advanced details

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel

Launch instance

Preview code

25 Click "Launch instance"

JS

Info

Add additional tags

Operating system and OS Images (Amazon Machine Image)

Operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search bar to find more AMIs.

Full catalog including 1000s of application and OS images

Quick Start

macOS

Ubuntu

Windows

Red Hat

SUSE Linux

Debian

23 kernel-6.1 AMI

b8d3e (64-bit (x86), uefi-preferred) / ami-05d9d9ea9f0230673 (64-bit (Arm), uefi)

ENA enabled: true Root device type: ebs

Free tier eligible

AMI 2023.11.20260427.1 x86_64 HVM kernel-6.1

Number of instances

1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.11...[read more](#)

ami-09e320d375d7b8d3e

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel

Launch instance

Preview code

26 Click "Instances"

aws Search [Alt+S] Europe (Stockholm) taha

EC2 Instances Launch an instance

Success
Successfully initiated launch of instance (i-0cb342154933c914b)

► Launch log

Next Steps
What would you like to do next with this instance, for example "create alarm" or "create backup"

Create billing usage alerts
To manage costs and avoid surprise bills, set up email notifications for billing usage thresholds.
[Create billing alerts](#)

Connect to your instance
Once your instance is running, log into it from your local computer.
[Connect to instance](#)
[Learn more](#)

Connect an RDS database
Configure the connection between an EC2 instance and a database to allow traffic flow between them.
[Connect an RDS database](#)
[Create a new RDS database](#)
[Learn more](#)

Create EBS snapshot policy
Create a policy that automates retention, and deletion of EBS snapshots.
[Create EBS snapshot policy](#)

Manage detailed monitoring
Enable or disable detailed monitoring for the instance. If you enable detailed monitoring, the Amazon EC2 console displays monitoring graphs for the instance.
[Manage detailed monitoring](#)

Create Load Balancer
Create an application, network gateway or classic Elastic Load Balancing load balancer.
[Create Load Balancer](#)

Create AWS budget
AWS Budgets allows you to create budgets, forecast spend, and take action on your costs and usage from a single location.
[Create AWS budget](#)

Manage CloudWatch alarms
Create or update Amazon CloudWatch alarms for your EC2 instances.
[Manage CloudWatch alarms](#)

27 Click "Launch instances"

[Alt+S] Europe (Stockholm) taha asim (719982590235) taha asim

Instances (1) Info Connect Instance state Actions Launch instances

Saved filter sets Choose filter set Find Instance by attribute or tag (case-sensitive)

Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Public IPv4 DN
vm-1-a	i-0cb342154933c914b	Running	t3.micro	Initializing	View alarms	eu-north-1a	ec2-13-53-214-

Select an instance

28 Type "vm-1-b"

29 Click the "Name" field.

The screenshot shows the AWS Management Console interface for launching an EC2 instance. The breadcrumb trail at the top indicates the path: EC2 > Instances > Launch an instance. A blue notification banner at the top suggests taking a walkthrough. The main heading is 'Launch an instance' with an 'Info' link. Below this, a sub-header 'Name and tags' also has an 'Info' link. The 'Name' input field is highlighted with an orange circle. To its right is a link to 'Add additional tags'. Below the 'Name and tags' section is the 'Application and OS Images (Amazon Machine Image)' section, which includes a description of AMIs and a 'Browse more AMIs' link. The 'Instance type' section is expanded, showing details for the 't3.micro' instance type, including its family, vCPU, memory, and pricing for various operating systems. There are also links for 'All generations' and 'Compare instance types'. At the bottom, the 'Key pair (login)' section is partially visible. On the right side, a 'Summary' panel displays the configuration: 1 instance, Software Image (AMI) as '-', Virtual server type (instance type) as 't3.micro', Firewall (security group) as '-', and Storage (volumes) as '-'. At the bottom of the summary panel are 'Cancel' and 'Launch instance' buttons, along with a 'Preview code' link.

aws [Search] [Alt+S] Europe (Stockholm) taha asim (719982590235) taha asim

EC2 > Instances > Launch an instance

It seems like you may be new to launching instances in EC2. Take a walkthrough to learn about EC2, how to launch instances and about best practices.

[Take a walkthrough](#) [Do not show me this message again.](#)

Launch an instance [Info](#)

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags [Info](#)

Name

 [Add additional tags](#)

▼ Application and OS Images (Amazon Machine Image) [Info](#)

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose [Browse more AMIs](#).

▼ Instance type [Info](#) | [Get advice](#)

Instance type

t3.micro Free tier eligible

Family: t3 2 vCPU 1 GiB Memory Current generation: true

On-Demand Linux base pricing: 0.0108 USD per Hour On-Demand Windows base pricing: 0.02 USD per Hour

On-Demand Ubuntu Pro base pricing: 0.0145 USD per Hour On-Demand RHEL base pricing: 0.0396 USD per Hour On-Demand SUSE base pricing: 0.0108 USD per Hour

[Additional costs apply for AMIs with pre-installed software](#)

☐ All generations [Compare instance types](#)

▼ Key pair (login) [Info](#)

▼ Summary

Number of instances [Info](#)

Software Image (AMI)

-

Virtual server type (instance type)

t3.micro

Firewall (security group)

-

Storage (volumes)

-

[Cancel](#) [Launch instance](#) [Preview code](#)

30 Click "Proceed without a key pair (Not recommended)"

Instance type

t3.micro Free tier eligible

Family: t3 2 vCPU 1 GiB Memory Current generation: true

On-Demand Linux base pricing: 0.0108 USD per Hour On-Demand Windows base pricing: 0.02 USD per Hour

On-Demand Ubuntu Pro base pricing: 0.0143 USD per Hour

On-Demand RHEL base pricing: 0.0396 USD per Hour On-Demand SUSE base pricing: 0.0108 USD per Hour

[Additional costs apply for AMIs with pre-installed software](#)

Key pair (login) [Info](#)

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - required

Select ↕ [Create new key pair](#)

Proceed without a key pair (Not recommended) Default value [Edit](#)

aws-key
Type: rsa

vpc-0e34eae17f79b6fb5

Subnet [Info](#)

No preference (Default subnet in any availability zone)

Auto-assign public IP [Info](#)

Enable

Firewall (security groups) [Info](#)

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☒ Create security group ☐ Select existing security group

We'll create a new security group called 'launch-wizard-14' with the following rules:

☒ Allow SSH traffic from Anywhere

Summary

Number of instances [Info](#)

1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.11...[read more](#)
ami-09e320d375d7b8d3e

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

[Cancel](#) [Launch instance](#) [Preview code](#)

31 Click "Edit"

Key pair (login) [Info](#)

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - required

Proceed without a key pair (Not recommended) Default value [Create new key pair](#) [Edit](#)

aws-key
Type: rsa

Summary

Number of instances [Info](#)

1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.11...[read more](#)
ami-09e320d375d7b8d3e

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

[Cancel](#) [Launch instance](#) [Preview code](#)

32 Click "subnet-13"

▼ Network settings Info

VPC - required Info

vpc-0e34eae17f79b6fb5 (default) ↕

172.31.0.0/16

Subnet Info

No preference ↕

Q

No preference ✓

subnet-0a67e74387e5d411c

VPC: vpc-0e34eae17f79b6fb5 Owner: 719982590235 Availability Zone: eu-north-1a (eun1-az1)

Zone type: Availability Zone IP addresses available: 4089 CIDR: 172.31.16.0/20

subnet-063b5fc0a2690b813

VPC: vpc-0e34eae17f79b6fb5 Owner: 719982590235 Availability Zone: eu-north-1b (eun1-az2)

Zone type: Availability Zone IP addresses available: 4090 CIDR: 172.31.32.0/20

subnet-01d37b614e4c97ca5

VPC: vpc-0e34eae17f79b6fb5 Owner: 719982590235 Availability Zone: eu-north-1c (eun1-az3)

Zone type: Availability Zone IP addresses available: 4090 CIDR: 172.31.0.0/20

launch-wizard-14

This security group will be added to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters: a-z, A-Z, 0-9, spaces, and _-:/#,@!+=&{}|~*

Description - required Info

launch-wizard-14 created 2026-05-03T14:28:11.639Z

Inbound Security Group Rules

▼ Security group rule 1 (TCP, 22, 0.0.0.0/0)

Type Info

ssh

TCP

Port range Info

22

Remove

Software Image (AMI)

Amazon Linux 2023 AMI 2023.11....read more

ami-09e320d375d7b8d3e

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel

Launch

33 Click "ssh"

Firewall (security groups) | Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

Create security group

Select existing security group

Security group name - required

launch-wizard-14

This security group will be added to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters: a-z, A-Z, 0-9, spaces, and _-./!@#%&'()*~+-^`=|;:,{}[]`~'."'
Description - required | Info
launch-wizard-14 created 2026-05-03T14:28:11.639Z

Inbound Security Group Rules

▼ Security group rule 1 (TCP, 22, 0.0.0.0/0)

Type | Info

ssh

Protocol | Info

TCP

Port range | Info

22

Description - optional | Info

e.g. SSH for admin desktop

Source type | Info

Anywhere

Source | Info

Add CIDR, prefix list or security group

0.0.0.0/0 X

Remove

Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

Add security group rule

Advanced network configuration

Number of instances | Info

1

Software Image (AMI)
Amazon Linux 2023 AMI 2023.11.....read more
ami-09e320d375d7b8d3e

Virtual server type (instance type)
t3.micro

Firewall (security group)
New security group

Storage (volumes)
1 volume(s) - 8 GiB

Cancel

Lau...
P...

34 Click "All traffic"

launch-wizard-14 created 2026-05-05 14:28:11.659Z

Inbound Security Group Rules

▼ Security group rule 1 (TCP, 22, 0.0.0.0/0)

Type [Info](#) Protocol [Info](#) Port range [Info](#)

ssh

Custom TCP
Custom UDP
Custom ICMP - IPv4
Custom ICMP - IPv6
Custom Protocol
All TCP
All UDP
All ICMP - IPv4
All ICMP - IPv6
All traffic
SSH
SMTP
DNS (UDP)
DNS (TCP)
HTTP
POP3
IMAP

Source [Info](#) Description - optional [Info](#)

0.0.0.0/0

0.0.0.0/0

addresses to access your instance. We recommend setting security group rules to allow

Remove

New security group

Storage (volumes)
1 volume(s) - 8 GiB

Cancel

Advanced

Root volume, 3000 IOPS, Not encrypted

Click refresh to view backup information
The tags that you assign determine whether the instance will be backed up by any Data Lifecycle Manager policies.

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy

35 Click "EFS"

0.0.0.0/0

Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

Add security group rule

► Advanced network configuration

▼ Configure storage [Info](#)

Advanced

1x 8 GiB gp3 Root volume, 3000 IOPS, Not encrypted

Add new volume

Click refresh to view backup information
The tags that you assign determine whether the instance will be backed up by any Data Lifecycle Manager policies.

File systems

☐ S3 Files - new ☒ EFS ☐ FSx

► Advanced details [Info](#)

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy

36 Click "eun1-az2"

▼ Network settings [Info](#)

VPC - required [Info](#)

vpc-0e34eae17f79b6fb5 (default) [↻](#)

Subnet [Info](#)

No preference [↻](#) [Create new subnet](#)

Availability Zone [Info](#)

No preference [↻](#) [Enable additional zones](#)

Q

No preference ✓
eu-north-1a eun1-az1
eu-north-1b eun1-az2
eu-north-1c eun1-az3

Security group name - required

launch-wizard-14

This security group will be added to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters: a-z, A-Z, 0-9, spaces, and _-./[!@#%&*~`]{1,255}

Description - required [Info](#)

launch-wizard-14 created 2026-05-03T14:31:07.974Z

Inbound Security Group Rules

▼ Security group rule 1 (TCP, 22, 0.0.0.0/0)

[Remove](#)

Type [Info](#)

ssh

Protocol [Info](#)

TCP

Port range [Info](#)

22

Amazon Linux 2023 AMI 2023.11...[read more](#)
ami-09e320d375d7b8d3e

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

[Cancel](#)

[Launch](#)

[Previous](#)

[Next](#)

37 Click "Add shared file system"

[Add security group rule](#)

► [Advanced network configuration](#)

▼ [Configure storage](#) [Info](#)

[Advanced](#)

1x 8 GiB gp3 Root volume, 3000 IOPS, Not encrypted

[Add new volume](#)

🔄 Click refresh to view backup information

The tags that you assign determine whether the instance will be backed up by any Data Lifecycle Manager policies.

File systems

☐ S3 Files - new ☒ EFS ☐ FSx

You currently have no file systems on this instance. To add a file system, choose [Add shared file system](#).

[Add shared file system](#)

[↻](#) [Create new shared file system](#)

5 remaining (Up to 5 file systems maximum).

► [Advanced details](#) [Info](#)

New security group

[Storage \(volumes\)](#)

1 volume(s) - 8 GiB

[Cancel](#)

[Launch](#)

[Previous](#)

[Next](#)

[CloudShell](#) [Feedback](#) [Console Mobile App](#)

© 2026, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#)

38 Click "Launch instance"

The screenshot shows the 'Launch instance' page in the AWS Management Console. The 'Launch instance' button is highlighted with an orange circle. The page displays configuration options for the instance, including the number of instances (1), software image (AMI), virtual server type (instance type), firewall (security group), and storage (volumes). The 'Launch instance' button is located at the bottom right of the configuration panel.

39 Click "Instances"

The screenshot shows the 'Instances' page in the AWS Management Console. The 'Instances' link in the left navigation menu is highlighted with an orange circle. The page displays a success message for the launch of an instance (i-0b97e15dc05913188). Below the message, there are several 'Next Steps' cards, including 'Create billing usage alerts', 'Connect to your instance', 'Connect an RDS database', 'Create EBS snapshot policy', 'Manage detailed monitoring', 'Create Load Balancer', 'Create AWS budget', and 'Manage CloudWatch alarms'.

40 Click this checkbox.

The screenshot shows the AWS Management Console interface for the EC2 Instances page. The left sidebar contains navigation links for EC2, Dashboard, AWS Global View, Events, Instances, Instance Types, Launch Templates, Spot Requests, Savings Plans, Reserved Instances, Dedicated Hosts, Capacity Reservations, Capacity Manager, Images, AMIs, AMI Catalog, Elastic Block Store, Volumes, Snapshots, and Lifecycle Manager. The main content area displays a table of instances. An orange circle highlights the checkbox next to the instance named 'vm-1-b'.

Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone
vm-1-b	i-0b97e15dc05913188	Running	t3.micro	Initializing	View alarms +	eu-north-1b
vm-1-a	i-0cb342154933c914b	Running	t3.micro	3/3 checks passed	View alarms +	eu-north-1a

41 Click "Connect"

The screenshot shows the AWS Management Console interface for the EC2 Instances page. The left sidebar contains navigation links for EC2, Dashboard, AWS Global View, Events, Instances, Instance Types, Launch Templates, Spot Requests, Savings Plans, Reserved Instances, Dedicated Hosts, Capacity Reservations, Capacity Manager, Images, AMIs, AMI Catalog, Elastic Block Store, Volumes, Snapshots, and Lifecycle Manager. The main content area displays a table of instances. An orange circle highlights the 'Connect' button.

Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Public IP
vm-1-b	i-0b97e15dc05913188	Running	t3.micro	Initializing	View alarms +	eu-north-1b	ec2-5
vm-1-a	i-0cb342154933c914b	Running	t3.micro	3/3 checks passed	View alarms +	eu-north-1a	ec2-1

42 Click "Connect"

or IPv6 address

☐ Connect using a Private IP
Connect using a private IP address and a VPC endpoint

AMI used to launch the instance. If you didn't define a custom username, use the default username, ec2-user.

default username, ec2-user, is correct. However, read your AMI usage instructions to check if the AMI owner has changed the default AMI username.

Cancel **Connect**

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

43 Click this checkbox.

aws [Search] [Alt+S] Europe (Stockholm)

EC2 > Instances

Instances (1/2) Info


Saved filter sets Choose filter set Find Instance by attribute or tag (case-sensitive)

	Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability
☐	vm-1-b	i-0b97e15dc05913188	Running	t3.micro	Initializing	View alarms +	eu-nortl
☒	vm-1-a	i-0cb342154933c914b	Running	t3.micro	3/3 checks passed	View alarms +	eu-nortl

i-0cb342154933c914b (vm-1-a)

Details Status and alarms Monitoring Security Networking Storage Tags

44 Click "Connect"

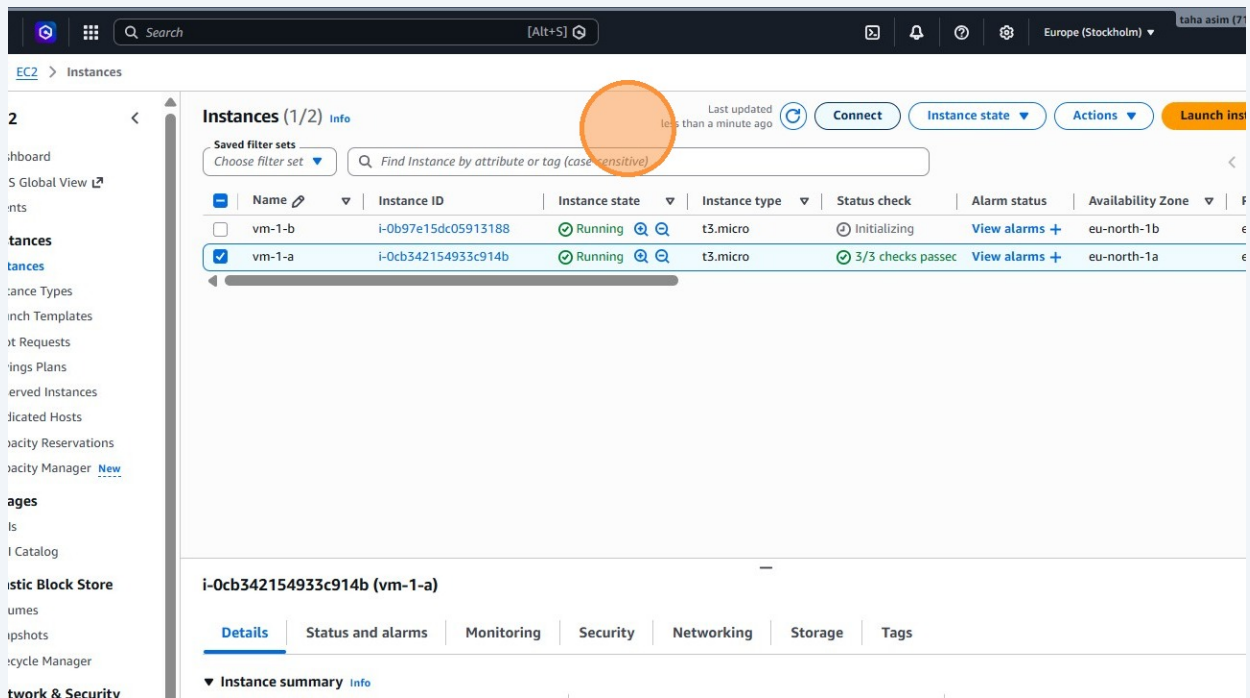

The screenshot shows the AWS Management Console interface for the EC2 Instances page. The left sidebar contains navigation links for various AWS services. The main content area displays a table of instances. The 'Connect' button is highlighted with an orange circle.

Instances (1/2) Info

Save filter sets
Choose filter set Find Instance by attribute or tag (case sensitive)

Last updated less than a minute ago [Refresh](#) [Connect](#) [Instance state](#) [Actions](#) [Launch instance](#)

	Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone
☐	vm-1-b	i-0b97e15dc05913188	Running	t3.micro	Initializing	View alarms +	eu-north-1b
☒	vm-1-a	i-0cb342154933c914b	Running	t3.micro	3/3 checks passed	View alarms +	eu-north-1a


i-0cb342154933c914b (vm-1-a)

[Details](#) [Status and alarms](#) [Monitoring](#) [Security](#) [Networking](#) [Storage](#) [Tags](#)


▼ Instance summary [Info](#)

45 Switch to tab EC2 Instance Connect | eu-north-1"

46 Click "[ec2-user@ip-172-31-34-51 ~]\$"

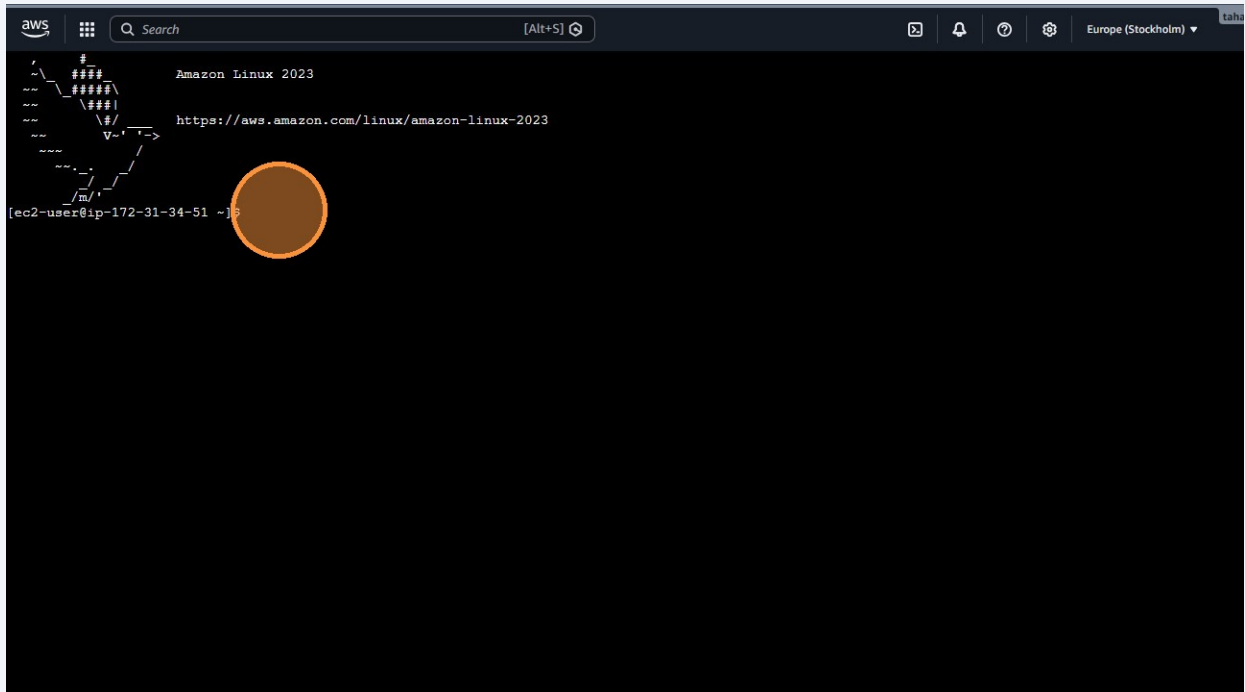

47 Click "Connect"

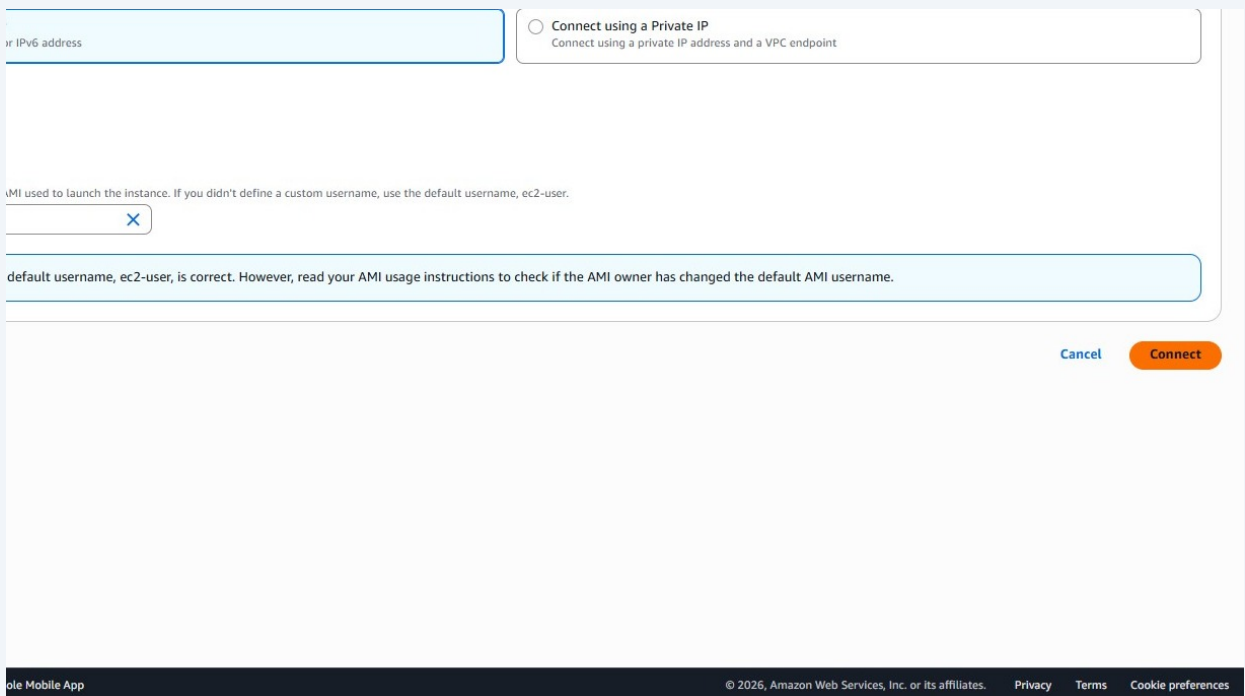


48 Type "sudo su - **Enter** touch"

49 Type "touch /mnt/efs/fs1/hello.txt"

Enter ls /mnt/efs/fs1"

50 Switch to tab EC2 Instance Connect | eu-north-1"

51 Click "[ec2-user@ip-172-31-20-57 ~]\$"

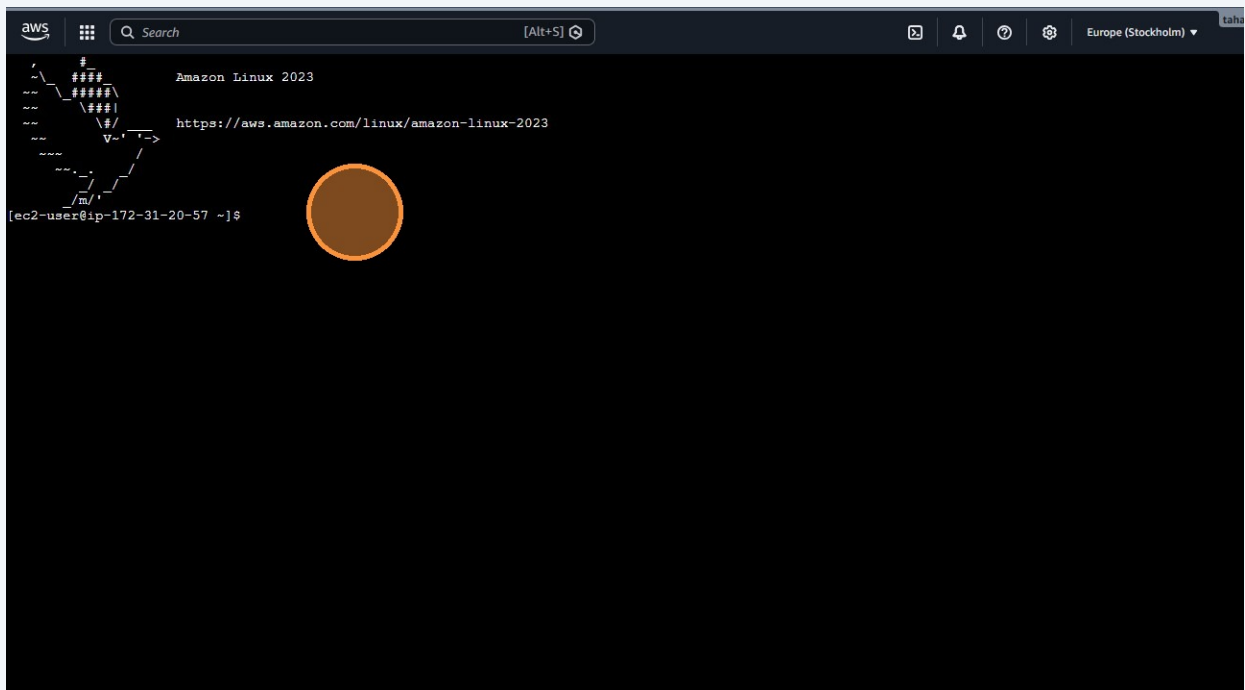

52 Type "sudo su - **Enter**

ls /mnt/efs/fs1

Enter touch /mnt/efs/fs1/bye.txt

Enter ls /mnt/efs/fs1"

53 Switch to tab Instances | EC2 | eu-north-1"

54 Type "vm-1-c"

55 Click the "Name" field.

The screenshot shows the AWS Management Console interface for launching an EC2 instance. The breadcrumb navigation at the top indicates the path: EC2 > Instances > Launch an instance. The main heading is "Launch an instance" with an "Info" link. Below this, a sub-header "Name and tags" is followed by a "Name" input field containing the placeholder text "e.g. My Web Server". An orange circle highlights this input field. To the right of the input field is a link "Add additional tags". Below the "Name and tags" section is the "Application and OS Images (Amazon Machine Image)" section, which is expanded and shows a loading spinner. The "Instance type" section is also expanded, showing the "t3.micro" instance type selected. The right sidebar contains a "Summary" section with the following details: "Number of instances" (1), "Software Image (AMI)" (empty), "Virtual server type (instance type)" (t3.micro), "Firewall (security group)" (empty), and "Storage (volumes)" (empty). At the bottom right of the sidebar, there are "Cancel" and "Launch" buttons.

56 Click "Select"

The screenshot shows the AWS Management Console interface for launching an EC2 instance. The page is titled 'Launch an instance' and includes a navigation bar with the AWS logo and search bar. The main content area is divided into several sections:

- Family:** t3, 2 vCPU, 1 GiB Memory. Current generation: true. Pricing information for various operating systems is listed.
- Additional costs apply for AMIs with pre-installed software**
- Key pair (login)**: A section with a description and a 'Key pair name - required' dropdown menu. The dropdown menu is open, showing 'Select' as the only option. An orange circle highlights the 'Select' button.
- Network settings**: Includes 'Network' (vpc-0e34eae17f79b6fb5), 'Subnet' (No preference), 'Auto-assign public IP' (Enable), and 'Firewall (security groups)' (Create security group).
- Summary**: A sidebar on the right showing the number of instances (1), software image (Amazon Linux 2023 AMI), virtual server type (t3.micro), firewall (New security group), and storage (1 volume(s) - 8 GiB).

57 Click "Default value"

This screenshot shows the same AWS Management Console interface as the previous one, but with the 'Key pair (login)' section expanded. The 'Key pair name - required' dropdown menu is open, showing a search bar and a list of options. The 'Default value' button is highlighted with an orange circle. The options in the dropdown are:

- Proceed without a key pair (Not recommended)
- Default value
- aws-key (Type: rsa)

The 'Default value' button is the one that should be clicked according to the instruction.

58 Click "Edit"

Search [Alt+S]

Europe (Stockholm) taha asim (719982590235) taha asim

Launch an instance

login) Info

air to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

quired

a key pair (Not recommended) Default value Create new key pair

ettings Info

o6fb5

ault subnet in any availability zone)

IP Info

roups) Info

st of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

y group Select existing security group

ecurity group called 'launch-wizard-15' with the following rules:

ic from Anywhere 0.0.0.0/0

to your instance

aff from the internet

oint, for example when creating a web server

ff from the internet

Summary

Number of instances Info 1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.11...read more ami-09e320d375d7b8d3e

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel Launch instance Preview code

59 Click "No preference"

Key pair (login) Info

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - required

Proceed without a key pair (Not recommended) Default value Create new key pair

Network settings Info

VPC - required Info

vpc-0e34eae17f79b6fb5 (default) Create new VPC

Subnet Info

No preference Create new subnet

Availability Zone Info

No preference Enable additional zones

Auto-assign public IP Info

Enable

Firewall (security groups) Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

Create security group Select existing security group

Security group name - required

launch-wizard-15

This security group will be added to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters: a-z, A-Z, 0-9, spaces, and _-./!@#%&*~

Description - required Info

Summary

Number of instances Info 1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.11...read more ami-09e320d375d7b8d3e

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel Launch instance Preview code

60 Click "Enable"

Proceed without a key pair (Not recommended) Default value [Create new key pair](#)

Network settings [Info](#)

VPC - required [Info](#)

vpc-0e34eae17f79b6fb5 (default) [Create new vpc](#)

172.31.0.0/16

Subnet [Info](#)

No preference [Create new subnet](#)

Q |

No preference [Enable additional zones](#)

subnet-0a67e74387e5d411c
VPC: vpc-0e34eae17f79b6fb5 Owner: 719982590235 Availability Zone: eu-north-1a (eun1-az1)
Zone type: Availability Zone IP addresses available: 4089 CIDR: 172.31.16.0/20

subnet-063b5fc0a2690b813
VPC: vpc-0e34eae17f79b6fb5 Owner: 719982590235 Availability Zone: eu-north-1b (eun1-az2)
Zone type: Availability Zone IP addresses available: 4089 CIDR: 172.31.32.0/20

subnet-01d37b614e4c37ca5
VPC: vpc-0e34eae17f79b6fb5 Owner: 719982590235 Availability Zone: eu-north-1c (eun1-az3)
Zone type: Availability Zone IP addresses available: 4090 CIDR: 172.31.0.0/20

launch-wizard-15

is security group will be added to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters: a-z, 0-9, spaces, and _-./[]@!+=&(){}\$*

Description - required [Info](#)

launch-wizard-15 created 2026-05-03T14:34:12.563Z

Bound Security Group Rules

Security group rule 1 (TCP, 22, 0.0.0.0/0) [Remove](#)

Software Image (AMI)
Amazon Linux 2023 AMI 2023.11...[read more](#)
ami-09e320d375d7b8d3e

Virtual server type (instance type)
t3.micro

Firewall (security group)
New security group

Storage (volumes)
1 volume(s) - 8 GiB

[Cancel](#) [Launch instance](#) [Preview console](#)

61 Click "eun1-az3"

Network settings [Info](#)

VPC - required [Info](#)

vpc-0e34eae17f79b6fb5 (default) [Create new vpc](#)

172.31.0.0/16

Subnet [Info](#)

No preference [Create new subnet](#)

Availability Zone [Info](#)

No preference [Enable additional zones](#)

Q |

No preference [eun1-az1](#) [eun1-az2](#) [eun1-az3](#)

eu-north-1a
eu-north-1b
eu-north-1c

Security group name - required

launch-wizard-15

This security group will be added to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters: a-z, A-Z, 0-9, spaces, and _-./[]@!+=&(){}\$*

Description - required [Info](#)

launch-wizard-15 created 2026-05-03T14:34:12.563Z

Inbound Security Group Rules

▼ Security group rule 1 (TCP, 22, 0.0.0.0/0) [Remove](#)

Type [Info](#) **Protocol** [Info](#) **Port range** [Info](#)

ssh TCP 22

Source type [Info **Source** \[Info\]\(#\) **Description - optional** \[Info\]\(#\)](#)

Virtual server type (instance type)
t3.micro

Firewall (security group)
New security group

Storage (volumes)
1 volume(s) - 8 GiB

[Cancel](#) [Launch instance](#) [Preview console](#)

62 Click "subnet-01d37b614e4c37ca5"

▼ Network settings Info

VPC - required Info

vpc-0e34eae17f79b6fb5
172.31.0.0/16

(default) ▼



Subnet Info

No preference

Create new subnet

Q

No preference

Enable additional zones

subnet-0a67e74387e5d411c

VPC: vpc-0e34eae17f79b6fb5 Owner: 719982590235 Availability Zone: eu-north-1a (eu1-az1)
Zone type: Availability Zone IP addresses available: 4089 CIDR: 172.31.16.0/20

subnet-063b5fc0a2690b813

VPC: vpc-0e34eae17f79b6fb5 Owner: 719982590235 Availability Zone: eu-north-1b (eu1-az2)
Zone type: Availability Zone IP addresses available: 4089 CIDR: 172.31.32.0/20

subnet-01d37b614e4c37ca5

VPC: vpc-0e34eae17f79b6fb5 Owner: 719982590235 Availability Zone: eu-north-1c (eu1-az3)
Zone type: Availability Zone IP addresses available: 4090 CIDR: 172.31.0.0/20

launch-wizard-15

This security group will be added to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters: a-z, A-Z, 0-9, spaces, and _-./!@#.%&*(){}\$%*

Description - required Info

launch-wizard-15 created 2026-05-03T14:34:12.563Z

Inbound Security Group Rules

▼ Security group rule 1 (TCP, 22, 0.0.0.0/0)

Remove

Type Info

ssh

Protocol Info

TCP

Port range Info

22

Source type Info

Source Info

Description - optional Info

63 Click here.

Firewall (security groups) Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

Create security group

Select existing security group

Security group name - required

launch-wizard-15

This security group will be added to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters: a-z, A-Z, 0-9, spaces, and _-./!@#.%&*(){}\$%*

Description - required Info

launch-wizard-15 created 2026-05-03T14:34:12.563Z

Inbound Security Group Rules

▼ Security group rule 1 (TCP, 22, 0.0.0.0/0)

Remove

Type Info

ssh

Protocol Info

TCP

Port range Info

22

Source type Info

Anywhere

Source Info

Q Add CIDR, prefix list or security group

Description - optional Info

e.g. SSH for admin desktop

0.0.0.0/0 X

Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

Add security group rule

► Advanced network configuration

▼ Configure storage Info

Advanced

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel

Launch



64 Click "All traffic"

The screenshot shows the AWS Management Console interface for launching an instance. The 'Security groups' dropdown menu is open, displaying a list of protocols. The 'All traffic' option is highlighted with an orange circle and a checkmark. The 'Summary' panel on the right indicates 1 instance, Amazon Linux 2023 AMI, t3.micro instance type, and 1 volume of 8 GiB.

Summary

- Number of instances: 1
- Software Image (AMI): Amazon Linux 2023 AMI 2023.11....read more
- Virtual server type (instance type): t3.micro
- Firewall (security group): New security group
- Storage (volumes): 1 volume(s) - 8 GiB

65 Click "EFS"

The screenshot shows the 'Configure storage' page in the AWS Management Console. The 'File systems' section has 'EFS' selected, highlighted with an orange circle. A warning message at the top states: "Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only."

Configure storage

1x 8 GiB gp3 Root volume, 3000 IOPS, Not encrypted

File systems

- ☐ S3 Files - new
- ☒ EFS
- ☐ FSx

66 Click "Add shared file system"

[Add security group rule](#)

► **Advanced network configuration**

▼ **Configure storage** [Info](#) Advanced

1x GiB Root volume, 3000 IOPS, Not encrypted

[Add new volume](#)

🔄 Click refresh to view backup information
The tags that you assign determine whether the instance will be backed up by any Data Lifecycle Manager policies.

File systems

☐ S3 Files - new ☒ EFS ☐ FSx

You currently have no file systems on this instance. To add a file system, choose [Add shared file system](#).

[Add shared file system](#) 🔄 [Create new shared file system](#)

5 remaining (up to 5 file systems maximum).

► **Advanced details** [Info](#)

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms

67 Click "Launch instance"

[Add security group rule](#)

► **Advanced network configuration**

storage [Info](#) Advanced

GiB Root volume, 3000 IOPS, Not encrypted

🔄 Click refresh to view backup information
The tags that you assign determine whether the instance will be backed up by any Data Lifecycle Manager policies.

☐ S3 Files - new ☒ EFS ☐ FSx

Remove

Mount point [Info](#)

85dfa Availability: Regional

[Add security group rule](#) 🔄 [Create new shared file system](#)

5 remaining (up to 5 file systems maximum).

Launch and attach security groups
To the file system, the required security groups will be automatically created and attached to this instance and the selected file system. To manually

Number of instances [Info](#)

Software Image (AMI)
Amazon Linux 2023 AMI 2023.11...[read more](#)
ami-09e320d375d7b8d3e


Virtual server type (instance type)
t3.micro

Firewall (security group)
New security group

Storage (volumes)
1 volume(s) - 8 GiB


[Cancel](#) [Launch instance](#) [Review code](#)

68 Click "Instances"

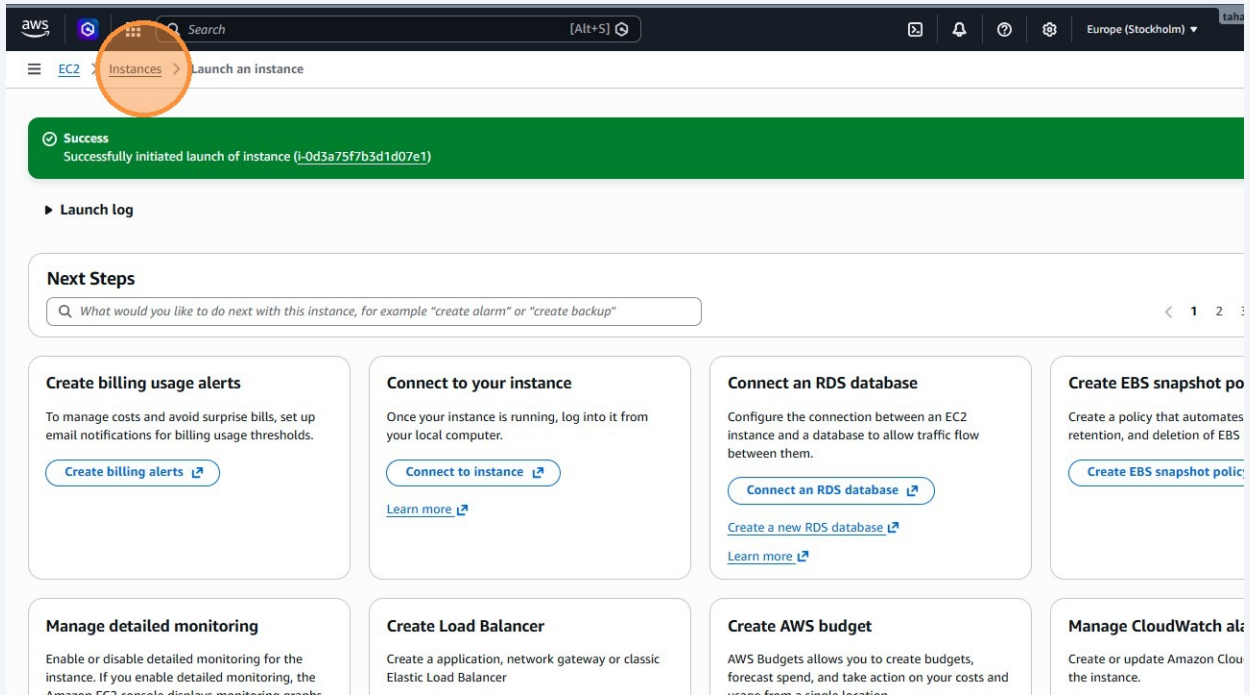

The screenshot shows the AWS Management Console interface. At the top, there's a navigation bar with the AWS logo, a search bar, and a region dropdown set to 'Europe (Stockholm)'. Below the navigation bar, the left-hand navigation menu is visible, with 'EC2' selected. The 'Instances' link under 'EC2' is highlighted with an orange circle. The main content area shows a green success banner for a recently launched instance (i-0d3a75f7b3d1d07e1). Below this, there's a 'Launch log' section and a 'Next Steps' section with a search bar. The 'Next Steps' section contains several cards with links to various AWS services: 'Create billing usage alerts', 'Connect to your instance', 'Connect an RDS database', 'Create EBS snapshot policy', 'Manage detailed monitoring', 'Create Load Balancer', 'Create AWS budget', and 'Manage CloudWatch alarms'.

69 Click this checkbox.

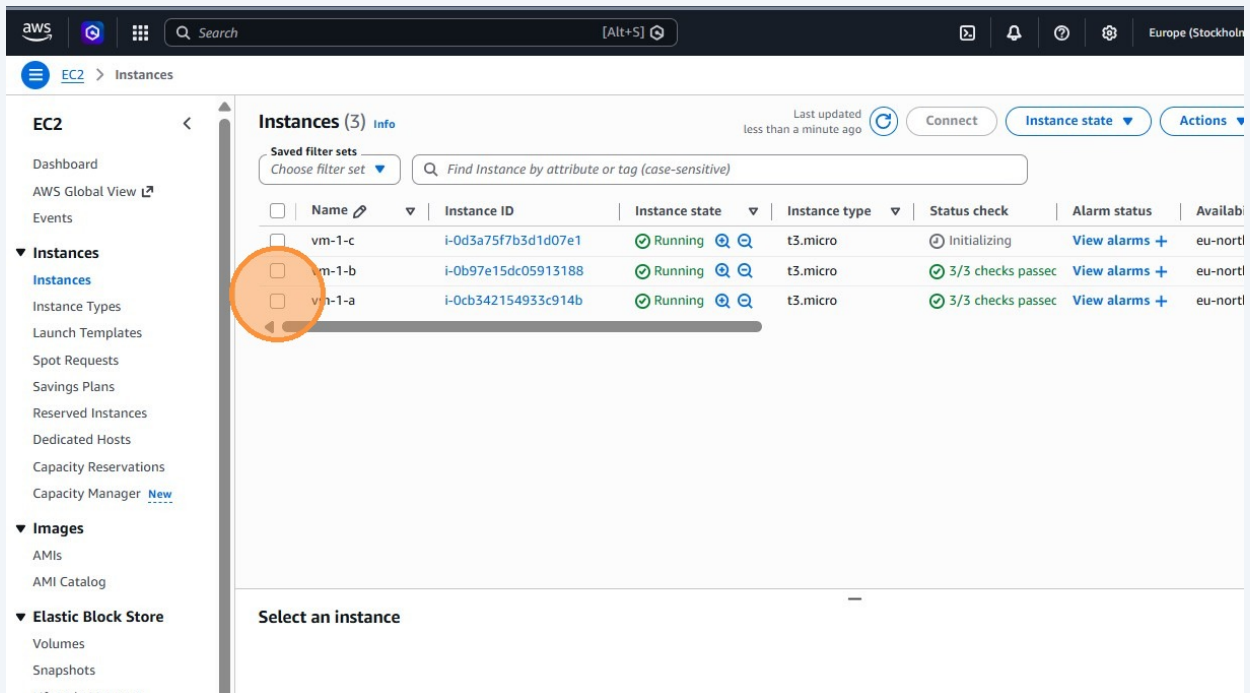

The screenshot shows the AWS Management Console interface for the 'Instances' page. The left-hand navigation menu is visible, with 'EC2' selected. The 'Instances' link under 'EC2' is highlighted with an orange circle. The main content area shows a table of instances. The table has columns for Name, Instance ID, Instance state, Instance type, Status check, Alarm status, and Availability zone. There are three instances listed: 'vm-1-c', 'vm-1-b', and 'vm-1-a'. The checkbox next to 'vm-1-b' is highlighted with an orange circle.

Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability zone
vm-1-c	i-0d3a75f7b3d1d07e1	Running	t3.micro	Initializing	View alarms +	eu-north-1
vm-1-b	i-0b97e15dc05913188	Running	t3.micro	3/3 checks passed	View alarms +	eu-north-1
vm-1-a	i-0cb342154933c914b	Running	t3.micro	3/3 checks passed	View alarms +	eu-north-1

70 Click this checkbox.

Instances (2/3) Info

Save filter sets
Choose filter set

Find Instance by attribute or tag (case-sensitive)

	Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability
☐	vm-1-c	i-0d3a75f7b3d1d07e1	Running	t3.micro	Initializing	View alarms +	eu-north-1c
☒	vm-1-b	i-0b97e15dc05913188	Running	t3.micro	3/3 checks passed	View alarms +	eu-north-1b
☒	vm-1-a	i-0cb342154933c914b	Running	t3.micro	3/3 checks passed	View alarms +	eu-north-1a

2 instances selected

Monitoring

71 Click "Actions"

Instances (2/3) Info

Save filter sets
Choose filter set


Find Instance by attribute or tag (case-sensitive)

	Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Public IPv4 DNS
☐	vm-1-c	i-0d3a75f7b3d1d07e1	Running	t3.micro	Initializing	View alarms +	eu-north-1c	ec2-16-16-121-
☒	vm-1-b	i-0b97e15dc05913188	Running	t3.micro	3/3 checks passed	View alarms +	eu-north-1b	ec2-56-228-34-
☒	vm-1-a	i-0cb342154933c914b	Running	t3.micro	3/3 checks passed	View alarms +	eu-north-1a	ec2-13-53-214-

2 instances selected

Monitoring


72 Click "Instance state"

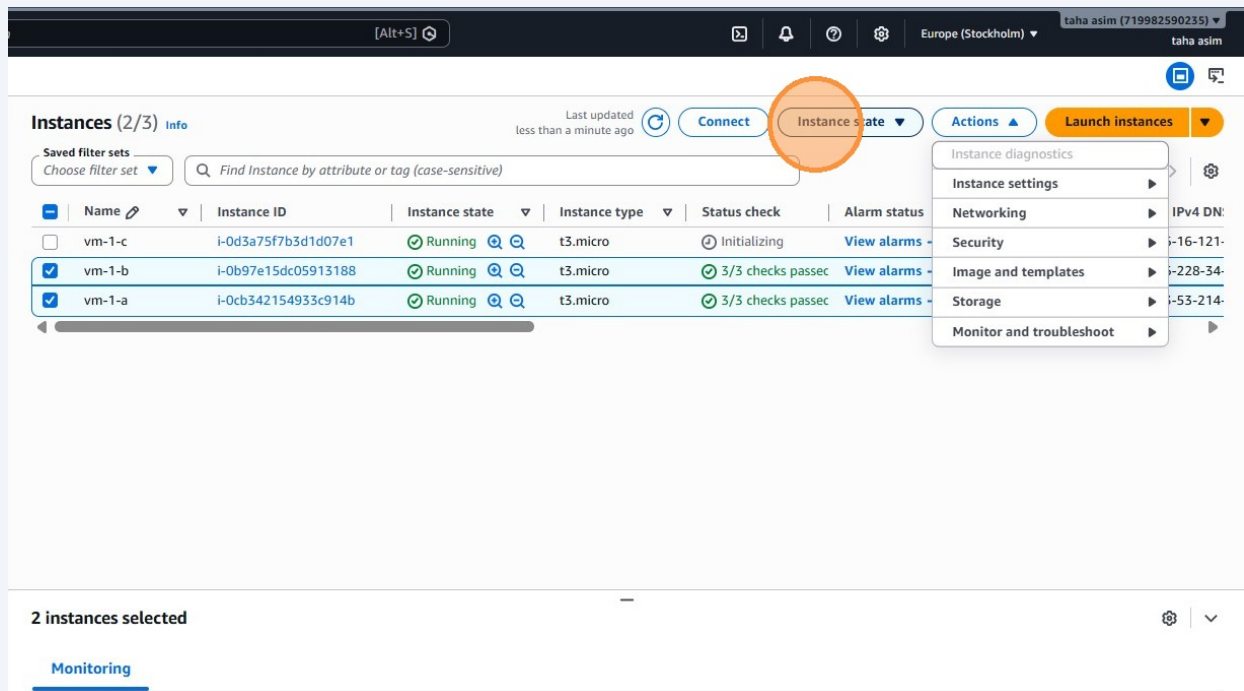

The screenshot shows the AWS Management Console 'Instances' page. The 'Instance state' dropdown menu is open, showing options like 'Instance diagnostics', 'Instance settings', 'Networking', 'Security', 'Image and templates', 'Storage', and 'Monitor and troubleshoot'. The table below lists three instances:

Name	Instance ID	Instance state	Instance type	Status check	Alarm status
vm-1-c	i-0d3a75f7b3d1d07e1	Running	t3.micro	Initializing	View alarms
vm-1-b	i-0b97e15dc05913188	Running	t3.micro	3/3 checks passed	View alarms
vm-1-a	i-0cb342154933c914b	Running	t3.micro	3/3 checks passed	View alarms

73 Click "Terminate (delete) instance"

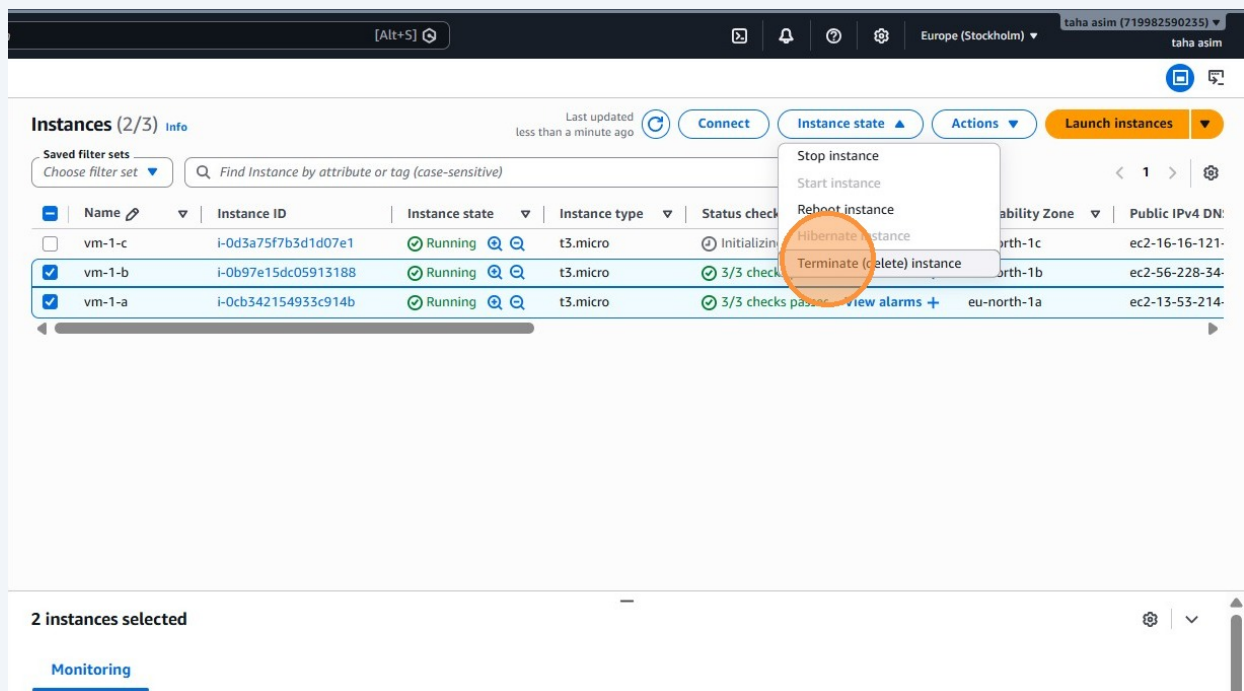

The screenshot shows the AWS Management Console 'Instances' page. The 'Instance state' dropdown menu is open, showing options like 'Stop instance', 'Start instance', 'Reboot instance', 'Hibernate instance', and 'Terminate (delete) instance'. The table below lists three instances:

Name	Instance ID	Instance state	Instance type	Status check	Availability Zone	Public IPv4 DN
vm-1-c	i-0d3a75f7b3d1d07e1	Running	t3.micro	Initializing	eu-north-1c	ec2-16-16-121-
vm-1-b	i-0b97e15dc05913188	Running	t3.micro	3/3 checks passed	eu-north-1b	ec2-56-228-34-
vm-1-a	i-0cb342154933c914b	Running	t3.micro	3/3 checks passed	eu-north-1a	ec2-13-53-214-

74 Click here.

Instances (2/3) Info

Saved filter sets: Choose filter set. Find Instance by attribute or tag (case-sensitive)

Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Public IPv4 DN
vm-1-c	i-0d3a75f7b3d1d07e1	Running	t3.micro	Initializing	View alarms +	eu-north-1c	ec2-16-16-121-
vm-1-b	i-0b97e15dc05913188	Running	t3.micro	3/3 checks passed	View alarms +	eu-north-1b	ec2-56-228-34-
vm-1-a	i-0cb342154933c914b	Running	t3.micro	3/3 checks passed	View alarms +	eu-north-1a	ec2-13-53-214-

2 instances selected

Monitoring

Terminate (delete) instances

On an EBS-backed instance, the default action is for the root EBS volume to be deleted when the instance is terminated. Storage on any local drives will be lost.

Are you sure you want to terminate these instances?

Instance ID	Termination protection
i-0cb342154933c914b (vm-1-a)	Disabled
i-0b97e15dc05913188 (vm-1-b)	Disabled

To confirm that you want to delete the instances, choose the terminate button below. Instances with termination protection enabled will not be terminated. Terminating the instance cannot be undone.

Skip OS shutdown
This option skips the graceful OS shutdown process. Use only when your instance must be stopped immediately, such as during an emergency or failover.

☐ Skip OS shutdown

75 Click "Connect"

Instances (1/3) Info

Saved filter sets: Choose filter set. Find Instance by attribute or tag (case-sensitive)

Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Public
vm-1-c	i-0d3a75f7b3d1d07e1	Running	t3.micro	Initializing	View alarms +	eu-north-1c	ec2-16-16-121-
vm-1-b	i-0b97e15dc05913188	Running	t3.micro	3/3 checks passed	View alarms +	eu-north-1b	ec2-56-228-34-
vm-1-a	i-0cb342154933c914b	Running	t3.micro	3/3 checks passed	View alarms +	eu-north-1a	ec2-13-53-214-

Connect **Instance state** **Actions** **Launch instance**

i-0d3a75f7b3d1d07e1 (vm-1-c)

Details **Status and alarms** **Monitoring** **Security** **Networking** **Storage** **Tags**

Instance summary Info

76 Click "Connect"

or IPv6 address

☐ Connect using a Private IP
Connect using a private IP address and a VPC endpoint

AMI used to launch the instance. If you didn't define a custom username, use the default username, ec2-user.


default username, ec2-user, is correct. However, read your AMI usage instructions to check if the AMI owner has changed the default AMI username.

Cancel **Connect**

Get the Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences


77 Click "[ec2-user@ip-172-31-4-184 ~]\$"

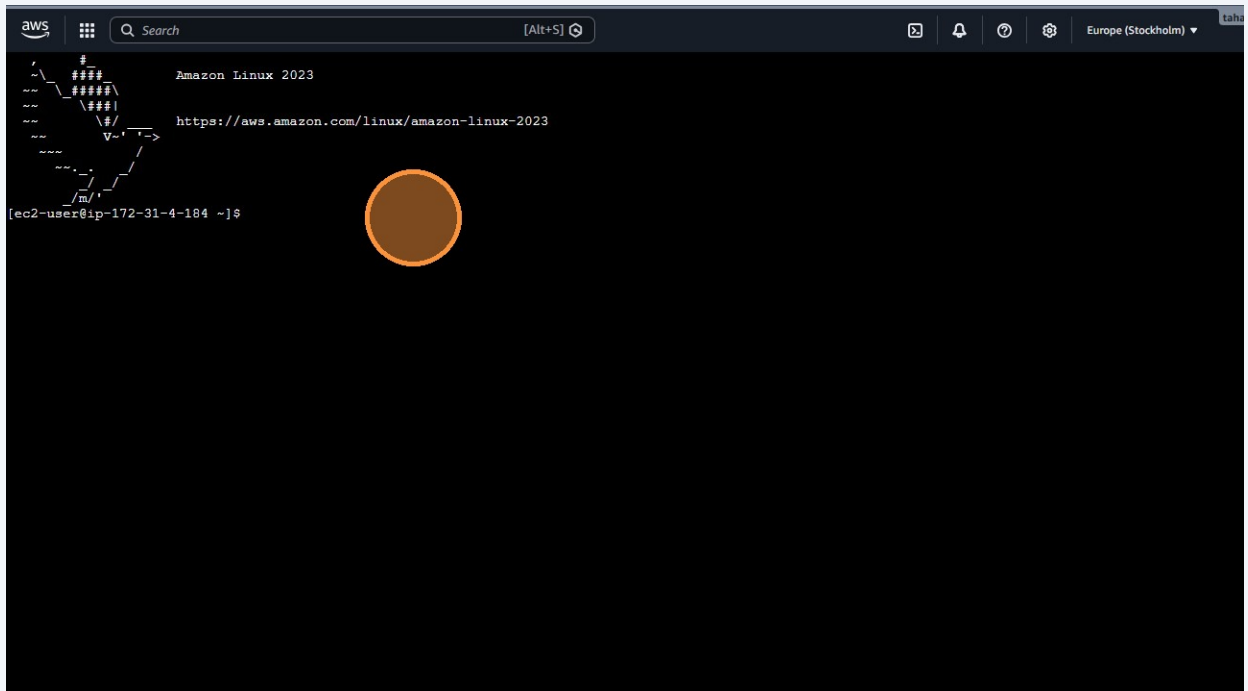

78 Type "ls /mnt/efs/fs1 **Enter**"

79 Switch to tab Instances | EC2 | eu-north-1"

80 Click "Terminate (delete) instance"

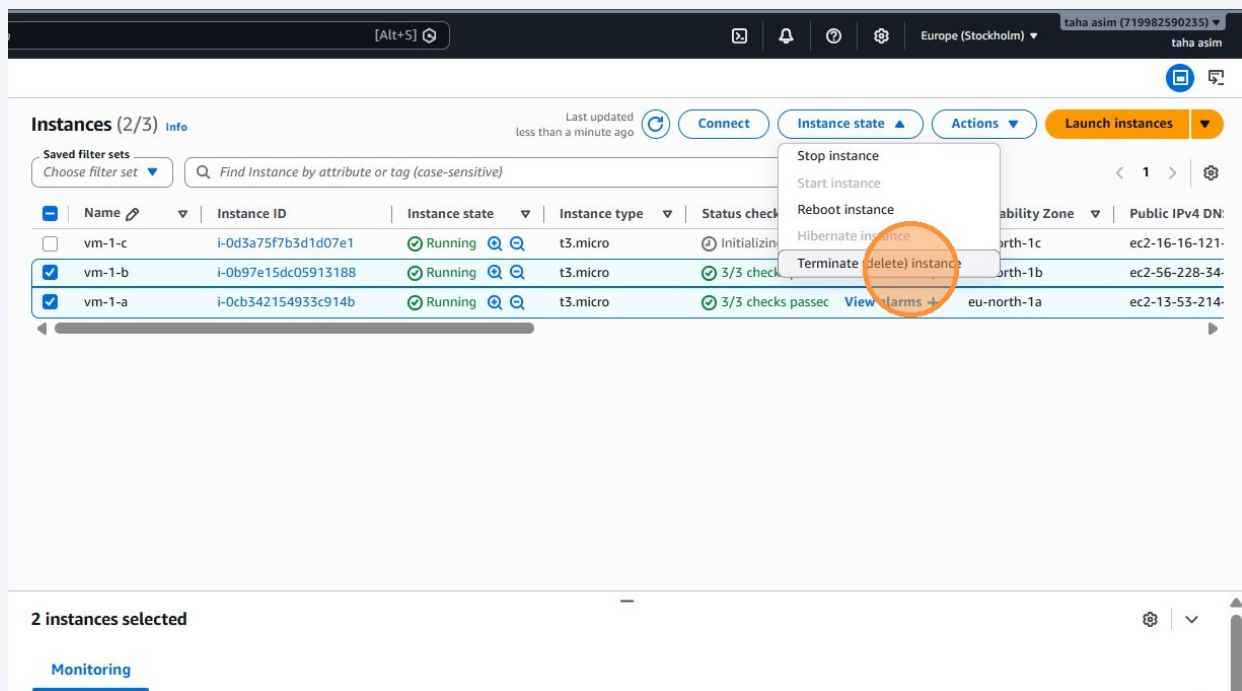

81 Click "Terminate (delete)"

A warning message at the top states: "On an EBS-backed instance, the default action is for the root EBS volume to be deleted when the instance is terminated. Storage on any local drives will be lost."

Are you sure you want to terminate these instances?

Instance ID	Termination protection
☒ i-0b97e15dc05913188 (vm-1-b)	✓ Disabled
☒ i-0cb342154933c914b (vm-1-a)	✓ Disabled

To confirm that you want to delete the instances, choose the terminate button below. Instances with termination protection enabled will not be terminated. Terminating the instance cannot be undone.

Skip OS shutdown
This option skips the graceful OS shutdown process. Use only when your instance must be stopped immediately, such as during an emergency or failover.

☐ Skip OS shutdown

Buttons: Cancel, **Terminate (delete)** (highlighted with an orange circle).

82 Click here.

Successfully initiated termination (deletion) of i-0b97e15dc05913188, i-0cb342154933c914b

Instances (2/3) Info

Find Instance by attribute or tag (case-sensitive)

	Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Public IPv4
☐	vm-1-c	i-0d3a75f7b3d1d07e1	Running	t3.micro	Initializing	View alarms +	eu-north-1c	ec2-16-16-1
☒	vm-1-b	i-0b97e15dc05913188	Shutting-d...	t3.micro	3/3 checks pass	View alarms +	eu-north-1b	-
☒	vm-1-a	i-0cb342154933c914b	Shutting-d...	t3.micro	3/3 checks pass	View alarms +	eu-north-1a	-

2 instances selected

Monitoring

83 Click this checkbox.

Successfully initiated termination (deletion) of i-0b97e15dc05913188,i-0cb342154933c914b

Instances (2/3) Info

Find Instance by attribute or tag (case-sensitive)

	Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability
☐	vm-1-c	i-0d3a75f7b3d1d07e1	Running	t3.micro	3/3 checks passed	View alarms +	eu-north-1
☒	vm-1-b	i-0b97e15dc05913188	Terminated	t3.micro	-	View alarms +	eu-north-1
☒	vm-1-a	i-0cb342154933c914b	Shutting-down	t3.micro	-	View alarms +	eu-north-1

2 instances selected

Monitoring

84 Click this checkbox.

Successfully initiated termination (deletion) of i-0b97e15dc05913188,i-0cb342154933c914b

Instances (3) Info

Find Instance by attribute or tag (case-sensitive)


	Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability
☐	vm-1-c	i-0d3a75f7b3d1d07e1	Running	t3.micro	3/3 checks passed	View alarms +	eu-north-1
☒	vm-1-b	i-0b97e15dc05913188	Terminated	t3.micro	-	View alarms +	eu-north-1
☒	vm-1-a	i-0cb342154933c914b	Shutting-down	t3.micro	-	View alarms +	eu-north-1

Select an instance

85 Switch to tab EC2 Instance Connect | eu-north-1"

86 Switch to tab Instances | EC2 | eu-north-1"

87 Click here.

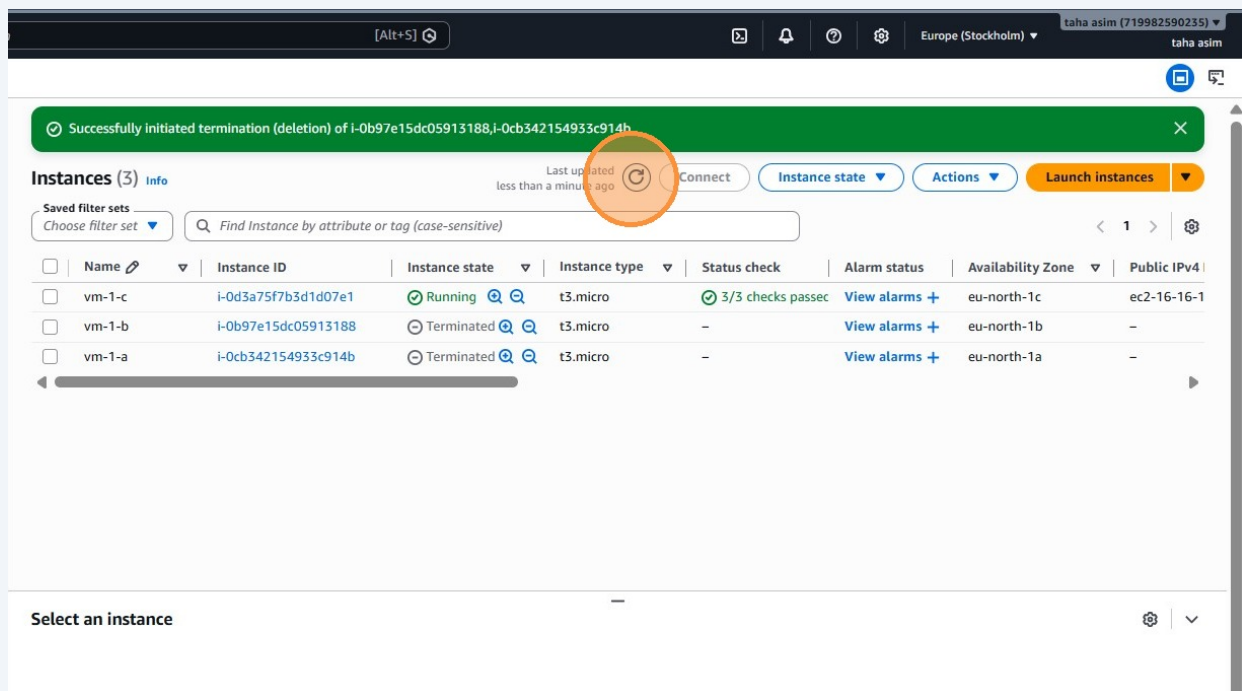

88 Switch to tab EC2 Instance Connect | eu-north-1" this is the vm-1-c

89 `ls /mnt/efs/fs1`
since this is a efc file server we will be able to see all the files because of the efc file system